

SANYO

No. 3942

LC7536LHS

CMOS LSI

**High-voltage, Two-channel
Electronic Attenuator****OVERVIEW**


The LC7536LHS is a two-channel electronic attenuator for volume, balance and loudness controls in stereo audio applications.

The LC7536LHS reads data from a three-line serial bus to control attenuation in 1 dB steps over an 80 dB range, up to a maximum of 96 dB. It features a center tap at 20 dB attenuation for a loudness control using a minimum of external components. A device select pin allows two devices to be connected to the serial bus.


The LC7536LHS operates from 5 V and 10 V supplies and is available in 30-pin DIPs.

FEATURES

- Three-line serial control
- Two device select
- Tap at 20 dB attenuation for a loudness control
- 80 dB attenuation range adjustable in 1 dB steps
- 96 dB maximum attenuation
- 75 dB crosstalk rejection
- 0.022% total harmonic distortion
- 47 k Ω input impedance
- 5 V and 10 V supplies
- 30-pin DIP

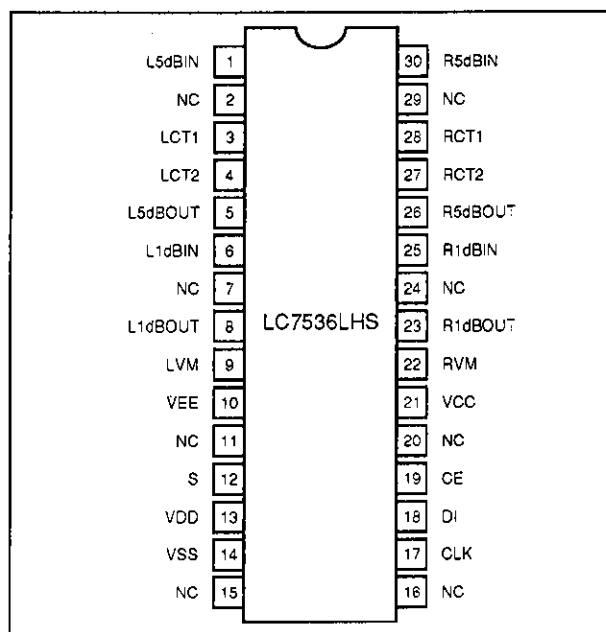
PINOUT**PACKAGE DIMENSIONS**

Unit: mm

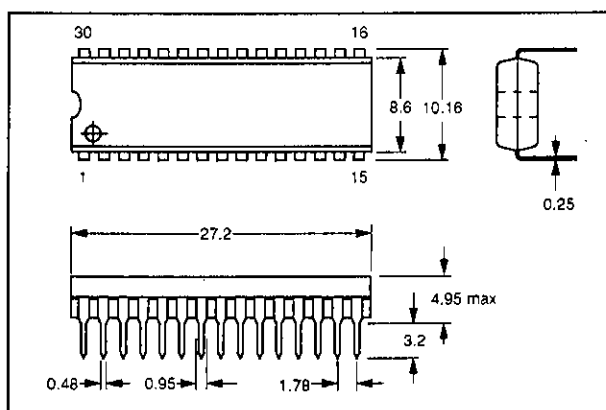3047A-DIP30S

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE, Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

BLOCK DIAGRAM

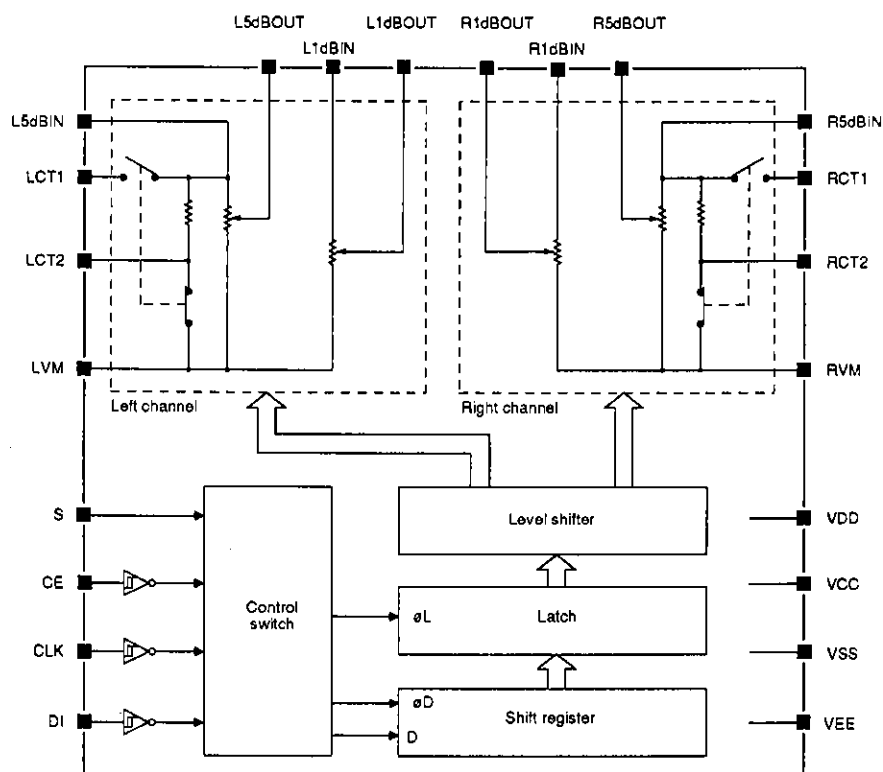

PIN DESCRIPTION

Number	Name	Description
1	L5dBIN	Left-channel 5 dB attenuation step input. Low-impedance drive. 75 k Ω total resistance
2	NC	No connection
3	LCT1	Left-channel loudness compensation inputs
4	LCT2	
5	L5dBOUT	Left-channel 5 dB attenuation step output. Approximately 1 M Ω load resistance
6	L1dBIN	Left-channel 1 dB attenuation step input. Low-impedance drive
7	NC	No connection
8	L1dBOUT	Left-channel 1 dB attenuation step output. 47 k Ω to 1 M Ω load resistance
9	LVM	Left-channel volume control common. Normally connected to ground
10	VEE	Ground
11	NC	No connection
12	S	Address select input
13	VDD	10 V supply
14	VSS	Ground
15	NC	No connection
16	NC	
17	CLK	Clock input
18	DI	Serial data input
19	CE	Chip enable input

LC7536LHS

Number	Name	Description
20	NC	No connection
21	VCC	5 V supply
22	RVM	Right-channel volume control common. Normally connected to ground
23	R1dBOUT	Right-channel 1 dB attenuation step output. 47 k Ω to 1 M Ω load resistance
24	NC	No connection
25	R1dBIN	Right-channel 1 dB attenuation step input. Low-impedance drive
26	R5dBOUT	Right-channel 5 dB attenuation step output. Approximately 1 M Ω load resistance
27	RCT2	Right-channel loudness compensation inputs
28	RCT1	
29	NC	No connection
30	R5dBIN	Right-channel 5 dB attenuation step input. Low-impedance drive. 75 k Ω total resistance

SPECIFICATIONS

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage ranges	V_{DD}	0 to 12	V
	V_{CC}	0 to 7	
CLK, DI and CE input voltage range	V_{I1}	0 to $V_{CC} + 0.3$	V
Analog input voltage range	V_{I2}	$V_{EE} - 0.3$ to $V_{DD} + 0.3$	V
Select pin input voltage range	V_{I3}	$V_{CC} - 0.3$ to $V_{DD} + 0.3$	V
Power dissipation	P_D	250 ($T_A \leq 85$ °C)	mW
Operating temperature range	T_{opr}	-40 to 85	°C
Storage temperature range	T_{stg}	-50 to 125	°C

Recommended Operating Conditions

$T_A = 25$ °C, $V_{SS} = 0$ V, $V_{EE} = 0$ V


Parameter	Symbol	Rating	Unit
Analog supply voltage range	V_{DD}	$V_{CC} + 3.2$ to 10.0	V
Logic supply voltage	V_{CC}	5	V
Logic supply voltage range	V_{CC}	3.6 to 5.5	V

Electrical Characteristics

 $V_{CC} = 5\text{ V}$, $V_{DD} = 10\text{ V}$, $V_{EE} = 0\text{ V}$, $V_{SS} = 0\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$

Parameter	Symbol	Condition	Rating			Unit
			min	typ	max	
Supply currents	I_{DD}		–	–	1	mA
	I_{CC}		–	–	1	
Serial bus HIGH-level input voltage	V_{IH1}		$0.8V_{CC}$	–	V_{CC}	V
Select pin HIGH-level input voltage	V_{IH2}		$0.8 \times (V_{DD} - V_{CC}) + V_{CC}$	–	V_{DD}	V
Serial bus LOW-level input voltage	V_{IL1}		V_{SS}	–	$0.2V_{CC}$	V
Select pin LOW-level input voltage	V_{IL2}		V_{CC}	–	$0.2 \times (V_{DD} - V_{CC}) + V_{CC}$	V
Input voltage	V_{IN}		V_{EE}	–	V_{DD}	V_{p-p}
Input pulsewidth	t_{PW}		20	–	–	μs
Setup time	t_{setup}		20	–	–	μs
Hold time	t_{hold}		20	–	–	μs
Operating frequency	f_{opg}		–	–	25	kHz
Output leakage current	I_{OFF}	Analog switches OFF	–10	–	10	μA
Total harmonic distortion	THD	$V_{IN} = 0.3\text{ V}$, $f = 1\text{ kHz}$, $V_{DD} - V_{EE} = 10\text{ V}$, $V_R = V_R(\text{max})$	–	0.022	–	%
Crosstalk rejection	C_T	$f = 20\text{ kHz}$, $V_{IN} = 1\text{ V}$	60	75	–	dB
Maximum attenuation	V_D	$f = 20\text{ kHz}$, $V_{IN} = 1\text{ V}$	–	96	–	dB

Timing

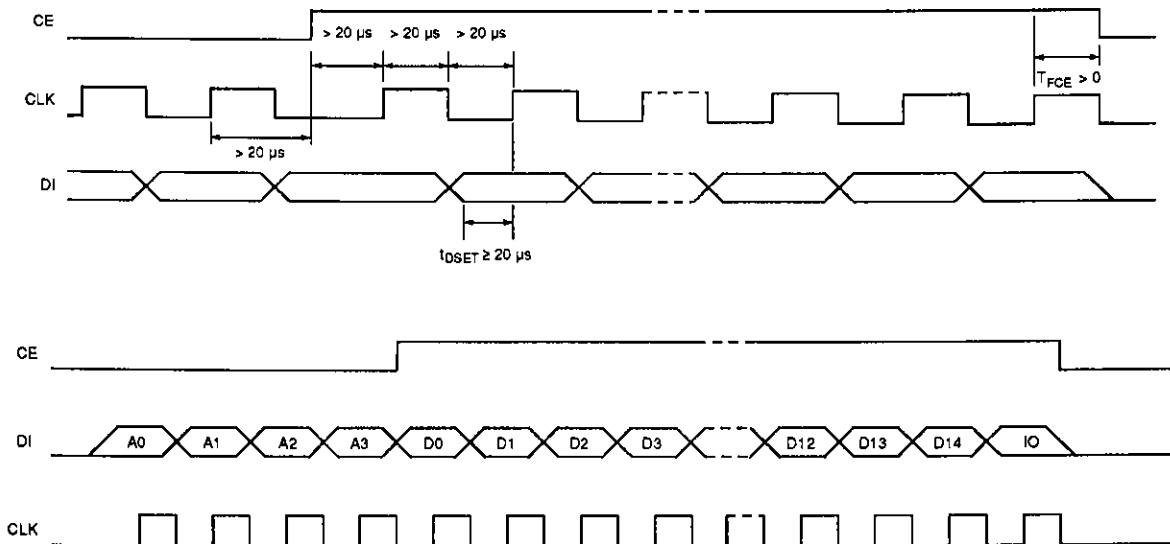

FUNCTIONAL DESCRIPTION

Data Control

Data is clocked into a 20-bit shift register. When 20 bits have been received, the data is latched and then passed to a level shifter.

Data Format

The 20-bit data word comprises a 4-bit address code, two 4-bit 5 dB attenuation step selectors, two 3-bit 1 dB attenuation step selectors and a loudness control ON/OFF bit as shown in figure 1.

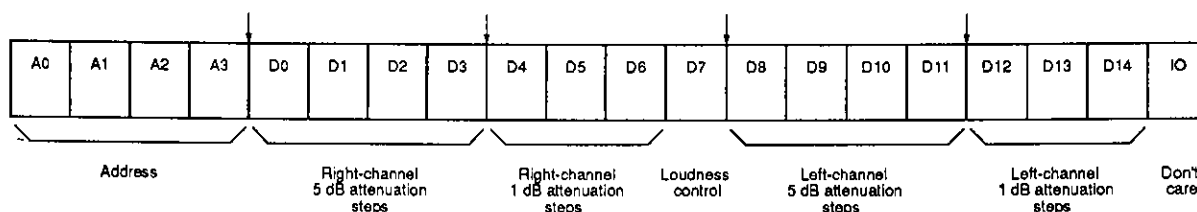


Figure 1. Data format

The voltage on the select input determines the address of the device as shown in table 1.

Table 1. Address codes

Select pin	A0	A1	A2	A3
VDD	1	0	0	1
VCC	0	0	0	1

Data bits D0 to D3 select the right-channel attenuation in 5 dB steps as shown in table 2. Similarly, bits D8 to D11 select the left-channel attenuation in 5 dB steps.

Table 2. Right-channel 5 dB steps

Attenuation (dB)	D0	D1	D2	D3
0	1	1	1	1
5	0	1	1	1
10	1	0	1	1
15	0	0	1	1
20	1	1	0	1
25	0	1	0	1
30	1	0	0	1
35	0	0	0	1
40	1	1	1	0
45	0	1	1	0
50	1	0	1	0
55	0	0	1	0
60	1	1	0	0
65	0	1	0	0
70	1	0	0	0
75	0	0	0	0

Data bits D4 to D6 select the right-channel attenuation in 1 dB steps as shown in table 3. Similarly, bits D12 to D14 select the left-channel attenuation in 1 dB steps.

Table 3. Right-channel 1 dB steps

Attenuation (dB)	D4	D5	D6
0	0	1	1
1	1	0	1
2	0	0	1
3	1	1	0
4	0	1	0
∞	0	0	0

Data bit D7 selects loudness control. When D7 is 1, loudness control is ON, and when 0, loudness control is OFF.

Audio Signal

The right-channel audio input signal is input on R5dBIN (5 dB attenuation steps). The output, R5dBOUT, is fed back to R1dBIN (1 dB attenuation steps). The right-channel audio output is on R1dBOUT. The left-channel audio signal flow is identical.

TYPICAL APPLICATION

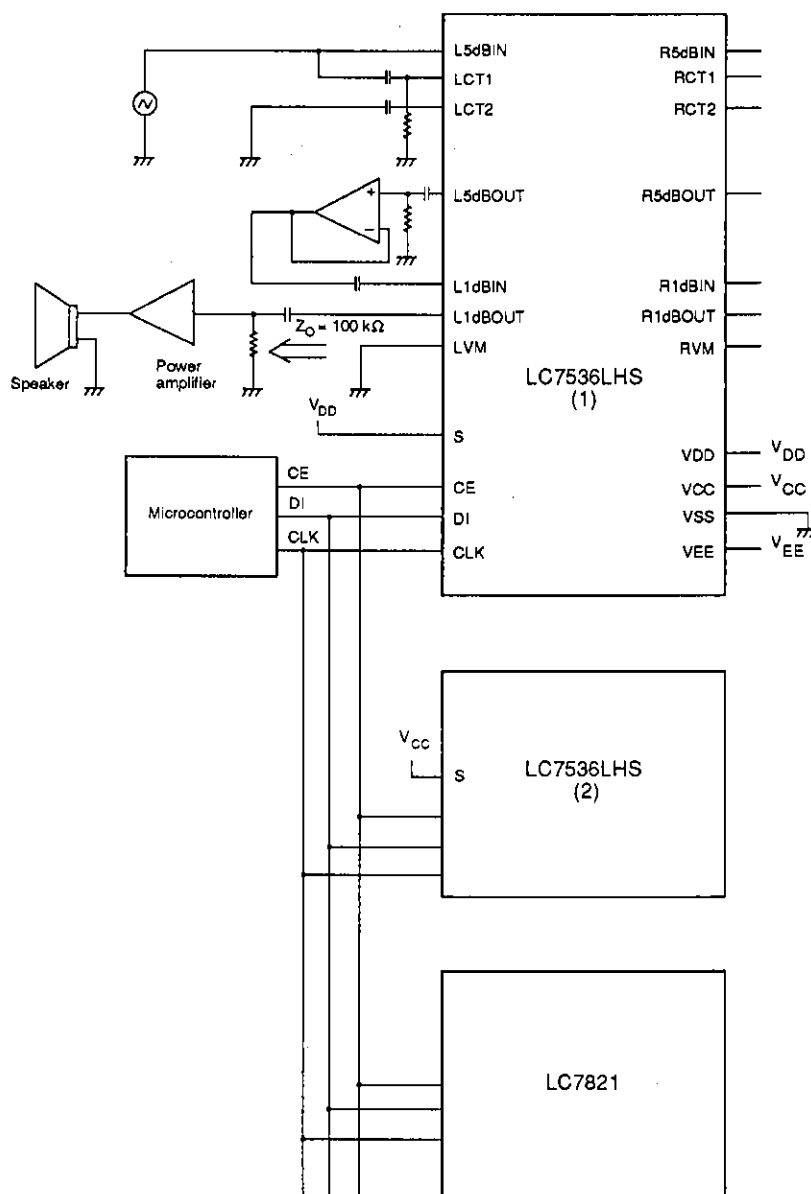


Figure 2. Typical application

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.