




DERATING FACTOR OF FORWARD BIAS SAFE OPERATING AREA

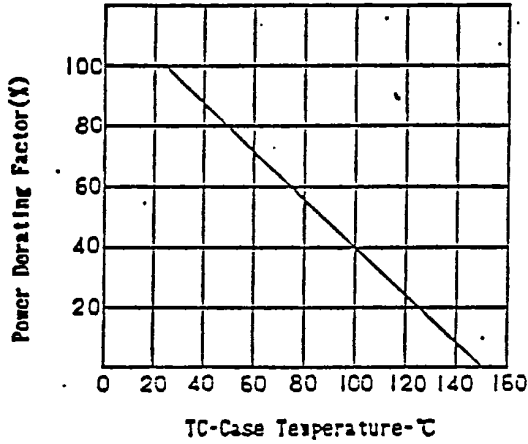


FORWARD BIAS SAFE OPERATING AREA






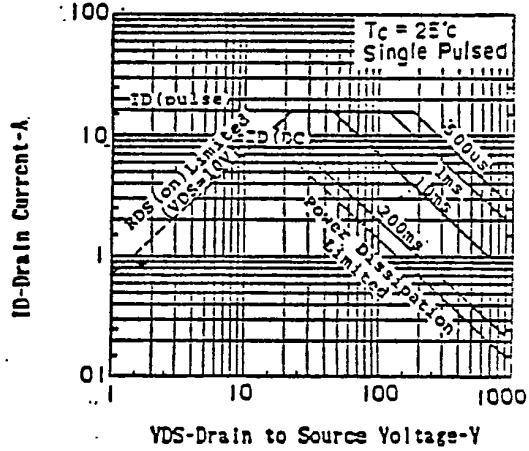


TOTAL POWER DISSIPATION vs. CASE TEMPERATURE

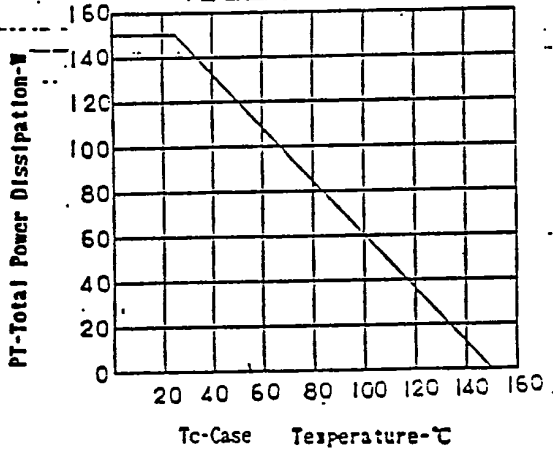


DRAIN CURRENT vs. DRAIN TO SOURCE VOLTAGE

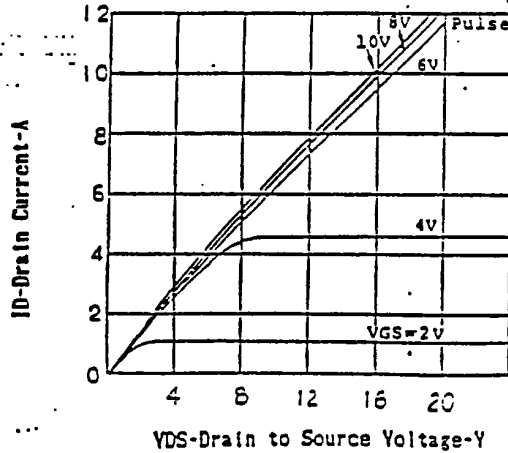


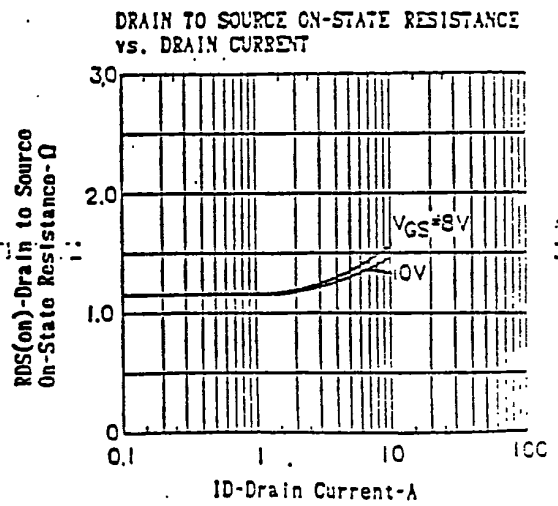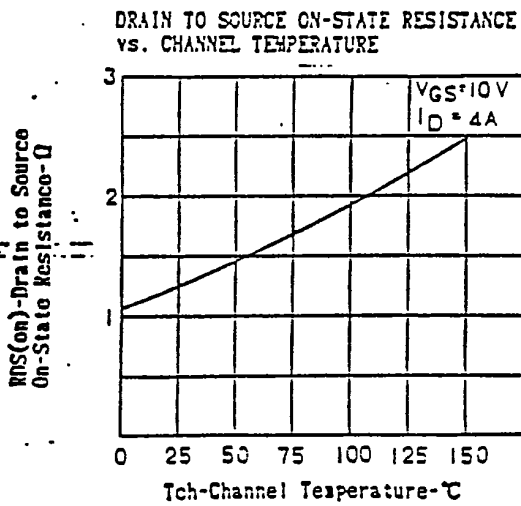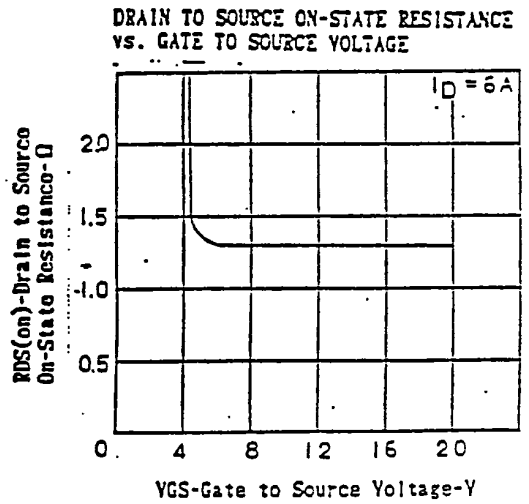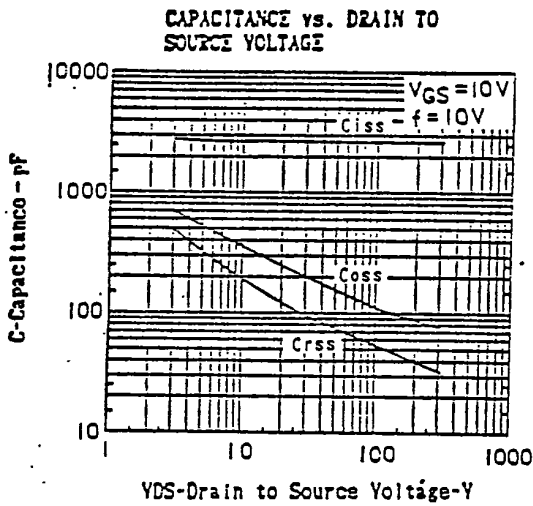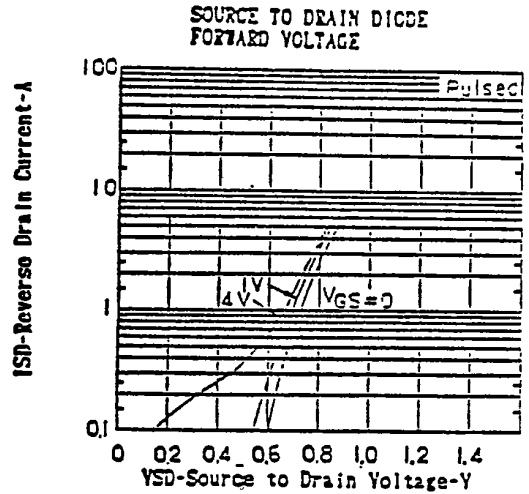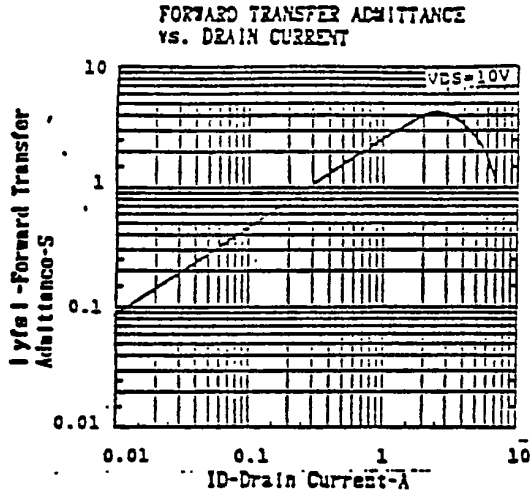


TRANSFER CHARACTERISTICS

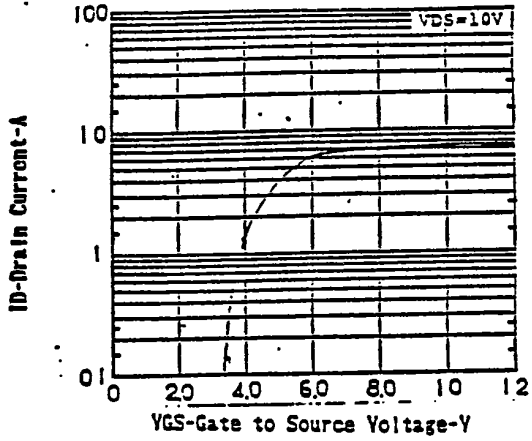

GATE TO SOURCE CUTOFF VOLTAGE vs. CHANNEL TEMPERATURE

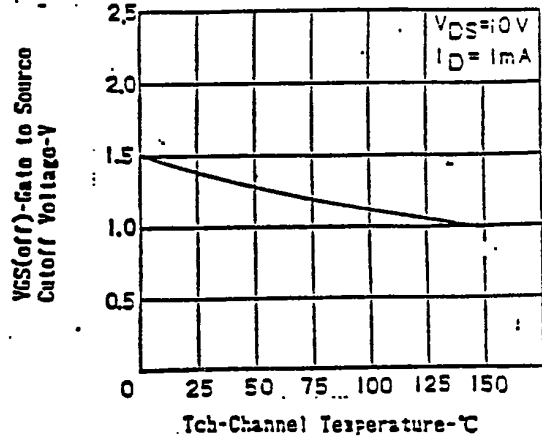

TURN-ON AND TURN-OFF TIME

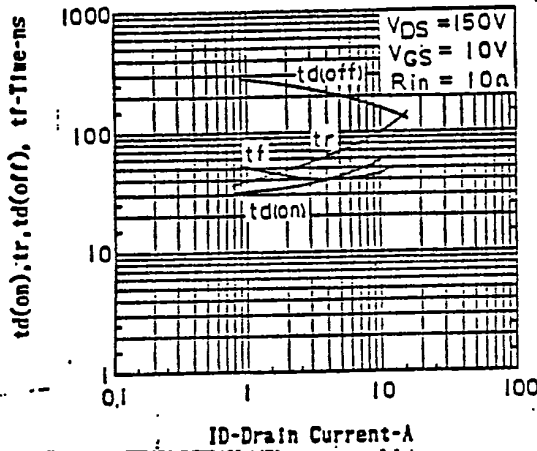

NORMALIZED TRANSIENT THERMAL IMPEDANCE vs. PULSE WIDTH.

