

UTC M2904 LINEAR INTEGRATED CIRCUIT


SINGLE-SUPPLY DUAL OPERATIONAL AMPLIFIER

DESCRIPTION

The UTC M2904 consists of two independent, high gain, internally frequency compensated operation amplifiers which were designed specifically to operate from a single power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

FEATURES


- *Single Supply
- *Operating Voltage: +3V~+32V
- *Low Operating Current: 0.7mA (typ.)
- *Slew Rate: 0.5V/ μ s (typ.)

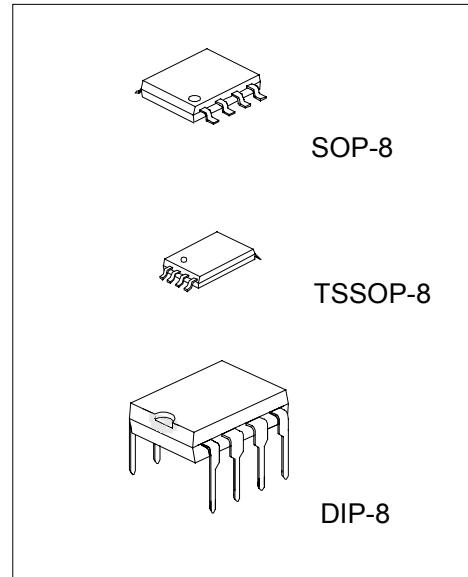

APPLICATIONS


*transducer amplifiers, DC gain blocks, and all the conventional op amp circuits which now can be more easily implemented in single power supply systems.

PIN CONFIGURATION

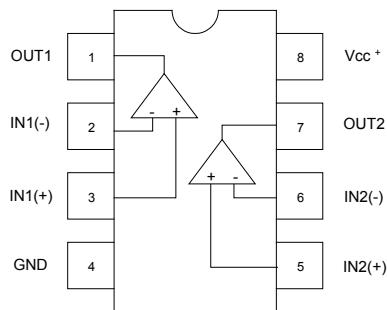

UTC M2904 LINEAR INTEGRATED CIRCUIT

EQUIVALENT CIRCUIT (1/2 shown)

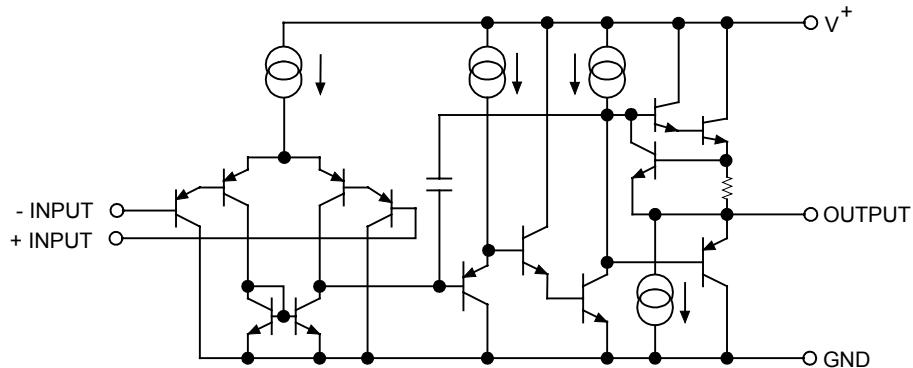







ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)







PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+(V^+/V^-)$	32(or ± 16)	V
Differential Input Voltage	V_{ID}	32	V
Input Voltage	V_{IC}	-0.3 ~ +32	V
Power Dissipation			
DIP-8		500	
SOP-8		300	
TSSOP-8		300	
Operating Temperature Range	T_{opr}	-40 ~ +85	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-50 ~ +125	$^\circ\text{C}$





ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}, V^+=5\text{V}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{IO}	$R_s=0\Omega$		2	7	mV
Input Offset Current	I_{IO}			5	50	nA
Input Bias Current	I_B			25	250	nA
Large Signal Voltage Gain	A_V	$R_L \geq 2\text{k}\Omega$	100			dB
Maximum Output Voltage Swing	V_{OM}	$R_L=2\text{k}\Omega$	3.5			V
Input Common Mode Voltage Range	V_{ICM}		0 ~ 3.5			V
Common Mode Rejection Ratio	CMR			85		dB
Supply Voltage Rejection Ratio	SVR			100		dB
Output Source Current	I_{SOURCE}	$V_{IN^+}=1\text{V}, V_{IN^-}=0\text{V}$	20	30		mA
Output Sink Current	I_{SINK}	$V_{IN^+}=0\text{V}, V_{IN^-}=1\text{V}$	8	20		mA
Channel Separation	CS	$f=1\text{kHz} \sim 20\text{kHz}$, Input Referred		120		dB
Operating Current	I_{CC}	$R_L=\infty$		0.7	1.2	mA
Slew Rate	SR	$V^+/V^- = \pm 15\text{V}$		0.5		$\text{V}/\mu\text{s}$
Unity Gain Bandwidth	f_T	$V^+/V^- = \pm 15\text{V}$		0.2		MHz

TYPICAL CHARACTERISTICS

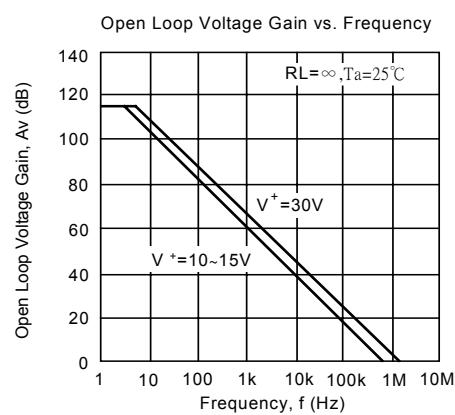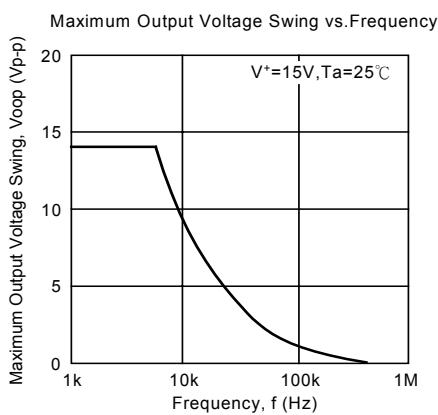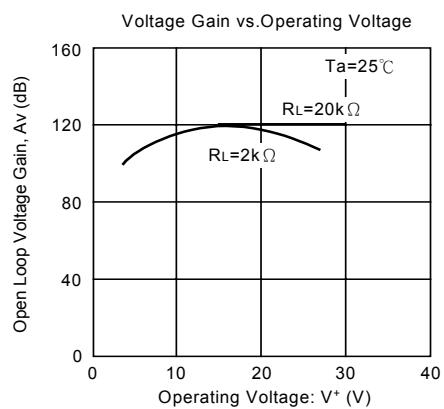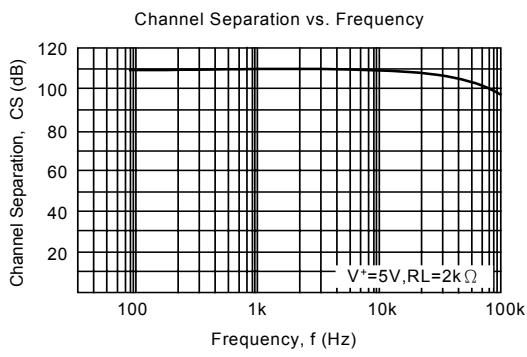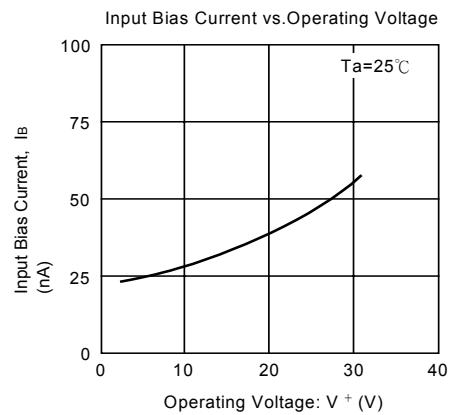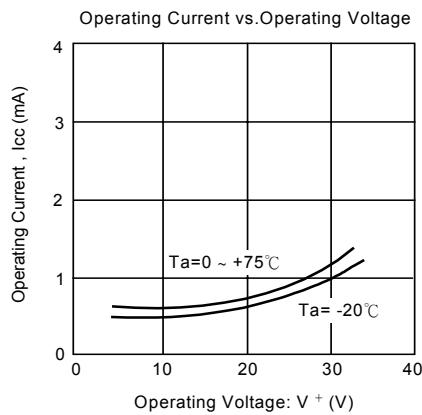

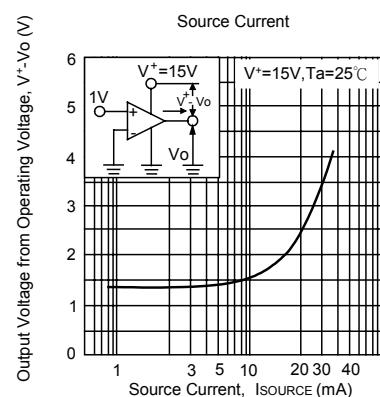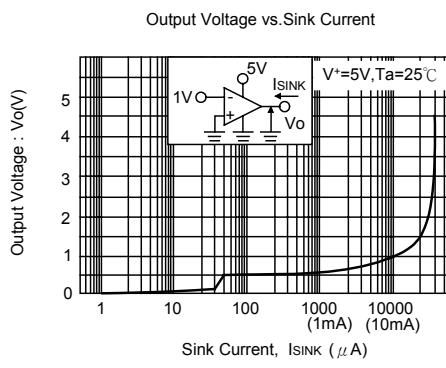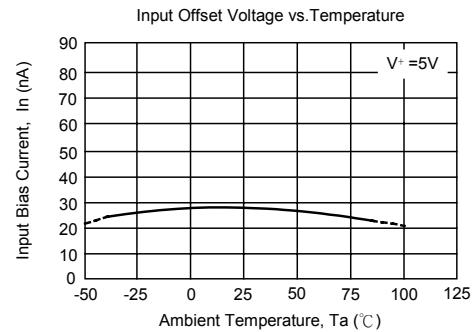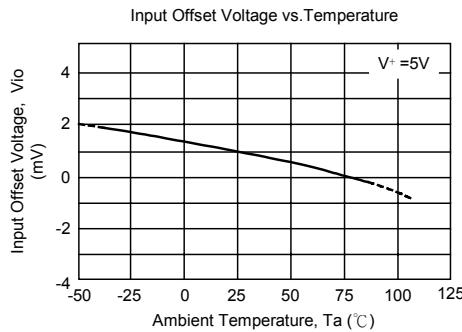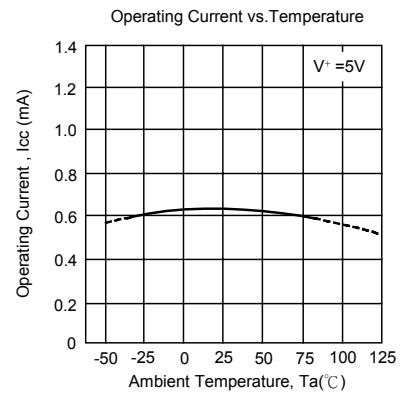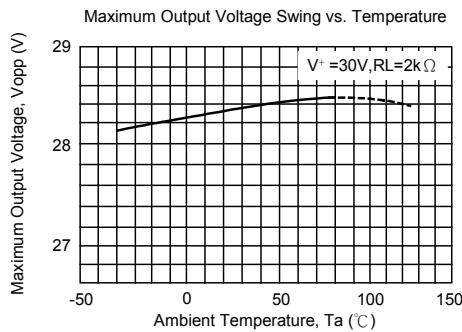

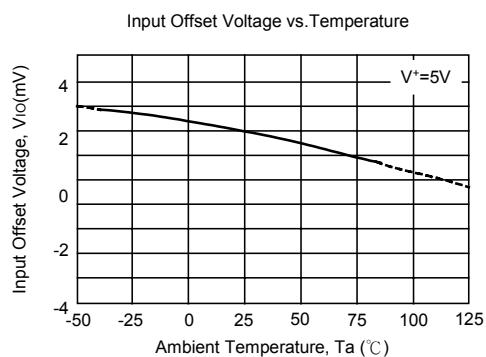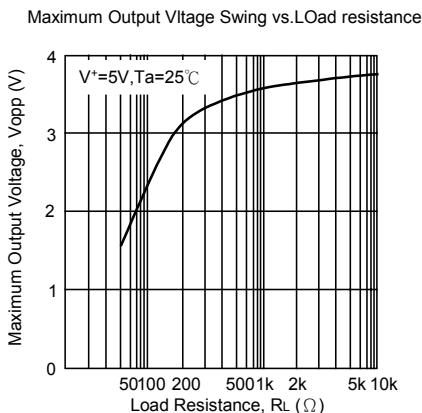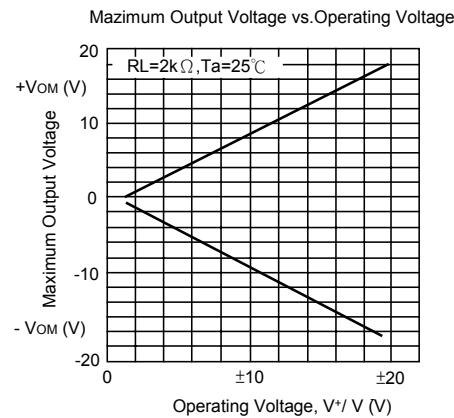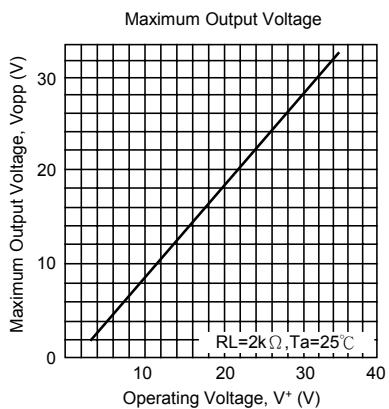

APPLICATION

The UTC M2904, in its static state (No in and output condition) when design, Qu being biased by constant current (break down beam) yet, QL stays OFF.

While using with both power source mode, the cross-over distortion might occur instantly when QL ON.

There might be cases when application for amplifier of audio signals, not only distortion but also the apparent frequency bandwidth being narrowed remarkably. It is adjustable especially when using both power source mode, constantly to use with higher on Qu than the load current (including feedback current), and then connect the pull-down resistor RP at the part between output and GND pins.

Improvement of Cross-over Distortion
Equivalent circuit at the output stage

