



LA8633V

Low-voltage, Low-current Componder

Overview

The LA8633V is a low-voltage, low-current compander IC for battery-powered, cordless telephone applications.

The LA8633V features a good signal-to-noise ratio and a high dynamic range at voice-signal frequencies. The output compression is given by $V_O = 0.5 \log V_I$, and the expansion, by the inverse operation.

The LA8633V also features an FSK comparator for receiving FSK-modulated digital data, a microphone amplifier, selectable intercom or telephone operation expander outputs, and an output mute control.

The LA8633V operates from a 1.8 to 6.0V supply and is available in 24-pin SSOPs.

Features

- Low-voltage operation and low-power consumption.
- On-chip frequency-shifted keyed (FSK) comparator.
- On-chip microphone amplifier with audio limiter and mute option.
- Expander output analog switch for telephone or intercom operation.
- Low-power, standby mode.
- 1.8 to 6.0V supply.
- 24-pin SSOP

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC \text{ max}}$		8	V
Allowable power dissipation	$P_d \text{ max}$		300	mW
Operating temperature	T_{opr}		-20 to +75	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		3	V
Operating supply voltage range	$V_{CC \text{ op}}$		1.8 to 6.0	V

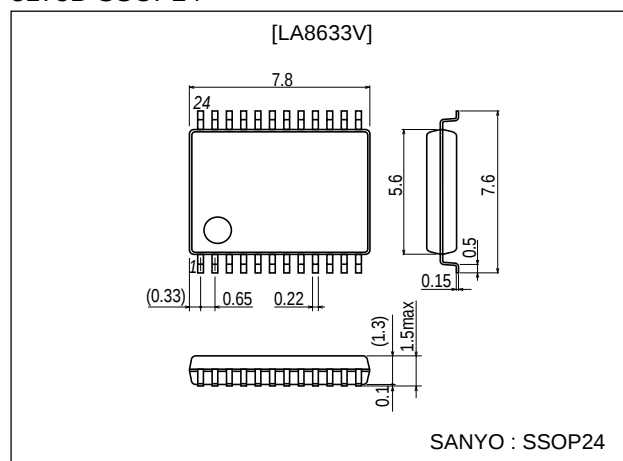
■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

Package Dimensions

unit:mm

3175B-SSOP24




LA8633V

Electrical Characteristics

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
[Supply current] Ta=25°C, VCC=3V, VB1=1.2V, f=1kHz						
Current drain with no signal	ICCO	No signal	2.5	3.4	5.0	mA
Standby current	ISTBY	No signal, data shaper ON (pin 9=H), standby mode (pin 12=L)	300	500	700	μA
[Compressor] Vinrefe=10mVrms=0dB, Pre AMP Gain=20dB, Output : pin 18, RL=10kΩ						
Input impedance	rI			50		kΩ
COUT rms output voltage	VOC	VI=Vinrefe=0dB	210	265	335	mVrms
Gain error	Gec1	VI=−20dB	−0.5	0.0	+0.5	dB
	Gec2	VI=−40dB	−1.0	0.0	+1.0	dB
Total harmonic distortion	THD	VI=0dB		0.25	1.00	%
COUT rms output noise voltage	VNOC	Rg=620Ω, f=20Hz to 20kHz		1.5	3.0	mVrms
Limiting voltage	VL		1.25	1.40	1.55	Vp-p
Maximum preamplifier voltage gain	VGP max			28		dB
Data voltage gain	VGD		−2	0	+2	dB
Mute attenuation	ATTc	VI=0dB	−60	−73		dB
Crosstalk	CTC	Expander rms input voltage=100mV	−25	−34		dB
[Expander] Vinrefe=10mVrms=0dB, Filter AMP Gain=0dB, RL=10kΩ						
Expander rms output voltage	VOE	VI=Vinrefe=0dB	100	125	160	mVrms
Maximum expander rms output voltage	VO max	THD=10%, RL=10kΩ	600	1000		mVrms
Gain error	Gee1	VI=5dB	−0.5	0	+0.5	dB
	Gee2	VI=−20dB	−1.0	0	+1.0	dB
	Gee3	VI=−30dB	−1.5	0	+2.0	dB
Total harmonic distortion	THD	VI=0dB, data shaper ON (pin 9=H)		0.40	1.00	%
Expander rms output noise voltage	VNOe	Rg=620Ω, f=20Hz to 20kHz		13	80	μVrms
Mute attenuation	ATTe	VI=0dB	−60	−70		dB
Crosstalk	CTe		−60	−83		dB
[Compressor lowpass filter]						
Input/output ratio		f=3.4kHz		−3		dB
Attenuation	ATT			−18		dB/octave
Total harmonic distortion	THD	Vin=10mVrms (in : 15pin)		0.15	1.00	%
Maximum LPF2OUT rms output voltage	VO max	THD=10%, RL=10kΩ	600	1000		mVrms
[Expander lowpass filter]						
Input/output ratio		f=3.4kHz		−3		dB
Attenuation	ATT			−18		dB/octave
Total harmonic distortion	THD	Vin=10mVrms		0.35	1.00	%
Maximum LPF1OUT rms output voltage	VO max	THD=10%, RL=7.7kΩ	200	340		mVrms
[Frequency-shifted keyd comparator]						
CCGCTL duty cycle	Duty	VIN=100mVrms	43	48	53	%
CHGCTL ON voltage	VON	Pin 9	1			V
CHGCTL OFF voltage	VOFF	Pin 9			0.4	V
CHGCTL input impedance	RI	Pin 9		200		kΩ
VHOLD input/output current	IO	Pin7, pin9=2V		80		μA
FSKOUT LOW-level output voltage	VOL	RL=100kΩ, pin10			0.3	V
FSKOUT HIGH-level output voltage	VOH	RL=100kΩ, pin10	2.8			V
[Standby mode characteristics]						
STBY voltage	VSTBY	Pin 12			0.7	V
STBY output current	ISTBY	Pin 12, flowing out current			50	μA
[Digital input characteristics]						
Input L-level voltage	VIL	Pins16, 17			0.65	V
Input H-level voltage	VIH	Pins16, 17	0.6VCC			V
Input L-level current	IIL	VI=0.2V, Pins16, 17			100	μA
Input H-level current	IIH	VI=2V, Pins16, 17			5	μA


- Note 1 : This IC enters mute mode when the pins 16 and 17 become low.
 2 : Pin 6 is used as an output pin when 8 is high (=open), pin 5 is used as an output pin when pin 8 is low.
 3 : FSK waveform shaper circuit becomes on when pin 9 is high.
 4 : FSK waveform shaping polarity : outputs low in the positive cycle of signal.

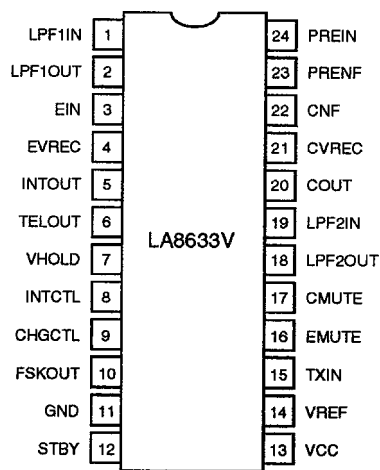Pin Assignment



Top view

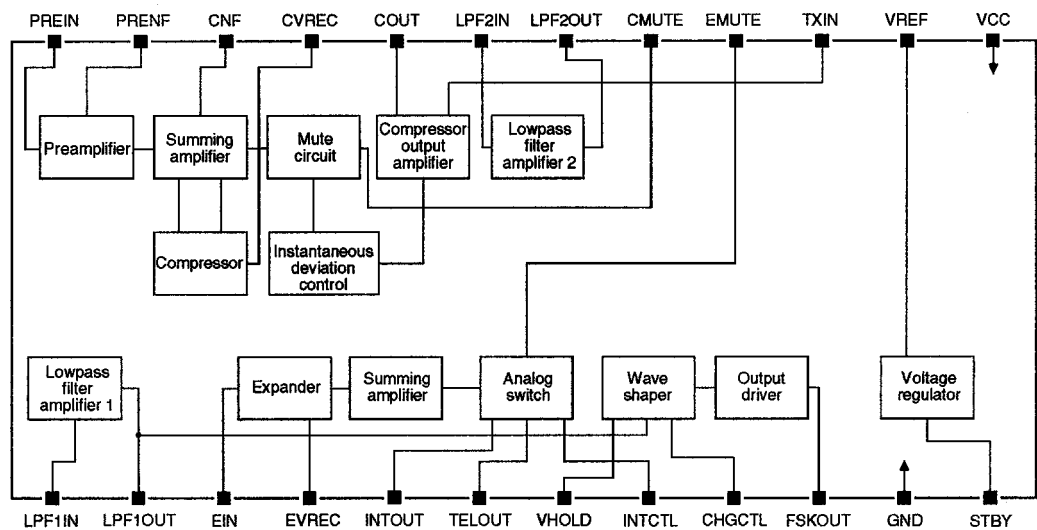Block Diagram









Pin Function

Number	Name	Equivalent circuit	Description
1	LPF1IN		Lowpass filter 1 buffer amplifier (class A) input. Nominal voltage is 1.2V.
2	LPF1OUT		Lowpass filter 1 buffer amplifier (class A) output. Nominal voltage is 1.2V.
3	EIN		Expander voltage-to-current converter input. Nominal voltage is 1.5V.
4	EVREC		Expander full-wave rectifier.
5	INTOUT		Expander intercom op-amplifier (class AB) output. Nominal voltage is 1.5V.
6	TELOUT		Expander telephone op-amplifier (class AB) output. Nominal voltage is 1.5V.
7	VHOLD		Voltage hold capacitor connection. Nominal voltage is 1.2V.
9	CHGCTL		Charge control input. Nominal voltage is V_{CC} .
10	FSKOUT		Frequency-shifted keyed comparator, open-collector output.

Continued on next page.

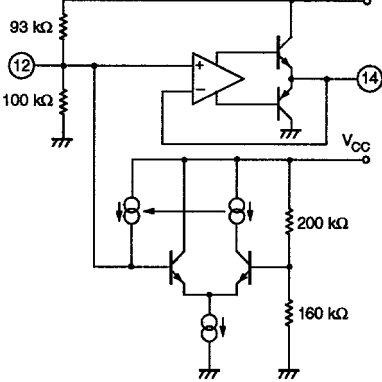
Continued from preceding page.

Number	Name	Equivalent circuit	Description
8	INTCTL		Intercom control input. Nominal voltage is 3V.
11	GND		Ground
12	STBY		Standby control input. Nominal voltage is 1.5V.
14	VREF		Reference voltage amplifier (class B) capacitor connection. Nominal voltage is 1.5V.
13	VCC		Voltage supply
15	TXIN		Transmit data input. Nominal voltage is 1.5V.
20	COUT		Compander amplifier (class AB) output. Nominal voltage is 1.5V.
16	EMUTE		Expander mute control input. Nominal voltage is 3V.
17	CMUTE		Compressor mute control input. Nominal voltage is 3.3V.
18	LPF2OUT		Lowpass filter 2 buffer amplifier (class AB) output. Nominal voltage is 1.5V.
19	LPF2IN		Lowpass filter 2 buffer amplifier (class AB) input. Nominal voltage is 1.5V.


Continued on next page.

Continued from preceding page.

Number	Name	Equivalent circuit	Description
21	CVREC		Compressor full-wave rectifier capacitor.
22	CNF		Compressor negative feedback capacitor connection. Nominal voltage is 1.5V
23	PRENF		Compressor preamplifier negative feedback network connection. Nominal voltage is 1.5V.
24	PREIN		Compressor preamplifier input. Nominal voltage is 1.5V.

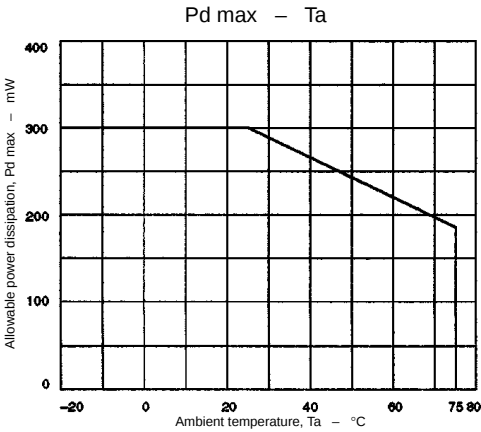

Typical Application

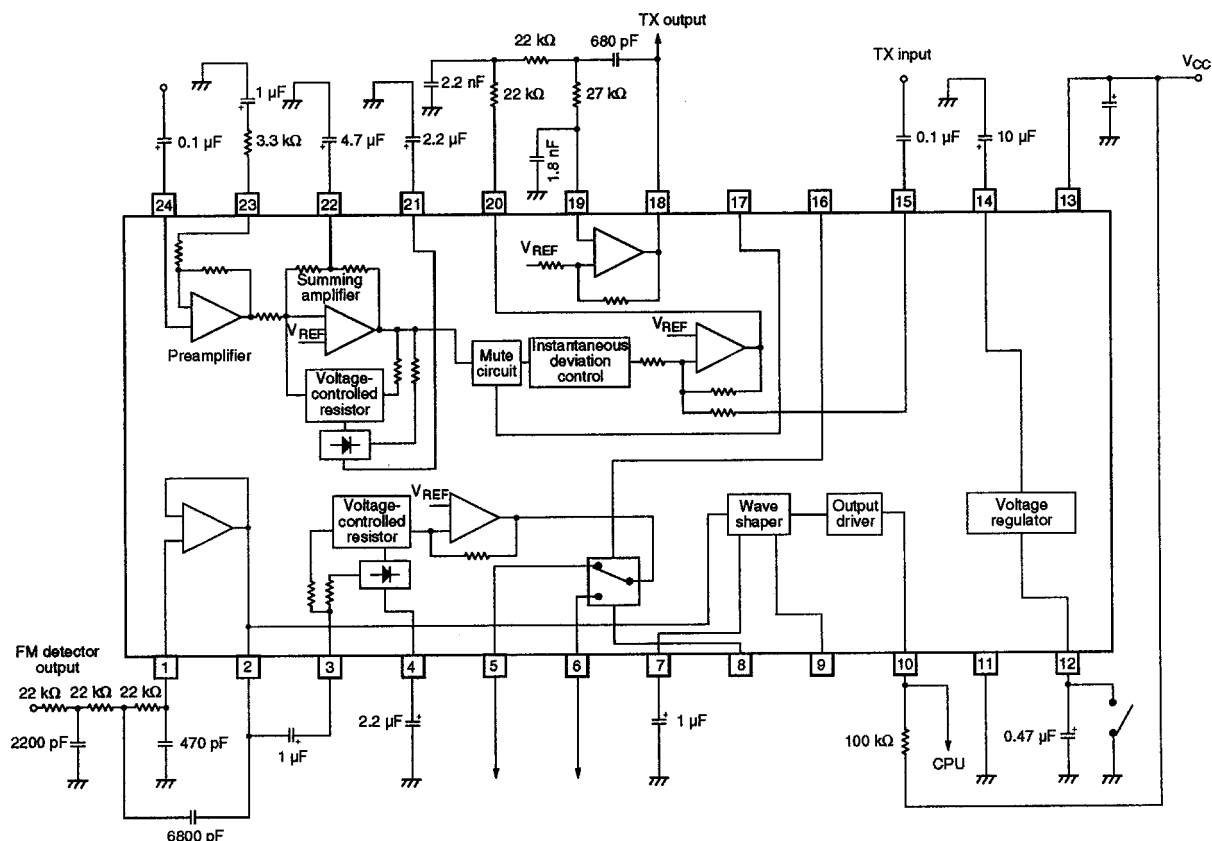

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 2001. Specifications and information herein are subject to change without notice.