
Features

- First-in first-out dual port memory
- 4096 x 9 organisation
- Fast Flag and access times: 15, 30 ns
- Wide temperature range: - 55°C to + 125°C
- Fully expandable by word width or depth
- Asynchronous read/write operations
- Empty, full and half flags in single device mode
- Retransmit capability
- Bi-directional applications
- Battery back-up operation: 2V data retention
- TTL compatible
- Single 5V + 10% power supply
- QML Q and V with SMD 5962-89568

Description

The M67204F implements a first-in first-out algorithm, featuring asynchronous read/write operations. The FULL and EMPTY flags prevent data overflow and underflow. The Expansion logic allows unlimited expansion in word size and depth with no timing penalties. Twin address pointers automatically generate internal read and write addresses, and no external address information are required for the Atmel FIFOs. Address pointers are automatically incremented with the write pin and read pin. The 9 bits wide data are used in data communications applications where a parity bit for error checking is necessary. The Retransmit pin reset the Read pointer to zero without affecting the write pointer. This is very useful for retransmitting data when an error is detected in the system.

Using an array of eight transistors (8 T) memory cell, the M67204F combine an extremely low standby supply current (typ = 0.1 μ A) with a fast access time at 15 ns over the full temperature range. All versions offer battery backup data retention capability with a typical power consumption at less than 2 μ W.

The M67204F is processed according to the methods of the latest revision of the MIL PRF 38535 (Q and V) or ESA SCC 9000.



**Rad Tolerant
High Speed
4 K x 9
Parallel FIFO**


M67204F

Rev. E-20-Aug-01



Interface


Block Diagram

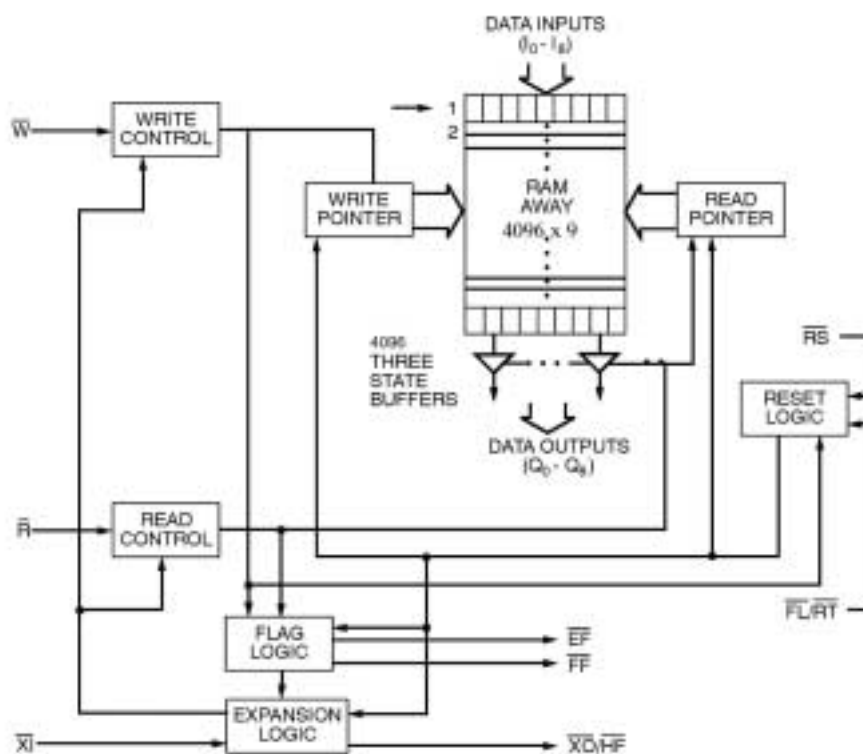

Pin configuration

DIL ceramic 28 pin 300 mils
FP 28 pin 400 mils

(top view)

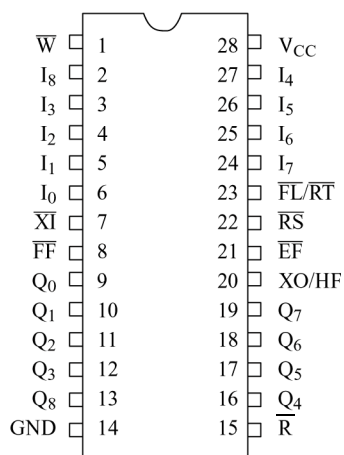

Pin Names

NAMES	DESCRIPTION
$\overline{FF}$	Full Flag
$\overline{XO}/\overline{HF}$	Expansion Out/Half-Full Flag
$\overline{XI}$	Expansion IN
$\overline{FL}/\overline{RT}$	First Load/Retransmit
VCC	Power Supply
GND	Ground
I0-8	Inputs
Q0-8	Outputs
$\overline{W}$	Write Enable
$\overline{R}$	Read Enable
$\overline{RS}$	Reset
$\overline{EF}$	Empty Flag

Signal Description


Data In ($I_0 - I_8$)

Data inputs for 9 - bit data

Reset ($\overline{RS}$)

Reset occurs whenever the Reset ($\overline{RS}$) input is taken to a low state. Reset returns both internal read and write pointers to the first location. A reset is required after power-up before a write operation can be enabled. Both the Read Enable ($\overline{R}$) and Write Enable ($\overline{W}$) inputs must be in the high state during the period shown in Figure 1 (i.e. t_{RSS} before the rising edge of $\overline{RS}$) and should not change until t_{RSB} after the rising edge of $\overline{RS}$. The Half-Full Flag ($\overline{HF}$) will be reset to high After Reset ($\overline{RS}$).

Figure 1. Reset

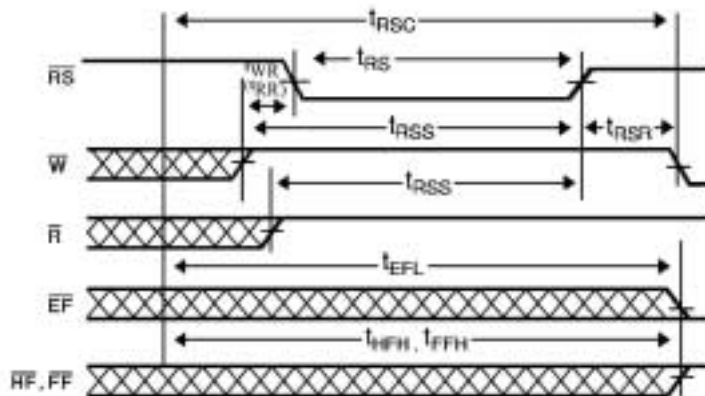

1. $\overline{EF}$, $\overline{FF}$ and $\overline{HF}$ may change status during reset, but flags will be valid at t_{RSC} .
2. $\overline{W}$ and $\overline{R}$ = VIH around the rising edge of $\overline{RS}$.

Write Enable ($\overline{W}$)

A write cycle is initiated on the falling edge of this input if the Full Flag ($\overline{FF}$) is not set. Data set-up and hold times must be maintained in the rise time of the leading edge of the Write Enable ($\overline{W}$). Data is stored sequentially in the Ram array, regardless of any current read operation.

Once half the memory is filled, and during the falling edge of the next write operation, the Half-Full Flag ($\overline{HF}$) will be set to low and remain in this state until the difference between the write and read pointers is less than or equal to half of the total available memory in the device. The Half-Full Flag ($\overline{HF}$) is then reset by the rising edge of the read operation.

To prevent data overflow, the Full Flag ($\overline{FF}$) will go low, inhibiting further write operations. On completion of a valid read operation, the Full Flag ($\overline{FF}$) will go high after TRFF, allowing a valid write to begin. When the FIFO stack is full, the internal write pointer is blocked from $\overline{W}$, so that external changes to $\overline{W}$ will have no effect on the full FIFO stack.

Read Enable ($\overline{R}$)

A read cycle is initiated on the falling edge of the Read Enable ($\overline{R}$) provided that the Empty Flag ($\overline{EF}$) is not set. The data is accessed on a first in/first out basis, not with standing any current write operations. After Read Enable ($\overline{R}$) goes high, the Data Outputs (Q0 - Q8) will return to a high impedance state until the next Read operation. When all the data in the FIFO stack has been read, the Empty Flag ($\overline{EF}$) will go low, allowing the "final" read cycle, but inhibiting further read operations whilst the data outputs remain in a high impedance state. Once a valid write operation has been completed, the Empty Flag ($\overline{EF}$) will go high after tWEF and a valid read may then be initiated. When the FIFO stack is empty, the internal read pointer is blocked from $\overline{R}$, so that external changes to $\overline{R}$ will have no effect on the empty FIFO stack.

First Load/Retransmit (FL/RT)

This is a dual-purpose input. In the Depth Expansion Mode, this pin is connected to ground to indicate that it is the first loaded (see Operating Modes). In the Single Device Mode, this pin acts as the retransmit input. The Single Device Mode is initiated by connecting the Expansion In ($\overline{XI}$) to ground.

The M67204F can be made to retransmit data when the Retransmit Enable Control ($\overline{RT}$) input is pulsed low. A retransmit operation will set the internal read point to the first location and will not affect the write pointer. Read Enable ($\overline{R}$) and Write Enable ($\overline{W}$) must be in the high state during retransmit. The retransmit feature is intended for use when a number of writes equals to or less than the depth of the FIFO has occurred since the last RS cycle. The retransmit feature is not compatible with the Depth Expansion Mode and will affect the Half-Full Flag ($\overline{HF}$), in accordance with the relative locations of the read and write pointers.

Expansion In ($\overline{XI}$)

This input is a dual-purpose pin. Expansion In ($\overline{XI}$) is connected to GND to indicate an operation in the single device mode. Expansion In ($\overline{XI}$) is connected to Expansion Out ($\overline{XO}$) of the previous device in the Depth Expansion or Daisy Chain modes.

Full Flag ($\overline{FF}$)

The Full Flag ($\overline{FF}$) will go low, inhibiting further write operations when the write pointer is one location less than the read pointer, indicating that the device is full. If the read pointer is not moved after Reset (RS), the Full Flag ($\overline{FF}$) will go low after 4096 writes.

Empty Flag ($\overline{EF}$)

The Empty Flag ($\overline{EF}$) will go low, inhibiting further read operations when the read pointer is equal to the write pointer, indicating that the device is empty.



Expansion Out/Half-Full Flag ($\overline{XO}/\overline{HF}$)

This is a dual-purpose output. In the single device mode, when Expansion In ($\overline{XI}$) is connected to ground, this output acts as an indication of a half-full memory.

After half the memory is filled and on the falling edge of the next write operation, the Half-Full Flag ($\overline{HF}$) will be set to low and will remain set until the difference between the write and read pointers is less than or equal to half of the total memory of the device. The Half-Full Flag ($\overline{HF}$) is then reset by the rising edge of the read operation.

In the Depth Expansion Mode, Expansion In ($\overline{XI}$) is connected to Expansion Out ($\overline{XO}$) of the previous device. This output acts as a signal to the next device in the Daisy Chain by providing a pulse to the next device when the previous device reaches the last memory location.

Data Output ($Q_0 - Q_8$)

DATA output for 9-bit wide data. This data is in a high impedance condition whenever Read ($\overline{R}$) is in a high state.


Functional Description

Operating Modes

Single Device Mode

A single M67204F may be used when the application requirements are for 4096 words or less. The M67204F is in a Single Device Configuration when the Expansion In ($\overline{XI}$) control input is grounded (see Figure 2). In this mode the Half-Full Flag ($\overline{HF}$), which is an active low output, is shared with Expansion Out ($\overline{XO}$).


Figure 2. Block Diagram of Single 4096 $\times$ 9.

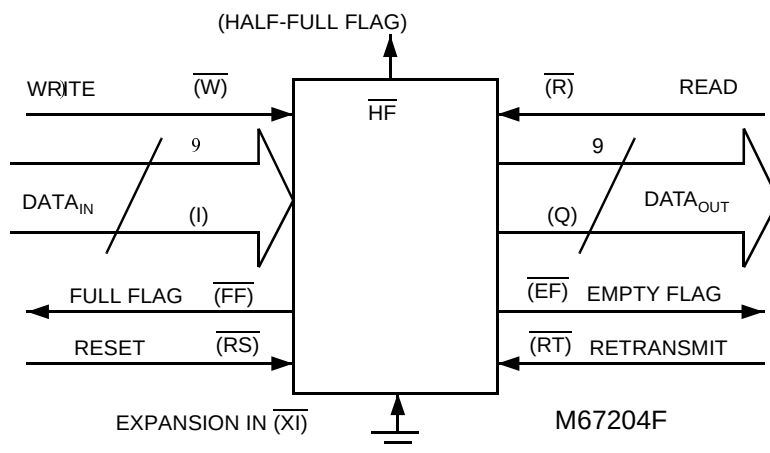

Width Expansion Mode

Word width may be increased simply by connecting the corresponding input control signals of multiple devices. Status flags ($\overline{EF}$, $\overline{FF}$ and $\overline{HF}$) can be detected from any device. Figure 3. demonstrates an 18-bit word width by using two M67204F. Any word width can be attained by adding additional M67204F.

Figure 3. Block Diagram of 4096 × 18 FIFO Memory Used in Width Expansion Mode.

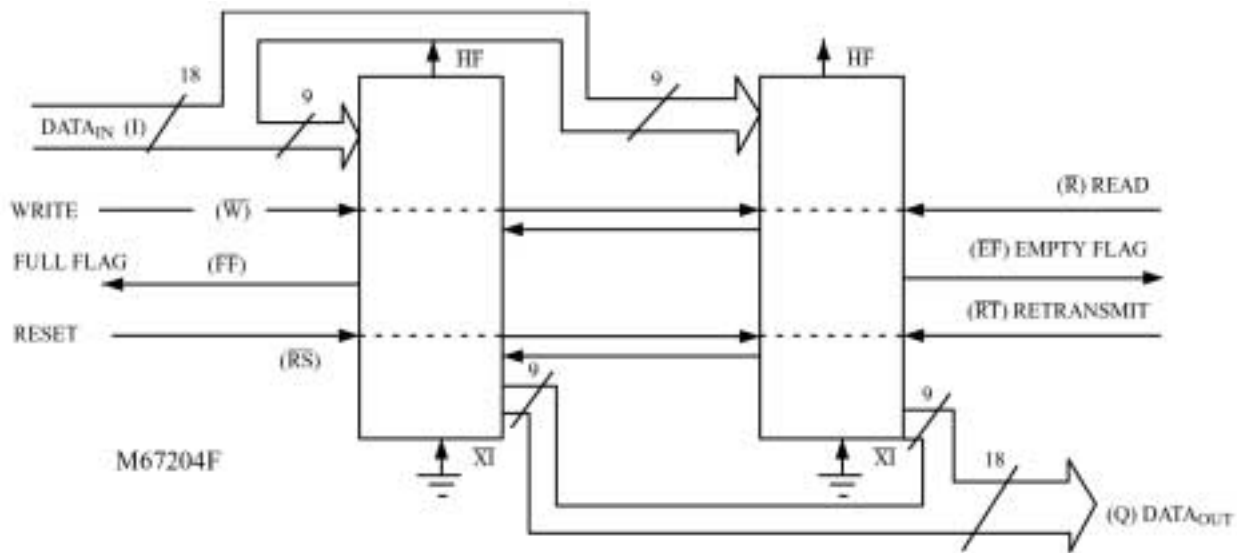

Note: Flag detection is accomplished by monitoring the $\overline{FF}$, $\overline{EF}$ and the $\overline{HF}$ signals on either (any) device used in the width expansion configuration. Do not connect any output control signals together.

Table 1. Reset and retransmit
Single Device Configuration/Width Expansion Mode

MODE	INPUTS			INTERNAL STATUS		OUTPUTS		
	$\overline{RS}$	$\overline{RT}$	$\overline{XI}$	Read Pointer	Write Pointer	$\overline{EF}$	$\overline{FF}$	$\overline{HF}$
Reset	0	X	0	Location Zero	Location Zero	0	1	1
Retransmit	1	0	0	Location Zero	Unchanged	X	X	X
Read/Write	1	1	0	Increment	Increment ⁽¹⁾	X	X	X

1. Pointer will increment if flag is high.

Table 2. Reset and First Load Truth Table
Depth Expansion/Compound Expansion Mode

MODE	INPUTS			INTERNAL STATUS		OUTPUTS	
	RS	RT	XI	Read Pointer	Write Pointer	EF	FF
Reset First Device	0	0	⁽¹⁾	Location Zero	Location Zero	0	1
Reset All Other Devices	0	1	⁽¹⁾	Location Zero	Location Zero	0	1
Read/Write	1	X	⁽¹⁾	X	X	X	X

1. $\overline{XI}$ is connected to $\overline{XO}$ of previous device.
See Figure 4.

Depth Expansion (Daisy Chain) Mode

The M67204F can be easily adapted for applications which require more than 4096 words. Figure 4. demonstrates Depth Expansion using three M67204F. Any depth can be achieved by adding additional M67204FF.

The M67204F operates in the Depth Expansion configuration if the following conditions are met:

1. The first device must be designated by connecting the First Load ($\overline{\text{FL}}$) control input to ground.
2. All other devices must have $\overline{\text{FL}}$ in the high state.
3. The Expansion Out ($\overline{\text{XO}}$) pin of each device must be connected to the Expansion In ($\overline{\text{XI}}$) pin of the next device. See Figure 4.
4. External logic is needed to generate a composite Full Flag ($\overline{\text{FF}}$) and Empty Flag ($\overline{\text{EF}}$). This requires that all $\overline{\text{EF}}$'s and all $\overline{\text{FF}}$'s be $\overline{\text{OR}}$ ed (i.e. all must be set to generate the correct composite $\overline{\text{FF}}$ or $\overline{\text{EF}}$). See Figure 4.
5. The Retransmit ($\overline{\text{RT}}$) function and Half-Full Flag ($\overline{\text{HF}}$) are not available in the Depth Expansion Mode.

Compound Expansion Module

It is quite simple to apply the two expansion techniques described above together to create large FIFO arrays (see Figure 5.).

Bidirectional Mode

Applications which require data buffering between two systems (each system being capable of Read and Write operations) can be created by coupling M67204F as shown in Figure 6. Care must be taken to ensure that the appropriate flag is monitored by each system (i.e. $\overline{\text{FF}}$ is monitored on the device on which $\overline{\text{W}}$ is in use; $\overline{\text{EF}}$ is monitored on the device on which $\overline{\text{R}}$ is in use). Both Depth Expansion and Width Expansion may be used in this mode.

Data Flow - Through Modes

Two types of flow-through modes are permitted: a read flow-through and a write flow-through mode. In the read flow-through mode (Figure 17) the FIFO stack allows a single word to be read after one word has been written to an empty FIFO stack. The data is enabled on the bus at $(t_{\text{WEF}} + t_{\text{A}})$ ns after the leading edge of $\overline{\text{W}}$ which is known as the first write edge and remains on the bus until the $\overline{\text{R}}$ line is raised from low to high, after which the bus will go into a three-state mode after t_{RHZ} ns. The $\overline{\text{EF}}$ line will show a pulse indicating temporary reset and then will be set. In the interval in which $\overline{\text{R}}$ is low, more words may be written to the FIFO stack (the subsequent writes after the first write edge will reset the Empty Flag); however, the same word (written on the first write edge) presented to the output bus as the read pointer will not be incremented if $\overline{\text{R}}$ is low. On toggling $\overline{\text{R}}$, the remaining words written to the FIFO will appear on the output bus in accordance with the read cycle timings.

In the write flow-through mode (Figure 18), the FIFO stack allows a single word of data to be written immediately after a single word of data has been read from a full FIFO stack. The $\overline{\text{R}}$ line causes the $\overline{\text{FF}}$ to be reset, but the $\overline{\text{W}}$ line, being low, causes it to be set again in anticipation of a new data word. The new word is loaded into the FIFO stack on the leading edge of $\overline{\text{W}}$. The $\overline{\text{W}}$ line must be toggled when $\overline{\text{FF}}$ is not set in order to write new data into the FIFO stack and to increment the write pointer.

Figure 4. Block Diagram of 12288 × 9 FIFO Memory (Depth expansion).



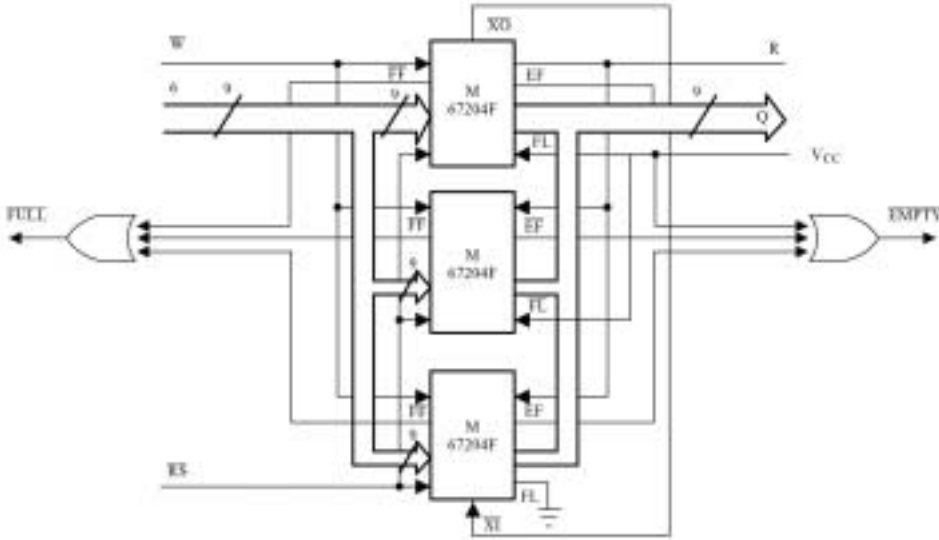


Figure 5. Compound FIFO Expansion

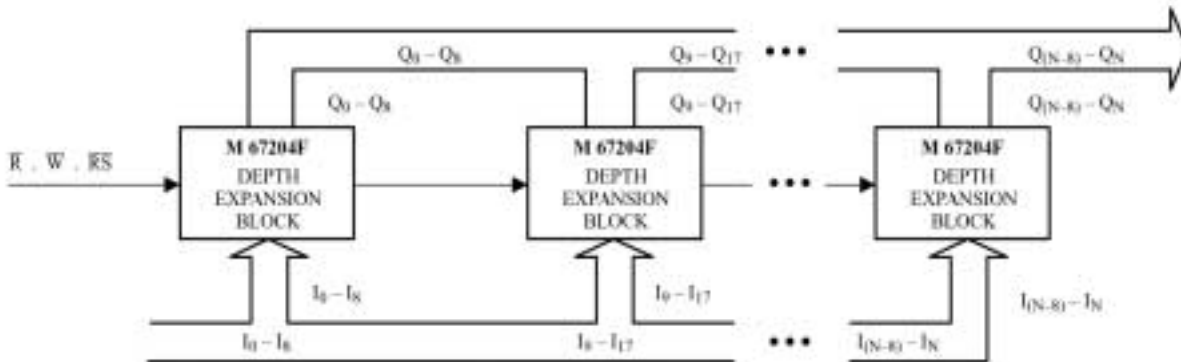

1. For depth expansion block see section on Depth Expansion and Figure 4
2. For Flag detection see section on Width Expansion and Figure 3

Figure 6. Bidirectional FIFO Mode.

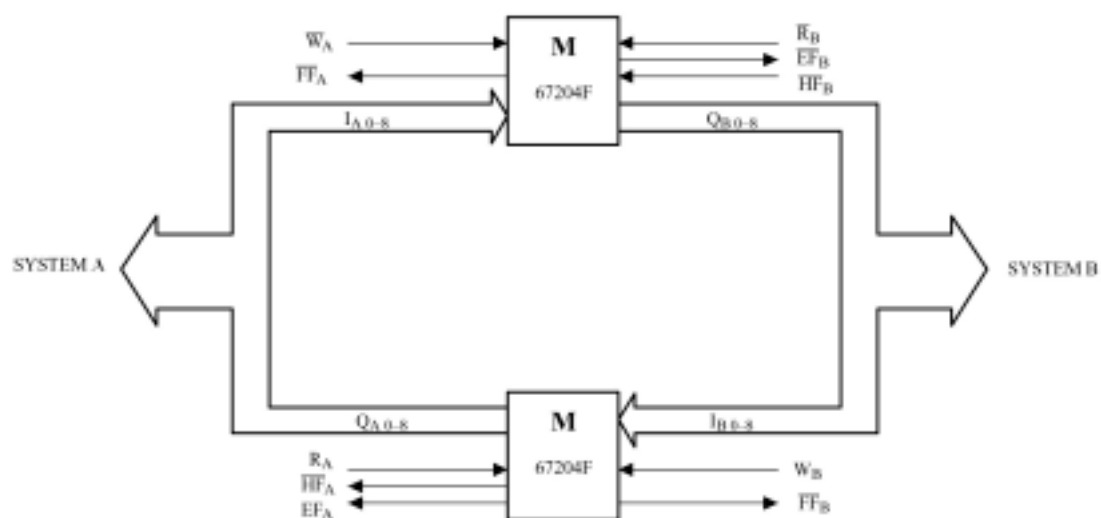

Electrical Characteristics

Absolute Maximum Ratings

Supply voltage (VCC - GND):..... - 0.3 V to 7.0 V
 Input or Output voltage applied: (GND - 0.3 V) to (Vcc + 0.3 V)
 Storage temperature: - 65 °C to + 150 °C

OPERATING RANGE	OPERATING SUPPLY VOLTAGE	OPERATING TEMPERATURE
Military	Vcc = 5 V ± 10%	– 55 °C to + 125 °C

DC Parameters

Parameter	Description	M M67204FF-30	M M67204FF-15	UNIT	VALUE
I _{CCOP} ⁽¹⁾	Operating supply current	110	120	mA	Max
I _{CCSB} ⁽²⁾	Standby supply current	5	5	mA	Max
I _{CCPD} ⁽³⁾	Power down current	400	400	μA	Max
ILI ⁽⁴⁾	Input leakage current	± 1		μA	Max
ILO ⁽⁵⁾	Output leakage current	± 1		μA	Max
VIL ⁽⁶⁾	Input low voltage	0.8		V	Max
VIH ⁽⁶⁾	Input high voltage	2.2		V	Min
VOL ⁽⁷⁾	Output low voltage	0.4		V	Max
VOH ⁽⁷⁾	Output high voltage	2.4		V	Min
C IN ⁽⁸⁾	Input capacitance	8		pF	Max
C OUT ⁽⁸⁾	Output capacitance	8		pF	Max

- I_{CC} measurements are made with outputs open.
- $\bar{R} = \bar{W} = \bar{RS} = \bar{FL/RT} = V_{IH}$.
- All input = V_{CC}.
- $0.4 \leq V_{in} \leq V_{CC}$.
- $\bar{R} = V_{IH}$, $0.4 \leq V_{OUT} \leq V_{CC}$.
- V_{IH} max = V_{CC} + 0.3 V. V_{IL} min = -0.3 V or -1 V pulse width 50 ns. For XI input, V_{IH} = 2.8V
- V_{CC} min, I_{OL} = 8 mA, I_{OH} = -2 mA.
- Guaranteed but not tested.

AC Test Conditions

Input pulse levels: Gnd to 3.0 V
 Input rise/Fall times: 5 ns
 Input timing reference levels: 1.5 V
 Output reference levels: 1.5 V
 Output load: See Figure 7.

Figure 7. Output Load

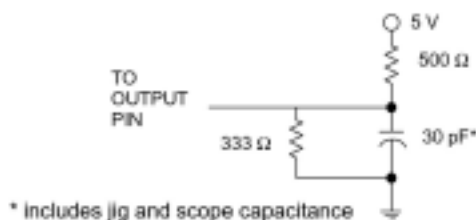


Table 3. AC Test Conditions

SYMBOL ⁽¹⁾	SYMBOL ⁽²⁾	PARAMETER ^{(3) (4)}	M67204F- 15		M67204F- 30		UNIT
			MIN.	MAX.	MIN.	MAX.	
READ CYCLE							
TRLRL	tRC	Read cycle time	25	-	40	-	ns
TRLQV	tA	Access time		15		30	ns
TRHRL	tRR	Read recovery time	10	-	10	-	ns
TRLRH	tRPW	Read pulse width ⁽⁵⁾	15	-	30	-	ns
TRLQX	tRLZ	Read low to data low Z ⁽⁶⁾	0	-	5	-	ns
TWHQX	tWLZ	Write low to data low Z ^{(6) (7)}	3	-	5	-	ns
TRHQX	tDV	Data valid from read high	5	-	5	-	ns
TRHQZ	tRHZ	Read high to data high Z ⁽⁶⁾	-	15	-	20	ns
WRITE CYCLE							
TWLWL	tWC	Write cycle time	25	-	40	-	ns
TWLWH	tWPW	Write pulse width ⁽⁵⁾	15	-	30	-	ns
TWHWL	tWR	Write recovery time	10	-	10	-	ns
TDVWH	tDS	Data set-up time	9	-	18	-	ns
TWHDX	tDH	Data hold time	0	-	0	-	ns
RESET CYCLE							
TRSLWL	tRSC	Reset cycle time	25	-	40	-	ns
TRSLRSH	tRS	Reset pulse width ⁽⁵⁾	15	-	30	-	ns
TWHRSH	tRSS	Reset set-up time	20	-	30	-	ns
TRSHWL	tRSR	Reset recovery time	10	-	10	-	ns
RETRANSMIT CYCLE							

TRTLWL	tRTC	Retransmit cycle time	25	-	40	-	ns
TRTLRTH	tRT	Retransmit pulse width ⁽⁵⁾	15	-	30	-	ns
TWHRTH	tRTS	Retransmit set-up time ⁽⁶⁾	15	-	30	-	ns
TRTHWL	tRTR	Retransmit recovery time	10	-	10	-	ns
FLAGS							
TRSLEFL	tEFL	Reset to EF low	-	25	-	30	ns
TRSLFFH	tHFH, tFFH	Reset to HF/FF high	-	25	-	30	ns
TRLEFL	tREF	Read low to EF low	-	15	-	30	ns
TRHFFH	tRFF	Read high to FF high	-	25	-	30	ns
TEFHRH	tRPE	Read width after EF high	15	-	30	-	ns
TWHEFH	tWEF	Write high to EF high	-	15	-	30	ns
TWLFFL	tWFF	Write low to FF low	-	20	-	30	ns
TWLHFL	tWHF	Write low to HF low	-	30	-	30	ns
TRHFFH	tRHF	Read high to HF high	-	30	-	30	ns
TFFHWH	tWPF	Write width after FF high	15	-	30	-	ns
EXPANSION							
TWLXOL	tXOL	Read/Write to XO low	-	15	-	30	ns
TWHXOH	tXOH	Read/Write to XO high	-	15	-	30	ns
TXILXIH	tXI	XI pulse width	15	-	30	-	ns
TXIHXIL	tXIR	XI recovery time	10	-	10	-	ns
TXILRL	tXIS	XI set-up time	10	-	10	-	ns

1. STD symbol.
2. ALT symbol.
3. Timings referenced as in ac test conditions.
4. All parameters tested only.
5. Pulse widths less than minimum value are not allowed.
6. Values guaranteed by design, not currently tested.
7. Only applies to read data flow-through mode.

Figure 8. Asynchronous Write and Read Operation

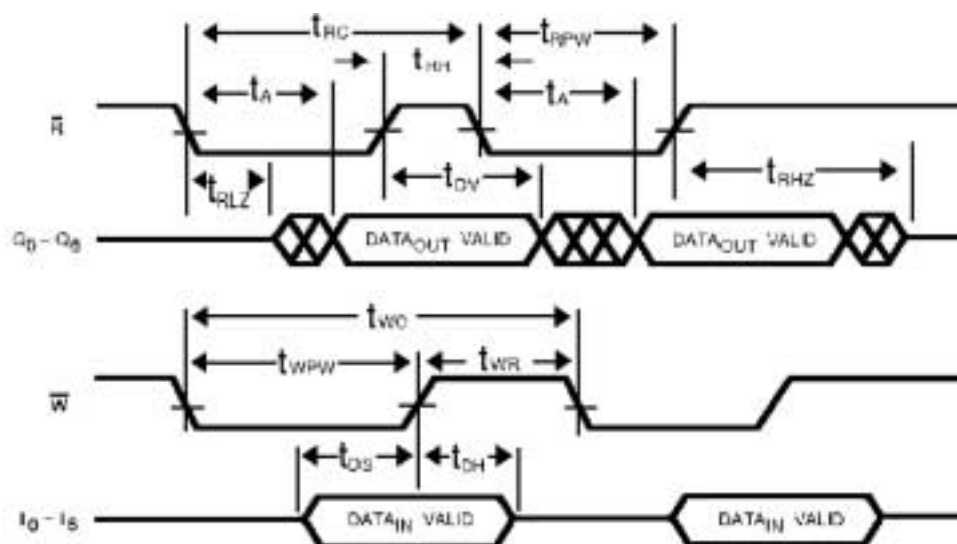


Figure 9. Full Flag from Last Write to First Read

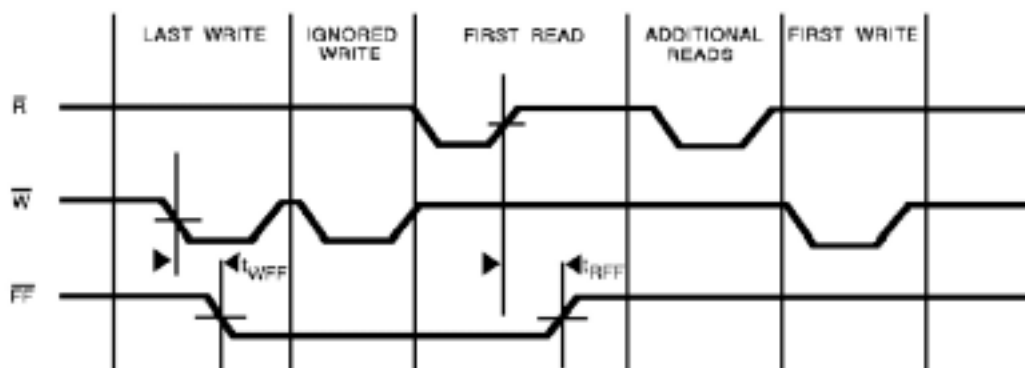


Figure 10. Empty Flag from Last Read to First Write

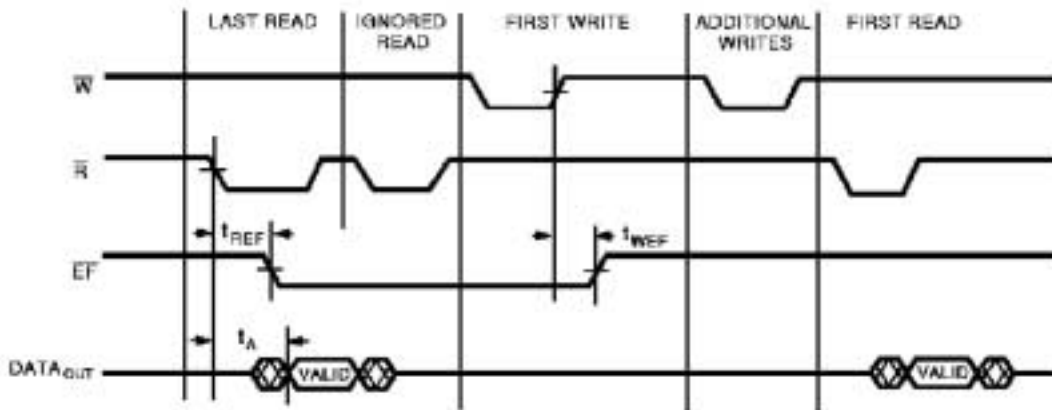


Figure 11. Retransmit

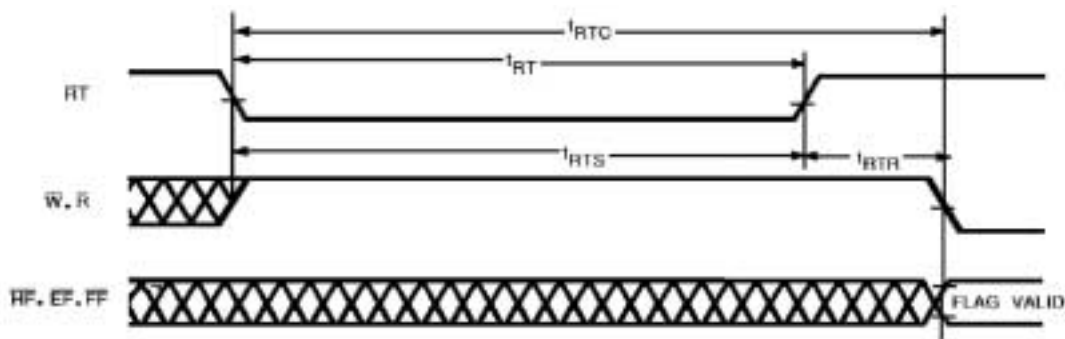


Figure 12. Empty Flag Timing

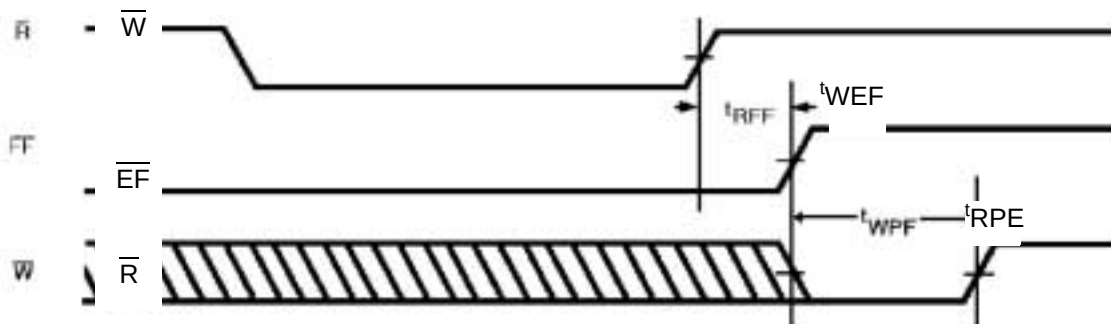


Figure 13. Full Flag Timing

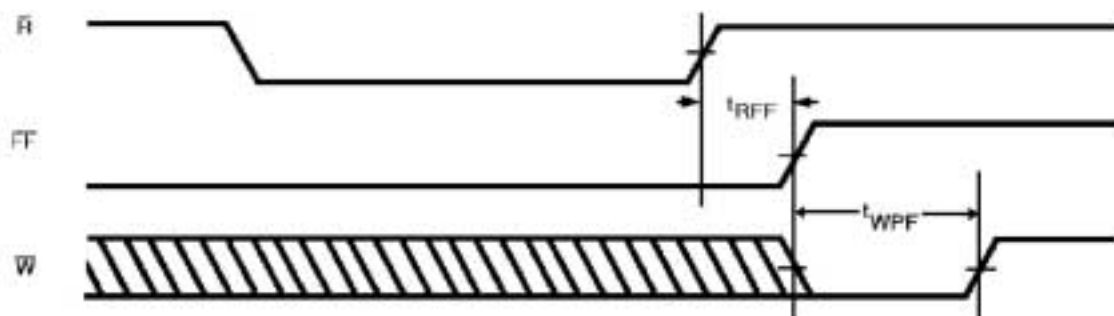


Figure 14. Half-Full Flag Timing

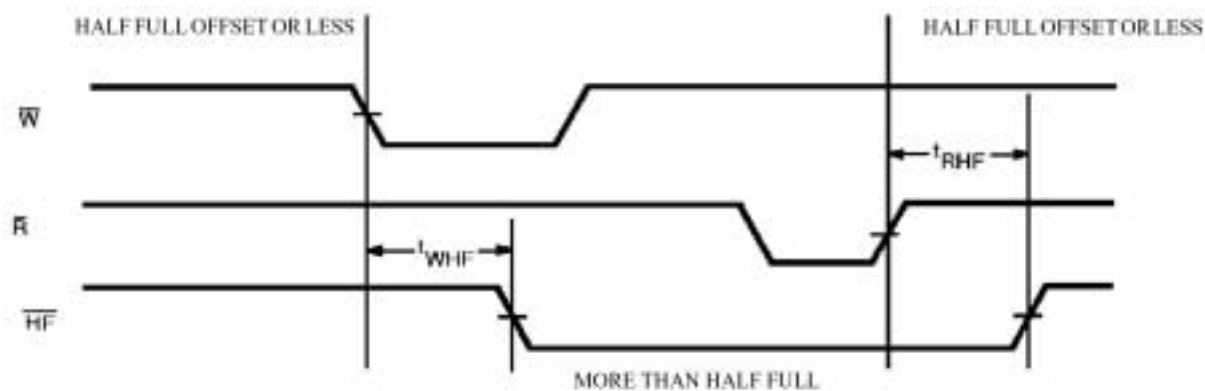


Figure 15. Expansion Out

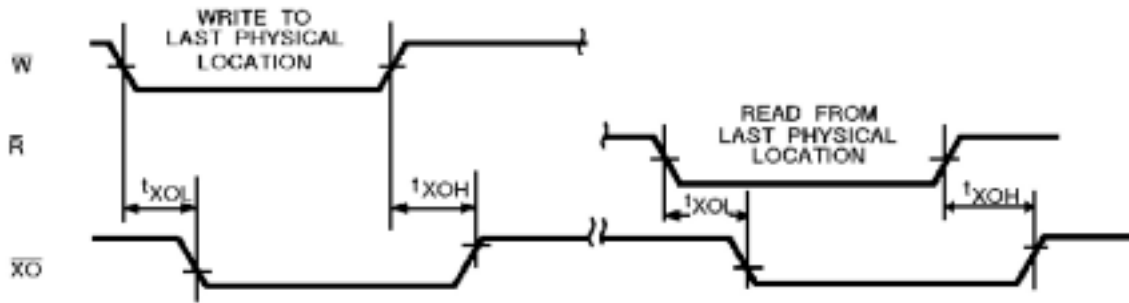


Figure 16. Expansion In

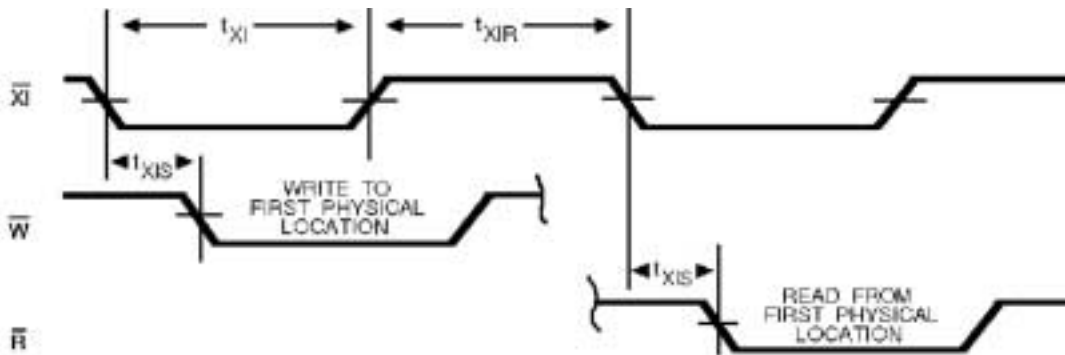


Figure 17. Read Data Flow - Through Mode


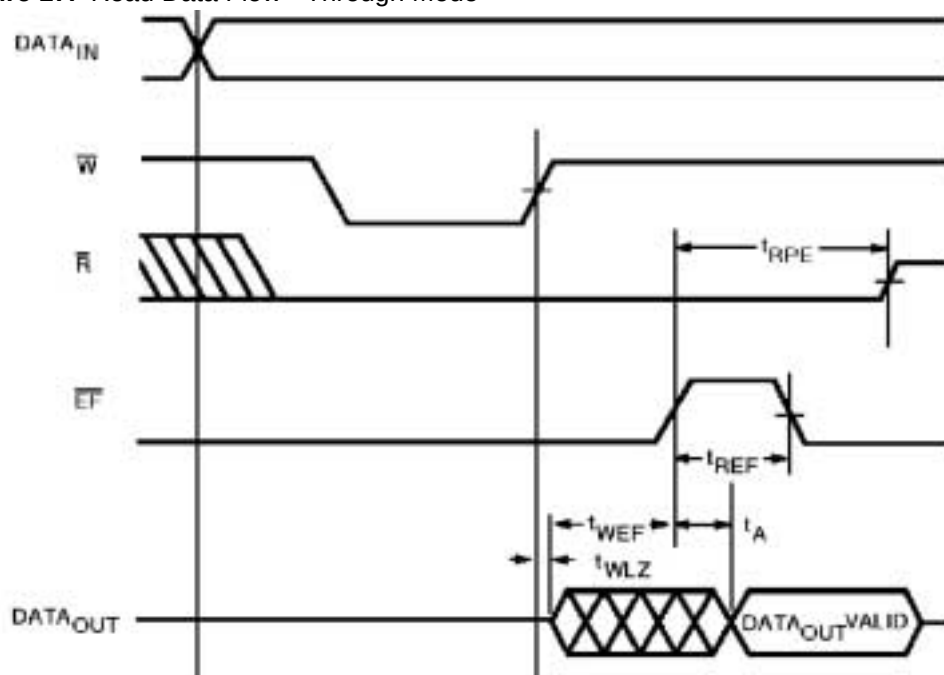


Figure 18. Write Data Flow - Through Mode

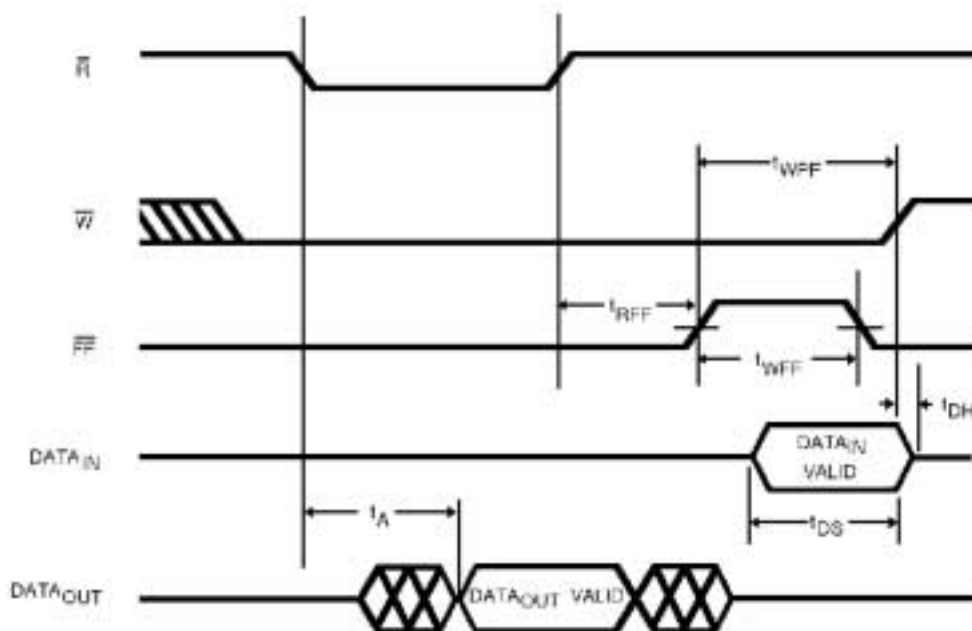

Ordering Information

Reference Number	Temperature Range	Speed	Package	Quality Flow
MMCP-67204FV-15-E(*)	25°C	15ns	SB28.3	Engineering Samples
MMCP-67204FV-15	-55 to +125°C	15ns	SB28.3	Mil.
MMCP-67204FV-30	-55 to +125°C	30ns	SB28.3	Mil.
SMCP-67204FV-15SB	-55 to +125°C	15ns	SB28.3	SCC B
SMCP-67204FV-30SB	-55 to +125°C	30ns	SB28.3	SCC B
SMCP-67204FV-15SC	-55 to +125°C	15ns	SB28.3	SCC C
SMCP-67204FV-30SC	-55 to +125°C	30ns	SB28.3	SCC C
MMCP-67204FV-15/883(*)	-55 to +125°C	15ns	SB28.3	MIL-883 B
MMCP-67204FV-30/883(*)	-55 to +125°C	30ns	SB28.3	MIL-883 B
SMCP-67204FV-15/883(*)	-55 to +125°C	15ns	SB28.3	MIL-883 S
SMCP-67204FV-30/883(*)	-55 to +125°C	30ns	SB28.3	MIL-883 S
5962-8956808QUC	-55 to +125°C	15ns	SB28.3	QML Q
5962-8956806QUC	-55 to +125°C	30ns	SB28.3	QML Q
5962-8956808VUC	-55 to +125°C	15ns	SB28.3	QML V
5962-8956806VUC	-55 to +125°C	30ns	SB28.3	QML V
MMDP-67204FV-15-E	25°C	15ns	FP28.4	Engineering Samples
MMDP-67204FV-15	-55 to +125°C	15ns	FP28.4	Mil.
MMDP-67204FV-30	-55 to +125°C	30ns	FP28.4	Mil.
SMDP-67204FV-15SB	-55 to +125°C	15ns	FP28.4	SCC B
SMDP-67204FV-30SB	-55 to +125°C	30ns	FP28.4	SCC B
SMDP-67204FV-15SC	-55 to +125°C	15ns	FP28.4	SCC C
SMDP-67204FV-30SC	-55 to +125°C	30ns	FP28.4	SCC C
MMDP-67204FV-15/883(*)	-55 to +125°C	15ns	FP28.4	MIL-883 B
MMDP-67204FV-30/883(*)	-55 to +125°C	30ns	FP28.4	MIL-883 B
SMDP-67204FV-15/883(*)	-55 to +125°C	15ns	FP28.4	MIL-883 S
SMDP-67204FV-30/883(*)	-55 to +125°C	30ns	FP28.4	MIL-883 S
5962-8956808QYC	-55 to +125°C	15ns	FP28.4	QML Q
5962-8956806QYC	-55 to +125°C	30ns	FP28.4	QML Q
5962-8956808VYC	-55 to +125°C	15ns	FP28.4	QML V
5962-8956806VYC	-55 to +125°C	30ns	FP28.4	QML V
MM0-67204FV-15-E	25°C	15ns	Die	Engineering Samples
5962-8956808Q9A	-55 to +125°C	15ns	Die	QML Q
5962-8956808V9A	-55 to +125°C	15ns	Die	QML V

Note: (*)contact factory



Atmel Wireless & Microcontrollers Sales Offices

France

3, Avenue du Centre
78054 St.-Quentin-en-Yvelines
Cedex
France
Tel: 33130 60 70 00
Fax: 33130 60 71 11

Germany

Erfurter Strasse 31
85386 Eching
Germany
Tel: 49893 19 70 0
Fax: 49893 19 46 21

Kruppstrasse 6
45128 Essen
Germany
Tel: 492 012 47 30 0
Fax: 492 012 47 30 47

Theresienstrasse 2
74072 Heilbronn
Germany
Tel: 4971 3167 36 36
Fax: 4971 3167 31 63

Italy

Via Grosio, 10/8
20151 Milano
Italy
Tel: 390238037-1
Fax: 390238037-234

Spain

Principe de Vergara, 112
28002 Madrid
Spain
Tel: 3491564 51 81
Fax: 3491562 75 14

Sweden

Kavallerivaegen 24, Rissne
17402 Sundbyberg
Sweden
Tel: 468587 48 800
Fax: 468587 48 850

United Kingdom

Easthampstead Road
Bracknell, Berkshire RG12 1LX
United Kingdom
Tel: 441344707 300
Fax: 441344427 371

USA

2325 Orchard Parkway
San Jose
California 95131
USA-California
Tel: 1408441 0311
Fax: 1408436 4200

1465 Route 31, 5th Floor
Annandale
New Jersey 08801
USA-New Jersey
Tel: 1908848 5208
Fax: 1908848 5232

Hong Kong

77 Mody Rd., Tsimshatsui East,
Rm.1219
East Kowloon
Hong Kong
Tel: 85223789 789
Fax: 85223755 733

Korea

Ste.605,Singsong Bldg. Young-
deungpo-ku
150-010 Seoul
Korea
Tel: 8227851136
Fax: 8227851137

Singapore

25 Tampines Street 92
Singapore 528877
Rep. of Singapore
Tel: 65260 8223
Fax: 65787 9819

Taiwan

Wen Hwa 2 Road, Lin Kou
Hsiang
244 Taipei Hsien 244
Taiwan, R.O.C.
Tel: 88622609 5581
Fax: 88622600 2735

Japan

1-24-8 Shinkawa, Chuo-Ku
104-0033 Tokyo
Japan
Tel: 8133523 3551
Fax: 8133523 7581

Web site

<http://www.atmel-wm.com>

© Atmel Nantes SA, 2001.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.



Printed on recycled paper.