


# HFA105NH60R

HEXFRED™

Ultrafast, Soft Recovery Diode

## Features


- Reduced RFI and EMI
- Reduced Snubbing
- Extensive Characterization of Recovery Parameters



$V_R = 600V$
$V_F = 1.5V$
$Q_{rr}^* = 1200nC$
$di_{(rec)M}/dt^* = 240A/\mu s$
* 125°C

## Description

HEXFRED™ diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems. An extensive characterization of the recovery behavior for different values of current, temperature and  $di/dt$  simplifies the calculations of losses in the operating conditions. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for power converters, motors drives and other applications where switching losses are significant portion of the total losses.



## Absolute Maximum Ratings

	Parameter	Max.	Units
$V_R$	Cathode-to-Anode Voltage	600	V
$I_F @ T_C = 25^\circ C$	Continuous Forward Current	147	
$I_F @ T_C = 100^\circ C$	Continuous Forward Current	72	
$I_{FSM}$	Single Pulse Forward Current ①	600	A
$I_{AS}$	Maximum Single Pulse Avalanche Current ②	2.0	
$E_{AS}$	Non-Repetitive Avalanche Energy ②	220	$\mu J$
$P_D @ T_C = 25^\circ C$	Maximum Power Dissipation	379	
$P_D @ T_C = 100^\circ C$	Maximum Power Dissipation	152	
$T_J$ $T_{STG}$	Operating Junction and Storage Temperature Range	-55 to +150	$^\circ C$

## Thermal - Mechanical Characteristics

	Parameter	Min.	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case, Single	—	—	0.33	$^\circ C/W$
$R_{\theta CS}$	Case-to-Sink, Flat , Greased Surface	—	0.15	—	K/W
Wt	Weight	—	26 (0.9)	—	g (oz)
	Mounting Torque	15 (1.7)	—	25 (2.8)	lbf-in
	Terminal Torque	20 (2.2)	—	40 (4.4)	(N•m)

Note: ① Limited by junction temperature

②  $L = 100\mu H$ , duty cycle limited by max  $T_J$

# HFA105NH60R





## Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$V_{BR}$	Cathode Anode Breakdown Voltage	600	—	—	V	$I_R = 100\mu\text{A}$
$V_{FM}$	Max Forward Voltage	—	1.3	1.5	V	$I_F = 105\text{A}$
			1.5	1.7		$I_F = 210\text{A}$
			1.2	1.4		$I_F = 105\text{A}, T_J = 125^\circ\text{C}$
$I_{RM}$	Max Reverse Leakage Current	—	6.0	30	$\mu\text{A}$	$V_R = V_R \text{ Rated}$
			1.5	6.0	mA	$T_J = 125^\circ\text{C}, V_R = 480\text{V}$
$C_T$	Junction Capacitance	—	200	300	pF	$V_R = 200\text{V}$
$L_S$	Series Inductance	—	6.0	—	nH	From top of terminal hole to mounting plane


## Dynamic Recovery Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Test Conditions
$t_{rr}$	Reverse Recovery Time	—	35	—	ns	$I_F = 1.0\text{A}, di/dt = 200\text{A}/\mu\text{s}, V_R = 30\text{V}$
			90	140		$T_J = 25^\circ\text{C}$
			160	240		$T_J = 125^\circ\text{C}$
$I_{RRM1}$	Peak Recovery Current	—	10	18	A	$T_J = 25^\circ\text{C}$
			15	30		$T_J = 125^\circ\text{C}$
$Q_{rr1}$	Reverse Recovery Charge	—	450	1300	nC	$T_J = 25^\circ\text{C}$
			1200	3600		$T_J = 125^\circ\text{C}$
$di_{(rec)M}/dt_1$	Peak Rate of Fall of Recovery Current During $t_b$	—	310	—	A/ $\mu\text{s}$	$T_J = 25^\circ\text{C}$
			240	—		$T_J = 125^\circ\text{C}$

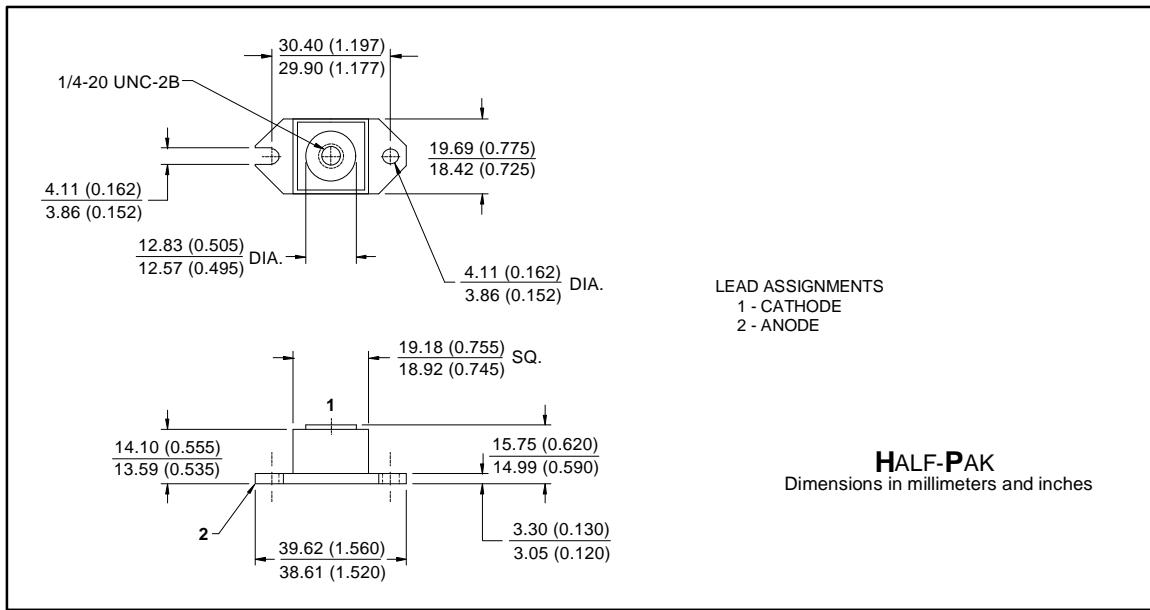


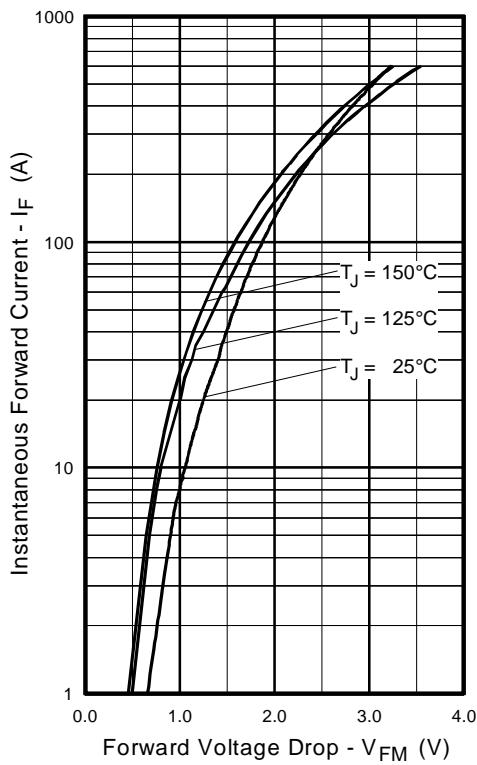**I<sub>O</sub>R****HFA105NH60R**


**Fig. 1** - Maximum Forward Voltage Drop vs. Instantaneous Forward Current

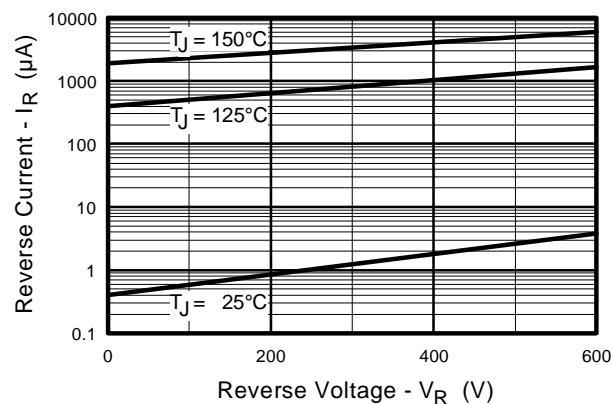

**Fig. 2** - Typical Reverse Current vs. Reverse Voltage

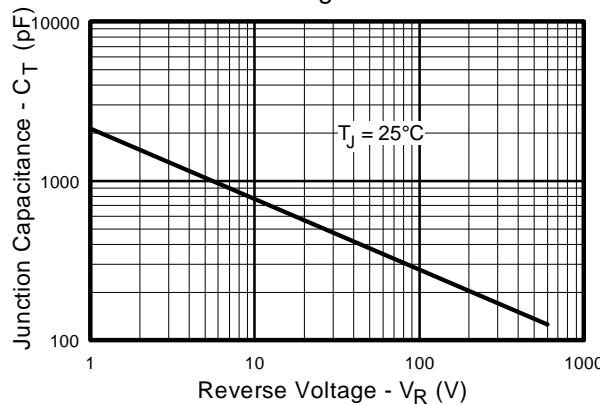


**Fig. 3** - Typical Junction Capacitance vs. Reverse Voltage

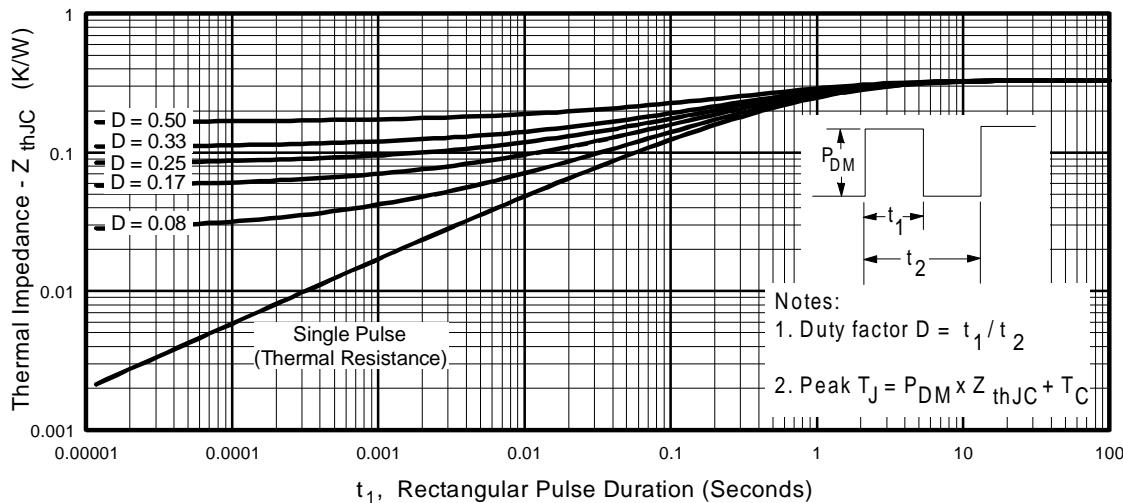


**Fig. 4** - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics


# HFA105NH60R

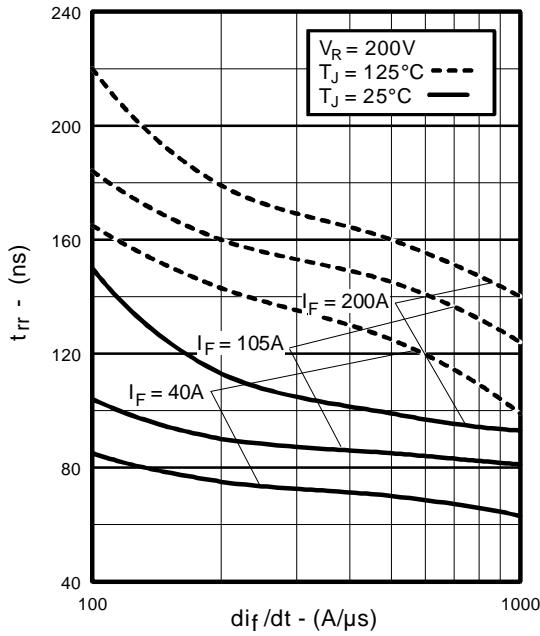


**Fig. 5 - Typical Reverse Recovery vs.  $dI_f/dt$**

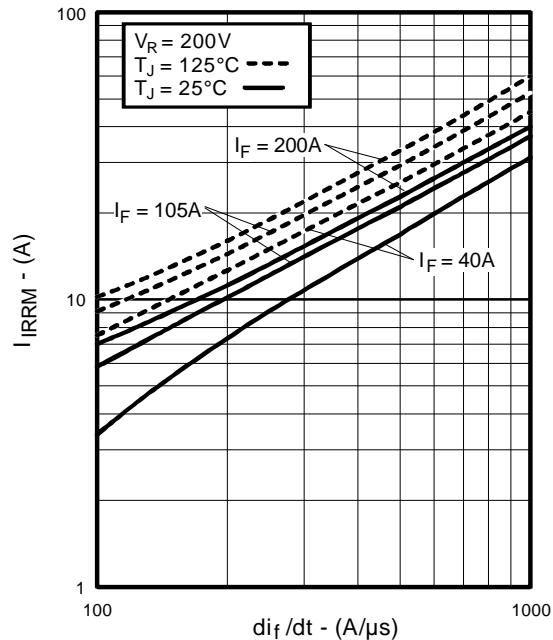

**Fig. 6 - Typical Recovery Current vs.  $dI_f/dt$**


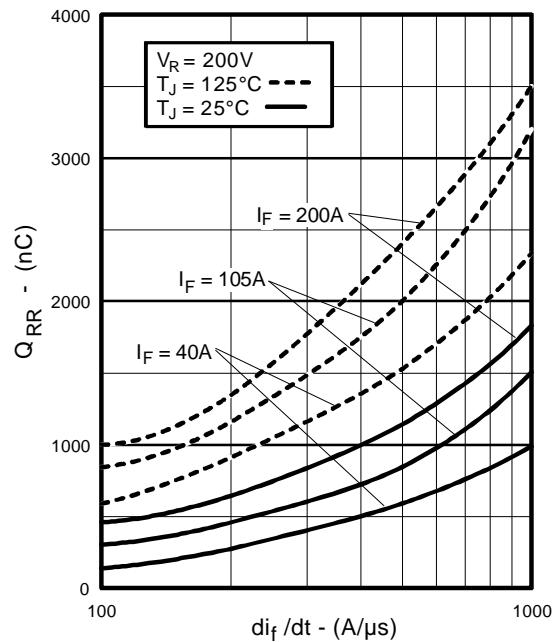


**Fig. 7 - Typical Stored Charge vs.  $dI_f/dt$**

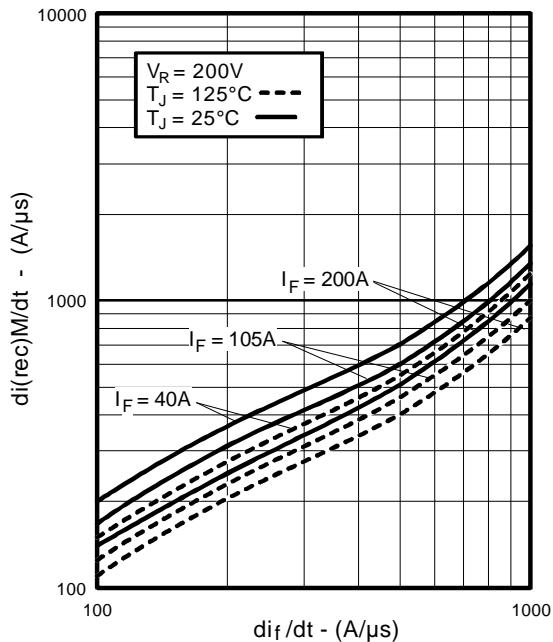

**Fig. 8 - Typical  $dI_{(rec)M}/dt$  vs.  $dI_f/dt$**

REVERSE RECOVERY CIRCUIT

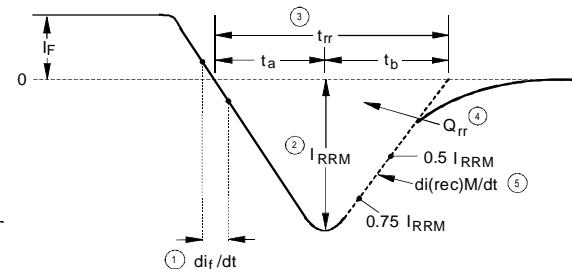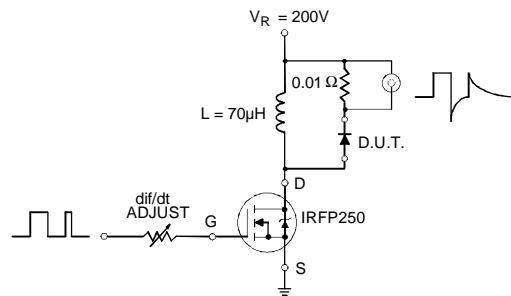

1.  $di_F/dt$  - Rate of change of current through zero crossing

2.  $I_{RRM}$  - Peak reverse recovery current

3.  $t_{rr}$  - Reverse recovery time measured from zero crossing point of negative going  $I_F$  to point where a line passing through  $0.75 I_{RRM}$  and  $0.50 I_{RRM}$  extrapolated to zero current



4.  $Q_{rr}$  - Area under curve defined by  $t_{rr}$  and  $I_{RRM}$

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$

5.  $di_{(rec)}M/dt$  - Peak rate of change of current during  $t_{rr}$  portion of  $t_{rr}$

**Fig. 9 - Reverse Recovery Parameter Test Circuit**

**Fig. 10 - Reverse Recovery Waveform and Definitions**

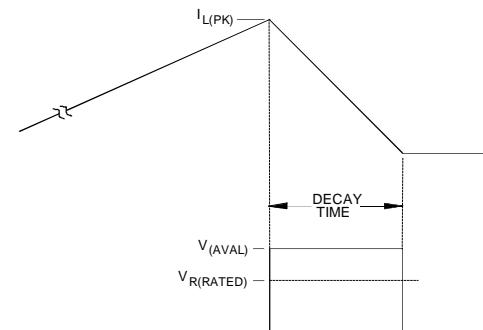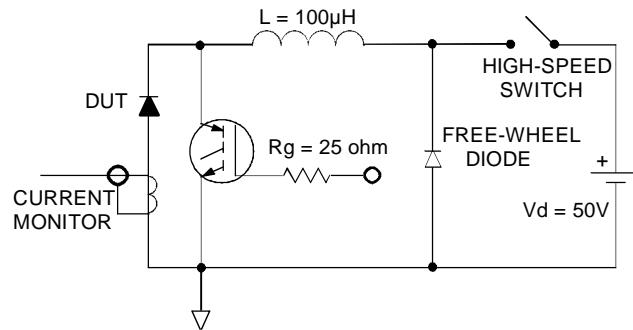

**Fig. 11 - Avalanche Test Circuit and Waveforms**