

HFV7A

AUTOMOTIVE RELAY



Typical Applications

Rear window defogger, Battery disconnection, Fuel pump control, ABS and traction control system, Air-conditioning, A/C blower, Cooling fan control, Horn, Fog lamp & headlight control

Features

- 50A switching capability
- Extended temperature range up to 125°C
- With transient suppression resistor
- 1 Form A & 1 Form C contact arrangement
- Wash tight and dust protected types available
- RoHS & ELV compliant

CHARACTERISTICS

Contact arrangement	1A, 1C	Release time	Typ.: 4ms Max.: 7ms ³⁾
Voltage drop (initial) ¹⁾	Typ.: 30mV (at 10A) Max.: 50mV (at 10A)	Ambient temperature	-40°C to 125°C
Max. continuous current	NO: 60A (at 23°C) 40A (at 85°C)	Storage temperature	-40°C to 155°C
Max. switching current	50A ²⁾	Vibration resistance	10Hz to 500Hz 49m/s ² (5g)
Max. switching voltage	50VDC ²⁾	Shock resistance	196m/s ² (20g)
Min. contact load	1A 6VDC	Termination	QC
Electrical endurance	1×10 ⁵ OPS	Construction	Wash tight, Dust protected
Mechanical endurance	1 x 10 ⁷ OPS (300OPS/min)	Unit weight	Approx. 38g
Initial insulation resistance	100MΩ (at 500VDC)	Mechanical data	cover retention (pull & push): 245N min. terminal retention (pull & push): 100N min. terminal resistance to bending (front & side): 10N min.
Dielectric strength	500VAC (1min, leakage current less than 1mA)		
Operate time	Typ.: 6ms Max.: 10ms (at nomi. vol.)	¹⁾ Equivalent to the max. initial contact resistance is 50mΩ (at 1A 24VDC). ²⁾ See " Load limit curve ". ³⁾ The value is measured when voltage drops suddenly from nominal voltage to 0 VDC and coil is not paralleled with suppression circuit.	

CONTACT DATA⁴⁾

Load voltage	Load type		Load current A			On/Off ratio		Electrical endurance OPS	Contact material	Ambient temp.	Load wiring diagram ³⁾
			1C		1A	On s	Off s				
			NO	NC	NO						
13.5 VDC	Resistive	Make	50	30	50	2	2	1×10 ⁵	AgNi0.15	See Ambient temp. curve	See diagram 1
		Break	50	30	50						
	Motor	Make ¹⁾	150	---	150	2	4	1×10 ⁵	AgSnO ₂		See diagram 2
		Break	35	---	35						
	Lamp ²⁾	Make	4×H4/60W	---	4×H4/60W	0.5	10	1×10 ⁵	AgSnO ₂		See diagram 3
		Break									
27VDC	Resistive	Make	40	10	40	2	2	1×10 ⁵	AgSnO ₂	See diagram 4	
		Break	40	10	40						



HONGFA RELAY
ISO9001, ISO/TS16949, ISO14001, OHSAS18001 CERTIFIED

2007 Rev. 1.00

- 1) Corresponds to the peak inrush current on initial actuation (motor).
- 2) The load in the table excludes flasher. When applied in flasher, a special silver alloy (AgSnO₂) contact material should be used and the customer special code should be (170) as a suffix. Please heed the anode and cathode's request when wired, terminal 30 should connect with anode.
- 3) The load wiring diagrams are listed below:




diagram 1




diagram 2




diagram 3




diagram 4

- 4) When the load requirement is different from content of the table above, please contact Hongfa for relay application support.

COIL DATA

at 23°C

	Nominal voltage VDC	Pick-up voltage VDC	Drop-out voltage VDC	Coil resistance x(1±10%)Ω	Parallel resistance ¹⁾ x(1±5%) Ω	Equivalent resistance Ω	Power consumption W	Max. allowable overdrive voltage ²⁾ VDC	
								23°C	85°C
Standard	6	3.6	0.6	22.5	---	--	1.6	10	9
	6	3.6	0.6	22.5	180	20	1.8	9	9
	12	7.2	1.2	90	---	---	1.6	21	18
	12	7.2	1.2	90	680	79.5	1.8	18	18
	24	14.4	2.4	360	---	---	1.6	43	34
	24	14.4	2.4	360	2700	317.6	1.8	36	34
High power consumption	6	3.6	0.6	18	---	--	2.0	9	7
	6	3.6	0.6	18	180	16.4	2.2	9	7
	12	7.2	1.2	72	---	---	2.0	19	14
	12	7.2	1.2	72	680	65.1	2.2	18	14
	24	14.4	2.4	288	---	---	2.0	39	28
	24	14.4	2.4	288	2700	260.2	2.2	36	28

1) The power consumption of parallel resistance is 0.5W.

2) Max. allowable overdrive voltage is stated with no load applied.

ORDERING INFORMATION

Type	HFV7A /	012	Z	S	P	T	-R (XXX)
Coil voltage	006: 6VDC	012: 12VDC	024: 24VDC				
Contact arrangement	H: 1 Form A	Z: 1 Form C					
Construction	S: Wash tight	Nil: Dust protected					
Coil power	P: High power consumption	Nil: Standard					
Contact material	T: AgSnO ₂	3: AgNi0.15					
Transient suppression resistor ¹⁾	R: With resistor	D: With parallel diode	Nil: Without resistor				

Customer special code ²⁾ e.g. (170) stands for flasher load, (555) stands for RoHS & ELV compliant. In case there are multiple special requirements, all special codes should be followed one by one.

1) Parallel connection of diode should provide the requirement of the polarity. Coil resistance is checked by voltammetry.




2) HFV7A is an environmental friendly product, please mark special code (555) when order.

OUTLINE DIMENSIONS AND WIRING DIAGRAM

Unit: mm

HFV7A/1 Form A


Outline Dimensions

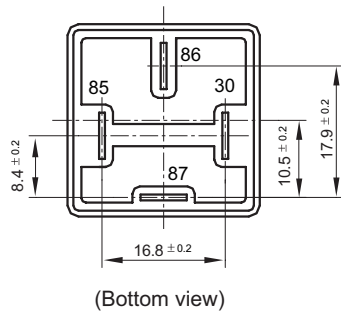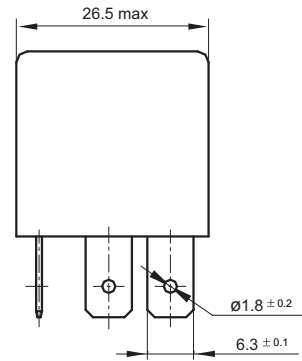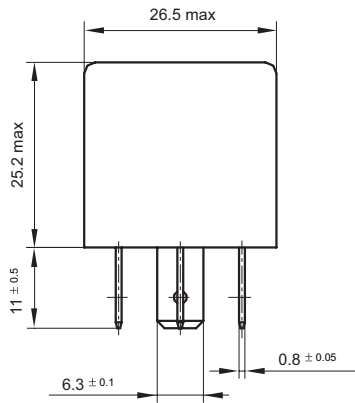

Wiring Diagram




Without parallel diode

With parallel diode

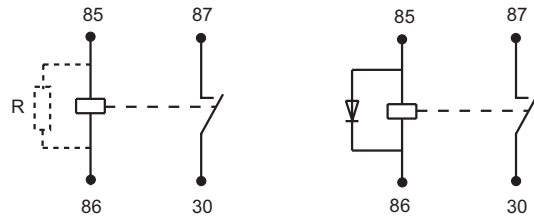

HFV7A / 1 Form C


Outline Dimensions

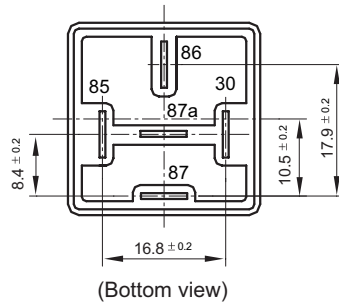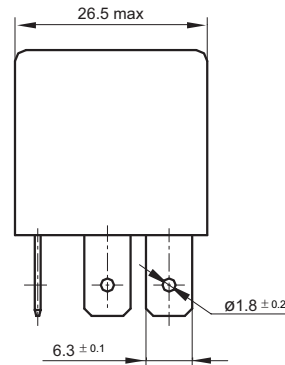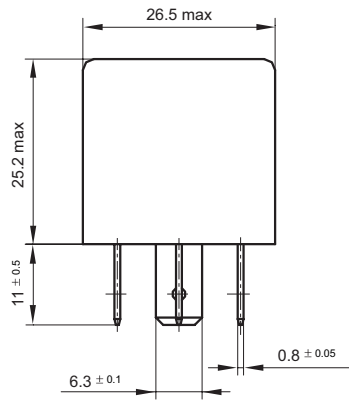

Wiring Diagram

Without parallel diode


With parallel diode

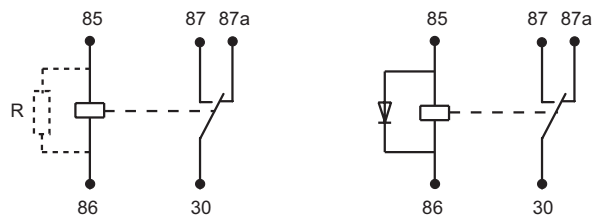

Notes: Terminal vertical deviation tolerance is 0.2mm.


CHARACTERISTIC CURVES

1. Coil operating voltage range

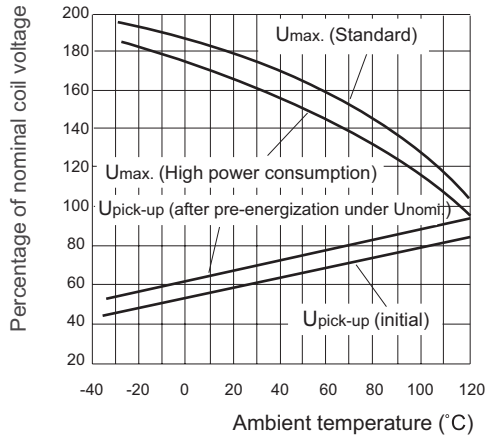


- 1) The curve is applicable under the condition of no contact load applied.
- 2) The operating voltage is connected with coil energized time and voltage. After energized, the operating voltage will increase.
- 3) The maximum allowable coil temperature is 180°C. For the coil temperature rise which is measured by resistance is average value, we recommend the coil temperature should be below 170°C under the different application ambient, different coil voltage and different load etc.
- 4) If the actual operating coil voltage is out of the specified range, please contact Hongfa for further details.

2. Load limit curve

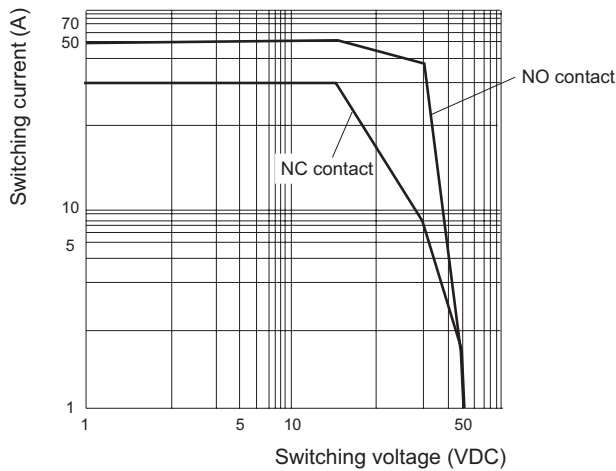

- 1) The contact load is resistive.
- 2) The contact material is AgSnO₂.
- 3) The load and electrical endurance tests are made according to "CONTACT DATA" parameters' table. If actual load voltage, current, or operate frequency is different from "CONTACT DATA" table, please arrange corresponding tests for confirmation.

3. Ambient temperature curve of the electrical endurance test

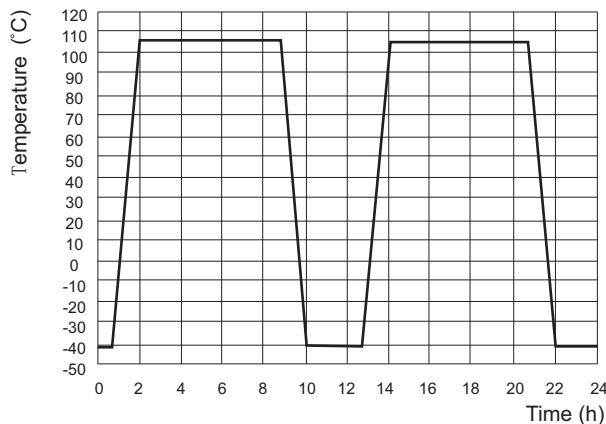

- 1) The minimum temperature is -40°C.
- 2) The maximum temperature is 105°C.

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.