


Description

Designed to convert a wide input voltage range into an isolated regulated voltage, the VWRBS3-SIP series is well suited for providing board-mount local supplies in a wide range of applications, including mixed analog/digital circuits, test & measurement equip., process/machine controls, datacom/telecom fields, etc...

Features

- Wide (2:1) input range
- High efficiency to 84%
- Regulated
- Single voltage output
- I/O Isolation 1500VDC
- No heatsink required
- Short circuit protection
- Remote on/off
- MTBF >1,000,000 hrs
- Temperature range: -40°C~+85°C

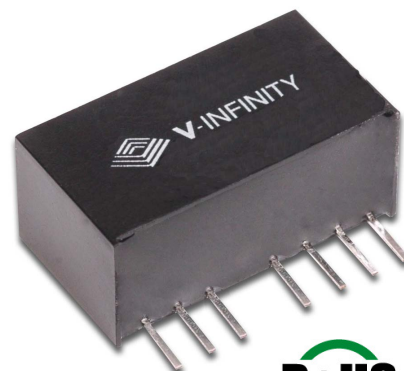

Model Number	Input Voltage			Output Voltage	Output Current		Efficiency	Package Style
	Nominal	Range	Max.		Max.	Min.		
VWRBS3-D12-S5-SIP	12 Vdc	9.0~18.0 Vdc	22 Vdc	5 Vdc	600 mA	0 mA	80%	SIP
VWRBS3-D12-S9-SIP	12 Vdc	9.0~18.0 Vdc	22 Vdc	9 Vdc	333 mA	0 mA	82%	SIP
VWRBS3-D12-S12-SIP	12 Vdc	9.0~18.0 Vdc	22 Vdc	12 Vdc	250 mA	0 mA	83%	SIP
VWRBS3-D12-S15-SIP	12 Vdc	9.0~18.0 Vdc	22 Vdc	15 Vdc	200 mA	0 mA	84%	SIP
VWRBS3-D24-S5-SIP	24 Vdc	18.0~36.0 Vdc	40 Vdc	5 Vdc	600 mA	0 mA	80%	SIP
VWRBS3-D24-S9-SIP	24 Vdc	18.0~36.0 Vdc	40 Vdc	9 Vdc	333 mA	0 mA	82%	SIP
VWRBS3-D24-S12-SIP	24 Vdc	18.0~36.0 Vdc	40 Vdc	12 Vdc	250 mA	0 mA	83%	SIP
VWRBS3-D24-S15-SIP	24 Vdc	18.0~36.0 Vdc	40 Vdc	15 Vdc	200 mA	0 mA	84%	SIP

Note:

1. All specifications measured at TA=25°C, humidity <75%, nominal input voltage and rated output load unless otherwise specified.

Output Specifications

Item	Test conditions	Min.	Typ.	Max.	Units
3W Output power		0.3		3	W
Output voltage accuracy	Refer to recommended circuit		±1	±3	%
Line Regulation	Input Voltage from low to high		±0.2	±0.5	%
Load Regulation	10% to 100% full load		±0.5	±0.75	%
Temperature drift	Refer to recommended circuit			0.03	%/°C
Output ripple	20 Hz Bandwidth		20	50	mVp-p
Output noise	DC-20MHz Bandwidth		80	150	mVp-p
Switching frequency	100% load, nominal input	200K		400K	Hz


General Specifications

Output short circuit protection	Continuous
Temperature rise at full load	15°C typ., 35°C max.
Cooling	Free air convection
Operating temperature range	-40°C to +85°C
Storage temperature range	-50°C to +125°C
Soldering temperature	300°C (1.5mm from case for 10sec.)
Storage humidity range	<95%
Case material	Plastic (UL94-V0)
MTBF	>1,000,000 hrs.
Weight	6 g


Isolation Specifications

Item	Test Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Flash tested for 1 min.	1500			Vdc
Isolation Resistance	Test at 500 Vdc	1000			M Ω
Isolation Capacitance	Input/Output		80		PF

Typical Characteristics

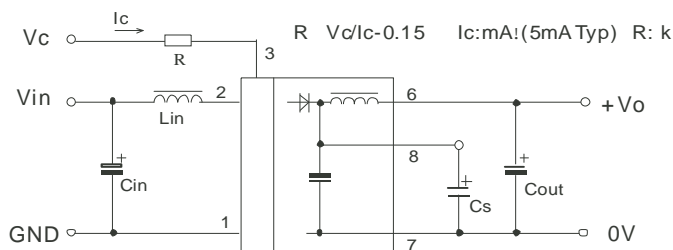

Outline Dimensions & Recommended Layout Pattern

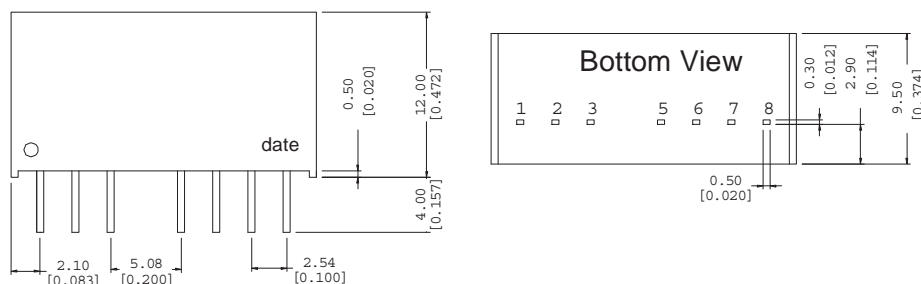

Pin	1	2	3	5	6	7	8
Function	GND	Vin	Ctrl	NC	+Vo	0V	CS

Note: Tolerances: (pin: ±0.1(0.004); others: ±0.25(0.01))

Application Notes:

- All of the VWRBS3-SIP Series have been tested according to the following recommended testing circuit before leaving the factory. This series should be tested under load(Figure 1). If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance should not be too high(Table 2).

CS Capacitor T able(Table 1)

Vout	5V	9V	12V	15V	24V
CS	47uF-100uF		10uF-47uF		

External Cap acitor T able (Table 2)


Vout	Cout (Max)
5	1000uF
9	680uF
12	470uF
15	330uF

- Input current
Nominal input voltage range. The input current of the power supply must be sufficient to the startup current (Ip) of the DC/DC module (Figure 2)

- Output Load
In order to ensure the product operates efficiently and reliably, make sure the specified range of input voltage is not exceeded.

No parallel connection or plug and play.

Figure 1



- NC Terminals
Unless otherwise specified, NC terminals of all series are used for converter's interior circuit connection, and are not allowed connection of any external circuit.;
- CTRL Terminal
When open or high impedance, the converter will work well; When this pin is 'high'; the converter will shutdown; It should be noted that the input current should remain between 5-10mA,exceeding the maximum 20mA will cause permanent damage to the converter.