

# RF Power Field Effect Transistors

## N-Channel Enhancement-Mode Lateral MOSFETs

Designed for PCN and PCS base station applications with frequencies from 1900 to 2000 MHz. Suitable for TDMA, CDMA and multicarrier amplifier applications.


- Typical 2-Carrier N-CDMA Performance for  $V_{DD} = 26$  Volts,  $I_{DQ} = 1300$  mA,  $f_1 = 1958.75$  MHz,  $f_2 = 1961.25$  MHz IS-95 CDMA (Pilot, Sync, Paging, Traffic Codes 8 Through 13) 1.2288 MHz Channel Bandwidth Carrier. Adjacent Channels Measured over a 30 kHz Bandwidth at  $f_1 - 885$  kHz and  $f_2 + 885$  kHz. Distortion Products Measured over 1.2288 MHz Bandwidth at  $f_1 - 2.5$  MHz and  $f_2 + 2.5$  MHz. Peak/Avg. = 9.8 dB @ 0.01% Probability on CCDF. Output Power — 24 Watts Avg. Power Gain — 13.6 dB Efficiency — 22% ACPR — -51 dB IM3 — -37.0 dBc
- Capable of Handling 5:1 VSWR, @ 26 Vdc, 1960 MHz, 125 Watts CW Output Power

### Features


- Internally Matched for Ease of Use
- High Gain, High Efficiency and High Linearity
- Integrated ESD Protection
- Designed for Maximum Gain and Insertion Phase Flatness
- Excellent Thermal Stability
- Characterized with Series Equivalent Large-Signal Impedance Parameters
- RoHS Compliant
- In Tape and Reel. R3 Suffix = 250 Units per 56 mm, 13 inch Reel.

**MRF19125R3**  
**MRF19125SR3**

**1930-1990 MHz, 125 W, 26 V**  
**LATERAL N-CHANNEL**  
**RF POWER MOSFETs**



CASE 465B-03, STYLE 1  
NI-880  
MRF19125R3



CASE 465C-02, STYLE 1  
NI-880S  
MRF19125SR3

**Table 1. Maximum Ratings**

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	-0.5, +65	Vdc
Gate-Source Voltage	$V_{GS}$	-0.5, +15	Vdc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	330 1.89	W W/ $^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-65 to +150	$^\circ\text{C}$
Case Operating Temperature	$T_C$	150	$^\circ\text{C}$
Operating Junction Temperature	$T_J$	200	$^\circ\text{C}$

**Table 2. Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.53	$^\circ\text{C}/\text{W}$

**Table 3. ESD Protection Characteristics**

Test Conditions	Class
Human Body Model	2 (Minimum)
Machine Model	M3 (Minimum)

**Table 4. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted)


Characteristic	Symbol	Min	Typ	Max	Unit
<b>Off Characteristics</b>					
Drain-Source Breakdown Voltage ( $V_{GS} = 0 \text{ Vdc}$ , $I_D = 100 \mu\text{A}$ )	$V_{(BR)DSS}$	65	—	—	Vdc
Gate-Source Leakage Current ( $V_{GS} = 5 \text{ Vdc}$ , $V_{DS} = 0 \text{ Vdc}$ )	$I_{GSS}$	—	—	1	$\mu\text{A}$
Zero Gate Voltage Drain Leakage Current ( $V_{DS} = 26 \text{ Vdc}$ , $V_{GS} = 0 \text{ Vdc}$ )	$I_{DSS}$	—	—	10	$\mu\text{A}$
<b>On Characteristics</b>					
Forward Transconductance ( $V_{DS} = 10 \text{ Vdc}$ , $I_D = 3 \text{ A}$ )	$g_{fs}$	—	9	—	S
Gate Threshold Voltage ( $V_{DS} = 10 \text{ Vdc}$ , $I_D = 300 \mu\text{A}$ )	$V_{GS(\text{th})}$	2	—	4	Vdc
Gate Quiescent Voltage ( $V_{DS} = 26 \text{ Vdc}$ , $I_D = 1300 \text{ mA}$ )	$V_{GS(Q)}$	2.5	3.9	4.5	Vdc
Drain-Source On-Voltage ( $V_{GS} = 10 \text{ Vdc}$ , $I_D = 3 \text{ A}$ )	$V_{DS(\text{on})}$	—	0.185	0.21	Vdc
<b>Dynamic Characteristics</b>					
Reverse Transfer Capacitance (1) ( $V_{DS} = 26 \text{ Vdc}$ , $V_{GS} = 0$ , $f = 1 \text{ MHz}$ )	$C_{rss}$	—	5.4	—	pF
<b>Functional Tests</b> (In Freescale Test Fixture) 2-Carrier N-CDMA, 1.2288 MHz Channel Bandwidth Carriers. Peak/Avg = 9.8 dB @ 0.01% Probability on CCDF.					
Common-Source Amplifier Power Gain ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 24 \text{ W Avg}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1932.5 \text{ MHz}$ and $f_1 = 1987.5 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ )	$G_{ps}$	12	13.5	—	dB
Drain Efficiency ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 24 \text{ W Avg}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1932.5 \text{ MHz}$ and $f_1 = 1987.5 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ )	$\eta$	19	22	—	%
Intermodulation Distortion ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 24 \text{ W Avg}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1932.5 \text{ MHz}$ and $f_1 = 1987.5 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ ; IM3 measured over 1.2288 MHz Bandwidth at $f_1 - 2.5 \text{ MHz}$ and $f_2 + 2.5 \text{ MHz}$ )	IM3	—	-37	-35	dBc
Adjacent Channel Power Ratio ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 24 \text{ W Avg}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1932.5 \text{ MHz}$ and $f_1 = 1987.5 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ ; ACPR measured over 30 kHz Bandwidth at $f_1 - 885 \text{ MHz}$ and $f_2 + 885 \text{ MHz}$ )	ACPR	—	-51	-47	dBc
Input Return Loss ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 24 \text{ W Avg}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1932.5 \text{ MHz}$ and $f_1 = 1987.5 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ )	IRL	—	-13	-9	dB

1. Part is internally matched both on input and output.

(continued)

**Table 4. Electrical Characteristics** ( $T_C = 25^\circ\text{C}$  unless otherwise noted) (continued)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>Functional Tests (In Freescale Test Fixture)</b>					
Two-Tone Common-Source Amplifier Power Gain ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 125 \text{ W PEP}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ , Tone Spacing = 100 kHz)	$G_{ps}$	—	13.5	—	dB
Two-Tone Drain Efficiency ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 125 \text{ W PEP}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ , Tone Spacing = 100 kHz)	$\eta$	—	35	—	%
Third Order Intermodulation Distortion ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 125 \text{ W PEP}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ , Tone Spacing = 100 kHz)	IMD	—	-30	—	dBc
Input Return Loss ( $V_{DD} = 26 \text{ Vdc}$ , $P_{out} = 125 \text{ W PEP}$ , $I_{DQ} = 1300 \text{ mA}$ , $f_1 = 1930 \text{ MHz}$ , $f_2 = 1990 \text{ MHz}$ , Tone Spacing = 100 kHz)	IRL	—	-13	—	dB
$P_{out}$ , 1 dB Compression Point ( $V_{DD} = 26 \text{ Vdc}$ , $I_{DQ} = 1300 \text{ mA}$ , $f = 1990 \text{ MHz}$ )	P1dB	—	130	—	W

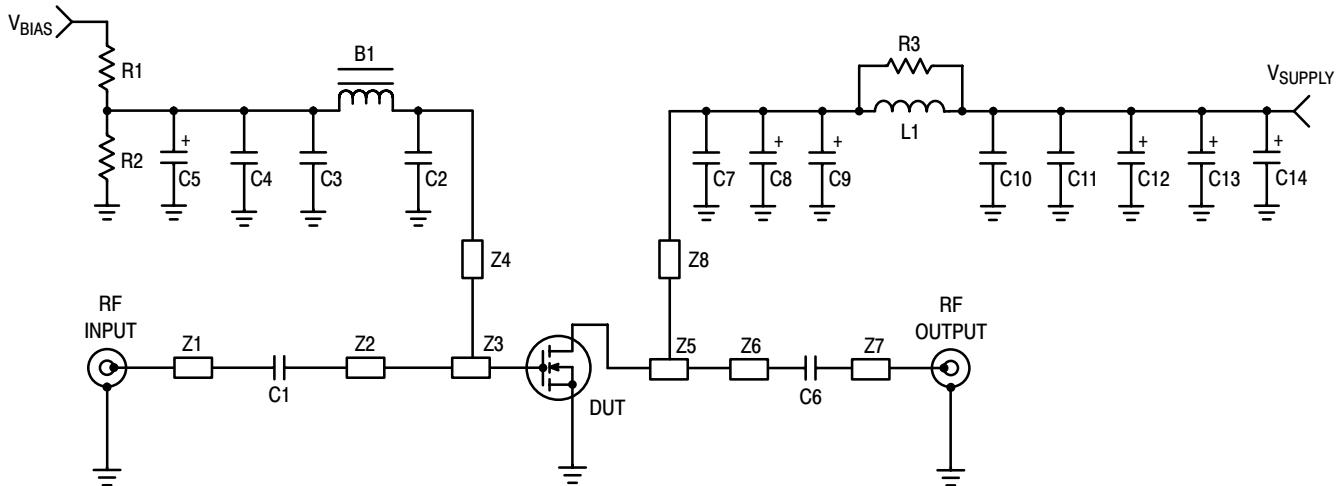


Z1, Z7      0.500" x 0.084" Microstrip  
 Z2      1.105" x 0.084" Microstrip  
 Z3      0.360" x 0.895" Microstrip  
 Z4      0.920" x 0.048" Microstrip  
 Z5      0.605" x 1.195" Microstrip  
 Z6      0.800" x 0.084" Microstrip  
 Z8      0.660" x 0.095" Microstrip

Board      0.030" Glass Teflon®,  
 Keene GX-0300-55-22,  $\epsilon_r = 2.55$   
 PCB      Etched Circuit Boards  
 MRF19125 Rev. 5, CMR

Figure 1. MRF19125R3(SR3) Test Circuit Schematic

Table 5. MRF19125R3(SR3) Test Circuit Component Designations and Values


Designators	Description
B1	Short Ferrite Bead, Fair Rite #2743019447
C1	51 pF Chip Capacitor, ATC #100B510JCA500X
C2, C7	5.1 pF Chip Capacitors, ATC #100B5R1JCA500X
C3, C10	1000 pF Chip Capacitors, ATC #100B102JCA500X
C4, C11	0.1 $\mu$ F Chip Capacitors, Kemet #CDR33BX104AKWS
C5	0.1 $\mu$ F Tantalum Chip Capacitor, Kemet #T491C105M050
C6	10 pF Chip Capacitor, ATC #100B100JCA500X
C8	10 $\mu$ F Tantalum Chip Capacitor, Kemet #T491X106K035AS4394
C9, C12, C13, C14	22 $\mu$ F Tantalum Chip Capacitors, Kemet #T491X226K035AS4394
L1	1 Turn, #20 AWG, 0.100" ID
N1, N2	Type N Flange Mounts, Omni Spectra #3052-1648-10
R1	1.0 k $\Omega$ , 1/8 W Chip Resistor
R2	220 k $\Omega$ , 1/8 W Chip Resistor
R3	10 $\Omega$ , 1/8 W Chip Resistor

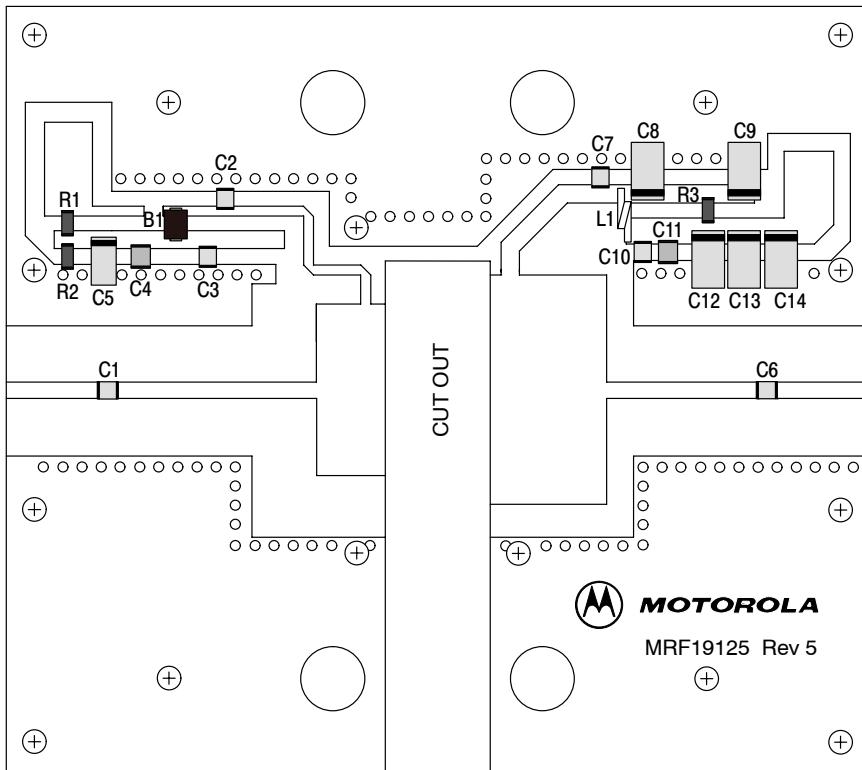


Freescale has begun the transition of marking Printed Circuit Boards (PCBs) with the Freescale Semiconductor signature/logo. PCBs may have either Motorola or Freescale markings during the transition period. These changes will have no impact on form, fit or function of the current product.

**Figure 2. MRF19125R3(SR3) Test Circuit Component Layout**


## TYPICAL CHARACTERISTICS

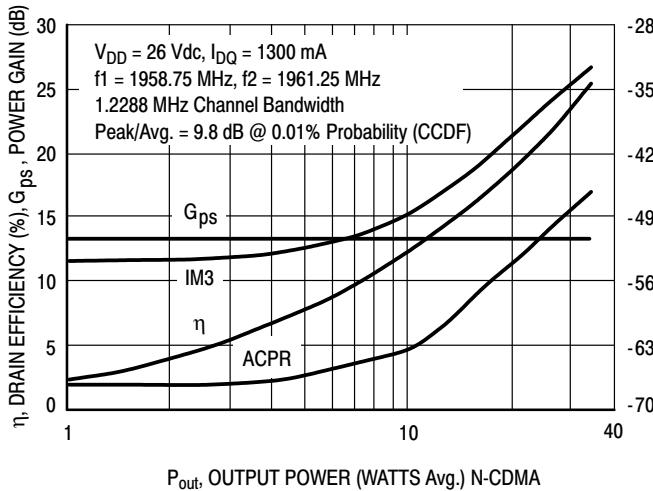


**Figure 3. 2-Carrier CDMA ACPR, IM3, Power Gain and Drain Efficiency versus Output Power**

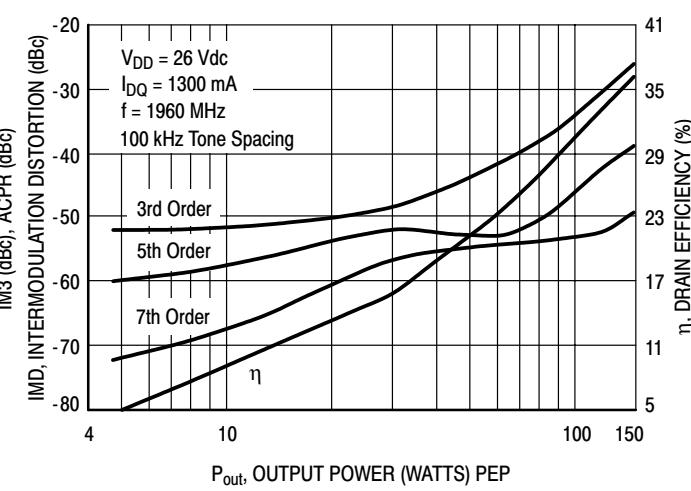


**Figure 4. Intermodulation Distortion Products versus Output Power**

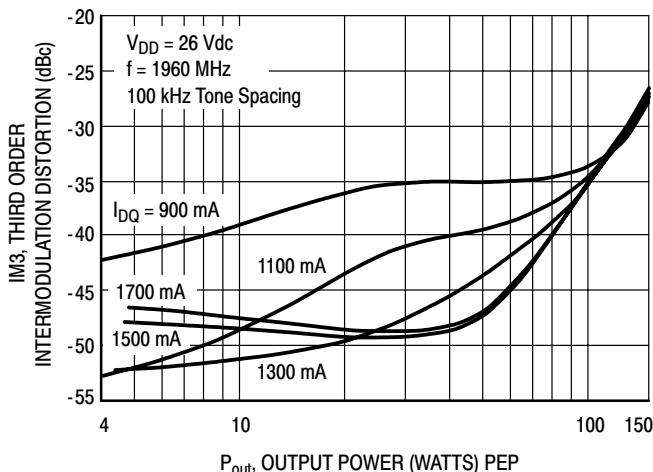


**Figure 5. Third Order Intermodulation Distortion versus Output Power**

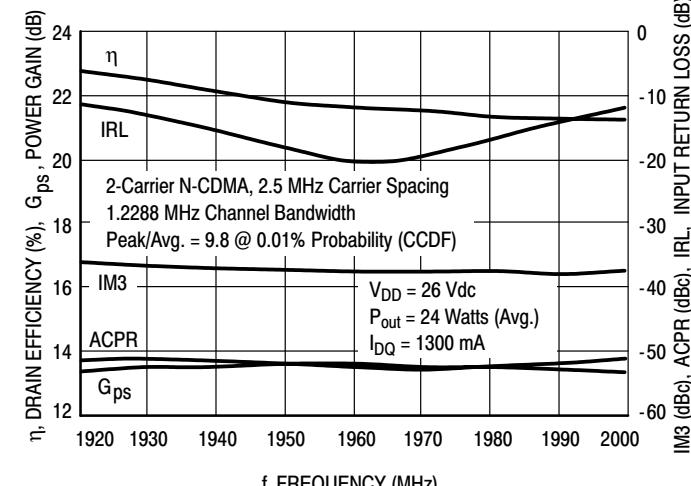

**Figure 6. 2-Carrier N-CDMA Broadband Performance**




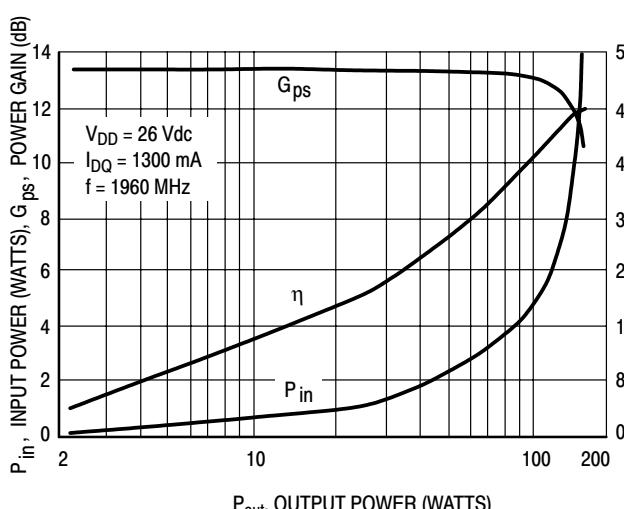


**Figure 7. CW Performance**

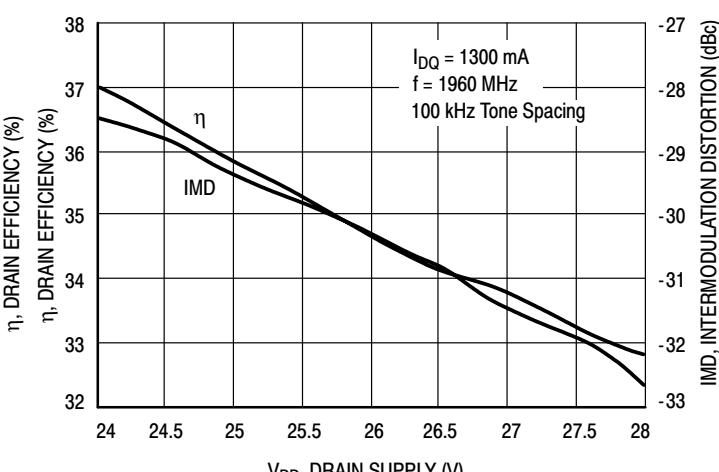

**Figure 8. Two-Tone Intermodulation Distortion and Drain Efficiency versus Drain Supply**

## TYPICAL CHARACTERISTICS

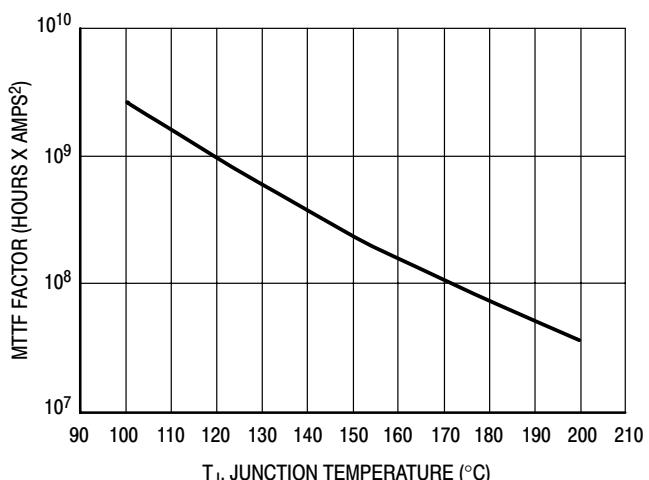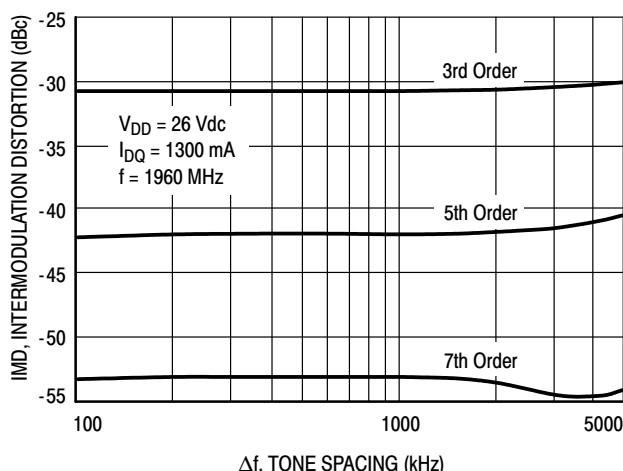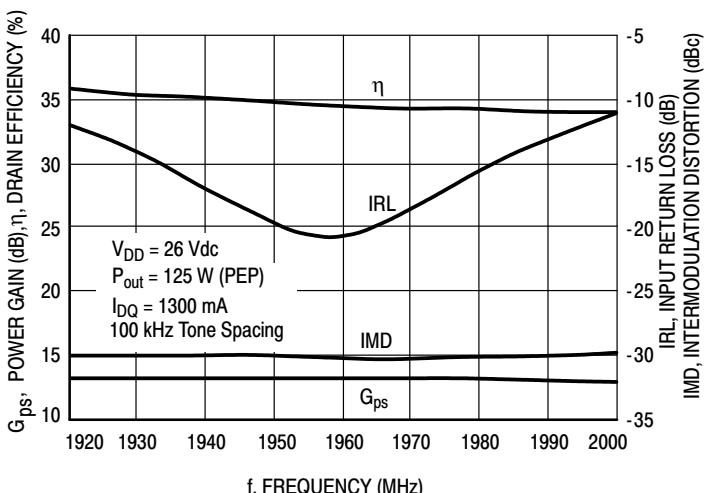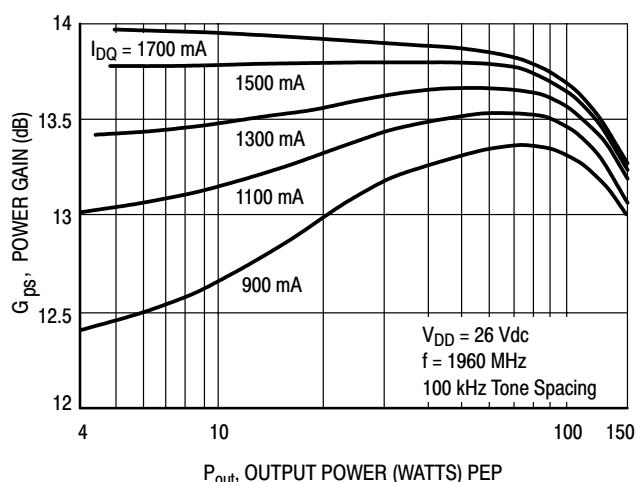

This above graph displays calculated MTTF in hours x ampere<sup>2</sup> drain current. Life tests at elevated temperatures have correlated to better than  $\pm 10\%$  of the theoretical prediction for metal failure. Divide MTTF factor by  $I_D^2$  for MTTF in a particular application.

## N-CDMA TEST SIGNAL


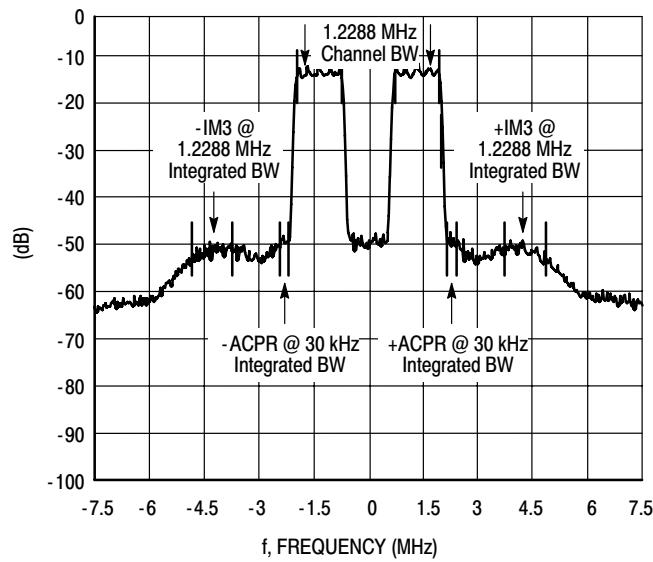


Figure 14. 2-Carrier N-CDMA Spectrum

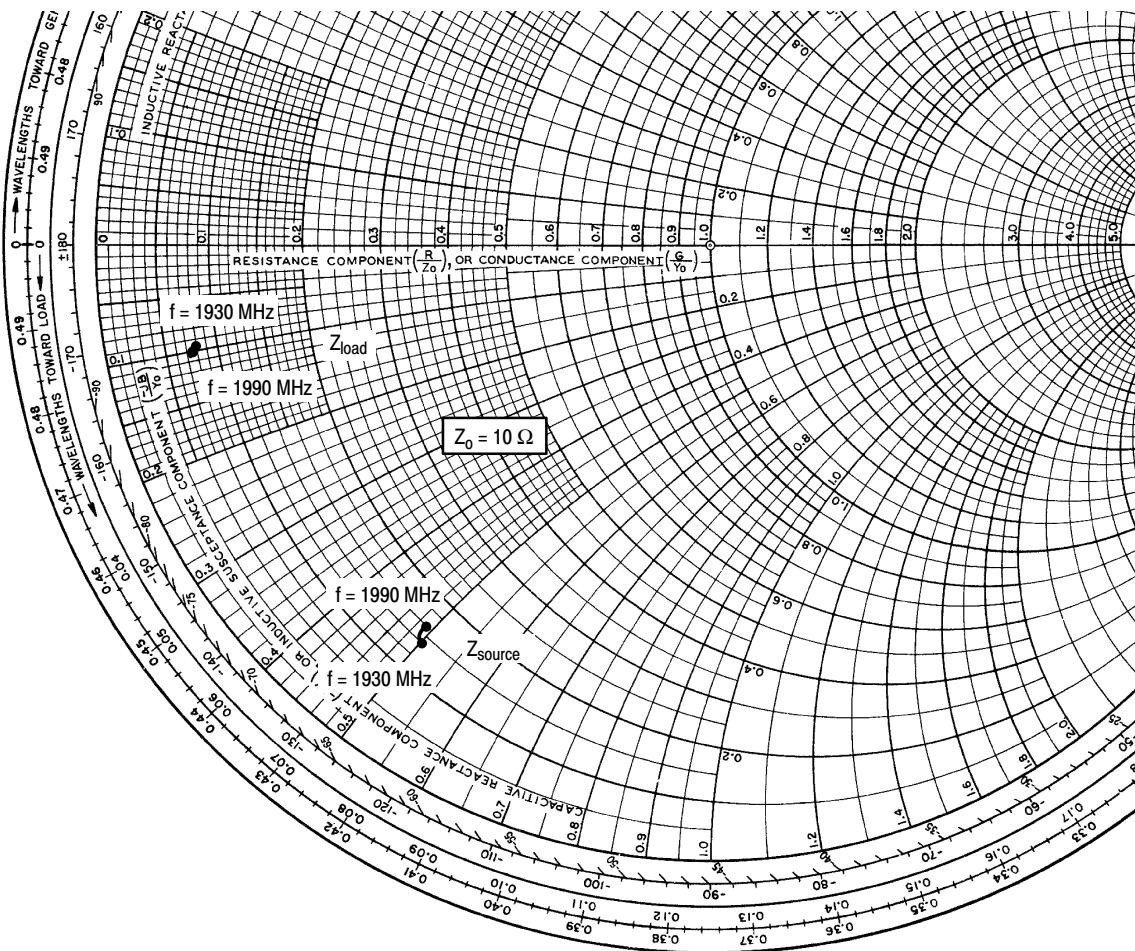


$V_{DD} = 26 \text{ V}$ ,  $I_{DQ} = 1300 \text{ mA}$ ,  $P_{out} = 24 \text{ W (Avg.)}$

<b>f MHz</b>	<b>Z<sub>source</sub> <math>\Omega</math></b>	<b>Z<sub>load</sub> <math>\Omega</math></b>
1930	1.43 - j5.01	0.75 - j0.93
1960	1.51 - j4.88	0.71 - j0.89
1990	1.56 - j4.93	0.68 - j1.02

$Z_{\text{source}}$  = Test circuit impedance as measured from gate to ground.


$Z_{\text{load}}$  = Test circuit impedance as measured from drain to ground.

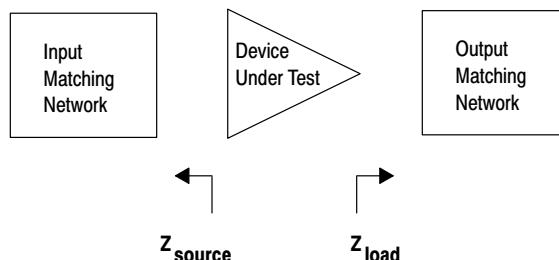

**Figure 13. Series Equivalent Source and Load Impedance**

## NOTES


## PACKAGE DIMENSIONS

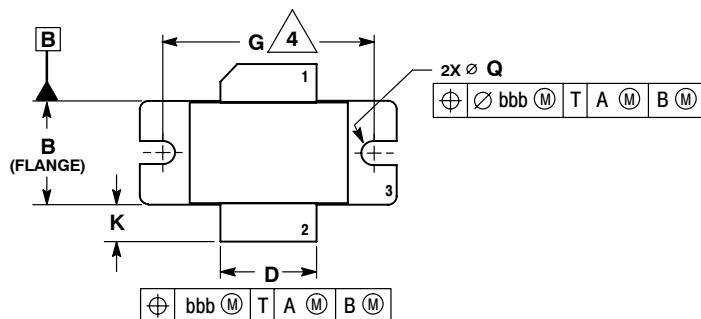

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION H IS MEASURED 0.030 (0.762) AWAY FROM PACKAGE BODY.
4. RECOMMENDED BOLT CENTER DIMENSION OF 1.16 (29.57) BASED ON M3 SCREW.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	1.335	1.345	33.91	34.16
B	0.535	0.545	13.6	13.8
C	0.147	0.200	3.73	5.08
D	0.495	0.505	12.57	12.83
E	0.035	0.045	0.89	1.14
F	0.003	0.006	0.08	0.15
G	1.100	BSC	27.94	BSC
H	0.057	0.067	1.45	1.70
K	0.175	0.205	4.44	5.21
M	0.872	0.888	22.15	22.55
N	0.871	0.889	19.30	22.60
Q	0.118	0.138	3.00	3.51
R	0.515	0.525	13.10	13.30
S	0.515	0.525	13.10	13.30
aaa	0.007	REF	0.178	REF
bbb	0.010	REF	0.254	REF
ccc	0.015	REF	0.381	REF

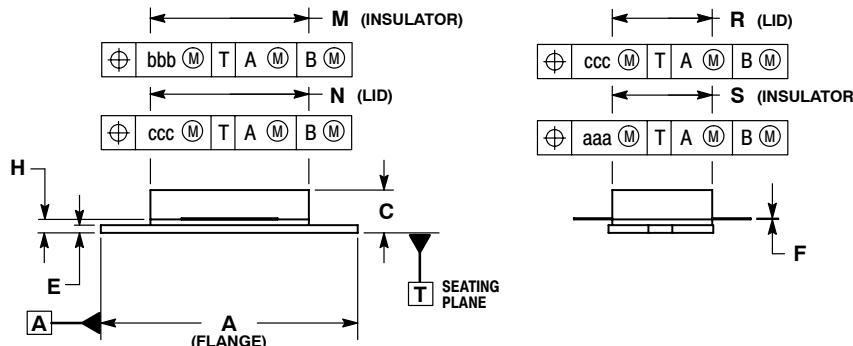


### CASE 465B-03

ISSUE D

NI-880


MRF19125R3



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION H IS MEASURED 0.030 (0.762) AWAY FROM PACKAGE BODY.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.905	0.915	22.99	23.24
B	0.535	0.545	13.60	13.80
C	0.147	0.200	3.73	5.08
D	0.495	0.505	12.57	12.83
E	0.035	0.045	0.89	1.14
F	0.003	0.006	0.08	0.15
G	1.100	BSC	27.94	BSC
H	0.057	0.067	1.45	1.70
K	0.170	0.210	4.32	5.33
M	0.872	0.888	22.15	22.55
N	0.871	0.889	19.30	22.60
R	0.515	0.525	13.10	13.30
S	0.515	0.525	13.10	13.30
aaa	0.007	REF	0.178	REF
bbb	0.010	REF	0.254	REF
ccc	0.015	REF	0.381	REF

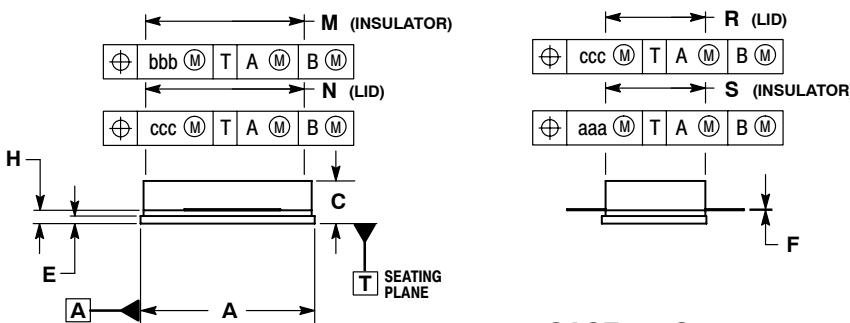

### CASE 465C-02

ISSUE D

NI-880S

MRF19125SR3

**MRF19125R3 MRF19125SR3**

## **How to Reach Us:**

**Home Page:**  
[www.freescale.com](http://www.freescale.com)

**E-mail:**  
[support@freescale.com](mailto:support@freescale.com)

### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor  
Technical Information Center, CH370  
1300 N. Alma School Road  
Chandler, Arizona 85224  
+1-800-521-6274 or +1-480-768-2130  
[support@freescale.com](mailto:support@freescale.com)

**Europe, Middle East, and Africa:**  
Freescale Halbleiter Deutschland GmbH  
Technical Information Center  
Schatzbogen 7  
81829 Muenchen, Germany  
+44 1296 380 456 (English)  
+46 8 52200080 (English)  
+49 89 92103 559 (German)  
+33 1 69 35 48 48 (French)  
[support@freescale.com](mailto:support@freescale.com)

**Japan:**  
Freescale Semiconductor Japan Ltd.  
Headquarters  
ARCO Tower 15F  
1-8-1, Shimo-Meguro, Meguro-ku,  
Tokyo 153-0064  
Japan  
0120 191014 or +81 3 5437 9125  
[support.japan@freescale.com](mailto:support.japan@freescale.com)

**Asia/Pacific:**  
Freescale Semiconductor Hong Kong Ltd.  
Technical Information Center  
2 Dai King Street  
Tai Po Industrial Estate  
Tai Po, N.T., Hong Kong  
+800 2666 8080  
[support.asia@freescale.com](mailto:support.asia@freescale.com)

**For Literature Requests Only:**  
Freescale Semiconductor Literature Distribution Center  
P.O. Box 5405  
Denver, Colorado 80217  
1-800-441-2447 or 303-675-2140  
Fax: 303-675-2150  
[LDCForFreescaleSemiconductor@hibbertgroup.com](mailto:LDCForFreescaleSemiconductor@hibbertgroup.com)

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.  
© Freescale Semiconductor, Inc. 2006. All rights reserved.