


# Schottky PowerMod

CPT30135 — CPT30145

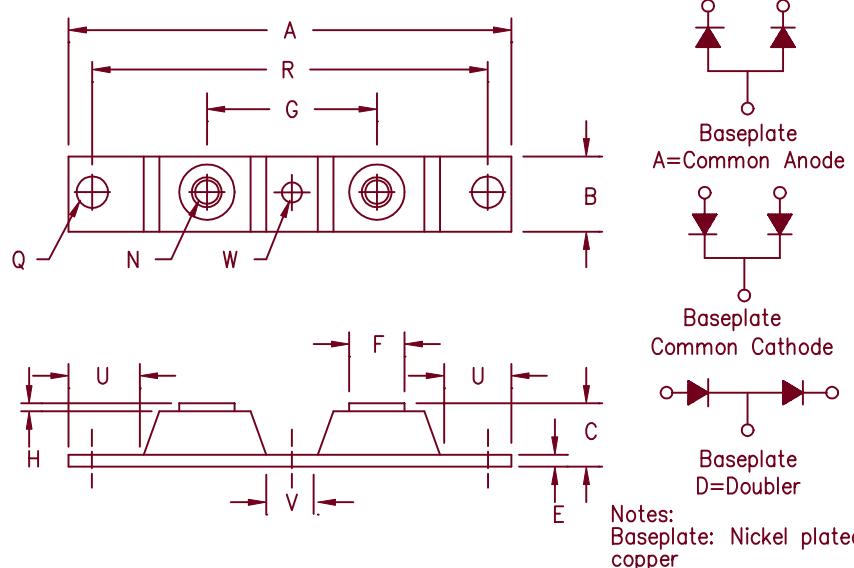

| Dim. |           | Inches | Millimeters |       |        |       |
|------|-----------|--------|-------------|-------|--------|-------|
|      |           | Min.   | Max.        | Min.  | Max.   | Notes |
| A    | —         | 3.630  | —           | 92.20 |        |       |
| B    | 0.700     | 0.800  | 17.78       | 20.32 |        |       |
| C    | —         | 0.630  | —           | 16.00 |        |       |
| E    | 0.120     | 0.130  | 3.05        | 3.30  |        |       |
| F    | 0.490     | 0.510  | 12.45       | 12.95 |        |       |
| G    | 1.375 BSC |        | 34.92 BSC   |       |        |       |
| H    | 0.010     | —      | 0.25        | —     |        |       |
| N    | —         | —      | —           | —     | 1/4-20 | Dia.  |
| Q    | 0.275     | 0.290  | 6.99        | 7.37  |        |       |
| R    | 3.150 BSC |        | 80.01 BSC   |       |        |       |
| U    | 0.600     | —      | 15.24       | —     |        |       |
| V    | 0.312     | 0.340  | 7.92        | 8.64  |        |       |
| W    | 0.180     | 0.195  | 4.57        | 4.95  |        |       |

| Microsemi Catalog Number | Working Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|------------------------------|---------------------------------|
| CPT30135*                | 35V                          | 35V                             |
| CPT30140*                | 40V                          | 40V                             |
| CPT30145*                | 45V                          | 45V                             |

\*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- Common Cathode Center Tap
- 300 Amperes/35 to 45 Volts
- 125°C Junction Temperature
- Reverse Energy Tested
- $V_{RRM}$  35 — 45 Volts

## Electrical Characteristics

Average forward current per pkg  
Average forward current per leg  
Maximum surge current per leg  
Maximum repetitive reverse current per leg  
Max peak forward voltage per leg  
Max peak forward voltage per leg  
Max peak reverse current per leg  
Max peak reverse current per leg  
Typical junction capacitance per leg

I<sub>F(AV)</sub> 300 Amps  
I<sub>F(AV)</sub> 150 Amps  
I<sub>FSM</sub> 2000 Amps  
I<sub>R(OV)</sub> 2 Amps  
V<sub>FM</sub> 0.62 Volts  
V<sub>FM</sub> 0.58 Volts  
I<sub>RM</sub> 2 Amps  
I<sub>RM</sub> 4.0 mA  
C<sub>J</sub> 5500 pF

T<sub>C</sub> = 71°C, Square wave, R<sub>θJC</sub> = 0.20°C/W  
T<sub>C</sub> = 71°C, Square wave, R<sub>θJC</sub> = 0.40°C/W  
8.3ms, half sine, T<sub>J</sub> = 125°C  
f = 1 KHZ, 25°C  
I<sub>FM</sub> = 200A: T<sub>J</sub> = 25°C\*  
I<sub>FM</sub> = 200A: T<sub>J</sub> = 125°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 125°C\*  
V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
V<sub>R</sub> = 5.0V, T<sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 usec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range  
Operating junction temp range  
Max thermal resistance per leg  
Max thermal resistance per pkg  
Typical thermal resistance (greased)  
Terminal Torque  
Mounting Base Torque (outside holes)  
Mounting Base Torque (center hole)  
center hole must be torqued first  
Weight

T<sub>STG</sub>  
T<sub>J</sub>  
R<sub>θJC</sub>  
R<sub>θJC</sub>  
R<sub>θCS</sub>

-55°C to 150°C  
-55°C to 125°C  
0.40°C/W Junction to case  
0.20°C/W Junction to case  
0.08°C/W Case to sink  
35–50 inch pounds  
30–40 inch pounds  
8–10 inch pounds  
2.8 ounces (75 grams) typical

# CPT30135

# - CPT30145

Figure 1  
Typical Forward Characteristics – Per Leg

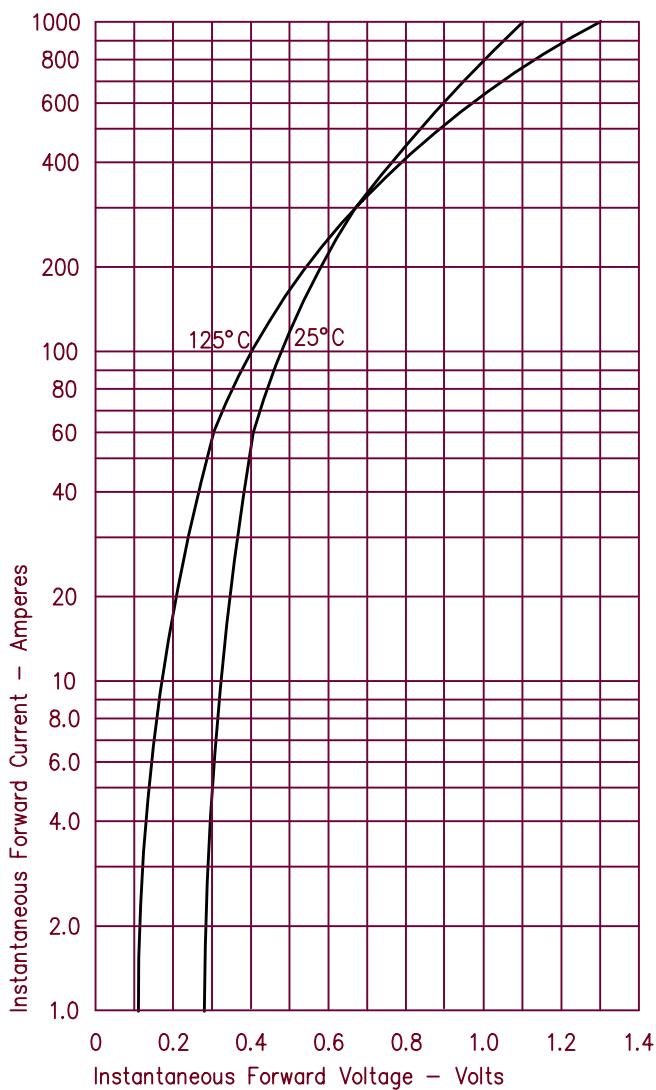


Figure 2  
Typical Reverse Characteristics – Per Leg

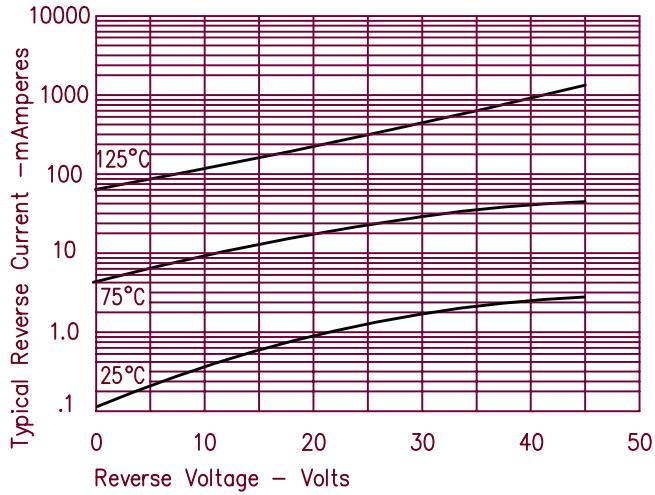


Figure 3  
Typical Junction Capacitance – Per Leg

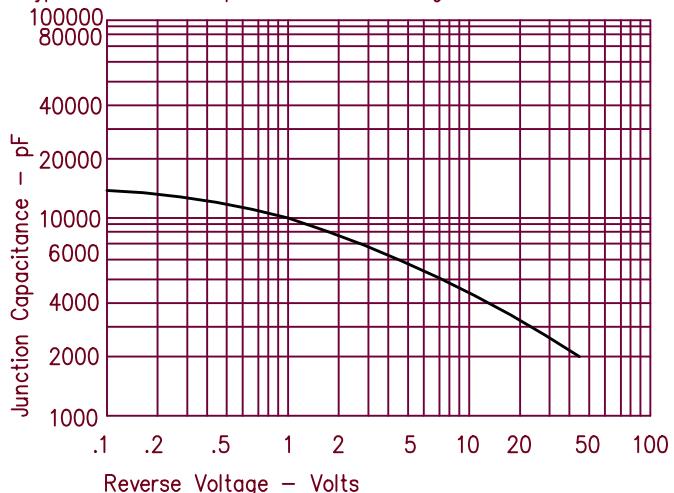


Figure 4  
Forward Current Derating – Per Leg

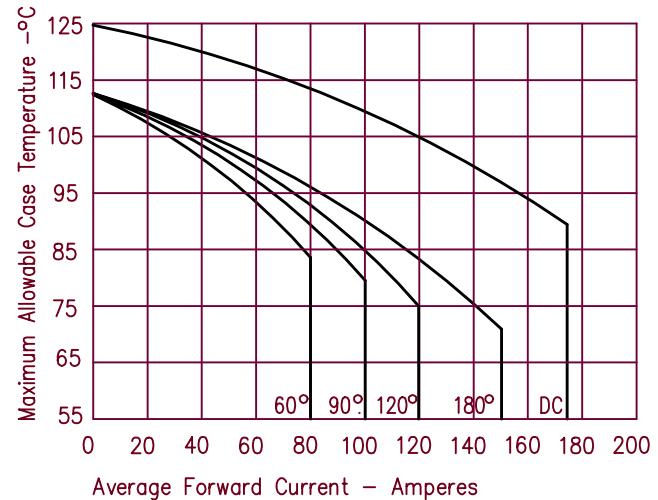


Figure 5  
Maximum Forward Power Dissipation – Per Leg

