

MABA-008482-CF1A40



1.78:1 step up flux coupled transformer
5 - 200MHz


M/A-COM Products
Part Status: Released Rev V2

Features


- Surface mount
- 1.78:1 step-up flux coupled transformer
- Separate secondary coils, allowing separate bias feed into balanced amplifiers
- 260°C reflow compatible
- RoHS* compliant
- Part is welded and lead free
- Available on tape and reel. Reel quantity 2000

Description


M/A-COM's MABA-008482-CF1A40 is a 1.78:1 Flux Coupled step up transformer in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications. Suitable for use in 50 Ohm and 75 Ohm systems



Schematic

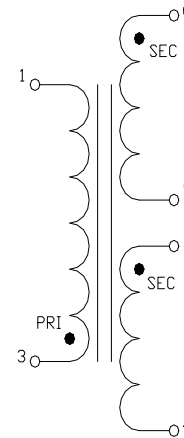

Case Style: SM-156

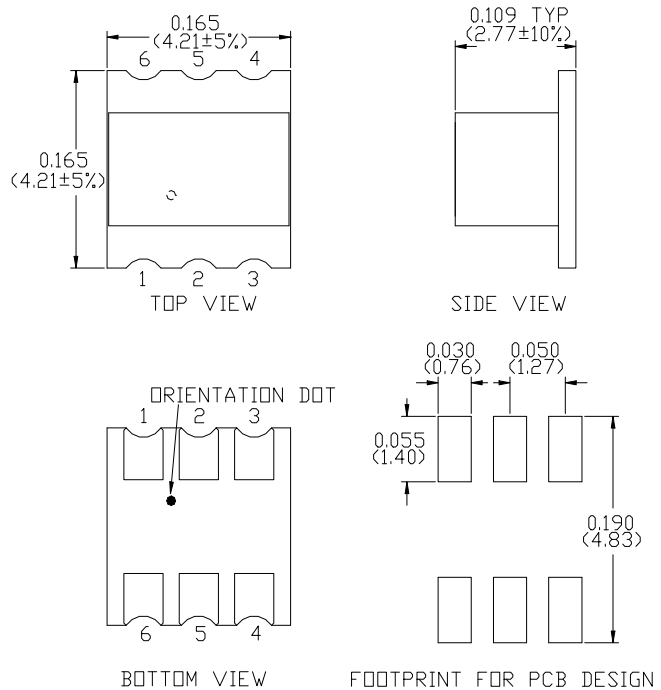

Pin Configuration

Pin No.	Function
1	Primary (ground)
2	Secondary ground 2
3	Primary Dot (input)
4	Secondary (output 2)
5	Secondary ground 1
6	Secondary Dot (output 1)

Ordering Information

Part Number	Package
MABA-008482-CF1A40	2000
MABA-008482-CF1ATB	Customer Test Board

Note: Reference Application Note **M513** for reel size information.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

1.78:1 step up flux coupled transformer
5 - 200MHz

M/A-COM Products
Part Status: Released Rev V2


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹

Parameter	Frequency	Units	Min	Typ	Max
Insertion Loss	5 - 80 MHz	dB	-	0.35	0.5
	80-200 MHz	dB	-	0.48	1.0
Amplitude Balance	5 - 100 MHz	dB	-	0.02	± 0.2
	100 - 200 MHz	dB	-	0.14	± 0.5
Phase Balance	5 - 50 MHz	$^\circ$	-	0.50	± 3
	50 - 100 MHz	$^\circ$	-	1.95	± 5
	100 - 200 MHz	$^\circ$	-	4.15	± 10
Input Return Loss	5 - 100 MHz	dB	22	25.9	-
	100 - 200 MHz	dB	16	18.4	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Max RF Power	1W
Max DC current	250mA per arm
Operating Temperature	-40°C to +60°C
Storage Temperature	-40°C to +85°C

Recommended PCB Configuration



FOOTPRINT FOR PCB DESIGN

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

2

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
- India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

1.78:1 step up flux coupled transformer
5 - 200MHz


M/A-COM Products
Part Status: Released Rev V2

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹


Insertion Loss 1 (pin3 - pin6)

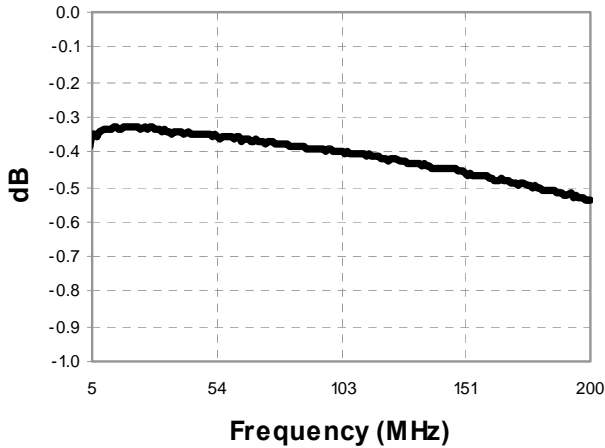


Insertion Loss 2 (pin3 - pin4)

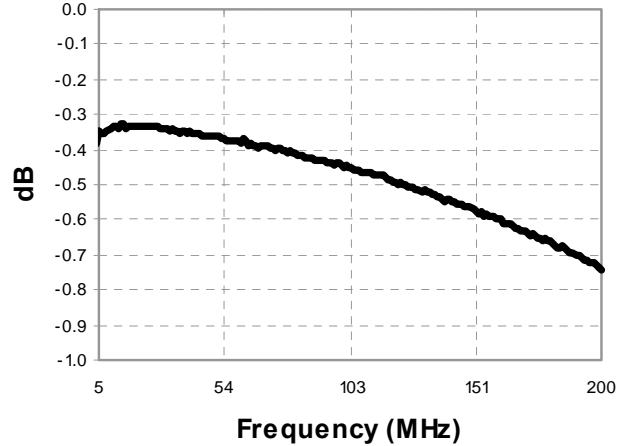


Amplitude Balance

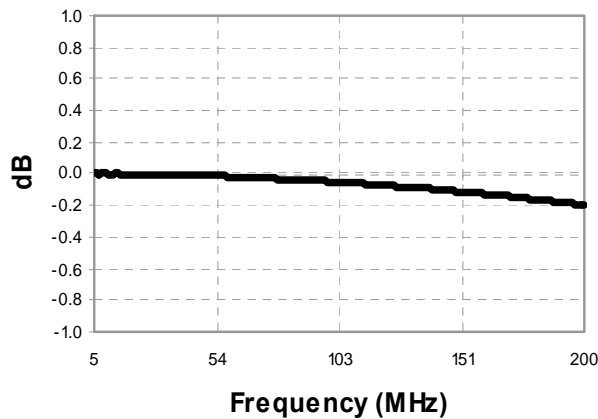

Phase Balance

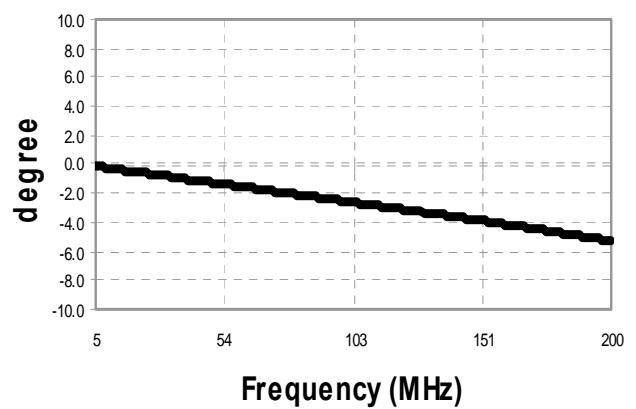

Return Loss: Input

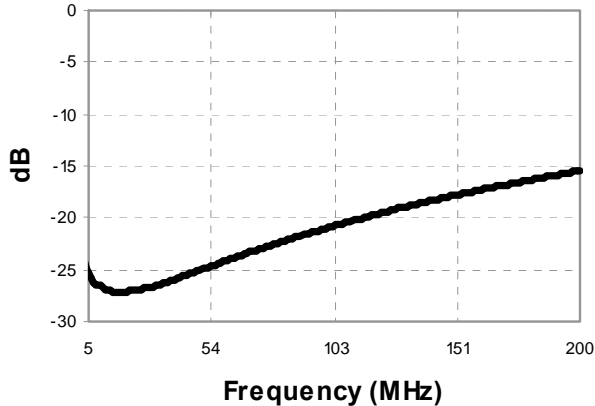

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.