


2-CH AUDIO POWER AMPLIFIER(10W X2)

DESCRIPTION

The SA7269 is a monolithic integrated circuit in HSIP package, intended for use as dual audio frequency class AB amplifier.

FEATURES

- * Wide supply voltage range up to 40V ABS MAX.
- * Split supply operation.
- * High output power: 10+10W @ THD=10%, $R_L=8\Omega$, $V_s=\pm 14V$
- * Mute/stand-by function.
- * Few external components.
- * Short circuit protection.
- * Thermal overload protection.

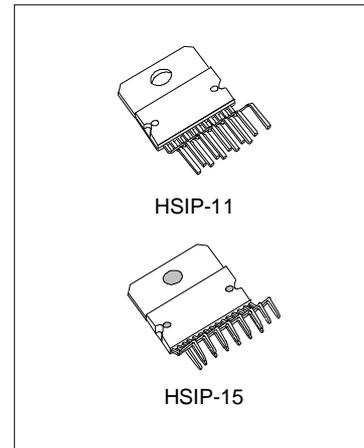


APPLICATIONS

- * Hi-Fi music centers
- * Stereo TV sets

ORDERING INFORMATION

Part No.	Package
SA7269	HSIP-11
SA7269A	HSIP-15

BLOCK DIAGRAM

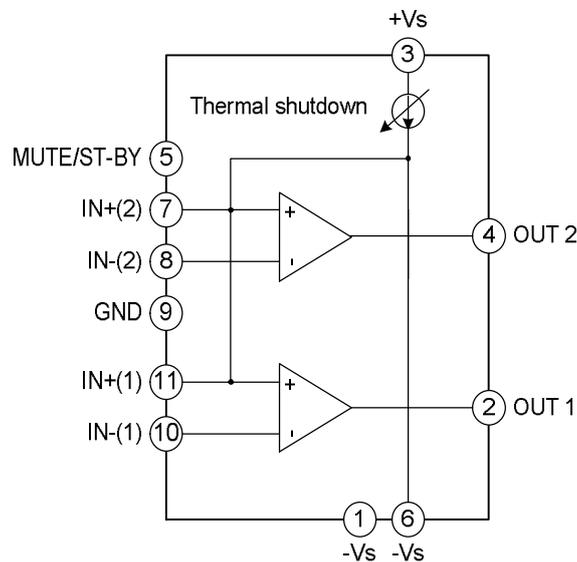

Note: Figures for the SA7269.

ABSOLUTE MAXIMUM RATING

Characteristics	Symbol	Rating	Unit
DC Supply Voltage	V_s	44	V
Output Peak Current (Internally Limited)	I_o	3	A
Power Dissipation $T_{case}=70^{\circ}C$	P_{tot}	40	W
Storage And Junction Temperature	T_{stg}, T_j	-40~+150	$^{\circ}C$
Supply voltage to guarantee short-circuit protection	$V_{s(sc)}$	$\pm 18^{(*)}$	V
Thermal Resistance From Junction To Case (Max)	$R_{th(j-c)}$	2	$^{\circ}C/W$

(*)Maximum supply voltage to guarantee short-circuit to $\pm V_s$ is $\pm 18V$, and to GND short-circuit protection is normal.

ELECTRICAL CHARACTERISTICS

(Refer to the test circuit, $V_s \pm 14V$; $R_L=8\Omega$; $R_s=50\Omega$; $G_v=30dB$; $f=1KHz$; $T_{amb}=25^{\circ}C$, unless otherwise specified.)



Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Supply Range	V_s		± 5		± 20	V
Total Quiescent Current	I_q			50	100	mA
Input Offset Voltage	V_{os}		-25		+25	mV
Non Inverting Input Bias Current	I_b			500		nA
Output Power	P_o	THD=10%; $R_L=8\Omega$; $V_s=\pm 12.5V$; $R_L=4\Omega$	8	10		W
			7.5	10		W
		THD=1%; $R_L=8\Omega$; $V_s=\pm 12.5V$; $R_L=4\Omega$		7.5		W
				7.5		W
Total Harmonic Distortion	THD	$R_L=8\Omega$; $P_o=1W$; $f=1KHz$		0.03		%
		$R_L=8\Omega$; $P_o=0.1\sim 5W$; $f=100Hz\sim 15KHz$			0.7	%
		$R_L=4\Omega$; $P_o=1W$; $f=1KHz$		0.02		%
		$R_L=4\Omega$; $V_s=\pm 10V$; $P_o=0.1\sim 5W$; $f=100Hz\sim 15KHz$			1	%
Cross Talk	CT	$f=1KHz$		70		dB
		$f=10KHz$	50	60		dB
Slew Rate	SR		6.5	8		V/ μs
Open Loop Voltage Gain	GV			80		dB
Total Input Noise	e_n	A curve		3		μV
		$f=20Hz\sim 22KHz$		4	8	μV

(To be continued)

(Continued)

Characteristics	Symbol	Test conditions	Min.	Typ.	Max.	Unit
Input Resistance	Ri		15	20		K Ω
Supply Voltage Rejection (each channel)	SVR	Fr=100Hz; Vripple=0.5Vrms		60		dB
Thermal Shut-down Junction Temperature	Tj			145		$^{\circ}$ C
Mute Function [ref: +Vs]						
Mute /Play Threshold	VTMUTE		-7	-6	-5	V
Mute Attenuation	AM		60	70		dB
Stand-by Function [ref: +Vs]						
Stand-by /Mute Threshold	VTST-BY		-3.5	-2.5	-1.5	V
Stand-by Attenuation	AST-BY			110		dB
Quiescent Current @ Stand-by	Iq ST-BY			3	6	mA

PIN CONFIGURATION

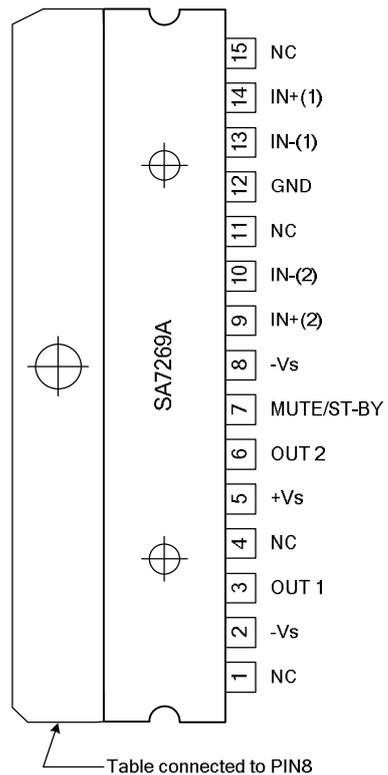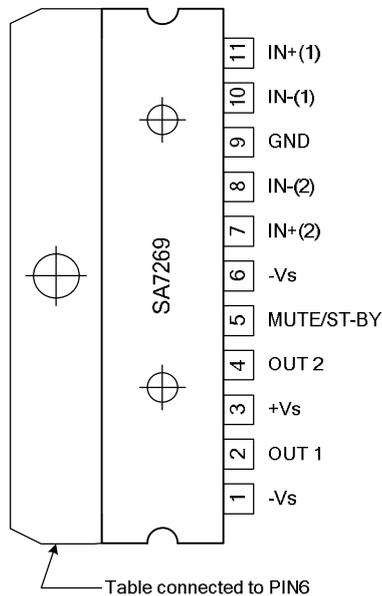

PIN DESCRIPTION

Pin No.		Pin Name	I/O	Pin Description
HSIP-11	HSIP-15			
1	2	-Vs	--	Negative power
2	3	OUT 1	O	Output1
3	5	+Vs	--	Positive power
4	6	OUT 2	O	Output2
5	7	MUTE / ST-BY	I	Mute /stand-by function
6	8	-Vs	--	Negative power
7	9	IN+(2)	I	Inverting Input 2
8	10	IN-(2)	I	Non inverting input 2
9	12	GND	--	Ground
10	13	IN-(1)	I	Non inverting input 1
11	14	IN+(1)	I	Inverting input 1
	1,4,11,15	NC	--	Not connected

FUNCTION DESCRIPTION
MUTE STAND-BY FUNCTION

The MUTE/ST-BY controls the amplifier status by two different thresholds, referred to +Vs.

- Ø When MUTE/ST-BY higher than = +Vs - 2.5V the amplifier is in Stand-by mode and the final stage generators are off.
- Ø When MUTE/ST-BY is between +Vs - 2.5V and +Vs- 6V the final stage current generators are switched on and the amplifier is in mute mode
- Ø When MUTE/ST-BY is lower than +Vs - 6V the amplifier is play mode.

Power Dissipation and Heat Sinking

The SA7269 must always be operated with a heat sink. In order to determine the appropriate heat sink for a given application, the power dissipation of the SA7269 in that application must be known. When the load is resistive, the maximum average power that the IC will be required to dissipate is approximately:

$$P_{D(MAX)} = V_S^2 / \pi^2 R_L + P_Q$$

Where VS is the total power supply voltage across the SA7269, RL is the load resistance PQ is the quiescent power dissipation of the amplifier. The above equation is only an approximation which assume an "ideal" class B output stage and constant power dissipation in all other parts of the circuit. The curves of "Power Dissipation vs. Power Output" give a better representation of the behavior of the SA7269 with various power supply voltages and resistive loads. As an example, if the SA7269 is operated on a ±14V power supply with a resistive load of 8Ω, it can develop up to 11.5W of internal power dissipation. If the die temperature is to remain below 150°C for ambient temperatures up to 50°C, the total junction-to-ambient thermal resistance must be less than:

$$(150^\circ\text{C} - 50^\circ\text{C}) / 11.5\text{W} = 8.7^\circ\text{C/W}$$

Using $R_{th(j-c)} = 2^\circ\text{C/W}$, the sum of the case-to-heat-sink interface thermal resistance and the heat-sink-to-ambient thermal resistance must be less than 6.7°C/W. The case-to-heat-sink thermal resistance of the HSIP-11



package varies with the mounting method used. A metal-to-metal interface will be about $1^{\circ}\text{C}/\text{W}$ if lubricated, and about $1.2^{\circ}\text{C}/\text{W}$ if dry.

If a mica insulator is used, the thermal resistance will be about $1.6^{\circ}\text{C}/\text{W}$ lubricated and $3.4^{\circ}\text{C}/\text{W}$ dry. For this example, we assume a lubricated mica insulator between the SA7269 and the heat sink. The heat sink thermal resistance must then be less than:

$$8.7^{\circ}\text{C}/\text{W} - 2^{\circ}\text{C}/\text{W} - 1.6^{\circ}\text{C}/\text{W} = 5.1^{\circ}\text{C}/\text{W}$$

The thermal requirements can become more difficult when an amplifier is driving a reactive load. For a given magnitude of load impedance, a higher degree of reactance will cause a higher level of power dissipation within the amplifier. As a general rule, the power dissipation of an amplifier driving a 60° reactive load (usually considered to be a worst-case loudspeaker load) will be roughly that of the same amplifier driving the resistive part of that load. For example, a loudspeaker may at some frequency have an impedance with a magnitude of 8Ω and a phase angle of 60° . The real part of this load will then be 4Ω , and the amplifier power dissipation will roughly follow the curve of power dissipation with a 4Ω load.


TYPICAL APPLICATION CIRCUIT IN SPLIT SUPPLY

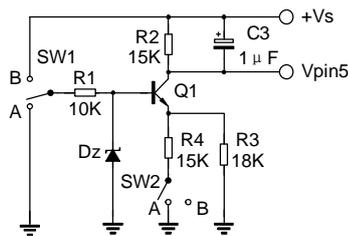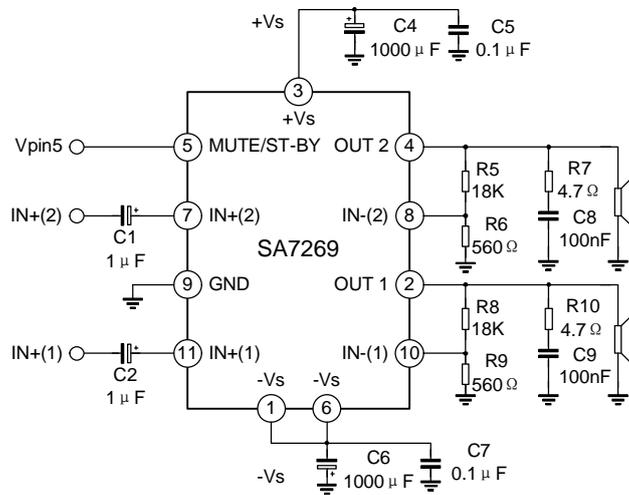

SW1	SW2	
A	A	Stand-by
A	B	Stand-by
B	B	Mute
B	A	Play







Note: Figures for the SA7269.

TYPICAL APPLICATION CIRCUIT IN SINGLE SUPPLY

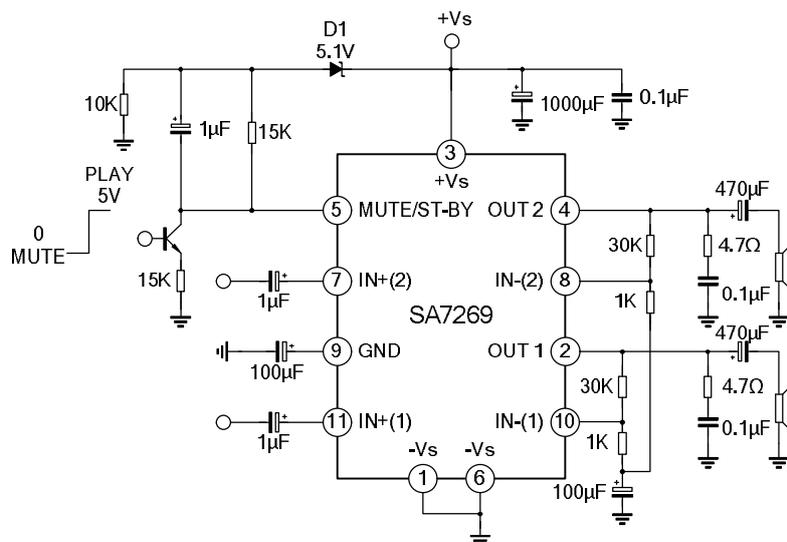



Note: Figures for the SA7269.

ELECTRICAL CHARACTERISTICS CURVES

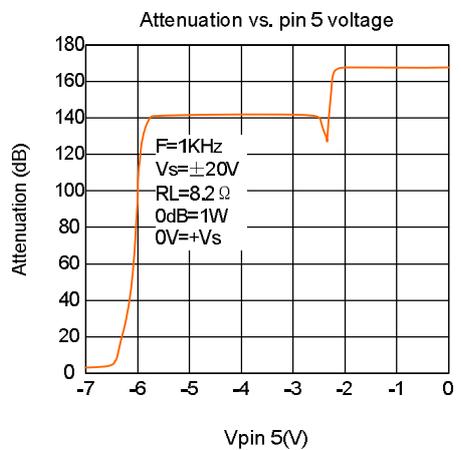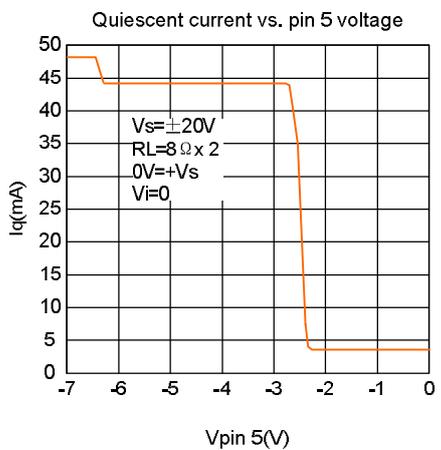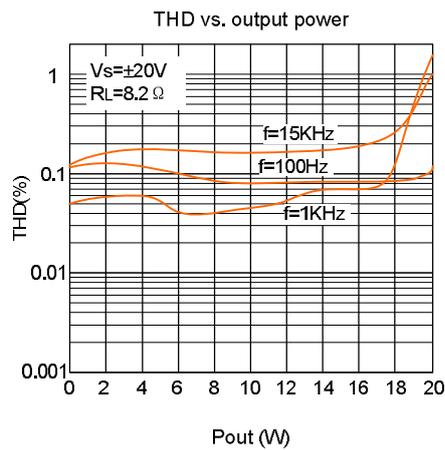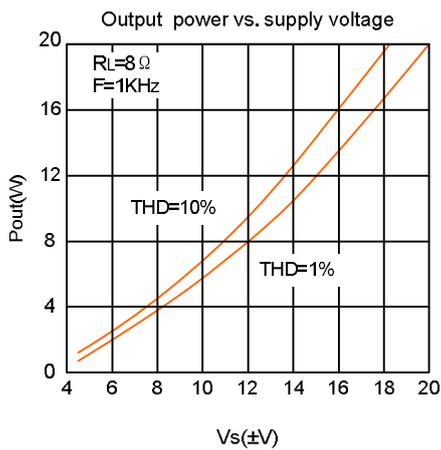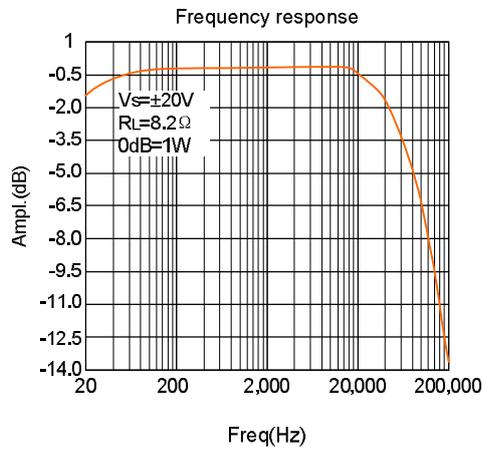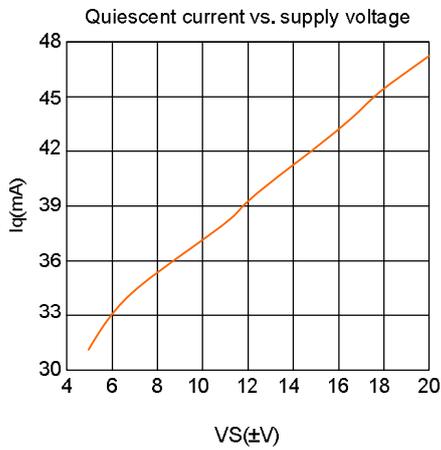


(To be continued)

(Continued)

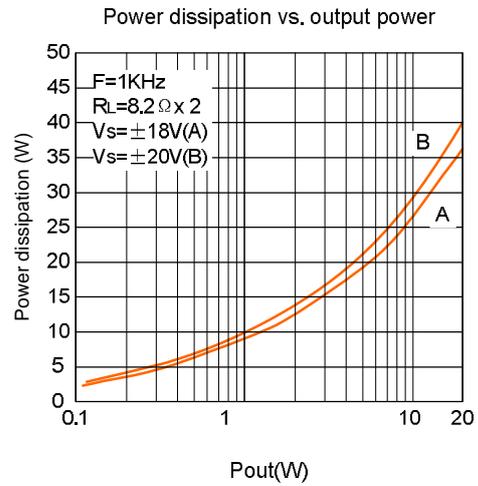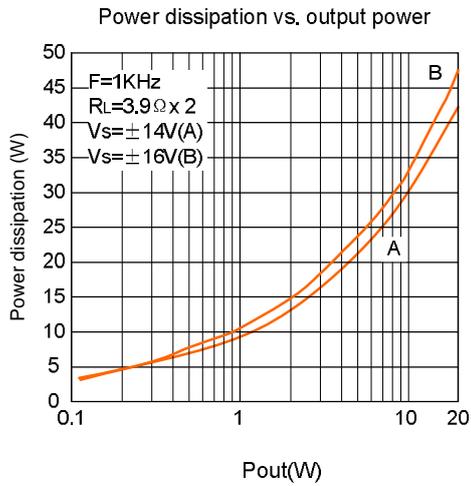

PC BOARD AND COMPINENTS LAYOUT OF THE TYPICAL APPLICATION IN SPLIT SUPPLY

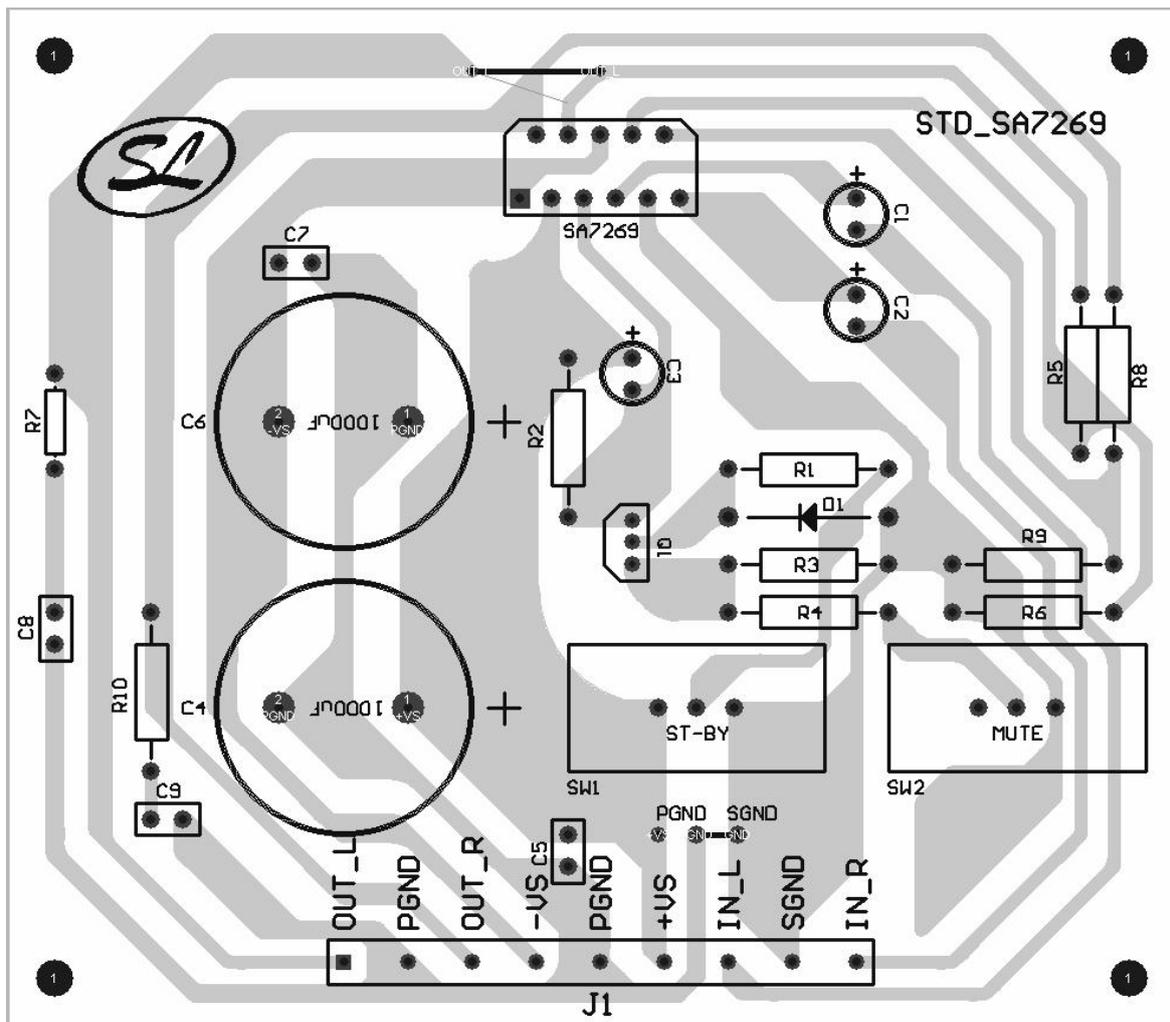

APPLICATION SUGGEST

The recommended values of the external components are those shown are the **Typical Application Circuit in Split Supply**:

COMPONENTS	RECOMMENDED VALUE	PURPOSE	LARGER THAN RECOMMENDED VALUE	SMALLER THAN RECOMMENDED VALUE
R1	10KΩ	Mute Circuit	Increase of Dz Biasing Current	
R2	15KΩ	Mute Circuit	VMUTE/STBY Shifted Downward	VMUTE/STBY Shifted Upward
R3	18KΩ	Mute Circuit	VMUTE/STBY Shifted Upward	VMUTE/STBY Shifted Downward
R4	15KΩ	Mute Circuit	VMUTE/STBY Shifted Upward	VMUTE/STBY Shifted Downward
R5, R8	18KΩ	Closed Loop Gain Setting*	Increase of Gain	
R6, R9	560Ω		Decrease of Gain	
R7, R10	4.7Ω	Frequency Stability	Danger of Oscillations	Danger of Oscillations
C1, C2	1μF	Input DC Decoupling		Higher Low Frequency Cutoff
C3	1μF	St-By/Mute Time Constant	Larger On/Off Time	Smaller On/Off Time
C4, C6	1000μF	Supply Bypass		Danger of Oscillations
C5, C7	0.1μF	Supply Bypass		Danger of Oscillations
C8, C9	0.1μF	Frequency Stability		
Dz	5.1V	Mute Circuit		
Q1	BC107	Mute Circuit		

* Closed loop gain has to be $\geq 25\text{dB}$.

PACKAGE OUTLINE

