



8700 E. Thomas Road  
 Scottsdale, AZ 85251  
 Tel: (480) 941-6300  
 Fax: (480) 947-1503

# MMAD1108

## Switching Diode Array



### FEATURES

- 8 Diode Array
- SOIC 16 pin Surface Mount Package
- UL 94V-0 Flammability Classification

### MECHANICAL

- Molded SOIC 16 Pin
- Weight: 0.128 grams (approximate)
- Marking: Logo, device number, date code
- Pin #1 defined by DOT on top of package


### MAXIMUM RATINGS

- Operating Temperatures: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Forward Surge Current: 2.0 Amps (8.3 mS)
- Minimum Breakdown Voltage  $V_{(BR)}$ : 90V
- Working Peak Reverse Voltage  $V_{RWM}$ : 75V
- Continuous forward current  $I_F$ : 40 mA
- Power dissipation ( $P_D$ ): 500 mW
- Derating factor: 4.0 mW/°C

### PACKAGING


- Tape & Reel EIA Standard 481
- 13 inch reel 2,500 pieces (OPTIONAL)
- Carrier tube 48 pcs per (STANDARD)

### CIRCUIT DIAGRAM

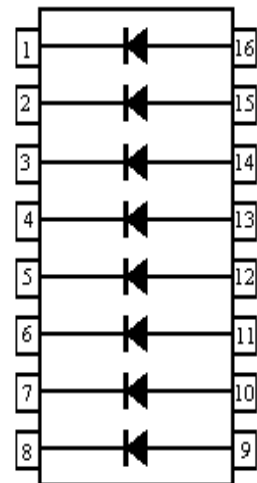

### ELECTRICAL CHARACTERISTICS @ 25°C Unless otherwise specified

Part Number	$V_{(BR)}$ @100µA V	$V_{RWM}$ V	$I_R$ +25°C µA		$I_R$ +150°C µA		CAP @0V pF	$t_{rr}$ (nS)	$V_F$ @ $I_f = 10mA$ V	$V_F$ @ $I_f = 100mA$ V
	MIN	MAX	MAX	@ $V_R$	MAX	@ $V_R$	MAX	MAX	MAX	MAX
MMAD1108	90	75	.200	20	.300	20	4.0	5.0	1.00	1.20

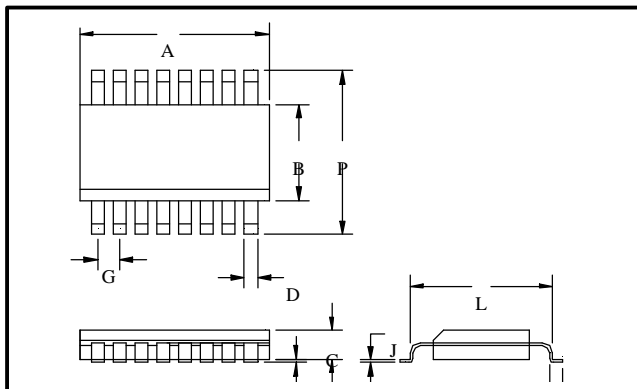

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.358	0.398	9.09	10.10
B	0.150	0.158	3.81	4.01
C	0.023	0.029	2.35	1.73
D	0.011	0.021	0.28	0.53
F	0.016	0.020	0.41	1.27
G	0.050 BSC		1.27 BSC	
J	0.006	0.010	0.15	0.25
K	0.004	0.008	0.10	0.20
L	0.189	0.206	4.80	5.23
P	0.328	0.344	8.29	8.73