

DUAL J-FET INPUT OPERATIONAL AMPLIFIER


■ GENERAL DESCRIPTION

The NJM2082 is JFET input dual operational amplifiers. The NJM2082 features low input offset and bias current, high input impedance. The NJM2082 ideally suits for fast integrator, DA converter, sample & hold and audio applications. The NJM2082 is improved version of the NJM082.

■ FEATURES

- Operating Voltage ($\pm 4V \sim \pm 18V$)
- High Input Resistancce ($10^{12}\Omega$ typ.)
- High Slew Rate ($20V/\mu s$ typ.)
- Package Outline DIP8, DMP8, SIP8, (SSOP8)
- Bipolar Technology

■ PACKAGE OUTLINE




NJM2082D



NJM2082M





NJM2082V



NJM2082L

■ PIN CONFIGURATION


NJM2082D
NJM2082M
NJM2082V

NJM2082L

PIN FUNCTION

1. A OUTPUT
2. A-INPUT
3. A+INPUT
4. V-
5. B+INPUT
6. B-INPUT
7. B OUTPUT
8. V+

■ EQUIVALENT CIRCUIT (1/2 Shown)

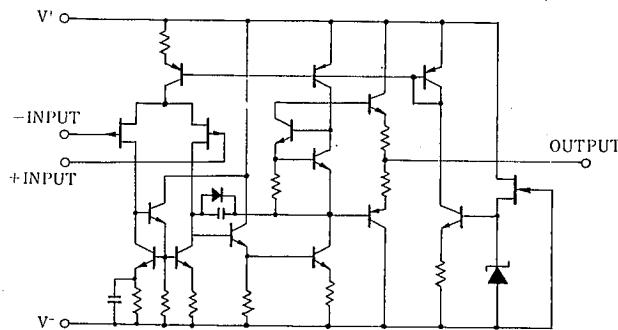

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|--------------------------------|---|------|
| Supply Voltage | V ⁺ /V ⁻ | ±18 | V |
| Differential Input Voltage | V _{ID} | ±30 | V |
| Input Voltage | V _{IC} | ±15 (note) | V |
| | P _D | (DIP8) 500 (DIM8) 300 (SIP8) 800 (SSOP8) 250 | mW |
| Power Dissipation | | | mW |
| Operating Temperature Range | T _{opr} | -40~+85 | °C |
| Storage Temperature Range | T _{stg} | -40~+125 | °C |

(note) For supply voltage less than ±15V, the absolute maximum input voltage is equal to the supply voltage.


■ ELECTRICAL CHARACTERISTICS

(Ta = +25°C, V⁺/V⁻ = ±15V)


| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|----------------------------------|------------------|---|------|------------------|------|--------|
| Input Offset Voltage | V _{IO} | R _S =50Ω | — | 2 | 10 | mV |
| Input Offset Current | I _{IO} | | — | 5 | 200 | pA |
| Input Bias Current | I _B | | — | 30 | 400 | pA |
| Input Resistance | R _{IN} | | — | 10 ¹² | — | Ω |
| Large Signal Voltage Gain | A _V | R _L ≥2kΩ, V _O =±10V | 86 | 110 | — | dB |
| Maximum Output Voltage Swing | V _{OM} | R _L =2kΩ | ±12 | +13.5, -13.0 | — | V |
| Input Common Mode Voltage Range | V _{ICM} | | ±12 | +15.0, -12.5 | — | V |
| Common Mode Rejection Ratio | CMR | R _S ≤10kΩ | 70 | 90 | — | dB |
| Supply Voltage Rejection Ratio | SVR | R _S ≤10kΩ | 76 | 100 | — | dB |
| Operating Current | I _{CC} | | — | 4 | 6 | mA |
| Slew Rate | SR | | — | 20 | — | V/μs |
| Gain Bandwidth Product | GB | f=10kHz | — | 5 | — | MHz |
| Equivalent Input Noise Voltage 1 | e _n | R _S =100Ω, f=1kHz | — | 13 | — | nV/√Hz |
| Equivalent Input Noise Voltage 2 | V _{NI} | RIAA R _S =2.2kΩ, 30kHz LPF | — | 1.6 | — | μVrms |

■ TYPICAL CHARACTERISTICS


Voltage Gain vs. Frequency

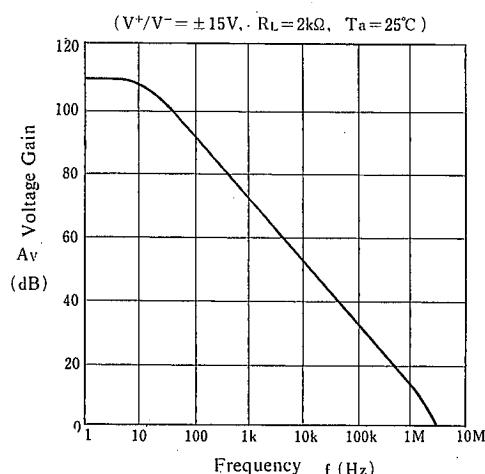


Maximum Output Voltage Swing vs. Load Resistance

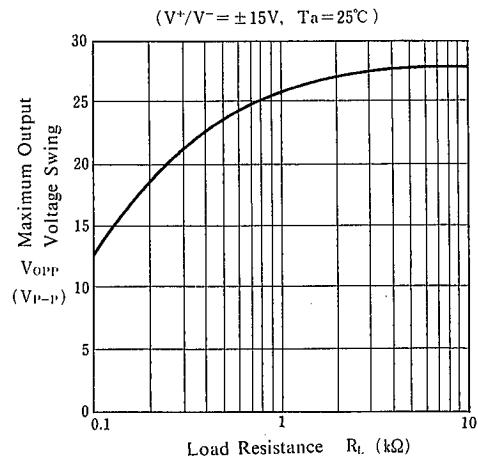


Maximum Output Voltage Swing vs. Frequency

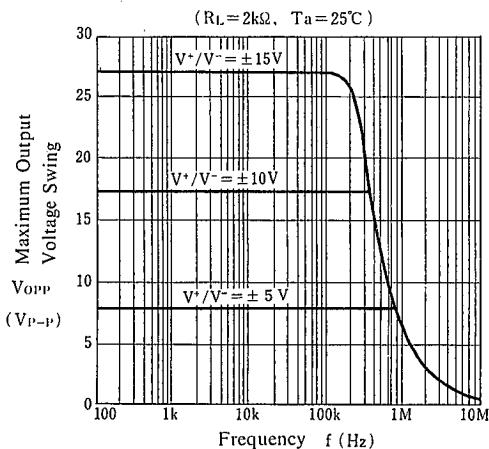


Equivalent Input Noise Voltage vs. Frequency

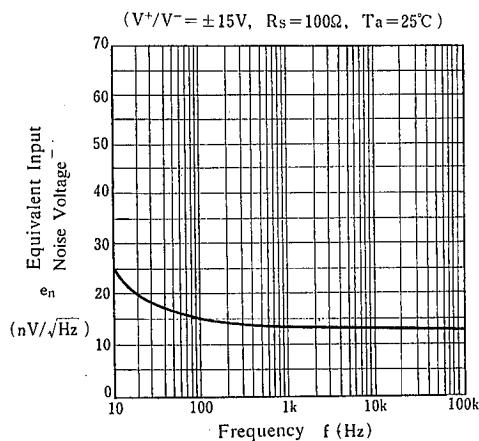

Equivalent Input Noise Voltage vs. Source Resistance

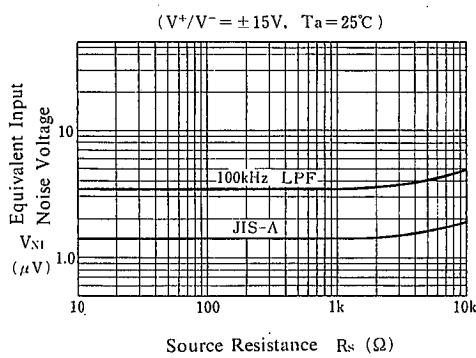


Voltage Follower Pulse Response

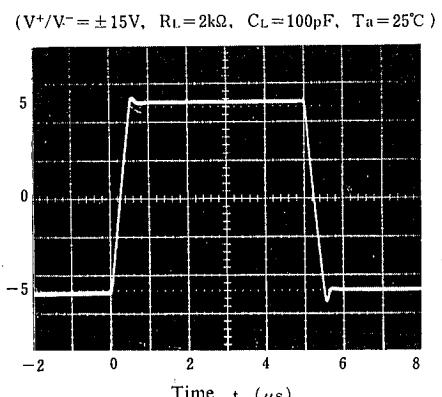


■ TYPICAL CHARACTERISTICS


Operating Current vs. Temperature

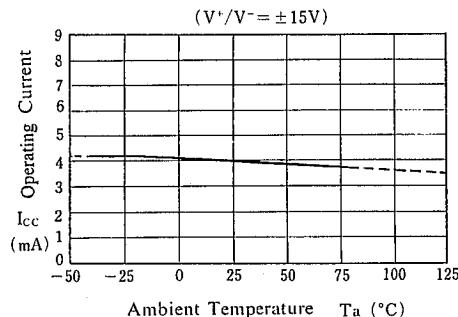


Input Offset Voltage vs. Temperature

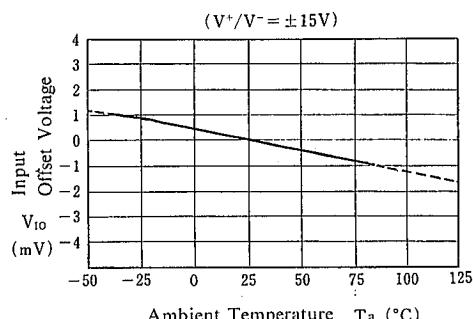


Operating Current vs. Operating Voltage

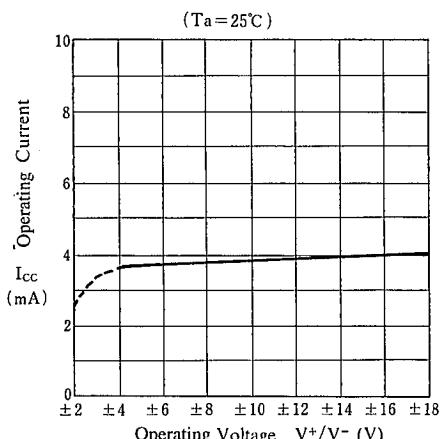

Maximum Output Voltage Swing vs. Temperature

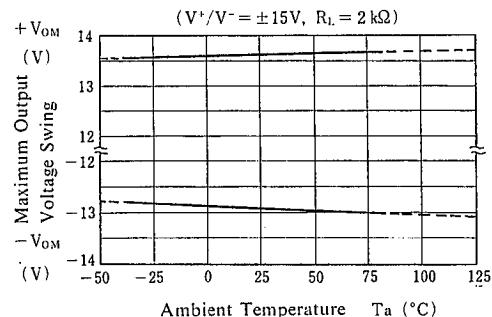


Input Bias Current vs. Temperature

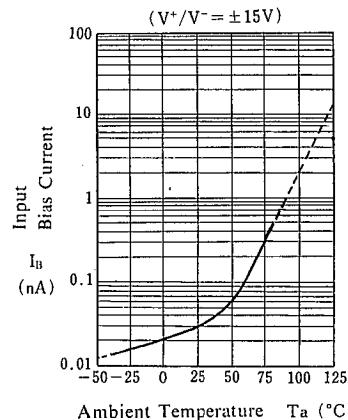

4

Maximum Output Voltage Swing vs. Operating Voltage

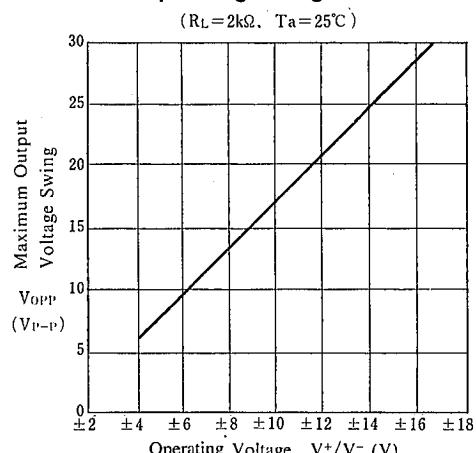

MEMO

[CAUTION]

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.