

**SI-3000J Series****5-Terminal, Multi-Function, Full-Mold, Low Dropout Voltage Dropper Type****■Features**

- Compact full-mold package (equivalent to TO220)
- Output current: 2.0A
- Low dropout voltage:  $V_{DIF} \leq 1V$  (at  $I_o=2.0A$ )
- Variable output voltage (rise only) May be used for remote sensing
- Output ON/OFF control terminal is compatible with LS-TTL.  
(It may be directly driven by LS-TTL or standard CMOS logic.)
- Built-in foldback overcurrent, overvoltage, thermal protection circuits

**■Applications**

- For stabilization of the secondary stage of switching power supplies
- Electronic equipment

**■Absolute Maximum Ratings**

(Ta=25°C)

Parameter	Symbol	Ratings			Unit
		SI-3050J	SI-3090J	SI-3120J/3150J	
DC Input Voltage	V <sub>IN</sub>	25	30	35	V
Voltage of Output Control Terminal	V <sub>C</sub>		V <sub>IN</sub>		V
DC Output Current	I <sub>O</sub>		2.0 <sup>*1</sup>		A
Power Dissipation	P <sub>D1</sub>	20(With infinite heatsink)			W
	P <sub>D2</sub>	1.5(Without heatsink, stand-alone operation)			W
Junction Temperature	T <sub>j</sub>	−40 to +125			°C
Ambient Operating Temperature	T <sub>op</sub>	−30 to +100			°C
Storage Temperature	T <sub>stg</sub>	−40 to +125			°C
Thermal Resistance (junction to case)	R <sub>th(j-c)</sub>	5.0			°C/W
Thermal Resistance (junction to ambient air)	R <sub>th(j-a)</sub>	66.7(Without heatsink, stand-alone operation)			°C/W

## ■Electrical Characteristics

(Ta=25°C unless otherwise specified)


Parameter	Symbol	Ratings												Unit	
		SI-3050J			SI-3090J			SI-3120J			SI-3150J				
		min.	typ.	max.	min.	typ.	max.	min.	typ.	max.	min.	typ.	max.		
Input Voltage	V <sub>IN</sub>	6 <sup>2</sup>		15 <sup>1</sup>	10 <sup>2</sup>		25 <sup>1</sup>	13 <sup>2</sup>		27 <sup>1</sup>	16 <sup>2</sup>		27 <sup>1</sup>	V	
Output Voltage	V <sub>O</sub>	4.90	5.00	5.10	8.82	9.00	9.18	11.76	12.00	12.24	14.70	15.00	15.30	V	
	Conditions	V <sub>IN</sub> =8V, I <sub>O</sub> =1.0A			V <sub>IN</sub> =12V, I <sub>O</sub> =1.0A			V <sub>IN</sub> =15V, I <sub>O</sub> =1.0A			V <sub>IN</sub> =18V, I <sub>O</sub> =1.0A				
Dropout Voltage	V <sub>DIF</sub>			0.5			0.5			0.5			0.5	V	
	Conditions	I <sub>O</sub> ≤1.5A													
	Conditions			1.0			1.0			1.0			1.0		
Line Regulation	ΔV <sub>O</sub>   <sub>LINE</sub>		10	30		18	48		24	64		30	90	mV	
	Conditions	V <sub>IN</sub> =6 to 15V, I <sub>O</sub> =1.0A			V <sub>IN</sub> =10 to 20V, I <sub>O</sub> =1.0A			V <sub>IN</sub> =13 to 25V, I <sub>O</sub> =1.0A			V <sub>IN</sub> =16 to 25V, I <sub>O</sub> =1.0A				
Load Regulation	ΔV <sub>O</sub>   <sub>LOAD</sub>		40	100		70	180		93	240		120	300	mV	
	Conditions	V <sub>IN</sub> =8V, I <sub>O</sub> =0 to 2.0A			V <sub>IN</sub> =12V, I <sub>O</sub> =0 to 2.0A			V <sub>IN</sub> =15V, I <sub>O</sub> =0 to 2.0A			V <sub>IN</sub> =18V, I <sub>O</sub> =0 to 2.0A				
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT <sub>A</sub>		±0.5			±1.0			±1.5			±1.5		mV/°C	
	Conditions	V <sub>IN</sub> =8V, I <sub>O</sub> =5mA, T <sub>A</sub> =0 to 100°C			V <sub>IN</sub> =12V, I <sub>O</sub> =5mA, T <sub>A</sub> =0 to 100°C			V <sub>IN</sub> =15V, I <sub>O</sub> =5mA, T <sub>A</sub> =0 to 100°C			V <sub>IN</sub> =18V, I <sub>O</sub> =5mA, T <sub>A</sub> =0 to 100°C				
Ripple Rejection	R <sub>REJ</sub>		54			54			54			54		dB	
	Conditions	V <sub>IN</sub> =8V, f=100 to 120Hz			V <sub>IN</sub> =12V, f=100 to 120Hz			V <sub>IN</sub> =15V, f=100 to 120Hz			V <sub>IN</sub> =18V, f=100 to 120Hz				
Quiescent Circuit Current	I <sub>Q</sub>		3	10		3	10		3	10		3	10	mA	
	Conditions	V <sub>IN</sub> =8V, I <sub>O</sub> =0A			V <sub>IN</sub> =12V, I <sub>O</sub> =0A			V <sub>IN</sub> =15V, I <sub>O</sub> =0A			V <sub>IN</sub> =18V, I <sub>O</sub> =0A				
	I <sub>Q</sub> (off)		0.5	1.0		0.5	1.0		0.5	1.0		0.5	1.0		
Overcurrent Protection Starting Current <sup>3,5</sup>	I <sub>S1</sub>	2.1			2.1			2.1			2.1			A	
	Conditions	V <sub>IN</sub> =8V			V <sub>IN</sub> =12V			V <sub>IN</sub> =15V			V <sub>IN</sub> =18V				
V <sub>C</sub> Terminal <sup>4</sup>	Control Voltage (Output ON)	V <sub>C</sub> . IH	2.0			2.0			2.0			2.0		V	
	Control Voltage (Output OFF)	V <sub>C</sub> . IL			0.8			0.8			0.8		0.8		
	Control Current (Output ON)	I <sub>C</sub> . IH		20		20			20			20		μA	
	Control Current (Output OFF)	I <sub>C</sub> . IL			-0.3			-0.3			-0.3		-0.3	mA	
Conditions V <sub>C</sub> =2.7V															
Conditions V <sub>C</sub> =0.4V															

<sup>1</sup>: V<sub>IN(max)</sub> and I<sub>O(max)</sub> are restricted by the relation P<sub>D(max)</sub>=(V<sub>IN</sub>-V<sub>O</sub>)•I<sub>O</sub>=20(W).<sup>2</sup>: Refer to the dropout voltage.(Refer to Setting DC Input Voltage on page 7.)<sup>3</sup>: I<sub>S1</sub> is specified at -5(%) drop point of output voltage V<sub>O</sub> on the condition that V<sub>IN</sub>=V<sub>O</sub>+3V, I<sub>O</sub>=1A.<sup>4</sup>: Output is ON even when output control terminal V<sub>C</sub> is open. Each input level is equivalent to LS-TTL. Therefore, it may be directly driven by an LS-TTL circuit.<sup>5</sup>: A foldback type overcurrent protection circuit is built into the I<sub>C</sub> regulator. Therefore, avoid using it for the following applications as it may cause starting errors:

- (1) Constant current load
- (2) Plus/minus power
- (3) Series power
- (4) V<sub>O</sub> adjustment by raising ground voltage

### ■External Dimensions

(unit:mm)

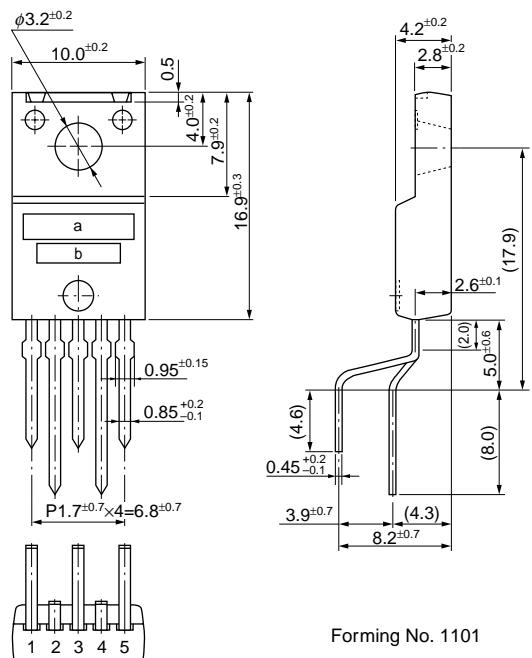

Forming No. 1101

- a. Part Number
- b. Lot Number

#### Pin Arrangement


- ① GND
- ② Vc
- ③ Vo
- ④ Vos
- ⑤ VIN

Plastic Mold Package Type


Flammability: UL94V-0

Weight: Approx. 2.3g

### ■Block Diagram

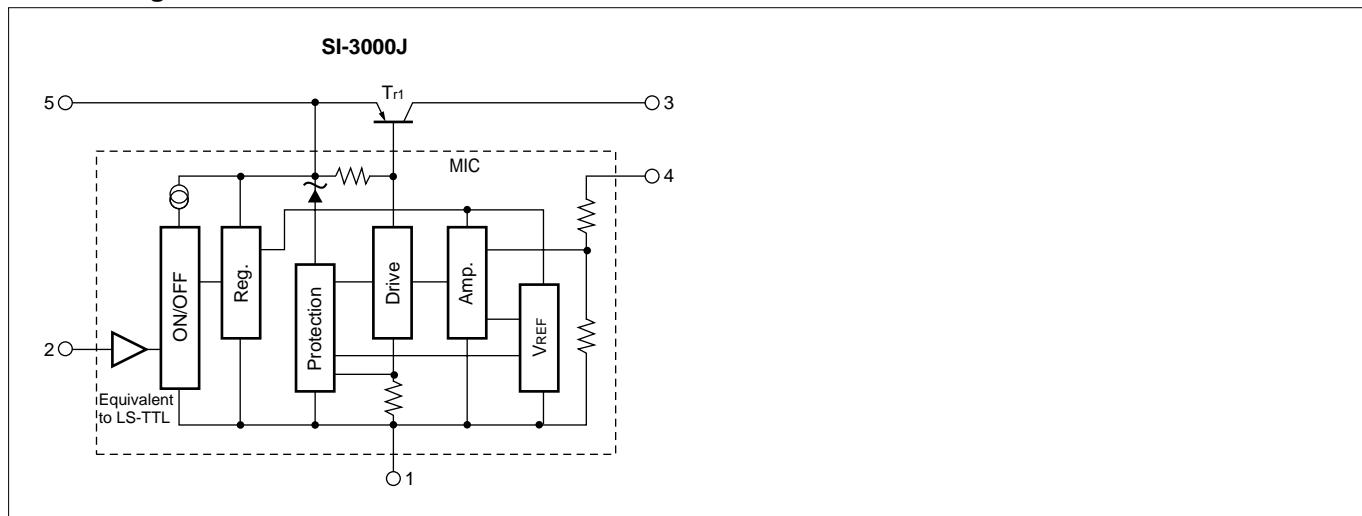

### ■Standard External Circuit

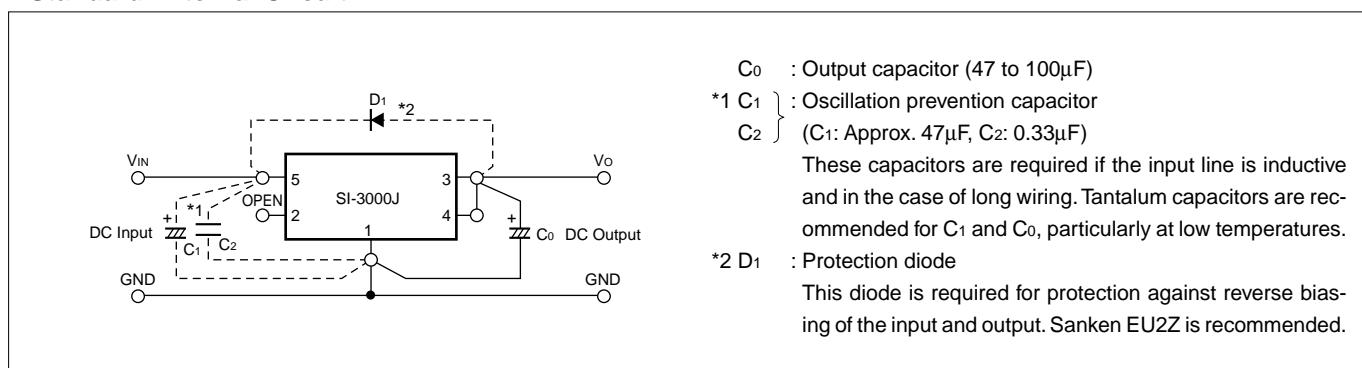


$C_0$  : Output capacitor (47 to 100μF)

\*1  $C_1 \left\{ \begin{array}{l} : \text{Oscillation prevention capacitor} \\ C_2 : (C_1: \text{Approx. } 47\mu\text{F}, C_2: 0.33\mu\text{F}) \end{array} \right.$

These capacitors are required if the input line is inductive and in the case of long wiring. Tantalum capacitors are recommended for  $C_1$  and  $C_0$ , particularly at low temperatures.

\*2  $D_1$  : Protection diode


This diode is required for protection against reverse biasing of the input and output. Sanken EU2Z is recommended.

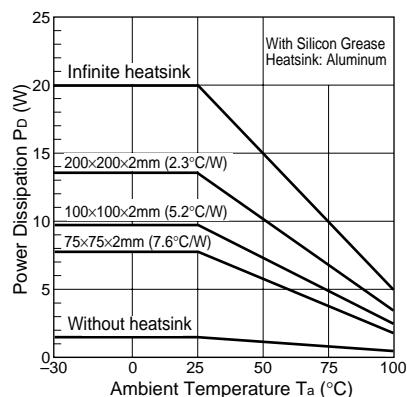**■Ta-PD Characteristics**

$$P_D = I_o \cdot [V_{IN}(\text{mean}) - V_o]$$

## External Variable Output Voltage Circuit

### 1. Variable output voltage with a single external resistor

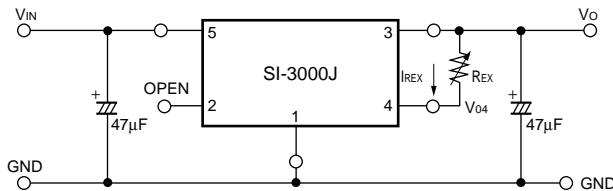


The output voltage may be increased by inserting resistor  $R_{EX}$  between terminals No.4 (sensing terminal) and No.3 (output terminal). The current  $I_{REX}$  flowing into terminal No.4 is 1mA (typ.), therefore the adjusted output voltage  $V_{OUT}$  is:

$$V_{OUT} = V_{O4} + I_{REX} \cdot R_{EX} \quad *V_{O4}: \text{output voltage of SI-3000J series}$$

However, the internal resistor (between terminals No. 4 and No.1) is a semiconductor resistor, which has approximately thermal characteristics of  $+0.2\%/\text{°C}$ .

It is important to keep the thermal characteristics in mind when adjusting the output voltage.

### 2. Variable output voltage with two external resistors

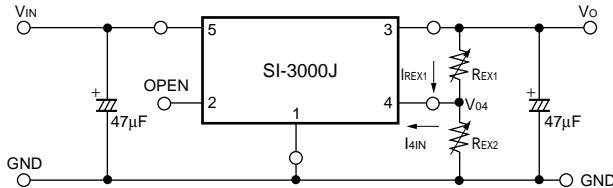

The output voltage may be increased by inserting resistors  $R_{EX1}$  between terminals No.4 (sensing terminal) and No.3 (output terminal) and  $R_{EX2}$  between terminals No.4 and No.1 (ground terminal).

The current  $I_{4IN}$  flowing into terminal No.4 is 1mA (typ.) so the thermal characteristics may be improved compared to the method shown in 1 by setting the external current  $I_{REX1}$  at approximately 5 times the value of  $I_{4IN}$  (stability coefficient  $S=5$ ).

The adjusted output voltage  $V_{OUT}$  in this case is:

$$\begin{cases} V_{OUT} = V_{O4} + R_{EX1} \cdot I_{REX1} \\ I_{REX1} = S \cdot I_{4IN} \end{cases}$$



The value of the external resistors may be obtained as follows:

$$R_{EX1} = \frac{V_{O4} - V_{O4}}{S \cdot I_{4IN}}, \quad R_{EX2} = \frac{V_{O4}}{(S-1) \cdot I_{4IN}}$$

\* $V_{O4}$ : Output voltage of SI-3000J series

$S$ : Stability coefficient of  $I_{4IN}$  (may be set to any value)


Note: In the SI-3000J series, the output voltage increase can be adjusted as mentioned above. However, when the rise is set to approximately 10V compared to output voltage  $V_{O4}$ , the necessary output current may not be obtained due to the S.O.A. protection circuit in the SI-3000J series.

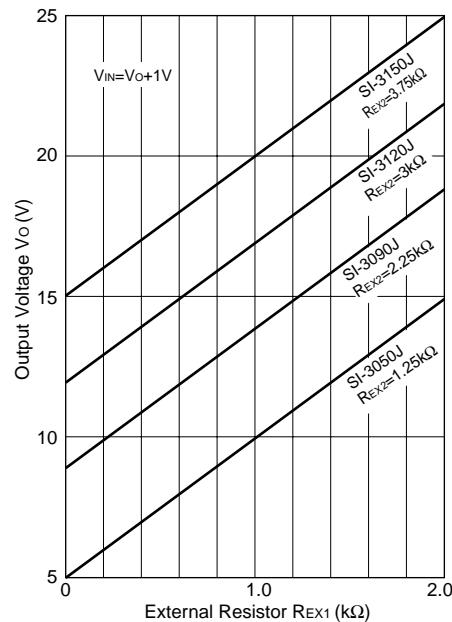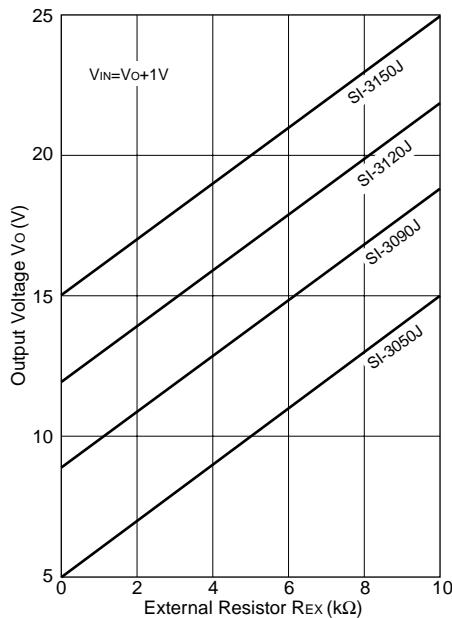


## ■Typical Characteristics

( $T_a=25^\circ\text{C}$ )


**Io vs. V<sub>DIF</sub> Characteristics**

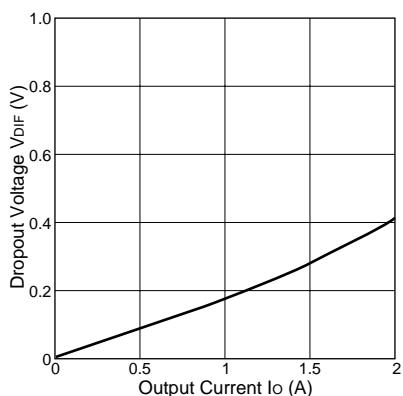


**Temperature Coefficient of Output Voltage(SI-3050J)**

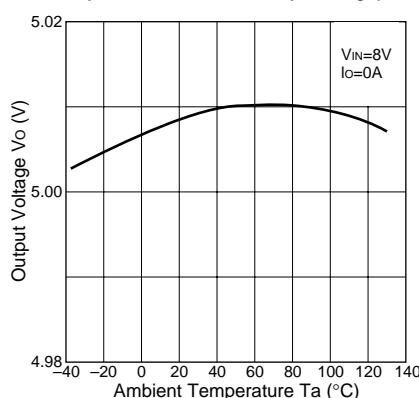


**Circuit Current(SI-3050J)**

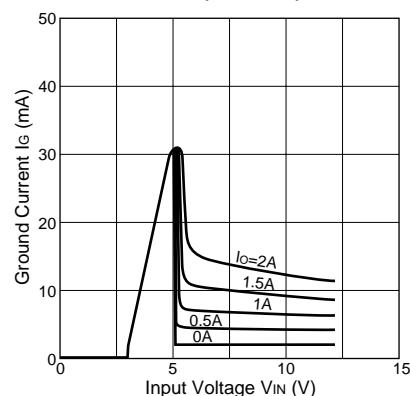


**Quiescent Circuit Current(SI-3050J)**

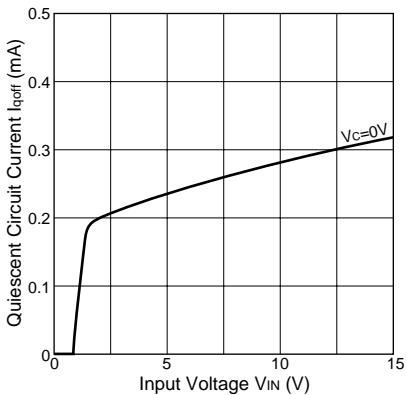


**Output Voltage(SI-3050J)**

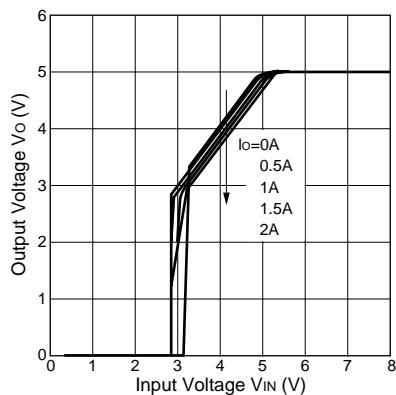


**Output Voltage(SI-3120J)**

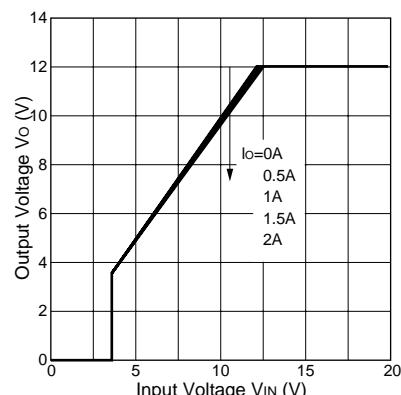


**Overcurrent Protection Characteristics(SI-3050J)**

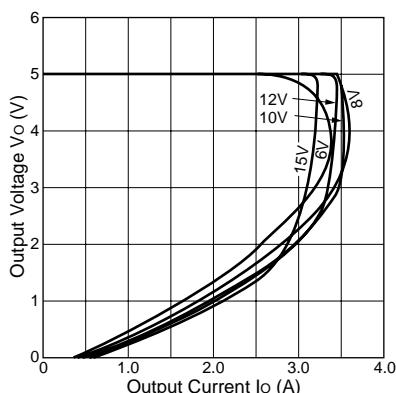


**Overcurrent Protection Characteristics(SI-3120J)**

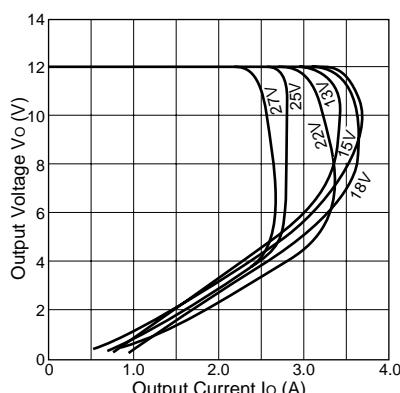

**ON/OFF Control Characteristics(SI-3050J)**

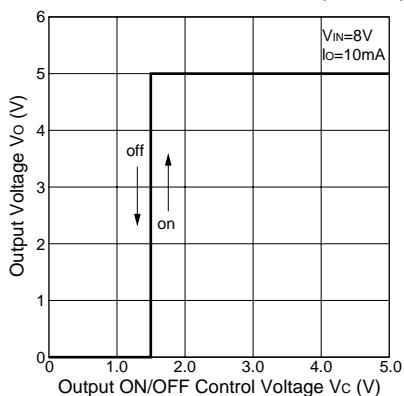

**Thermal Protection Characteristics(SI-3050J)**

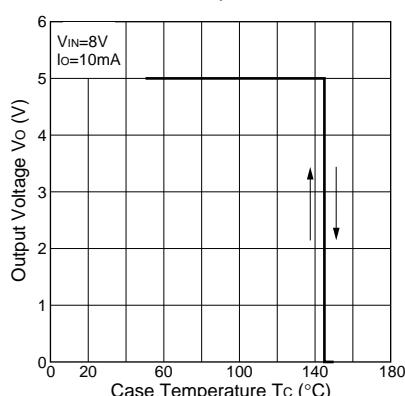

### Note on Thermal Protection:

The thermal protection circuit is intended for protection against heat during instantaneous short-circuiting. Its operation is not guaranteed for continuous heating condition such as short-circuiting over extended periods of time.