


## 14 BIT HYBRID CONTROL DIFFERENTIAL TRANSMITTER

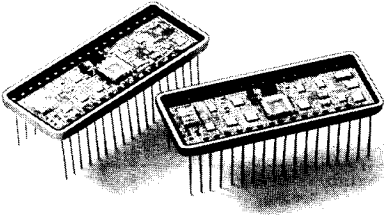

### DESCRIPTION

The HSCDX-14\* series are the smallest solid state control differential transmitters available. They are high reliability units consisting of two 36 pin double DIP packages.

Input isolation transformers are available but will seldom be required because the solid state signal input is true differential with high AC and DC common mode rejection. The AC analog output signals are the sin and cos of the difference between the synchro or resolver angle input and the digital angle input, modulated by the carrier frequency.

The HSCDX-14 is part of Data Device Corporation's second generation of hybrid synchro-digital conversion products, which includes S/D converters, D/S converters, control transformers, and multi-speed converters.

### APPLICATIONS

Control differential transmitters (CDX) subtract digital angles from analog synchro or resolver angles. They are used to provide angle offsets or correction angles when a resolver or synchro type output is required, and are especially adapted to computer controlled systems.

Because of their small size and low power requirements, the HSCDX-14 series of control differential transmitters is especially ideal for remotely located and hard to access equipment where high MTBF is critical. They are well suited to the most stringent and severe industrial or military ground and avionics applications. In conjunction with other devices, they are readily adapted for closed loop control. Designed for printed circuit board mounting by standard techniques, the HSCDX-14 can be readily incorporated into other equipment by the OEM user.

### FEATURES

- **ACCURACY:**  
±4 Minutes Normal Accuracy  
±2 Minutes High Accuracy
- **SIGNAL AND REF. INPUTS:**  
Internal solid state isolation or external isolation transformers  
All common L-L voltage levels and frequencies
- **LOGIC INPUT:**  
TTL and CMOS compatible  
14 bit parallel binary angle
- **POWER REQUIRED:**  
+15V DC and logic voltage supply

\*Patented

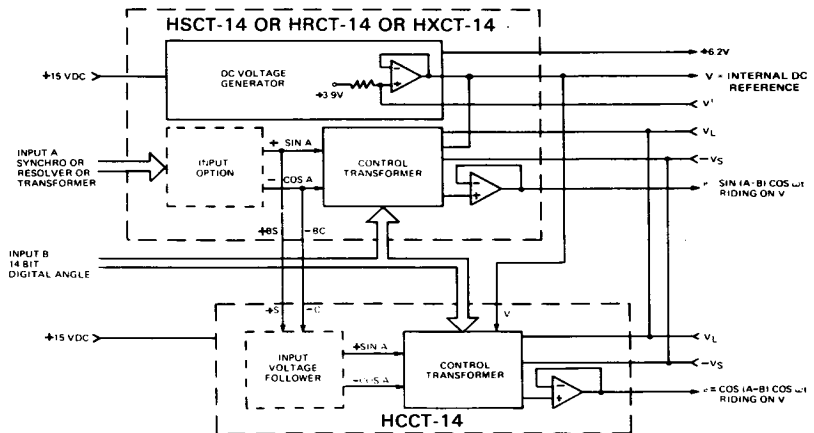
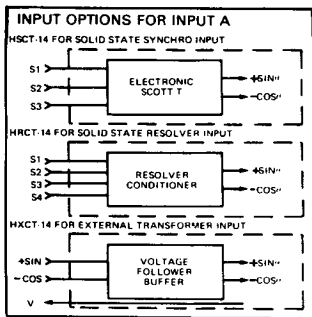


FIGURE 1. BLOCK DIAGRAM

## TECHNICAL INFORMATION

### 1. INTRODUCTION

As shown in the block diagram Figure 1, the HSCDX-14 control differential transmitter consists of two control transformer modules. One module is a complete unit with an input option, DC voltage generator, and a sin output. This module, with synchro, resolver, or transformer input, is called the HSCT-14 series and is described in a separate data sheet. The second HSCDX-14 module is a cos output control transformer and is called the HCCT-14. It relies on the first module for input conditioning and for DC voltage transformation.

The HSCDX-14 has two inputs: an analog synchro or resolver signal, and a 14 bit digital angle. It provides two AC outputs which are the sin and cos respectively of the difference between the synchro or resolver angle A and the digital angle B. The outputs ride on the internal D.C. Reference V and are modulated at the carrier frequency.

Power for the internal CMOS logic in both units must be provided at pins V<sub>L</sub>. The user connects pin V<sub>L</sub> to the +6.2V internal power supply when the external logic supply voltage is less than 6.2V, and to the external logic supply when the logic voltage is ≥6.2V.

Pin -V<sub>S</sub> provides the negative power supply voltage for the internal op-amps. This voltage is usually chosen to be either 0 to minimize power consumption, or -7V to optimize the common mode voltage or voltage range of the input option. Pin V' is used to bring the internal analog ground to normal ground potential when V<sub>L</sub> = 6.2V and -V<sub>S</sub> = -7V.

As indicated in Figure 1, there are three types of input options: an electronic Scott-T for direct synchro input (HSCDX); a signal conditioner for direct resolver input (HRCDX); and a voltage follower buffer (HXCDX). Depending on the line voltage, there are actually six possible options: two HSCDX, three HRCDX, and one HXCDX. The HXCDX input requires an external signal conditioner such as a synchro or resolver isolation transformer or a solid state buffer.

Interconnection layout is not critical. The analog outputs are derived from op-amps, have low output impedance, and are short circuit proof.

### 2. POWER SUPPLIES

Two power supplies are required: +15 VDC nominal supply and a logic voltage supply V<sub>L</sub>. The +15V supply can vary from +11 to +16.5V with no change in the specifications. The logic supply voltage can range from +4.5V to the voltage of the +15V supply. The logic supply is used in two ways, depending on the nature of the digital logic. When the digital input logic is TTL or DTL, current is drawn from the logic supply by 22K pull-up resistors (see Figure 2). When the logic supply voltage is greater than 6.2V, the logic supply must provide power to drive the internal CMOS logic through pin V<sub>L</sub>.

A power supply for -V<sub>S</sub>, which supplies the negative power supply voltages for the internal op-amps, is optional. -V<sub>S</sub> may be any voltage between ground and a negative voltage fifteen volts less than the positive logic supply voltage V<sub>L</sub>. For instance, if V<sub>L</sub> = 6.2V, -V<sub>S</sub> can range from 0V to -8.8V. For minimum power dissipation, -V<sub>S</sub> is connected to normal ground, and no connection is made to V'. The internal ground will then be at 3.9V. As -V<sub>S</sub> is made more negative, the common mode of the solid state input options HSCT-14 and HRCT-14 increases, the input voltage range of the buffer input option HXCT-14 increases, and the voltage of the internal ground V may be decreased. If V<sub>L</sub> = 6.2V and -V<sub>S</sub> = -7V, V' may be grounded so that V is at normal ground potential. The solid state input common mode, the buffer input voltage range, and the power consumed will all be increased as indicated in the specifications table.


While testing or evaluating the HSCDX-14 series, it is advisable to limit the power supply currents. Limit the +15V supply current to 75 mA, and the logic supply current to 5 mA. Power supply transients greater than 18V may damage the module.

### SPECIFICATIONS

For listed temperature, power supply, and signal amplitude ranges.

| PARAMETER  | VALUE  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
|--|--|------------------------|------------------------|------------------------|--------------|--------------------|-------------------|----------------------|----------------------|--------|--------|--------------------|-------|--------|-------|----------------------|-------|-------|-------|
| <b>RESOLUTION</b>  | 14 bits  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| <b>ACCURACY</b><br>Normal Accuracy<br>High Accuracy Option "a" | ±4 minutes max<br>±2 minutes max   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| <b>SOLID STATE BUFFER INPUT (HSCDX AND HRCDX UNITS)</b>        |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Carrier Frequency Range  | 47 - 1000 Hz   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Synchro and Resolver Input Characteristics                     |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Voltage Options and Minimum Input Impedance (Balanced)         |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Synchro (HSCDX)  | <table border="1"> <thead> <tr> <th>Z<sub>IN</sub></th> <th>Z<sub>IN</sub>, Each</th> </tr> <tr> <th>Line to Line</th> <th>Line to GND</th> </tr> </thead> <tbody> <tr> <td>90V L-L (Option H)</td> <td>130 KΩ      85 KΩ</td> </tr> <tr> <td>11.8V L-L (Option L)</td> <td>17.5 KΩ      11.5 KΩ</td> </tr> </tbody> </table>  | Z <sub>IN</sub>        | Z <sub>IN</sub> , Each | Line to Line           | Line to GND  | 90V L-L (Option H) | 130 KΩ      85 KΩ | 11.8V L-L (Option L) | 17.5 KΩ      11.5 KΩ |        |        |                    |       |        |       |                      |       |       |       |
| Z <sub>IN</sub>  | Z <sub>IN</sub> , Each   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Line to Line   | Line to GND  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 90V L-L (Option H)   | 130 KΩ      85 KΩ  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 11.8V L-L (Option L)   | 17.5 KΩ      11.5 KΩ   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Resolver (HRCDX)   | <table border="1"> <thead> <tr> <th>Z<sub>IN</sub></th> <th>Z<sub>IN</sub></th> <th>Z<sub>IN</sub>, Each</th> </tr> <tr> <th>Single Ended</th> <th>Differential</th> <th>Line to GND</th> </tr> </thead> <tbody> <tr> <td>90V L-L (Option H)</td> <td>175 KΩ</td> <td>350 KΩ</td> <td>175 KΩ</td> </tr> <tr> <td>26V L-L (Option M)</td> <td>50 KΩ</td> <td>100 KΩ</td> <td>50 KΩ</td> </tr> <tr> <td>11.8V L-L (Option L)</td> <td>23 KΩ</td> <td>46 KΩ</td> <td>23 KΩ</td> </tr> </tbody> </table> | Z <sub>IN</sub>        | Z <sub>IN</sub>        | Z <sub>IN</sub> , Each | Single Ended | Differential       | Line to GND       | 90V L-L (Option H)   | 175 KΩ               | 350 KΩ | 175 KΩ | 26V L-L (Option M) | 50 KΩ | 100 KΩ | 50 KΩ | 11.8V L-L (Option L) | 23 KΩ | 46 KΩ | 23 KΩ |
| Z <sub>IN</sub>  | Z <sub>IN</sub>  | Z <sub>IN</sub> , Each |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Single Ended   | Differential   | Line to GND            |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 90V L-L (Option H)   | 175 KΩ   | 350 KΩ                 | 175 KΩ                 |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 26V L-L (Option M)   | 50 KΩ  | 100 KΩ                 | 50 KΩ                  |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 11.8V L-L (Option L)   | 23 KΩ  | 46 KΩ                  | 23 KΩ                  |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Common Mode Range (DC Common Mode Plus Recurrent AC Peak)      |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 90V L-L (Option H)   | -V <sub>S</sub> = 0V      V <sub>L</sub> = +6.2V and -V <sub>S</sub> = -7V   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 26V L-L (Option M)   | 150V max      300V max   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 11.8V L-L (Option L)   | 45V max      90V max   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
|  | 20V max      60V max   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| <b>VOLTAGE FOLLOWER INPUT (FOR TRANSFORMER UNITS)</b>          |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| HXCT Input Characteristics                                     |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Carrier Frequency Range  | 47 - 1000 Hz   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Voltage Range  | 1V rms nominal; 1.15V max; 0.1V min  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| -V <sub>S</sub> = 0V   | 3V rms nominal; 3.5V max; 0.1V min   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| V <sub>L</sub> = +6.2 and -V <sub>S</sub> = -7V                | 15V rms continuous   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Max Voltage Without Damage                                     | 100V peak transient  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Input Impedance  | Z <sub>IN</sub> > 10 MΩ (transient protected voltage follower)   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| <b>TRANSFORMER CHARACTERISTICS</b>                             |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 400 Hz SIGNAL TRANSFORMER                                      |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Carrier Frequency Range  | 360 - 1000 Hz  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Minimum Input Impedances (Balanced)                            |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 90V L-L (Option 4H)  | Synchro Z <sub>IN</sub>   Z <sub>CO</sub> Resolver Z <sub>IN</sub>   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 26V L-L (Option 4M)  | 180 KΩ      100 KΩ   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 11.8V L-L (Option 4L)  | -      30 KΩ   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Breakdown Voltage to GND                                       | 20 KΩ      30 KΩ   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
|  | 700V peak  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| 60 Hz SIGNAL TRANSFORMER                                       |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Carrier Frequency Range  | 47 - 440 Hz  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Input Voltage Range  | 10 - 100V rms L-L; 90V rms L-L nominal   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Input Impedance  | 148 KΩ min L-L balanced resistive  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Input Common Mode Voltages                                     | : 500V rms, transformer isolated   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Output Description   | Resolver output, +sin (+S) and -cos (-C)<br>derived from op-amps. Short circuit proof.   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Output Voltage   | 1.0V rms nominal riding on DC reference V.<br>Output voltage level tracks input level.   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Power Required   | 4 mA typ, 7 mA max from +15V supply  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| <b>DIGITAL INPUT</b>   |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Logic Type   | TTL, DTL, CMOS compatible, depending on logic supply voltage   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Coding   | Natural binary angle; positive logic   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Number of Bits   | 14   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Loading  | : 1μA max (transient protected CMOS)   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| <b>ANALOG OUTPUTS</b>  |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Outputs e:   | A = Synchro or resolver input angle;   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| e = +sin (A-B) cos ωt  | B = digital input angle; ω = signal carrier frequency  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| and e = +cos (A-B) cos ωt                                      | : 2% max (absolute error, not a function of angle)   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Scale Factor Error   |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Scale Factor Variation With                                    |  |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Digital Angle B  | : -0.25% max   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| Maximum Output   | 1V rms (operates over full -180° range of (A-B))   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |
| DC Offset  | : 25 mV max (varies smoothly as function of digital angle B)   |                        |                        |                        |              |                    |                   |                      |                      |        |        |                    |       |        |       |                      |       |       |       |

| PARAMETER  | VALUE  |
|--|--|
| <b>ANALOG OUTPUTS (Cont'd)</b>                                   |  |
| Internal D.C. Reference V<br>Voltage                             | 3.9 VDC nominal when $-V_S = 0$ . Can be set to zero for suitable $-V_S$ voltage levels.           |
| Current Capability   | +1 mA  |
| Bias Voltage   |  |
| Voltage  | 6.2VDC   |
| Current Capability   | +0.1 mA  |
| Buffered +Sin A and -Cos A<br>(+BS and -BC)                      |  |
| Voltage Level  | 1V rms nominal   |
| Current Capability   | +1 mA  |
| <b>DYNAMIC CHARACTERISTICS</b>                                   |  |
| Input Rate   | Maximum conversion rate limited only by rate at which digital input changes                        |
| Settling Time  |  |
| For Normal Tracking  | No lag error   |
| For 179° step change   | 10 $\mu$ s to final value  |
| <b>TEMPERATURE RANGE</b>   |  |
| Operating  |  |
| -1 Option  | -55° C to +125° C  |
| -3 Option  | 0° C to 70° C  |
| Storage  | -55° C to +135° C  |
| <b>POWER SUPPLIES</b>  |  |
| Voltage  | +15 VDC Logic $-V_S$ (Optional)<br>Supply  |
| Voltage Limits   | +11V to +4.5V to 0 to (V <sub>L</sub> - 15V)<br>+16.5V +15 supply voltage                          |
| Max Voltage Without Damage                                       | +18V +18V -(18V-V <sub>L</sub> )   |
| Current or Impedance   | +50 mA* Z <sub>IN</sub> = 5 K $\Omega$ -50 mA*<br>max min max                                      |
| * Does not include current required by 60 Hz active transformer. |  |
| <b>PHYSICAL CHARACTERISTICS</b>                                  |  |
| Converter Modules (Two)  |  |
| Type   | 36 pin double DIP  |
| Size   | 0.78 x 1.9 x 0.21 inch (2.0 x 4.8 x 0.53 cm)   |
| Weight   | 1 oz max (28 g)  |
| 400 Hz Transformer Modules                                       |  |
| Type   | Encapsulated module. Signal input uses 2 modules (T1A and T2B). Ref uses 1 module (T2).            |
| Size   | 0.8 x 0.6 x 0.3 inch (2 x 1.5 x 0.8 cm)  |
| Weight   | 0.4 oz max (11 g)  |
| 60 Hz Transformer Modules  |  |
| Type   | Encapsulated module. Signal transformer and reference transformer each consist of one such module. |
| Size   | 1.125 x 1.125 x 0.42 inch (2.86 x 2.86 x 1.07 cm)  |
| Weight   | 0.7 oz max (20 g)  |

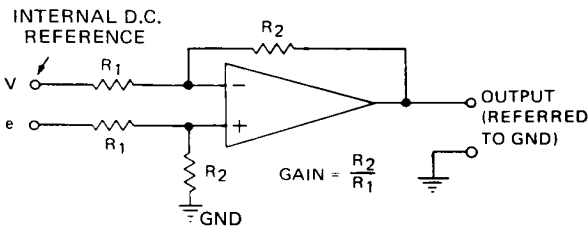

**CIRCUIT FOR REFERENCING OUTPUT TO NORMAL GROUND**


### 3. SYNCHRO AND RESOLVER INPUT (ANGLE A)

#### Solid State Buffer Input (HSCDX and HRCDX):

The solid state signal and reference inputs are true differential inputs with high AC and DC common mode rejection, so that separate isolation transformers will seldom be required. Input impedance is maintained with power off. The common mode voltage range (recurrent AC peak + DC common mode voltage) depends on  $-V_S$  and should not exceed the following values:

| INPUT     | COMMON MODE   |                 | MAXIMUM | MAX TRANSIENT |
|-----------|---------------|-----------------|---------|---------------|
|           | IF $-V_S = 0$ | IF $-V_S = -7V$ |         |               |
| 90V L-L   | 150V Peak     | 300V Peak       | 350V    | 350V          |
| 26V L-L   | 45V Peak      | 90V Peak        | 150V    | 150V          |
| 11.8V L-L | 20V Peak      | 60V Peak        | 150V    | 150V          |

90V line-to-line systems generally have voltage transients which exceed the 350V specification listed above. These transients can destroy the thin film input resistor network in the hybrid. Therefore, 90V L-L solid state input modules should always be protected by installing voltage suppressors as shown below.

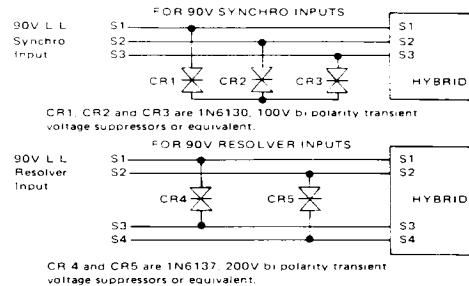


#### CONNECTIONS FOR VOLTAGE TRANSIENT SUPPRESSORS

#### Voltage Follower Buffer Input:

HXCDX units require a signal isolation transformer, a Scott-T, or a similar signal conditioner. They may be preferred in applications where the signal conditioner can be integrated with other components, as in many multiplexed systems. The HXCDX-14 input is high impedance and compatible with any device providing resolver type signals of appropriate amplitude riding on internal analog ground V. The maximum input voltage amplitude depends on  $-V_S$  and will be greater if the magnitude of  $-V_S$  is increased, as discussed in the Power Supplies section.

The 60 Hz signal transformer 24126 is an active device with amp outputs, and requires connection to the +15V power supply as shown below. An active transformer is provided because a passive transformer would be much larger at 60 Hz than at 400 Hz.

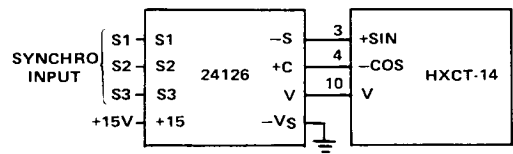

### 4. DIGITAL INPUT ANGLE B

The logic 0 level is from 0 to .3V<sub>L</sub> and the logic 1 level from .7V<sub>L</sub> to V<sub>L</sub>. For TTL/DTL logic, V<sub>L</sub> is 6.2V (see Figure 2), so 22K pull-up resistors to +5V should be added by the user to each digital input line.

## 5. OUTPUTS SIN (A-B) AND COS (A-B)

The outputs are AC voltages  $\sin(A-B) \cos \omega t$ , and  $\cos(A-B) \cos \omega t$ , at the carrier frequency. The amplitude of  $e$  is 0.38 mV per LSB of angle difference A-B, where 1 LSB = .02197 degrees = 1.318 minutes. The maximum output amplitude reached is 1 volt rms nominal, which represents an angular difference of  $\pm 90^\circ$ . The phase of the modulation  $\cos \omega t$  indicates whether the angle difference A-B is positive or negative. The maximum loading is 1 mA rms.

The outputs  $e$  ride on  $V_L$ , the D.C. Reference. When  $-V_S$  is grounded,  $V = +3.9V$  nominal. A difference circuit as shown, may be used to reference  $e$  with respect to normal ground instead of  $V_L$ , and also to provide gain.

## 6. DYNAMIC CHARACTERISTICS

The HSCDX-14 differential control transmitter is essentially a fast logic

circuit. During normal tracking, when the synchro or resolver update information is continuously available and the digital input is updated in LSB steps, there is no lag error in the output, and it is continuously available. If an instantaneous  $179^\circ$  step occurs in either input, the settling time to within final accuracy is 10 $\mu$ s.

## RELIABILITY

The use of MSI and thin film resistor networks, as well as careful thermal design, results in very high MTBF values. Summaries of MTBF calculations are available on request.




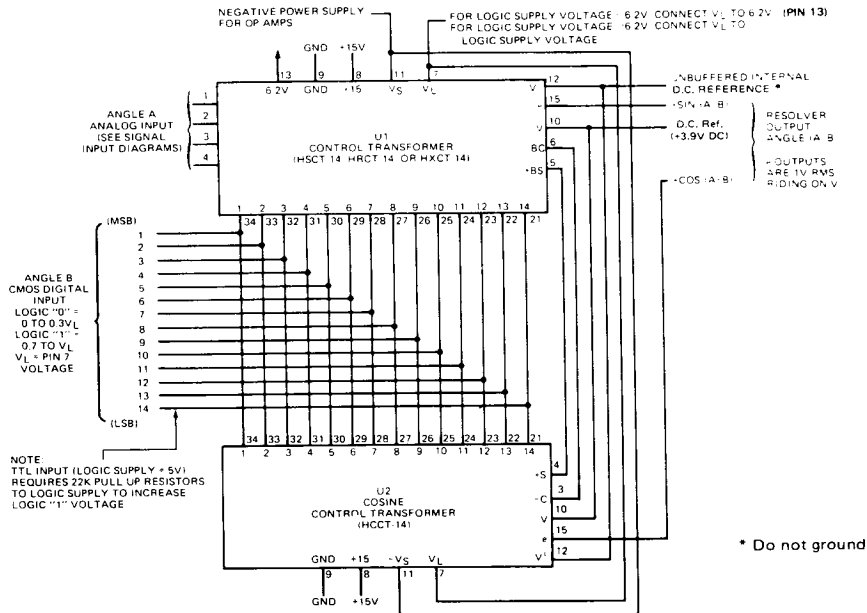


FIGURE 2. INTERCONNECT DIAGRAM

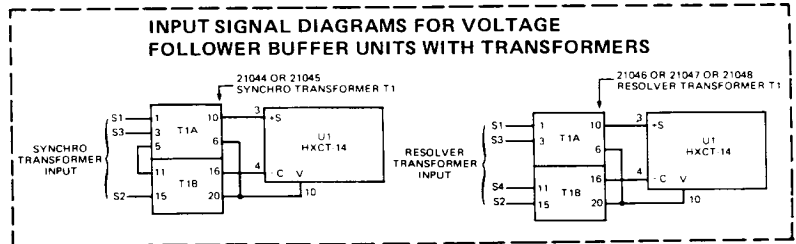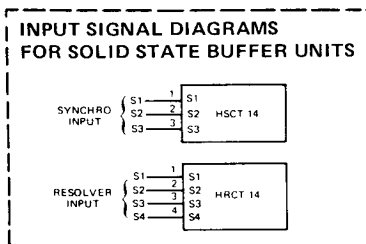

## CONTROL TRANSFORMER MODULE DIAGRAMS

### 1. Mechanical Outline (HSCT, HRCT, HXCT, and HCCT) 36 pin double DIP

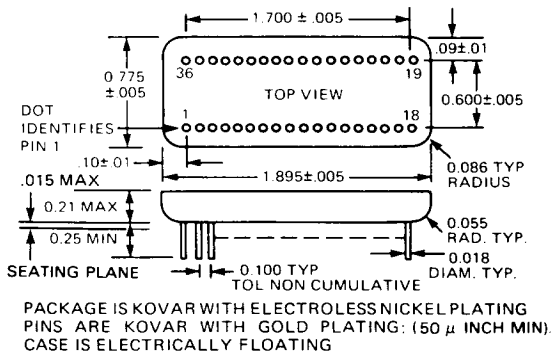

### 2. Pin Assignments

| PIN | FUNCTION               |      |      |          | PIN | FUNCTION   |
|-----|------------------------|------|------|----------|-----|------------|
|     | HSCT                   | HRCT | HXCT | HCCT     |     |            |
| 1   | S1                     | S1   | N C  | N C      | 19  | TP 3       |
| 2   | S2                     | S2   | N C  | N C      | 20  | TP 1       |
| 3   | S3                     | S3   | +SIN | -C       | 21  | BIT 14 LSB |
| 4   | S4                     | N C  | -COS | -S       | 22  | BIT 13     |
| 5   | -BS                    | +BS  | +BS  | -BC (TP) | 23  | BIT 12     |
| 6   | -BC                    | -BC  | -BC  | -BS (TP) | 24  | BIT 11     |
| 7   | V <sub>L</sub>         |      |      |          | 25  | BIT 10     |
| 8   | +15V                   |      |      |          | 26  | BIT 9      |
| 9   | GND                    |      |      |          | 27  | BIT 8      |
| 10  | V (Internal D.C. Ref.) |      |      |          | 28  | BIT 7      |
| 11  | -V <sub>S</sub>        |      |      |          | 29  | BIT 6      |
| 12  | V <sub>T</sub>         |      |      |          | 30  | BIT 5      |
| 13  | 6.2V                   | 6.2V | 6.2V | N C      | 31  | BIT 4      |
| 14  | TP 4                   |      |      |          | 32  | BIT 3      |
| 15  | e                      |      |      |          | 33  | BIT 2      |
| 16  | TP 5                   |      |      |          | 34  | BIT 1 MSB  |
| 17  | NC                     |      |      |          | 35  | TP 6       |
| 18  | TP 2                   |      |      |          | 36  | TP 7       |

Note: Test Points TP are for Factory Use Only

#### Note:

Mechanical outlines and schematic diagrams for all signal transformers (400 Hz, 21044 to 21048 and 60 Hz, 24126) can be found with HSDC-8915 product information.

## ORDERING INFORMATION

The HSCDX differential control transmitters consist of two control transformer modules:


A sin output with choice of synchro, resolver, or voltage follower buffer input (HSCT, HRCT, or HXCT).

A cos output without choice of input (HCCT).

If signal isolation transformers are required for HXCDCX units, they must be ordered separately from part 2 below.

1. Order a differential control transmitter consisting of two hybrid modules as follows:

HSCDX-14-H-1-a-883B

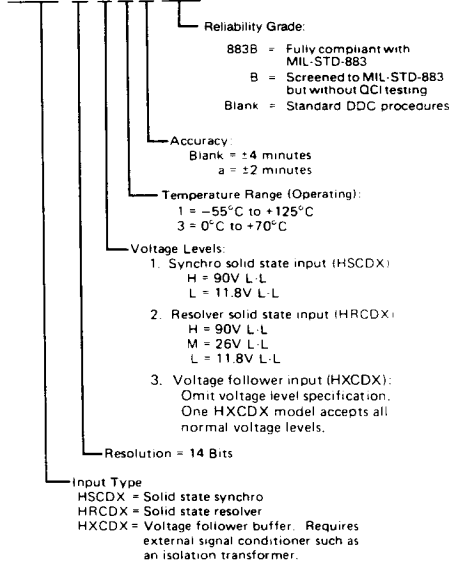

2. 400 Hz and 60 Hz transformers may be ordered by part number (P/N) as follows.

| Type     | Frequency | Ref. Voltage | L-L   | Part Numbers                              |
|----------|-----------|--------------|-------|---|
| Synchro  | 400 Hz    | 115V         | 90V   | 21049 21045*                              |
| Synchro  | 400 Hz    | 26V          | 11.8V | 21049 21044*                              |
| Resolver | 400 Hz    | 115V         | 90V   | 21049 21048*                              |
| Resolver | 400 Hz    | 26V          | 26V   | 21049 21047*                              |
| Resolver | 400 Hz    | 26V          | 11.8V | 21049 21046*                              |
| Synchro  | 60 Hz     | 115V         | 90V   | 24133-1 <sup>†</sup> 24126-1 <sup>†</sup> |
|          |           |              |       | -3 <sup>†</sup> -3 <sup>†</sup>           |

\* The part number for each 400 Hz synchro or resolver isolation transformer includes two separate modules as shown in the line drawings.

<sup>†</sup> 1 and -3 indicates operating temperature ranges available.

3. Order each sin or cos control transformer module as follows. Part 1 of the ordering information describes the alternatives in each portion of the part number.

HSCT-14-H-1-a-883B

