

**MOTOROLA**  
**SEMICONDUCTOR**  
**TECHNICAL DATA**

**MDA3500 Series**

**RECTIFIER ASSEMBLY**

... utilizing individual void-free molded MR2500 Series rectifiers, interconnected and mounted on an electrically isolated aluminum heat sink by a high thermal-conductive epoxy resin.

- 400 Ampere Surge Capability
- Electrically Isolated Base - 1800 Volts
- UL Recognized
- Cost Effective in Lower Current Applications




**SINGLE-PHASE FULL-WAVE BRIDGE**

**35 AMPERES**  
**50-1000 VOLTS**

**MAXIMUM RATINGS**

Rating (Per Diode)	Symbol	MDA							Unit
		3500	3501	3502	3504	3506	3508	3510	
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>								
Working Peak Reverse Voltage	V <sub>RWM</sub>	50	100	200	400	600	800	1000	Volts
DC Blocking Voltage	V <sub>R</sub>								
DC Output Voltage	V <sub>dc</sub>	30	62	124	250	380	500	630	Volts
		50	100	200	400	600	800	1000	Volts
Sine Wave RMS Input Voltage	V <sub>R</sub> (RMS)	35	70	140	280	420	560	700	Volts
Average Rectified Forward Current (Single phase bridge resistive load, 60 Hz, T <sub>C</sub> = 55°C)	I <sub>O</sub>	35							Amp
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions)	I <sub>FSM</sub>	400							Amp
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-65 to +175							°C



**3**

**THERMAL CHARACTERISTICS (Total Bridge)**

Characteristic	Symbol	Typ	Max	Unit
Thermal Resistance, Junction to Case	R <sub>θJC</sub>	1.4	1.87	°C/W

**ELECTRICAL CHARACTERISTICS (T<sub>C</sub> = 25°C unless otherwise noted).**

Characteristic	Symbol	Min	Typ	Max	Unit
Instantaneous Forward Voltage (Per Diode) (I <sub>F</sub> = 55 A)*	V <sub>F</sub>	-	1.0	1.1	Volts
Reverse Current (Per Diode) (Rated V <sub>R</sub> )	I <sub>R</sub>	-	-	10	μA

**MECHANICAL CHARACTERISTICS**

**CASE:** Plastic case with an electrically isolated aluminum base.

**POLARITY:** Terminal designation embossed on case:


- + DC output
- DC output
- AC not marked

**MOUNTING POSITION:** Bolt down. Highest heat transfer efficiency accomplished through the surface opposite the terminals. Use silicone grease on mounting surface for maximum heat transfer.

**WEIGHT:** 40 grams (approx.)

**TERMINALS:** Suitable for fast-on connections. Readily solderable, corrosion resistant. Soldering recommended for applications greater than 15 amperes.

**MOUNTING TORQUE:** 20 in-lb max

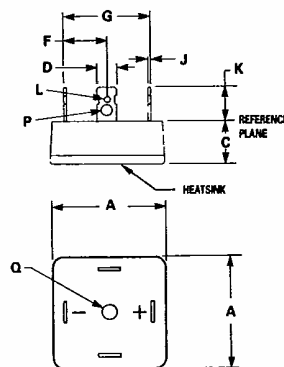

**NOTES:**

- 1 DIMENSION "Q" SHALL BE MEASURED ON HEATSINK SIDE OF PACKAGE.
- 2 DIMENSIONS F AND G SHALL BE MEASURED AT THE REFERENCE PLANE.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	34.80	35.18	1.370	1.385
C	12.44	13.97	0.490	0.550
D	6.10	6.60	0.240	0.260
F	13.97	14.50	0.550	0.571
G	28.00	29.00	1.100	1.142
J	0.71	0.86	0.028	0.034
K	9.52	11.43	0.375	0.450
L	1.52	2.06	0.060	0.081
P	2.79	2.92	0.110	0.115
Q	4.32	4.83	0.170	0.190

**CASE 309A-02**

\*Pulse Width = 100 ms, Duty Cycle ≤ 2%.

MDA3500 Series

FIGURE 1 – FORWARD VOLTAGE

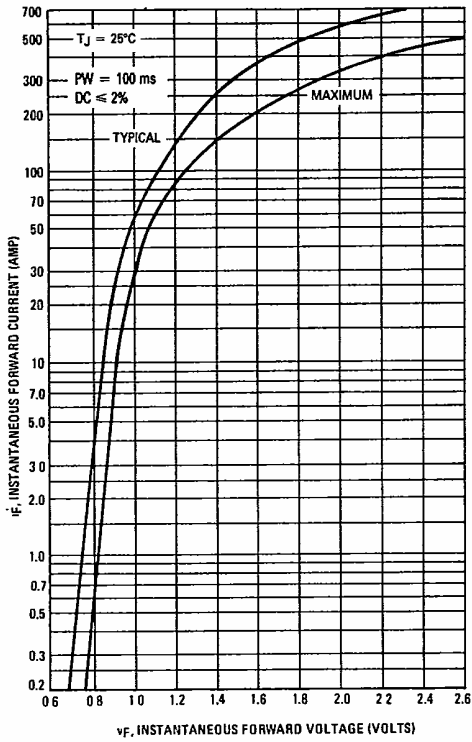


FIGURE 2 – NON REPETITIVE SURGE CURRENT

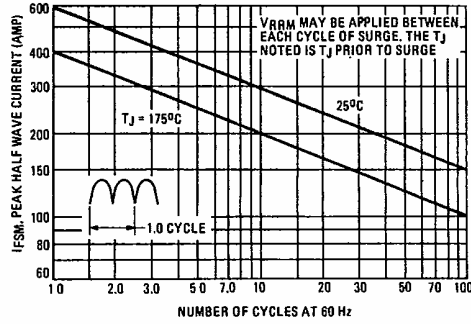


FIGURE 3 – FORWARD VOLTAGE TEMPERATURE COEFFICIENT

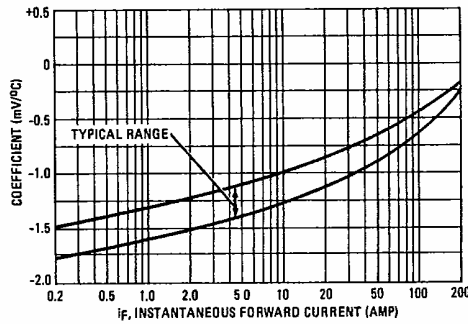


FIGURE 4 – CURRENT DERATING


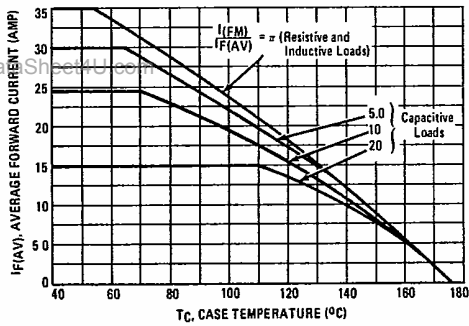



FIGURE 5 – FORWARD POWER DISSIPATION

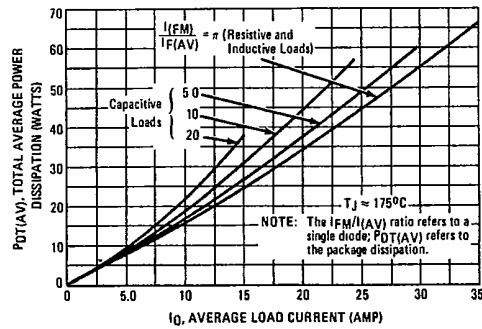

3

MDA3500 Series

FIGURE 6 -- TYPICAL THERMAL RESPONSE

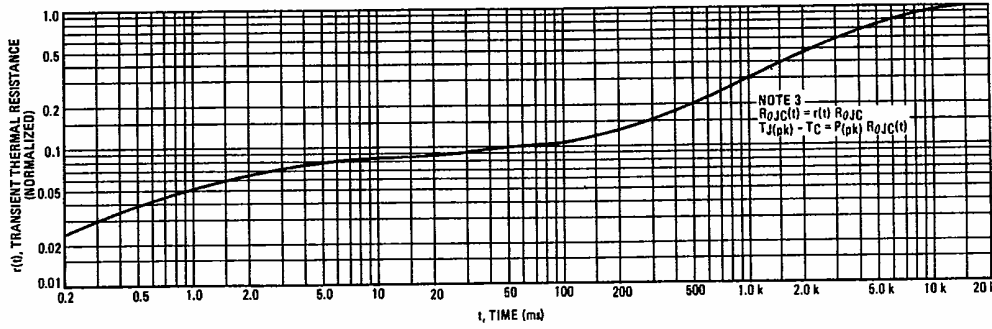

NOTE 1

DUTY CYCLE,  $D = t_p/t_1$   
 PEAK POWER,  $P_{pk}$ , is peak of an equivalent square wave pulse.

To determine maximum junction temperature of the diode in a given situation, the following procedure is recommended.

The temperature of the case should be measured using a thermocouple placed on the case at the temperature reference point (see the outline drawing on page 1). The thermal mass connected to the case is normally large enough so that it will not significantly respond to heat surges generated in the diode as a result of pulsed operation once steady state conditions are achieved. Using the measured value of  $T_C$ , the junction temperature may be determined by

$$T_J = T_C + \Delta T_{JC}$$

where  $\Delta T_{JC}$  is the increase in junction temperature above the case temperature. It may be determined by:

$$\Delta T_{JC} = P_{pk} \cdot R_{\theta JC} [D + (1 - D) \cdot r(t_1 + t_p) + r(t_p) - r(t_1)]$$

where  
 $r(t)$  = normalized value of transient thermal resistance at time,  $t$ , from Figure 6, i.e.,  
 $r(t_1 + t_p)$  = normalized value of transient thermal resistance at time  $t_1 + t_p$ .

FIGURE 7 -- CAPACITANCE

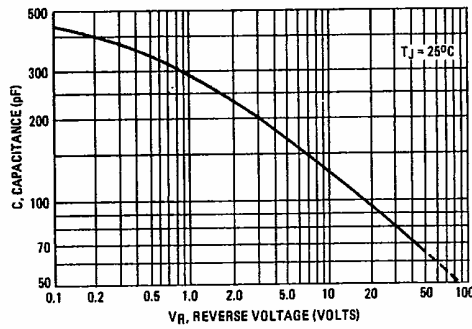


FIGURE 8 -- FORWARD RECOVERY TIME


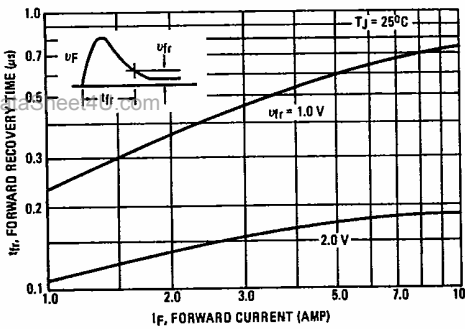


FIGURE 9 -- REVERSE RECOVERY TIME

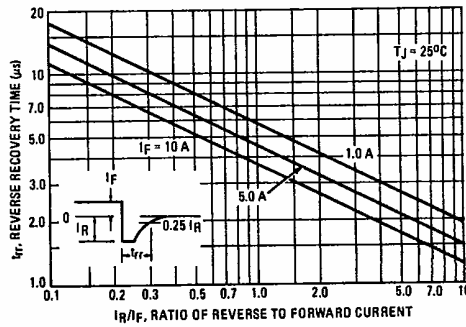

MDA3500 Series

AMBIENT TEMPERATURE DERATING INFORMATION

FIGURE 10A – THERMALLOY HEATSINK 6005B


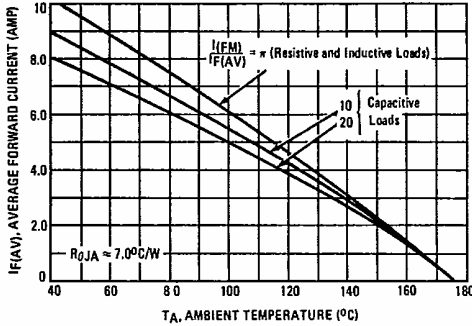


FIGURE 10B – IERC HEATSINK UP3 AND NO HEATSINK

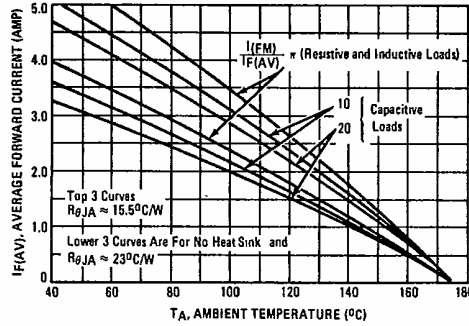

NOTE 2: THERMAL COUPLING AND EFFECTIVE THERMAL RESISTANCE

In multiple chip devices where there is coupling of heat between die, the junction temperature can be calculated as follows:

$$(1) \Delta T_{J1} = R_{\theta 1} P_{D1} + R_{\theta 2} K_{\theta 2} P_{D2} + R_{\theta 3} K_{\theta 3} P_{D3} + R_{\theta 4} K_{\theta 4} P_{D4}$$

Where  $\Delta T_{J1}$  is the change in junction temperature of diode 1  
 $R_{\theta 1}$  thru 4 is the thermal resistance of diodes 1 through 4  
 $P_{D1}$  thru 4 is the power dissipated in diodes 1 through 4  
 $K_{\theta 2}$  thru 4 is the thermal coupling between diode 1 and diodes 2 through 4.

An effective package thermal resistance can be defined as follows:

$$(2) R_{\theta(EFF)} = \Delta T_{J1} / P_{DT}$$

Where:  $P_{DT}$  is the total package power dissipation

Assuming equal thermal resistance for each die, equation (1) simplifies to

$$(3) \Delta T_{J1} = R_{\theta 1} (P_{D1} + K_{\theta 2} P_{D2} + K_{\theta 3} P_{D3} + K_{\theta 4} P_{D4})$$

For the conditions where  $P_{D1} = P_{D2} = P_{D3} = P_{D4}$ ,  $P_{DT} = 4 P_{D1}$ , equation (3) can be further simplified and by substituting into equation (2) results in

$$(4) R_{\theta(EFF)} = R_{\theta 1} (1 + K_{\theta 2} + K_{\theta 3} + K_{\theta 4}) / 4$$

When the case is used as a reference point, coupling between die is negligible for the MDA3500. When the bridge is used without heatsink, coupling between die is approximately 70% and  $R_{\theta 1}$  is 30°C/W,

$$\therefore R_{\theta(EFF)} = 30 [1 + (3) (.7)] / 4 = 23^\circ\text{C/W}$$

NOTE 3: SPLIT LOAD DERATING INFORMATION

Bridge rectifiers are used in two basic configurations as shown by circuits A and B of Figure 11. The current derating data of Figure 4 applies to the standard bridge circuit (A) where  $I_A = I_B$ . For circuit B where  $I_A \neq I_B$ , derating information can be calculated as follows:

$$(6) T_{R(Max)} = T_{J(Max)} - \Delta T_{J1}$$

Where  $T_{R(Max)}$  is the reference temperature (either case or ambient)

$\Delta T_{J1}$  can be calculated using equation (3) in Note 2.

For example, to determine  $T_{C(Max)}$  for the MDA3500 with the following capacitive load conditions.

$I_A = 20$  A average with a peak of 60 A

$I_B = 10$  A average with a peak of 70 A

First calculate the peak to average ratio for  $I_A$ .  $I(pK)/I(AV) = 60/10 = 6.0$ . (Note that the peak to average ratio is on a per diode basis and each diode provides 10 A average).

From Figure 5, for an average current of 20 A and an  $I(pK)/I(AV) = 6.0$  read  $P_{DT(AV)} = 40$  watts or 10 watts/diode. Thus  $P_{D1} = P_{D3} = 10$  watts.

Similarly, for a load current  $I_B$  of 10 A, diode #2 and diode #4 each see 5.0 A average resulting in an  $I(pK)/I(AV) = 14$ .

Thus, the package power dissipation for 10 A is 20 watts or 5.0 watts/diode  $\therefore P_{D2} = P_{D4} = 5.0$  watts.

The maximum junction temperature occurs in diode #1 and #3. From equation (3) for diode #1  $\Delta T_{J1} = (7.5) (10)$ , since coupling is negligible.

$$\Delta T_{J1} \approx 75^\circ\text{C}$$

$$\text{Thus } T_{C(Max)} = 175 - 75 = 100^\circ\text{C}$$

The total package dissipation in this example is:

$$P_{DT(AV)} = 2 \times 10 + 2 \times 5.0 = 30 \text{ watts, which must be considered when selecting a heat sink.}$$

FIGURE 11- BASIC CIRCUIT USES FOR BRIDGE RECTIFIERS

