

26–41 GHz Low Noise Amplifier




AA038N1-99

Features


- 3.8 dB Noise Figure
- 18 dB Gain
- +5 dBm Output Power
- Rugged, Reliable Package
- Single Voltage Operation
- 100% RF and DC Testing

Description

The AA038N1-99 is a broadband millimeterwave amplifier in a rugged package. The amplifier is designed for use in millimeterwave communication and sensor systems as the receiver front-end or transmitter gain stage when high gain, wide dynamic range, and low noise figure are required. The robust ceramic and metal package provides excellent electrical performance, excellent thermal performance, and a high degree of environmental protection for long-term reliability. A single supply voltage simplifies bias requirements. All amplifiers are screened at the operating frequencies prior to shipment for guaranteed performance. Amplifier is targeted for millimeterwave point-to-point and point-to-multipoint wireless communications systems.

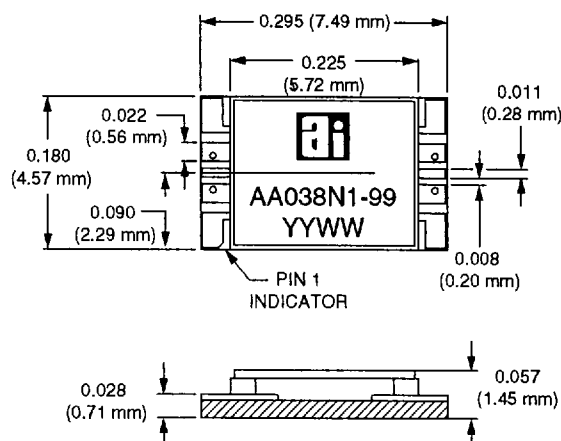

Block Diagram



Electrical Specifications at 25°C ($V_{D1} = V_{D2} = +5.5$ V)




RF

Parameter	Symbol	Low Band			High Band			Unit
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Bandwidth	BW	26	24–36	36	36	36–42	41	GHz
Small Signal Gain	G	16	22		14	18		dB
Noise Figure	NF		3.8	4.5		3.8	4.2	dB
Input Return Loss	RL _I		11			9		dB
Output Return Loss	RL _O		15			10		dB
Output Power at 1 dB Gain Compression	P _{1 dB}	4	6		3	5		dBm
Temperature Coefficient of Gain	dG/dT		-0.024			-0.024		dB/C

DC

Parameter	Symbol	Min.	Typ.	Max.	Unit
Drain Current 1	I _{D1}		27		mA
Drain Current 2	I _{D2}		1		mA
Total Drain Current	I _{D1} + I _{D2}		28	36.5	mA


Typical Performance Data

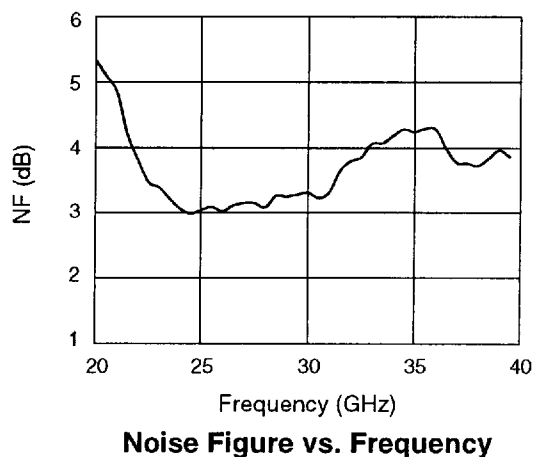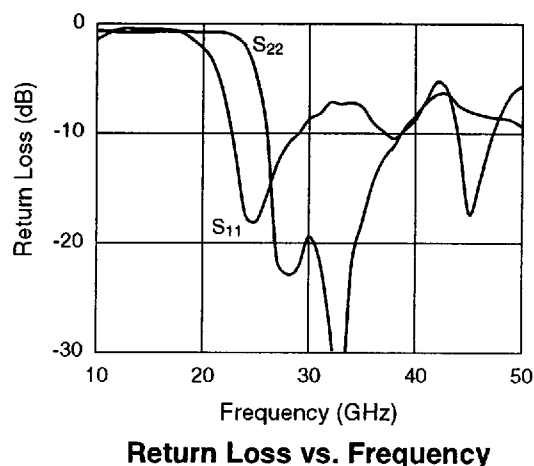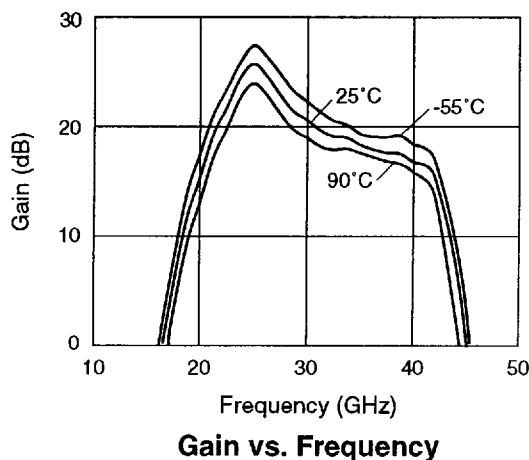

Absolute Maximum Ratings

Characteristic	Value
Operating Temperature (T_{OP})	-55°C to +90°C
Storage Temperature (T_{ST})	-65°C to +150°C
Bias Voltage (V_{D1})	6 V_{DC}
Bias Voltage (V_{D2})	6 V_{DC}
Power In (P_{IN})	13 dBm

Pin Out

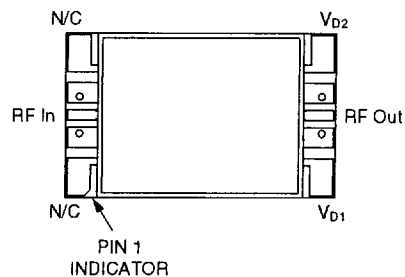

Typical S-Parameters

Frequency (GHz)	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	Mag. (dB)	Ang. (Deg.)	Mag. (dB)	Ang. (Deg.)	Mag. (dB)	Ang. (Deg.)	Mag. (dB)	Ang. (Deg.)
10.0	-1.4	37.7	-42.8	-39.2	-49.8	-70.2	-0.6	124.0
12.0	-0.5	1.1	-30.6	-150.6	-48.0	-70.7	-0.7	68.7
14.0	-0.4	-48.2	-20.7	99.3	-45.1	-89.8	-0.8	12.1
16.0	-0.5	-91.6	-8.5	7.8	-47.5	-81.8	-0.7	-41.0
18.0	-0.8	-134.0	4.6	-101.4	-44.9	-81.0	-0.7	-88.6
20.0	-2.2	177.8	12.5	125.7	-43.2	-74.3	-0.7	-131.9
21.0	-3.6	146.3	15.6	65.8	-42.4	-82.9	-0.7	-154.0
22.0	-6.6	106.6	18.8	4.4	-42.8	-83.4	-0.8	-177.9
23.0	-11.5	62.6	21.5	-59.1	-43.1	-81.2	-1.1	154.4
24.0	-17.4	5.7	23.6	-126.2	-41.1	-69.2	-2.0	122.4
25.0	-18.1	-38.6	24.7	165.2	-38.7	-76.2	-4.6	82.0
26.0	-15.7	-59.3	24.6	97.4	-38.4	-79.0	-9.6	39.7
27.0	-12.8	-79.2	23.3	36.5	-38.8	-88.5	-21.6	-15.8
28.0	-11.0	-95.9	22.0	-16.6	-39.3	-88.3	-22.9	165.3
29.0	-10.1	-106.6	20.7	-65.3	-39.5	-90.7	-22.2	134.1
30.0	-8.7	-123.2	19.8	-109.4	-40.1	-87.8	-19.4	115.8
31.0	-8.2	-138.6	19.3	-153.1	-39.1	-88.4	-21.6	76.3
32.0	-7.2	-159.0	19.1	164.8	-38.5	-92.3	-27.6	71.0
33.0	-7.3	178.3	19.1	121.8	-38.1	-90.1	-36.3	-52.4
34.0	-7.2	155.6	19.5	78.7	-38.2	-96.0	-22.1	-168.5
35.0	-7.6	121.9	19.9	31.5	-38.2	-109.0	-18.0	151.3
36.0	-9.0	92.6	20.1	-16.6	-38.9	-113.2	-14.5	123.9
37.0	-9.8	56.6	20.0	-67.1	-41.9	-121.1	-12.3	87.5
38.0	-10.5	32.5	19.6	-116.8	-45.8	-77.9	-11.1	62.5
39.0	-9.7	9.5	19.1	-167.4	-45.2	-63.3	-9.5	36.7
40.0	-8.7	-7.1	18.5	140.9	-46.7	-34.7	-8.4	8.7
41.0	-7.0	-25.7	17.8	86.5	-39.0	-41.3	-7.2	-15.4
42.0	-5.3	-54.7	16.7	28.0	-37.9	-49.1	-6.4	-41.5
43.0	-6.1	-89.0	14.3	-36.4	-38.3	-55.6	-6.4	-67.7
44.0	-10.4	-112.8	9.6	-99.7	-37.6	-58.5	-7.4	-85.9
45.0	-17.3	-97.3	3.7	-152.4	-37.7	-63.5	-7.9	-98.6
46.0	-14.5	-51.7	-3.7	161.7	-38.4	-57.0	-8.3	-111.4
47.0	-10.9	-49.9	-12.7	117.8	-37.0	-59.8	-8.5	-121.3
48.0	-8.2	-58.2	-30.8	15.6	-35.4	-56.7	-8.6	-133.3
49.0	-6.5	-68.7	-21.2	-104.2	-35.7	-54.1	-8.8	-143.9
50.0	-5.6	-79.8	-17.2	-145.9	-34.7	-61.0	-9.4	-154.8

0585443 0004346 971

Co-Planar Millimeterwave Package Handling/Mounting

Co-planar packages (Figure 1) require careful mounting design to maintain optimal performance and to minimize VSWR interactions. A connection to the ground pads on either side of the RF line is optional and will depend on the type of material and geometry of the interface at the RF ports.

Handling

In general the co-planar ceramic package is quite rugged. However, due to ceramic's brittle nature one should exercise care when handling with metal tools. Do not apply heavy pressure to the lid. Vacuum tools may be used to pick and place this part.

The Cu-Mo-Cu base of this package is very durable, however, care should be exercised when attaching with screw hardware on packages which come with screw holes. Over-tightening of screws could deform the base, which could cause cracks in the ceramic walls. Only personnel trained in both ESD precautions, and handling precautions should be allowed to handle these packages.

Microstrip Mounting

An example of a co-planar microstrip launch is illustrated in Figure 2 using an equal height dielectric material. A hole is cut into the circuit board to allow the package to be mounted directly to the circuit ground plane. The hole should be cut as close to the outer dimensions of the package to minimize RF gap distances.

It is preferred to match (mirror) the geometry of the package interface to achieve best results. Three 5 x 1/4 mil ribbon bonds will complete the connection providing a minimum discontinuity connection. Multiple bondwires are also acceptable.

Surface Mounting

Mounting of the package to the surface (Figure 3) of a circuit can be accomplished by using a series of via holes to provide ground for the package. Although, this method is not preferred it can be done if careful design practices are used. Via spacing and size may have a strong effect on high frequency performance of the package.

Package Attachment

The package can be conductive epoxy attached to its mounting surface using either a paste or film media. SnPb eutectic attachment can also be used in situations where heat removal is important. Some packages allow for hardware mounting. Care should be taken to ensure good ground contact is maintained.

RF/DC Bondwire Attachment

Standard thermosonic ball or ribbon attachment is used to make the connections to the RF and DC interfaces. When designing the layout, be aware that most bonding machines have a limited reach and may require special tooling to wire/ribbon bond in center of a large circuit.

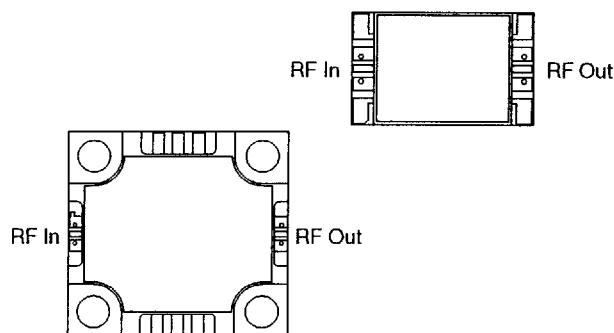


Figure 1. Co-Planar Packages

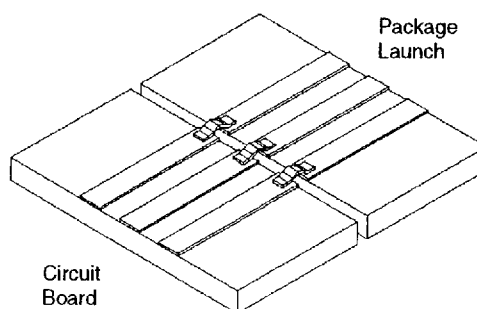


Figure 2. Microstrip Mount

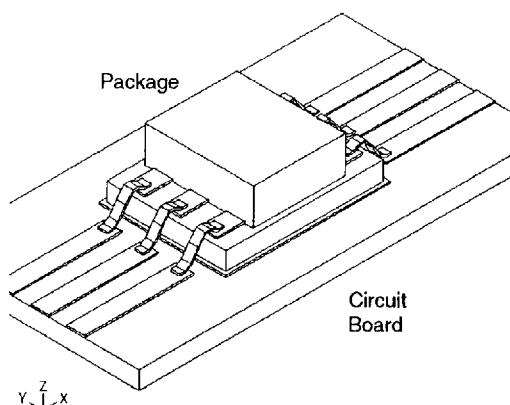


Figure 3. Surface Mount