




# DIGITAL VIDEO DISC PLAYER

## DVD905

# ***SERVICE*** *Manual*

### DIGITAL VIDEO DISC PLAYER

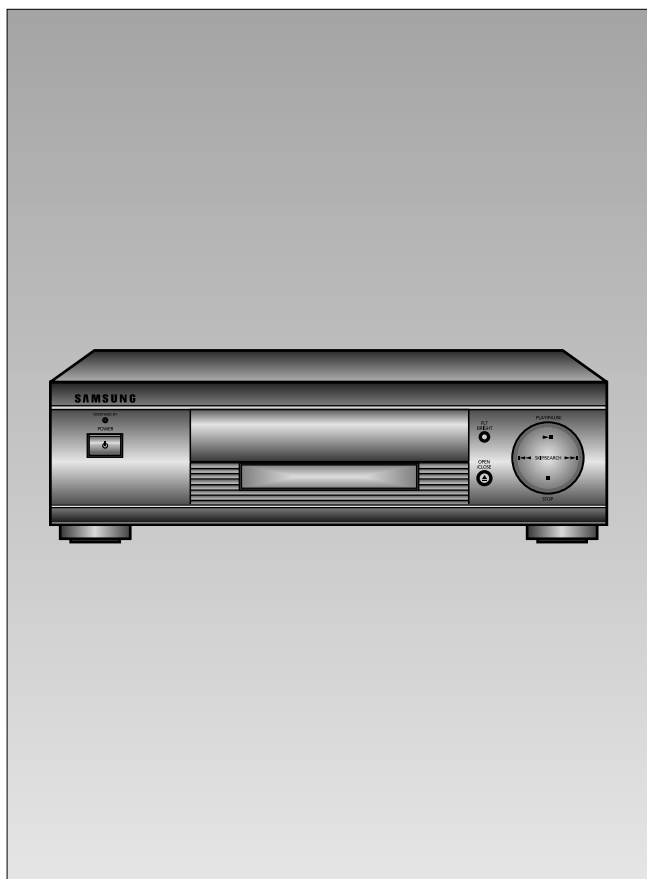

### CONTENTS

1. Precautions
2. Reference Information
3. Product Specifications
4. Disassembly and Reassembly
5. Thoubleshooting
6. Exploded Views and Parts List
7. Electrical Parts List
8. Block Diagram
9. PCB Diagrams
10. Wiring Diagram
11. Schematic Diagrams

# 1. Precautions

1. Be sure that all of the built-in protective devices are replaced. Restore any missing protective shields.
2. When reinstalling the chassis and its assemblies, be sure to restore all protective devices, including : control knobs and compartment covers.
3. Make sure that there are no cabinet openings through which people--particularly children --might insert fingers and contact dangerous voltages. Such openings include the spacing between the picture tube and the cabinet mask, excessively wide cabinet ventilation slots, and improperly fitted back covers.

If the measured resistance is less than 1.0 megohm or greater than 5.2 megohms, an abnormality exists that must be corrected before the unit is returned to the customer.

4. Leakage Current Hot Check (See Fig. 1) :  
Warning : Do not use an isolation transformer during this test. Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI C101.1, *Leakage Current for Appliances*), and Underwriters Laboratories (UL Publication UL1410, 59.7).
5. With the unit completely reassembled, plug the AC line cord directly the power outlet. With the unit's AC switch first in the ON position and then OFF, measure the current between a known earth ground (metal water pipe, conduit, etc.) and all exposed metal parts, including : antennas, handle brackets, metal cabinets, screwheads and control shafts. The current measured should not exceed 0.5 milliamp. Reverse the power-plug prongs in the AC outlet and repeat the test.
6. X-ray Limits :  
The picture tube is designed to prohibit X-ray emissions. To ensure continued X-ray protection, replace the picture tube only with one that is the same type as the original.

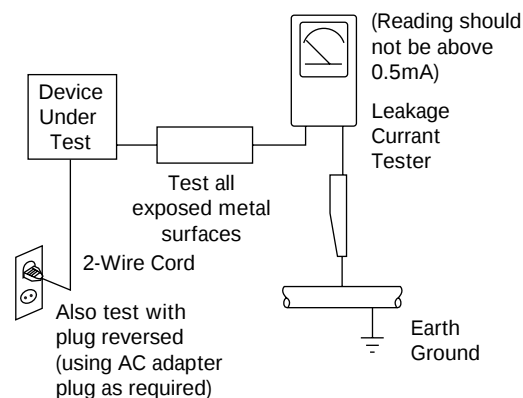


Fig. 1 AC Leakage Test

7. Antenna Cold Check :  
With the unit's AC plug disconnected from the AC source, connect an electrical jumper across the two AC prongs. Connect one lead of the ohmmeter to an AC prong. Connect the other lead to the coaxial connector.
8. High Voltage Limit :  
High voltage must be measured each time servicing is done on the B+, horizontal deflection or high voltage circuits.  
  
Heed the high voltage limits. These include the *X-ray protection Specifications Label*, and the *Product Safety and X-ray Warning Note* on the service data schematic.
9. Some semiconductor ("solid state") devices are easily damaged by static electricity. Such components are called Electrostatically Sensitive Devices (ESDs); examples include integrated circuits and some field-effect transistors. The following techniques will reduce the occurrence of component damage caused by static electricity.
10. Immediately before handling sny semiconductor components or assemblies, drain the electrostatic charge from your body by touching a known earth ground. Alternatively, wear a discharging Wrist-strap device. (Be sure to remove it prior to applying power--this is an electric shock precaution.)

## Precautions

11. High voltage is maintained within specified limits by close-tolerance, safety-related components and adjustments. If the high voltage exceeds the specified limits, check each of the special components.
12. Design Alteration Warning :  
Never alter or add to the mechanical or electrical design of this unit. Example : Do not add auxiliary audio or video connectors. Such alterations might create a safety hazard. Also, any design changes or additions will void the manufacturer's warranty.
13. Hot Chassis Warning :  
Some TV receiver chassis are electrically connected directly to one conductor of the AC power cord. If an isolation transformer is not used, these units may be safely serviced only if the AC power plug is inserted so that the chassis is connected to the ground side of the AC source.  
  
To confirm that the AC power plug is inserted correctly, do the following : Using an AC voltmeter, measure the voltage between the chassis and a known earth ground. If the reading is greater than 1.0V, remove the AC power plug, reverse its polarity and reinsert. Re-measure the voltage between the chassis and ground.
14. Some TV chassis are designed to operate with 85 volts AC between chassis and ground, *regardless of the AC plug polarity*. These units can be safely serviced *only* if an isolation transformer inserted between the receiver and the power source.
15. Never defeat any of the B+ voltage interlocks.  
Do not apply AC power to the unit (or any of its assemblies) unless all solid-state heat sinks are correctly installed.
16. Always connect a test instrument's ground lead to the instrument chassis ground *before* connecting the positive lead; always remove the instrument's ground lead last.
17. Observe the original lead dress, especially near the following areas : Antenna wiring, sharp edges, and especially the AC and high voltage power supplies. Always inspect for pinched, out-of-place, or frayed wiring. Do not change the spacing between components and the printed circuit board. Check the AC power cord for damage. Make sure that leads and components do not touch thermally hot parts.
18. Picture Tube Implosion Warning :  
The picture tube in this receiver employs "integral implosion" protection. To ensure continued implosion protection, make sure that the replacement picture tube is the same as the original.
19. Do not remove, install or handle the picture tube without first putting on shatterproof goggles equipped with side shields. Never handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; do not try to remove such "permanently attached" yokes from the picture tube.
20. Product Safety Notice :  
Some electrical and mechanical parts have special safety-related characteristics which might not be obvious from visual inspection. These safety features and the protection they give might be lost if the replacement component differs from the original—even if the replacement is rated for higher voltage, wattage, etc.  
  
Components that are critical for safety are indicated in the circuit diagram by shading, (  or  ).  
Use replacement components that have the same ratings, especially for flame resistance and dielectric strength specifications. A replacement part that does not have the same safety characteristics as the original might create shock, fire or other hazards.
21. Cautions for handling Pick-up  
Body grounding (hand) : Be sure to wear a wrist strip with one side grounded. (Impedance : Below  $10^{-8} \Omega$  )  
Work table grounding : Put A grounded electric conductor such as copper plate on the work table.  
  
Caution: Do not let clothing touch the product (to prevent possible damage from static electricity).  
  
FPC operation : Handle the FPC carefully because it is easily damaged.

## 1-2 Pick-up disassembly and ressembly

### 1-2-1 Disassembly

- 1) Remove the power cable.
- 2) Switch LD SW3 on deck PCB to 'S' before removing the FPC ( inserted into Main PCB CN1.  
See Fig 1-2.)
- 3) Disassemble the deck.
- 4) Disassemble the deck PCB.
- 5) Replace the Pick-up.

### 1-2-2 Assembly

- 1) Replace the Pick-up.
- 2) Assemble the deck PCB.
- 3) Reassemble the deck.
- 4) Switch LD SW3 on deck PCB to 'O' and insert FPC into Main PCB CN1 (See Fig 1-2).

**Note :** If the assembly and disassembly are not done in correct sequence, the Pick-up may be damaged.

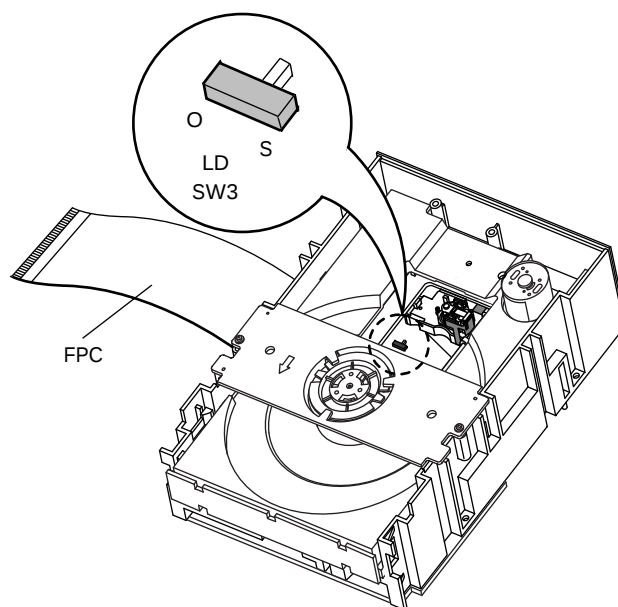


Fig. 1-2

## MEMO

### 3. Product Specifications

The specifications and design may be changed without notice. The weight and dimensions are approximate.

| MODEL                                |                                 | DVD905                                               |
|--------------------------------------|---------------------------------|------------------------------------------------------|
| G<br>E<br>N<br>E<br>R<br>A<br>L      | Power Requirements              | 120 Voltage, 60Hz                                    |
|                                      | Power Consumption               | 23W                                                  |
|                                      | Weight                          | 4.4Kg                                                |
|                                      | Set Size                        | (W)420mm x (D)339mm x (H)120mm                       |
|                                      | Operating Temperature Range     | + 5 °C ~ 35 °C                                       |
|                                      | Operating Humidity Range        | 50% ~ 95%                                            |
| D<br>I<br>S<br>C                     | DVD<br>(DIGITAL VERSATILE DISC) | Reading Speed ; 1.2 ~ 1.4mm/sec                      |
|                                      |                                 | Maximum Play Time ; 135 minutes                      |
|                                      | CD : 12cm<br>(COMPACT DISC)     | Reading Speed ; 1.2 ~ 1.4mm/sec                      |
|                                      |                                 | Maximum Play Time ; 74 minutes                       |
|                                      | CD : 8cm<br>(COMPACT DISC)      | Reading Speed ; 1.2 ~ 1.4mm/sec                      |
|                                      |                                 | Maximum Play Time ; 74 minutes                       |
| V<br>O<br>I<br>D<br>E<br>O<br>U<br>T | RCA JACK                        | 2 channel ; 1.0Vp-p                                  |
|                                      |                                 | R(Red) ; 0.714Vp-p                                   |
|                                      |                                 | G(Green) ; 0.714Vp-p                                 |
|                                      |                                 | B(Blue) ; 0.714Vp-p                                  |
|                                      |                                 | S(Sync) ; 4.0Vp-p                                    |
|                                      | SUPER VIDEO                     | Luminance Signal ; 1Vp-p (75Ω load)                  |
|                                      |                                 | Color Signal ; 0.286Vp-p (75Ω load)                  |
| A<br>O<br>U<br>D<br>I<br>O<br>U<br>T | 2 channel                       | L(1/L), R(2/R)                                       |
|                                      | 5 channel                       | F/L, F/R, R/L, R/R, C/T, S/W                         |
|                                      | Output Level                    | Analog ; 2Vrms(1KHz)                                 |
|                                      |                                 | Digital ; 5Vp-p                                      |
|                                      | Digital Frequency<br>Response   | * Frequency Response ; 4Hz ~20KHz, S/M Ratio : 105dB |
|                                      |                                 | * <b>Dynamic Range ; 95dB</b>                        |
|                                      |                                 | * <b>Total Harmonic Distortion 0,005%</b>            |

MEMO

---


## 4. Disassembly and Reassembly

---

### 4-1 Exterior and PCB Disassembly

---

#### 4-1-1 Door-tray

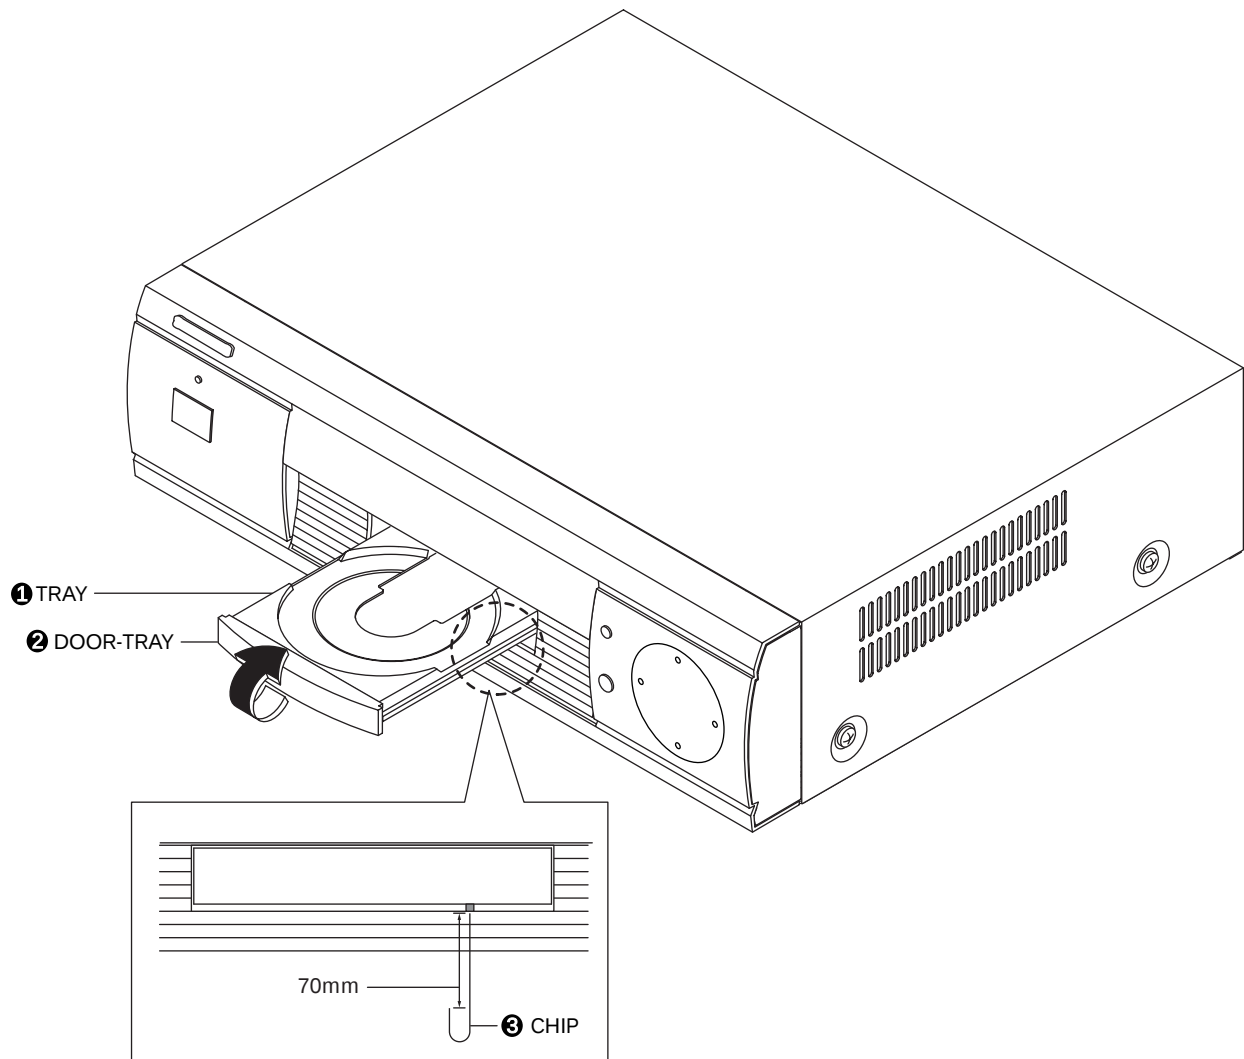

- 1) Supply power and open Tray ❶.
- 2) Disassemble the door-tray ❷ in direction of arrow.
- 3) Close Tray ❶ and power off.

**Note :** If Tray ❶ doesn't open, insert a clip ❸ into the hole (as shown in detailed drawing), and open Tray ❶ manually.

Fig. 4-1

### 4-1-2 Top cabinet

1. Remove 3 screws ❶ on the back panel.
2. Remove 4 screws ❷, ❸ on the left and right side.
3. Lift up the top cabinet in direction of arrow.

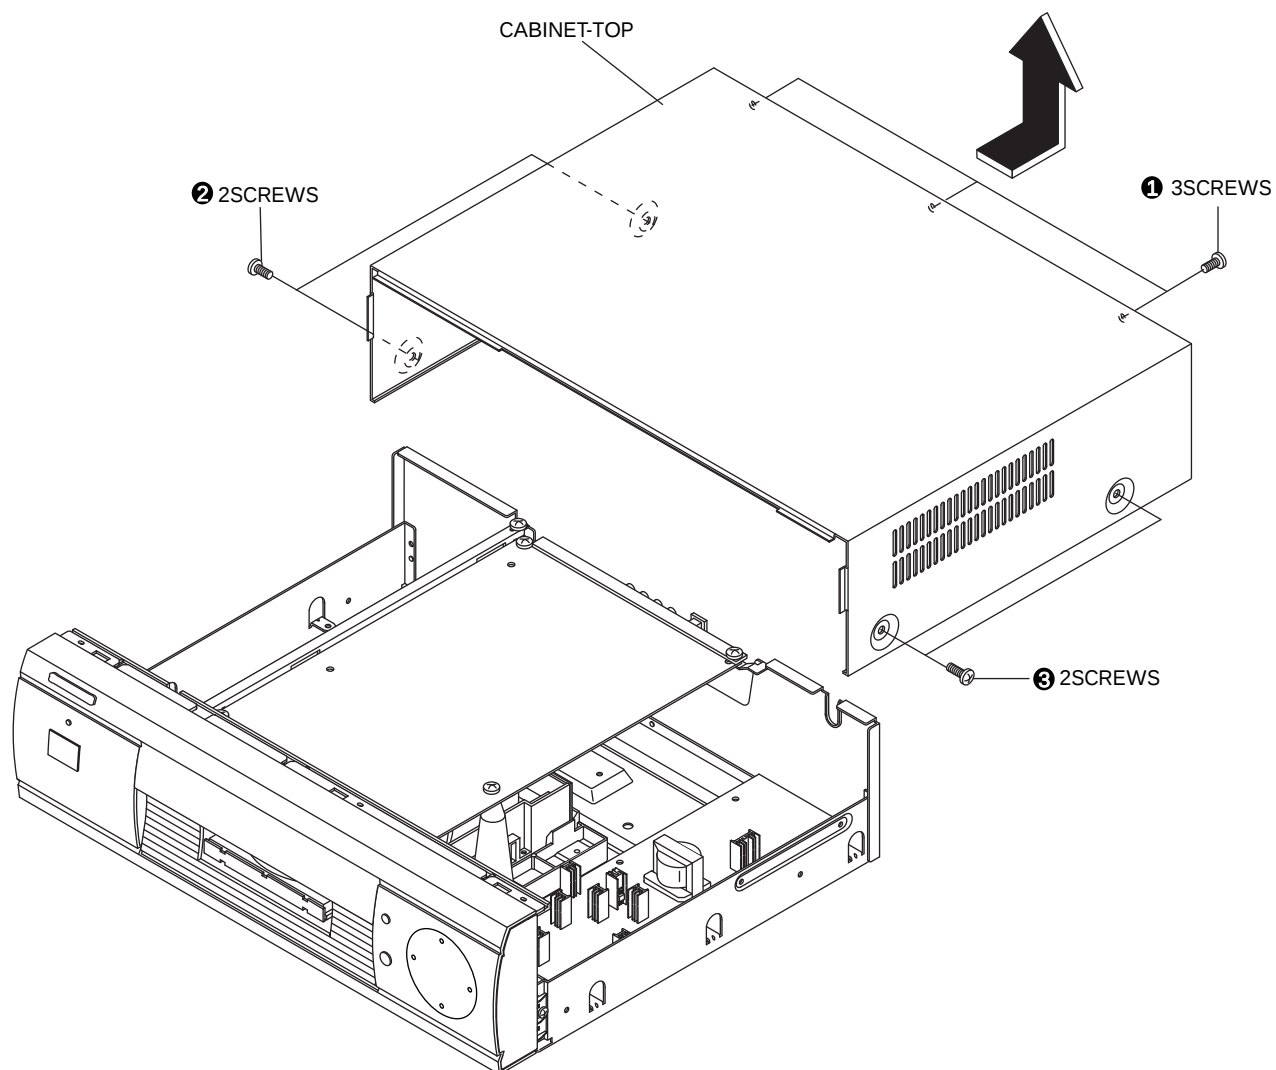


Fig. 4-2

### 4-1-3 Front

1. Remove 2 screws ❶, ❷ on the left and right side of panel-front ass'y
2. Remove 2 screws ❸ on the bottom of cover-panel ass'y and disassemble the front.
3. Remove 2 screws ❹ from PCB-front.
4. Remove 9 hooks to fix PCB-front and disassemble PCB-front.
5. Remove 2 screws ❺ on the top of cover-panel ass'y
6. Remove 4 top hooks ❻ and 5 bottom hooks ❼ and disassemble the cover-panel ass'y.

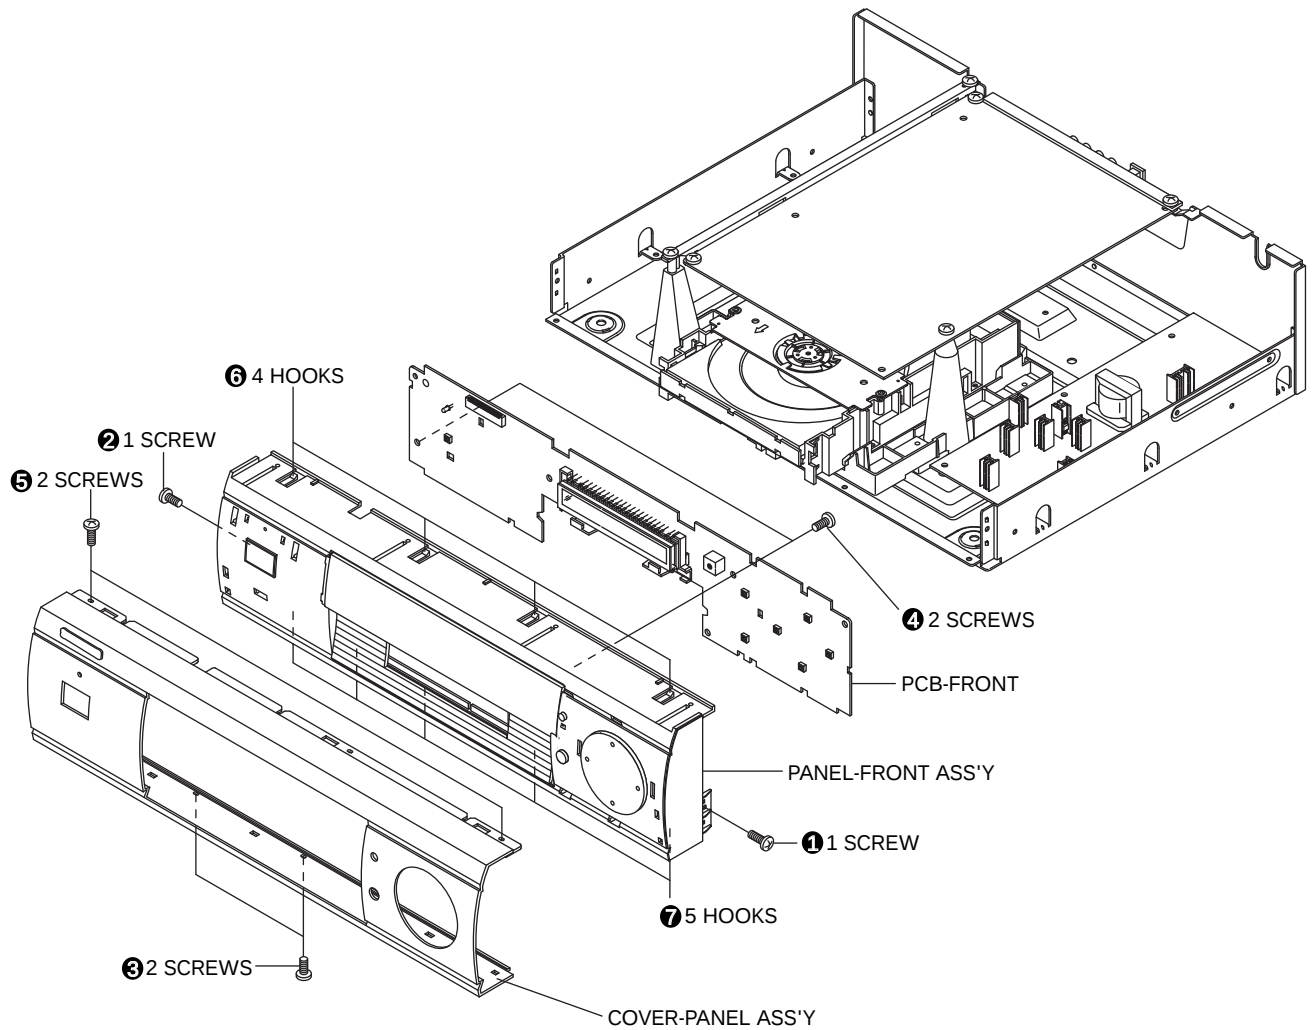


Fig. 4-3

#### 4-1-4 PCB-MAIN, PCB-SMPS

1. Remove 4 screws ❶ to fix PCB-MAIN.
2. Remove 2 Holder-PCB ❷ inserted in PCB-MAIN and lift up PCB-MAIN.
3. Remove 3 screws ❸ from PCB-SMPS.
4. Remove 3 Spacer-PCB ❹ inserted in PCB-SMPS and lift up PCB-SMPS.
5. Remove 2 screws ❺ to fix BRKT-PCB ass'y.

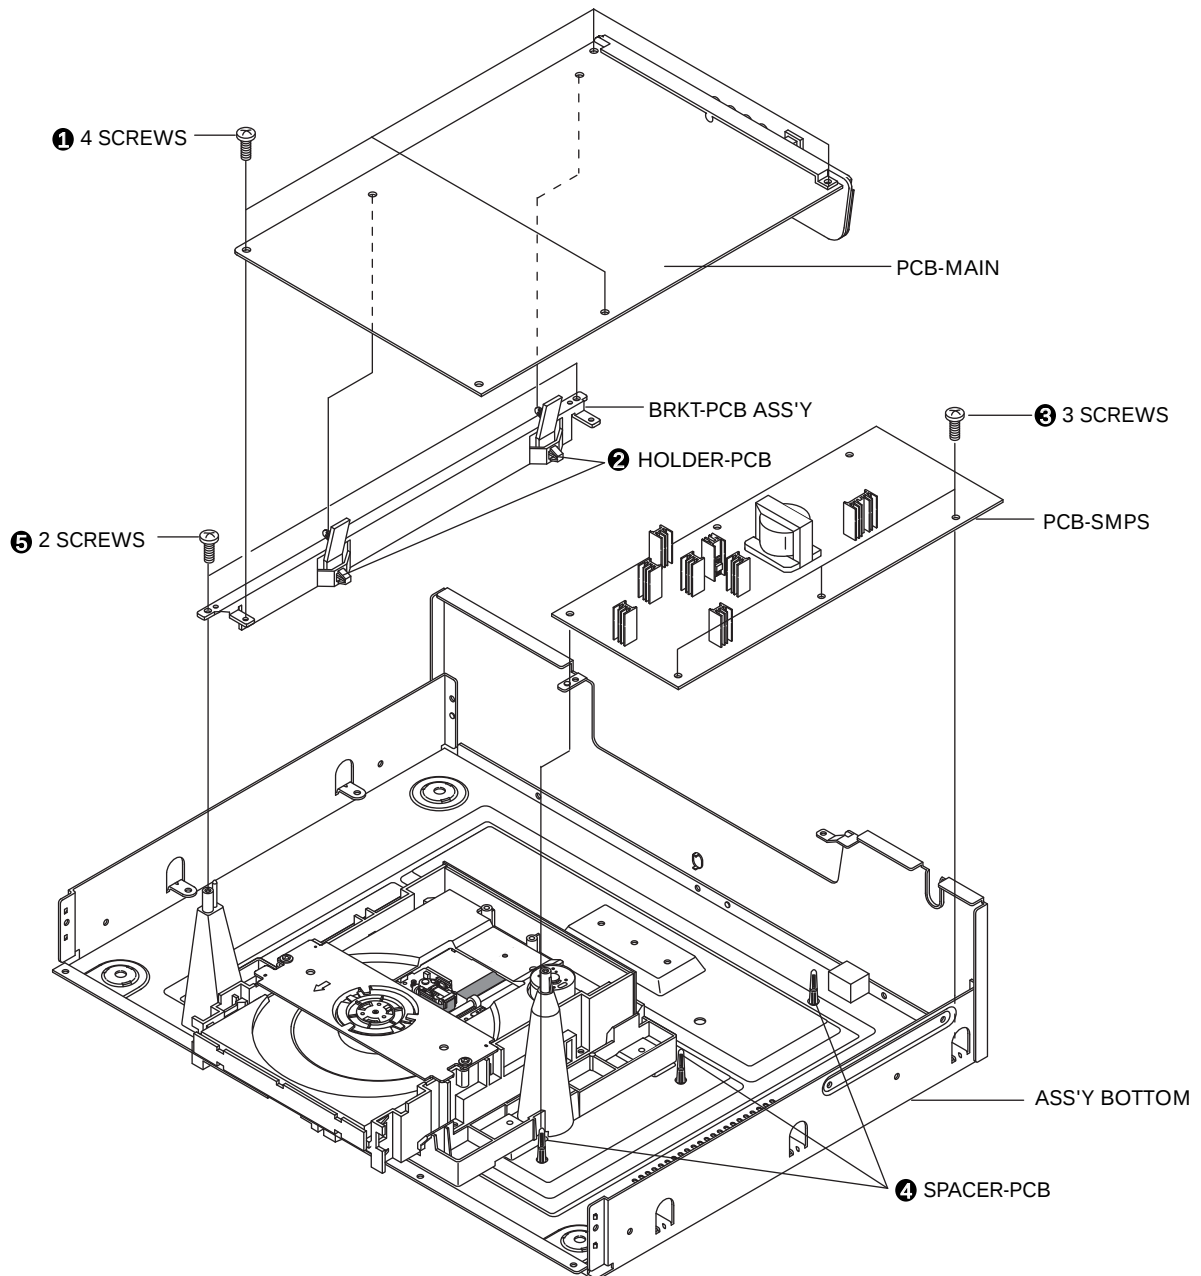


Fig. 4-4

#### 4-1-5 Deck, Frame-chassis

1. Remove 4 screws ❶ from the deck and lift it up.
2. Remove 4 screws ❷ from the frame-chassis and lift it up.

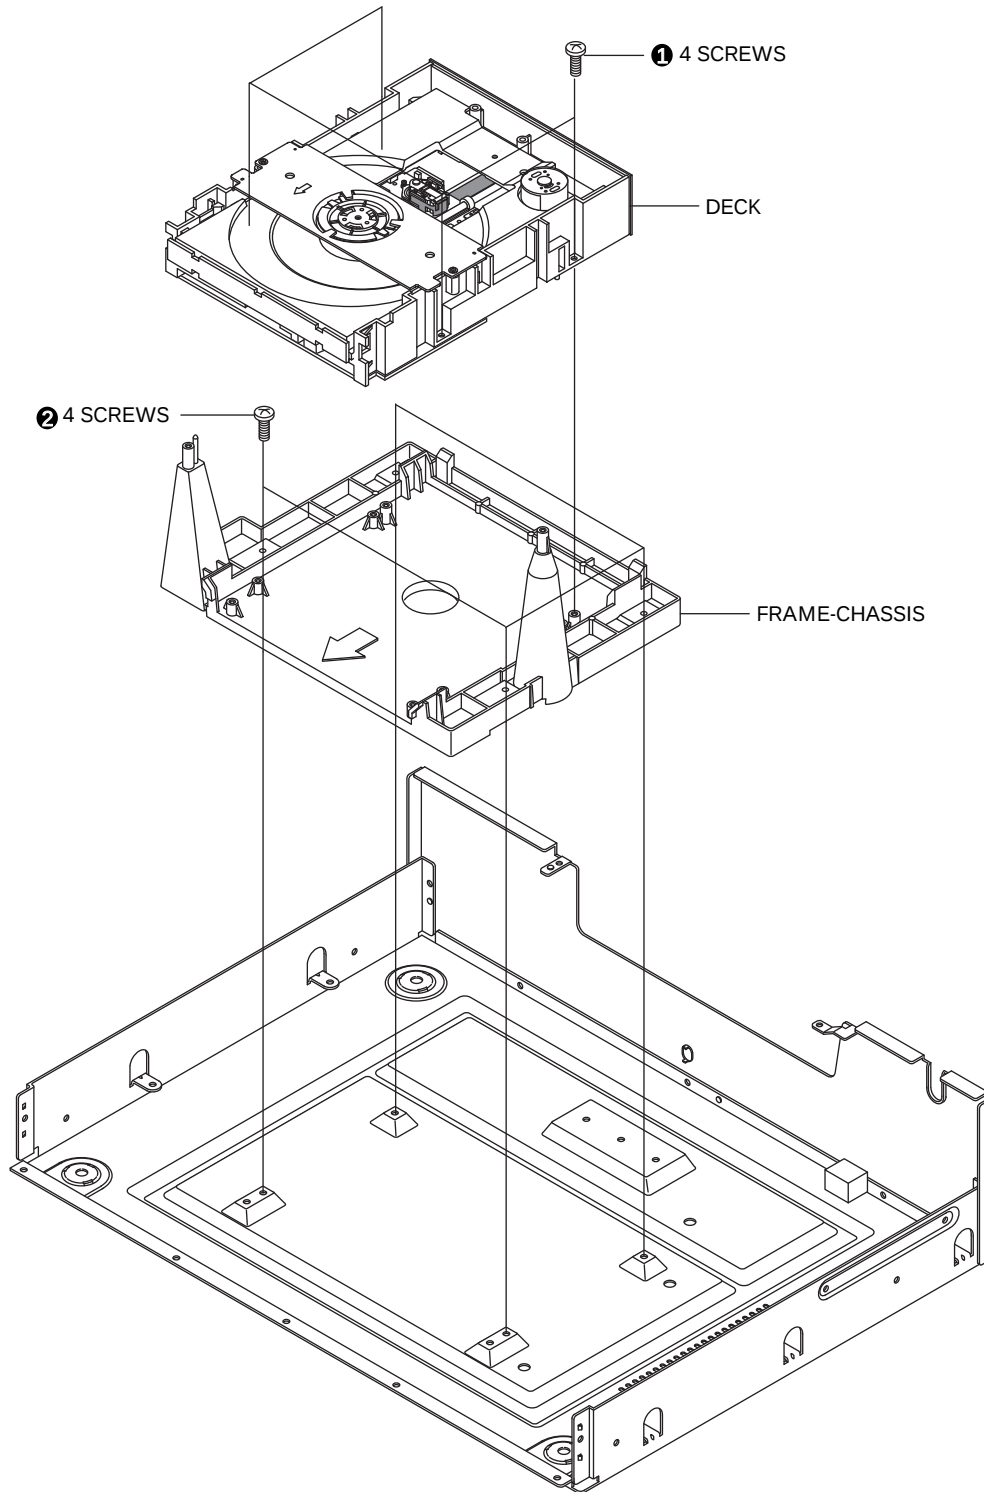


Fig. 4-5

## 4-2 PCB Locations

---

**DVD905**

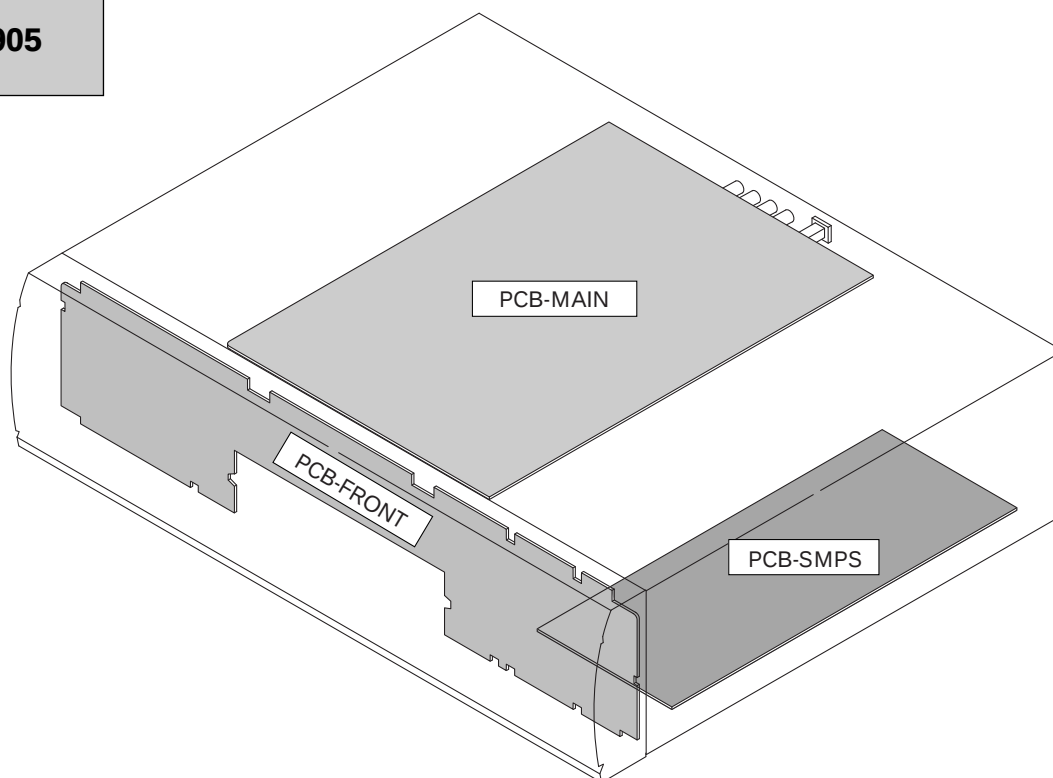


Fig. 4-6

## 4-2-1 DVD905

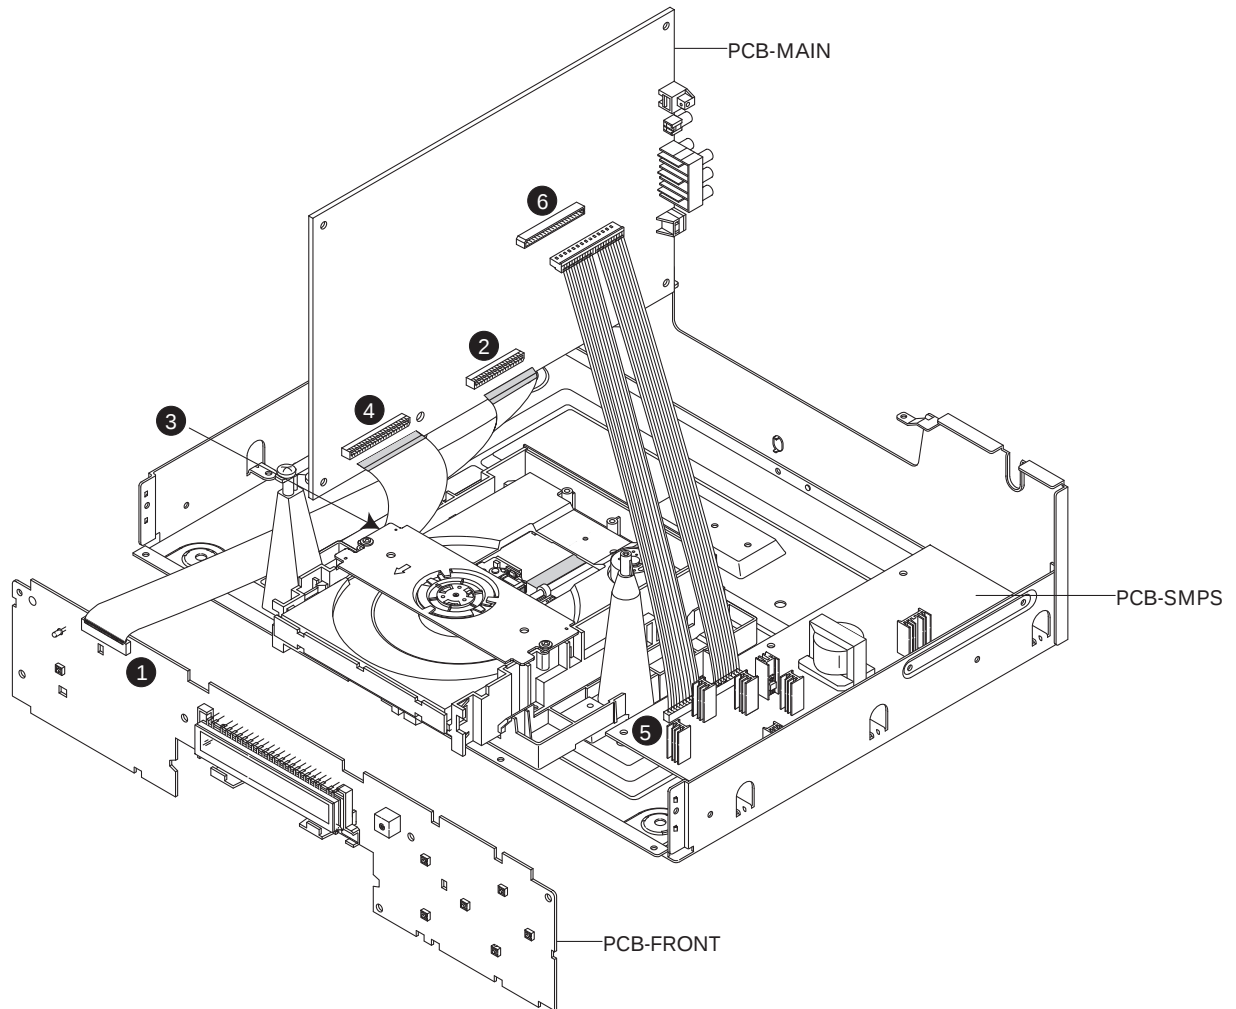


Fig. 4-7

| No. | Connector wafer No. | Direction            | Connector wafer No. |
|-----|---------------------|----------------------|---------------------|
| ①   | FCN1                | PCB-FRONT → PCB-MAIN | VCN11               |
| ②   | VCN11               | PCB-FRONT            | FCN1                |
| ③   | CN5                 | DECK → PCB-MAIN      | CN1                 |
| ④   | CN1                 | DECK                 | CN5                 |
| ⑤   | PCN02               | PCB-SMP → PCB-MAIN   | VCN13               |
| ⑥   | VCN13               | PCB-SMPS             | PCN02               |

## 4-3 Deck Disassembly

### 4-3-1 Tray

1. Remove 2 screws **1** and lift up the ass'y-deck clamper **2**.
2. Insert a clip into Emergency hole, and push Gear-Cam Center **3**. When the tray **4** comes out a little, pull it in direction of arrow "C".
3. Pull the tray **4** to disassemble, while simultaneously pushing the hook **5**, **6** in direction of arrow "A", "B".

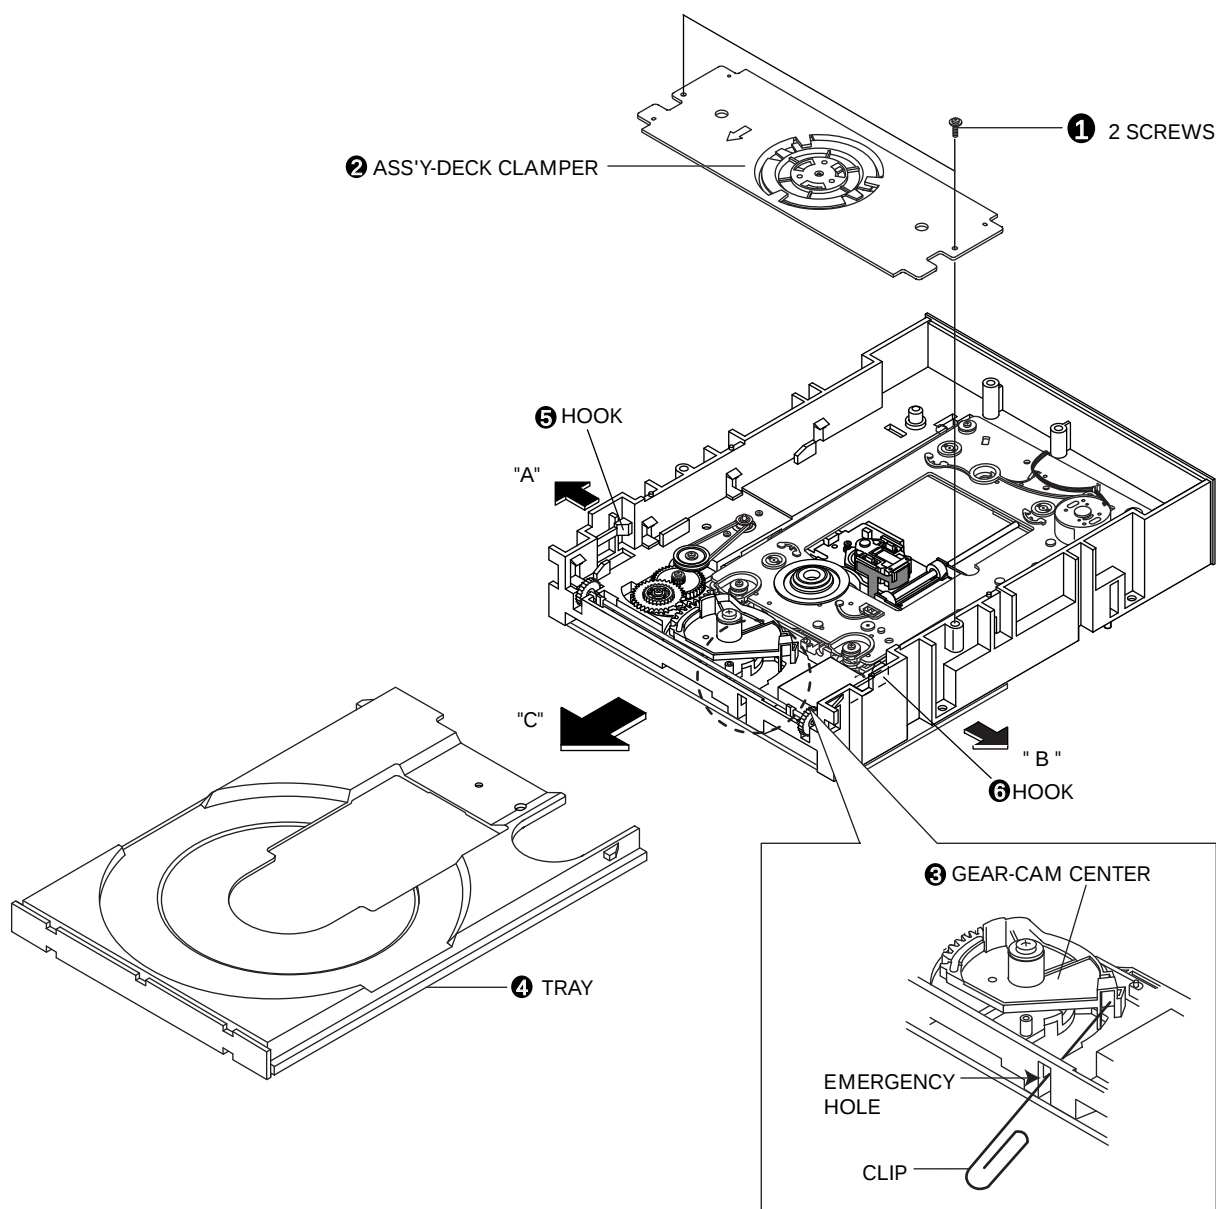


Fig. 4-8

### 4-3-2 Ass'y-Deck DVD

1. Remove 2 screws ❶ and disassemble the ass'y-PCB deck ❷.
2. Disassemble the ass'y-deck DVD ❸ in direction of arrow "B", while simultaneously pushing the hook ❹ in direction of arrow "A".

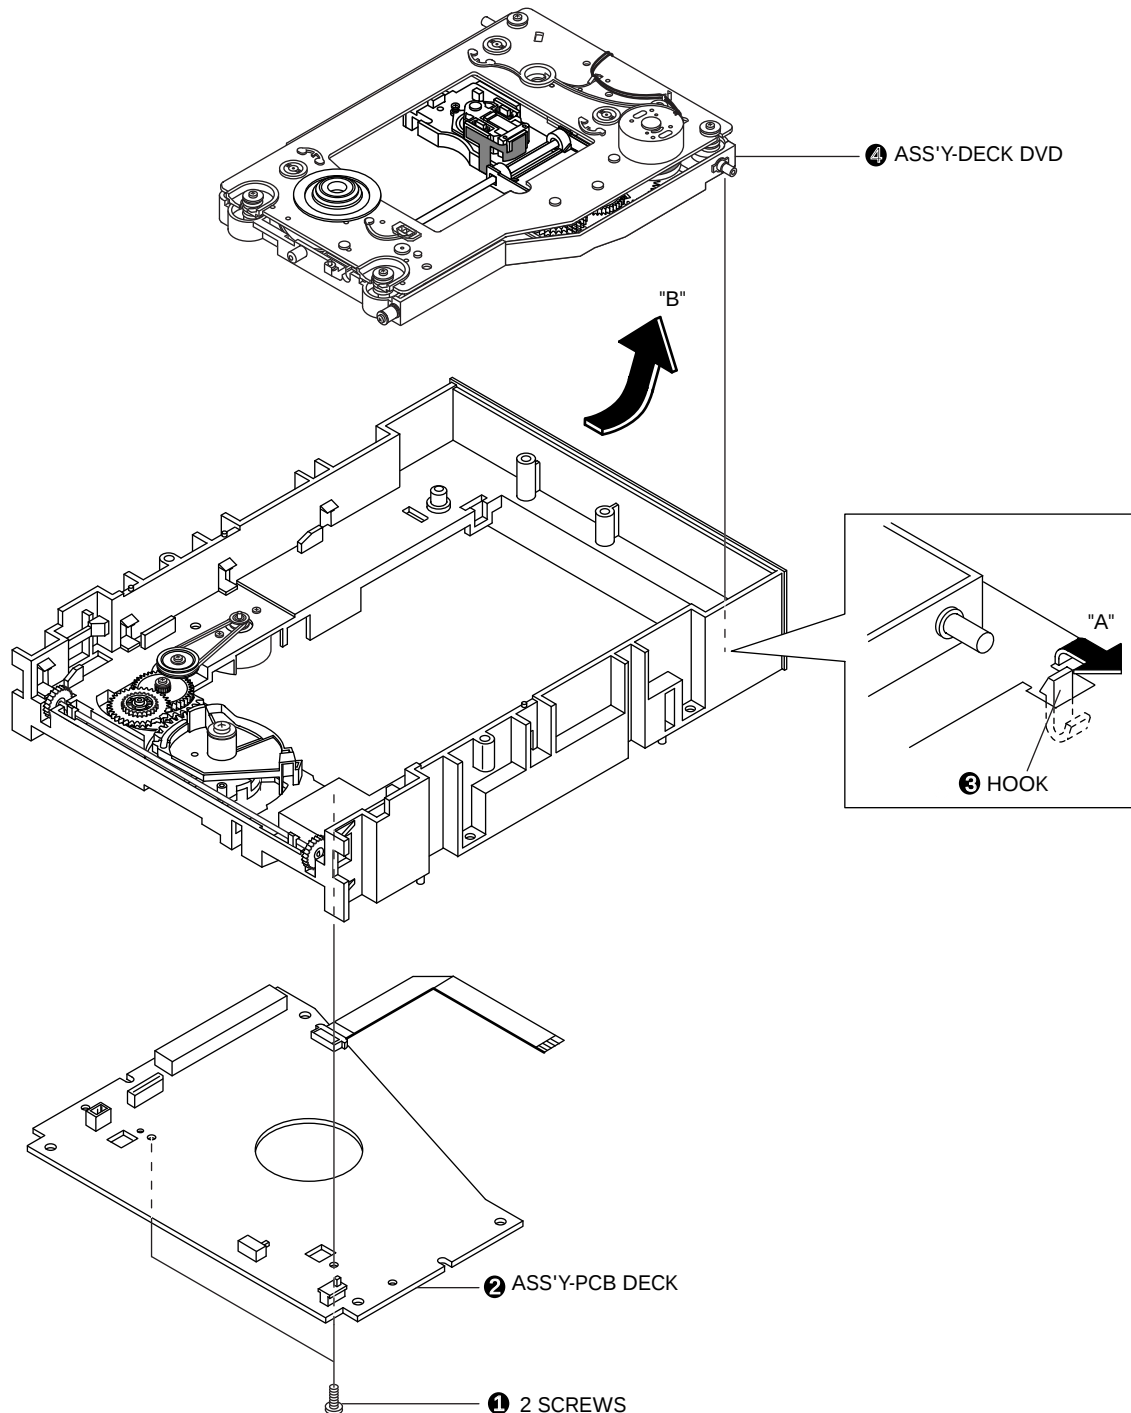


Fig. 4-9

### 4-3-3 Chassis-Main parts

1. Lift up the gear-tray ❶, remove 1 screw ❷ and lift up the gear-cam center ❸.
2. Lift up the belt-pulley ❹, remove 1 screw ❺ and lift up the pulley-gear ❻.
3. Remove 1 screw ❼ and lift up the gear-tray A ❽ and gear-cam sub ❾.
4. Remove 2 screws ❿ and disassemble the ass'y-motor load ⓫.
5. Remove 1 screw ⓬ and disassemble the lever-open S/W ⓭.
6. Lift up the shaft-syncro ⓬ and remove the 2 gear-syncro ⓮ in both directions.

**Assembling :** Adjust the shaft end of motor-feed so that it is exactly equal to the height of the hump in gear pole of ass'y-gear magnet.

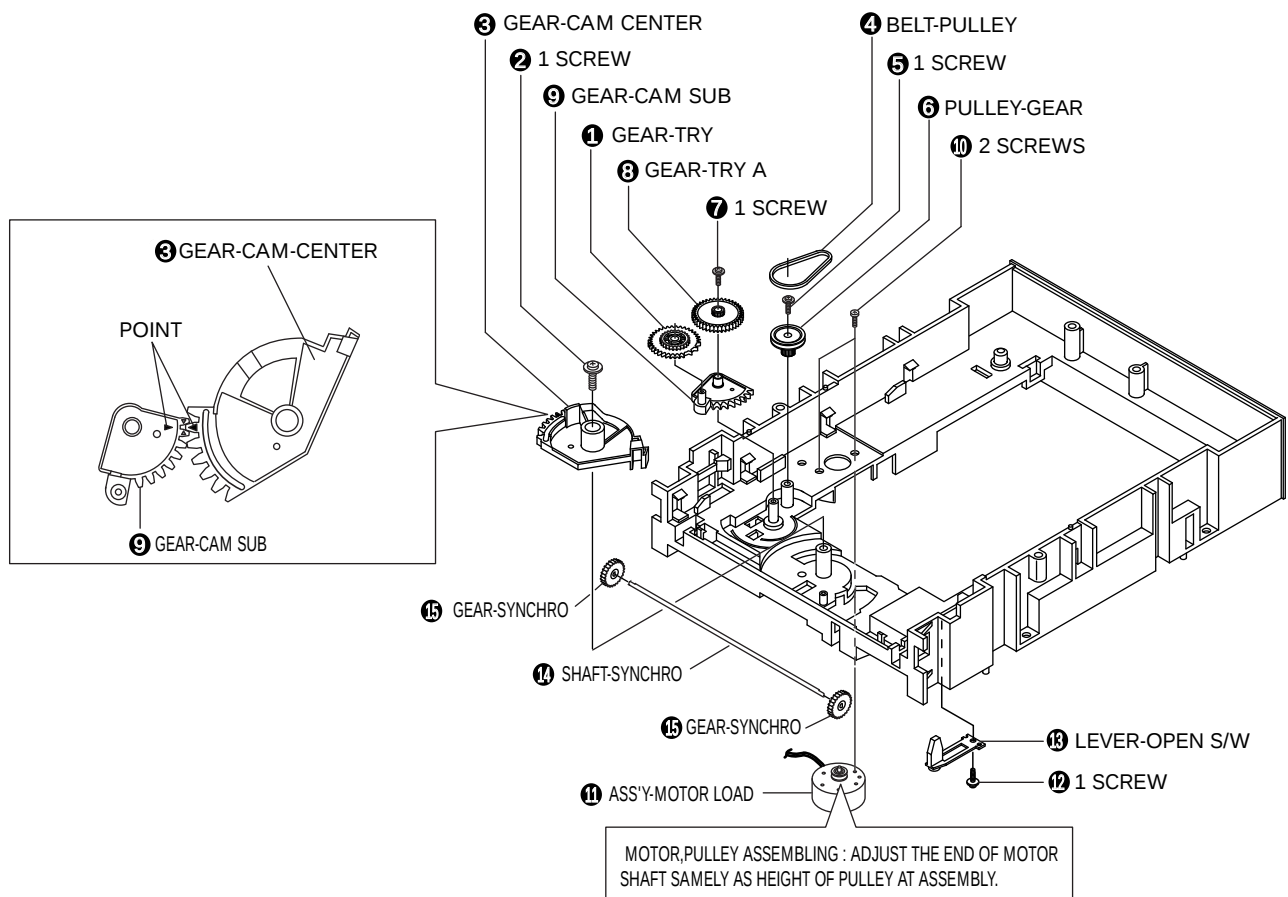


Fig. 4-10

### 4-3-4 Ass'y deck

1. Remove 4 screws ❶.
2. Lift up the ass'y-deck ❷.

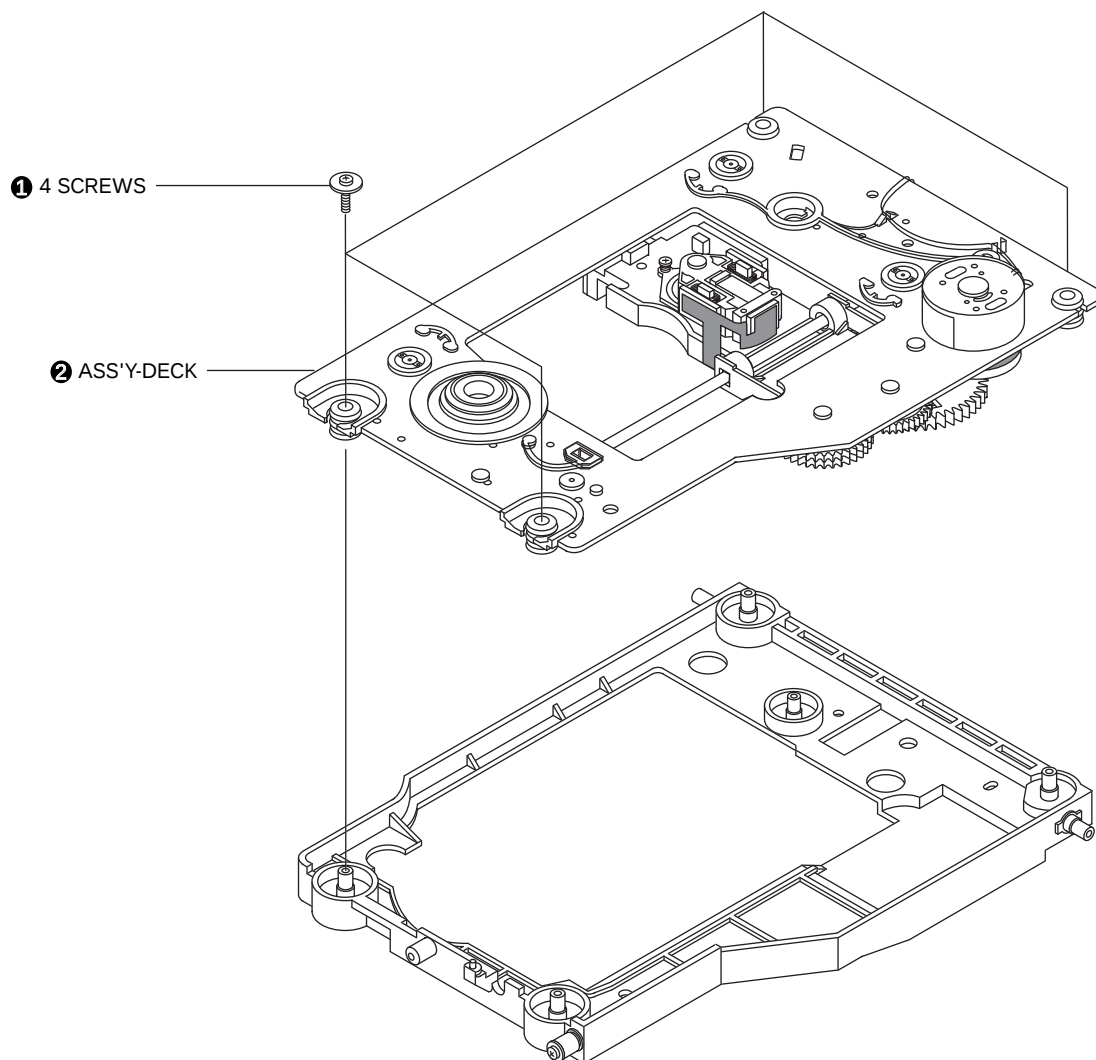


Fig. 4-11

### 4-3-5 Ass'y-Deck parts

1. Remove 3 screws ❶ and disassemble 3 holder-cams ❷.
2. Disassemble the rack-slide ❸ and ass'y-pickup ❹, while simultaneously removing the shaft-P/U-L ❺, shaft-P/U-R ❻.
3. Remove 3 screws ❼ and disassemble the ass'y-motor spindle ❽.
4. Remove the washer-plane ❾ and disassemble the ass'y-gear feed AU/AL ❿.
5. Remove the washer-plane ⓫ and disassemble the gear-feed B ⓬.
6. Remove the washer-plane ⓭ and disassemble the ass'y-gear feed CU/CL ⓮.
7. Disassemble the ass'y-gear magnet ⓯.
8. Remove 2 screws ⓰ and disassemble the ass'y-PCB hall sensor ⓱.
9. Remove 1 screw ⓲ and disassemble the motor-feed ⓳.

**Assembling :** Adjust the shaft end of motor-feed ⓳ so that it is exactly equal to the height of the hump in gear pole of ass'y-gear magnet.

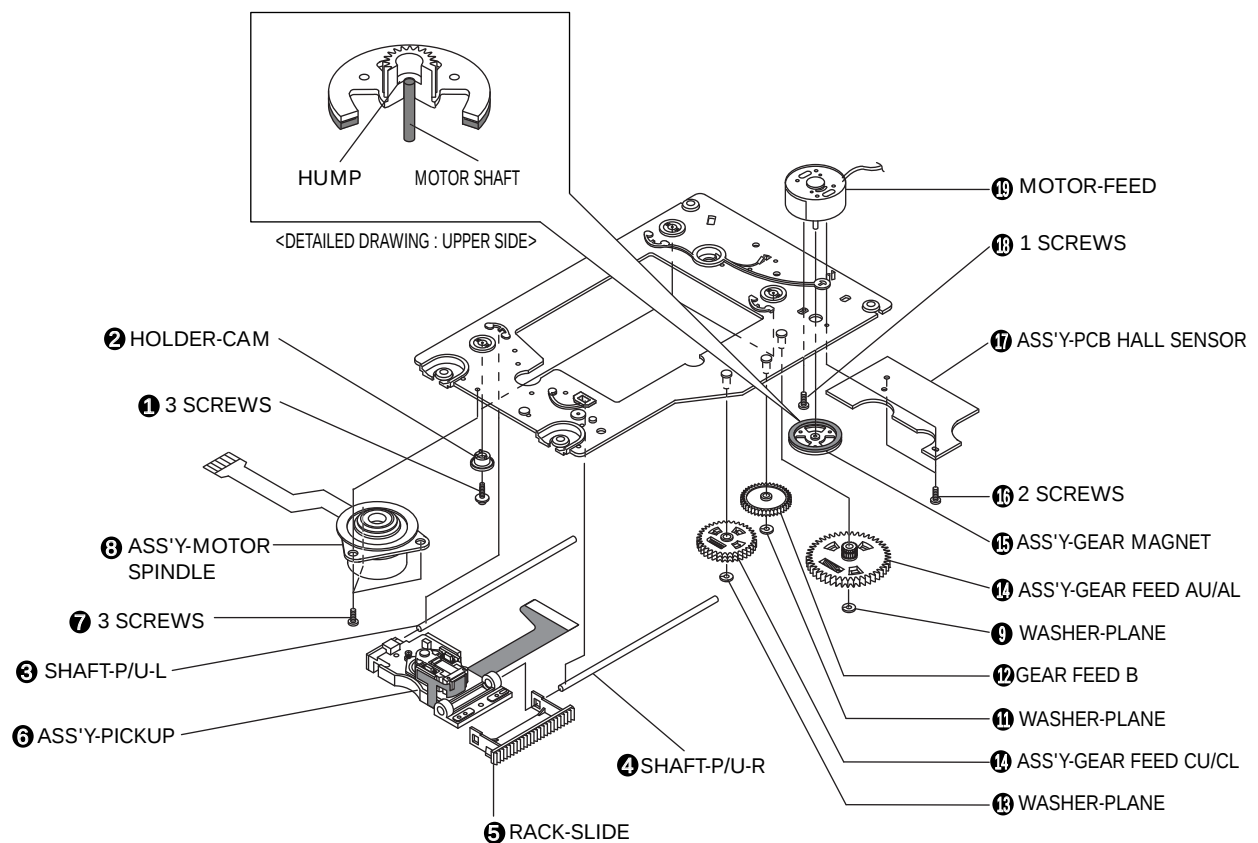


Fig. 4-12

## 2. Circuit Operating Description

### 2-1 SMPS circuit description

#### 2-1-1 Comparison between linear power supply and SMPS

##### 2-1-1(a) LINEAR

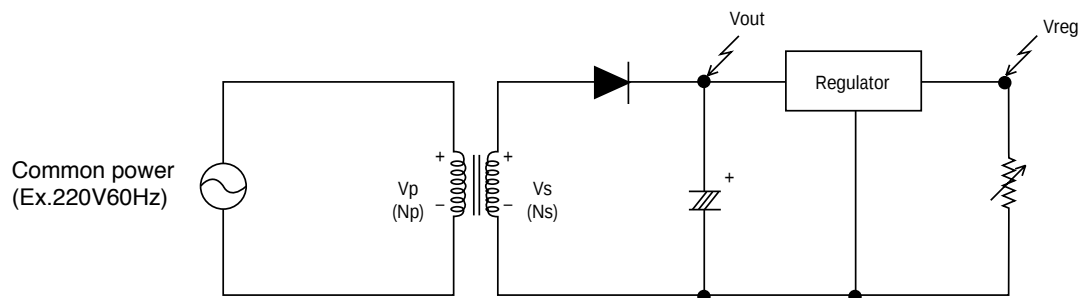


Fig. 2-1

##### ◆ Waveform/Description

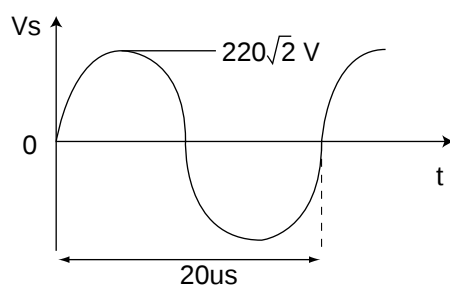


Fig. 2-2

Input : Common power to transformer( $V_p$ )

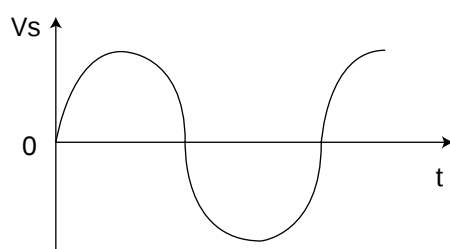


Fig. 2-3

The output  $V_s$  of transformer is determined by the ratio of 1st  $N_p$  and 2nd  $N_s$ .  
 $V_s = (N_s/N_p) \times V_p$

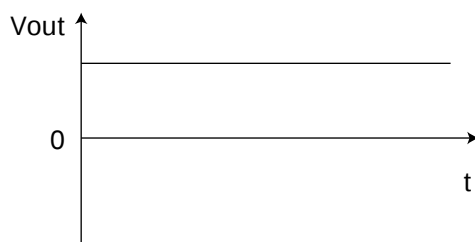


Fig. 2-4

$V_{out}$  is output (DC) by diode and condensor.

◆ Advantages and disadvantages of linear power supply

a. Advantages :

Little noise because the output waveform of transformer is sine wave.

b. Disadvantages :

- » Additional margin is required because  $V_s$  is changed (depending on power source). (The regulator loss is caused by margin design).
- » Greater core size and condensor capacity are needed, because the transformer works on a single power frequency.

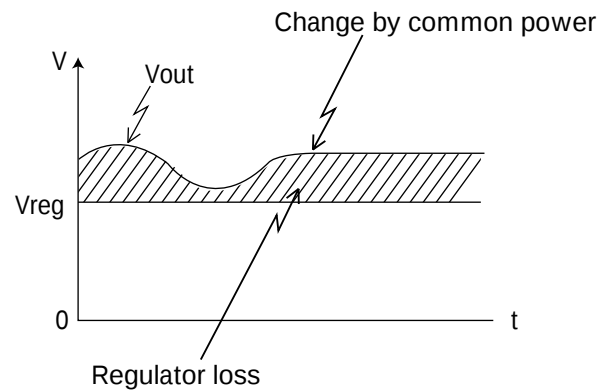


Fig. 2-5

2-1-1 (B) SMPS(PULSE WIDTH MODULATION METHOD)

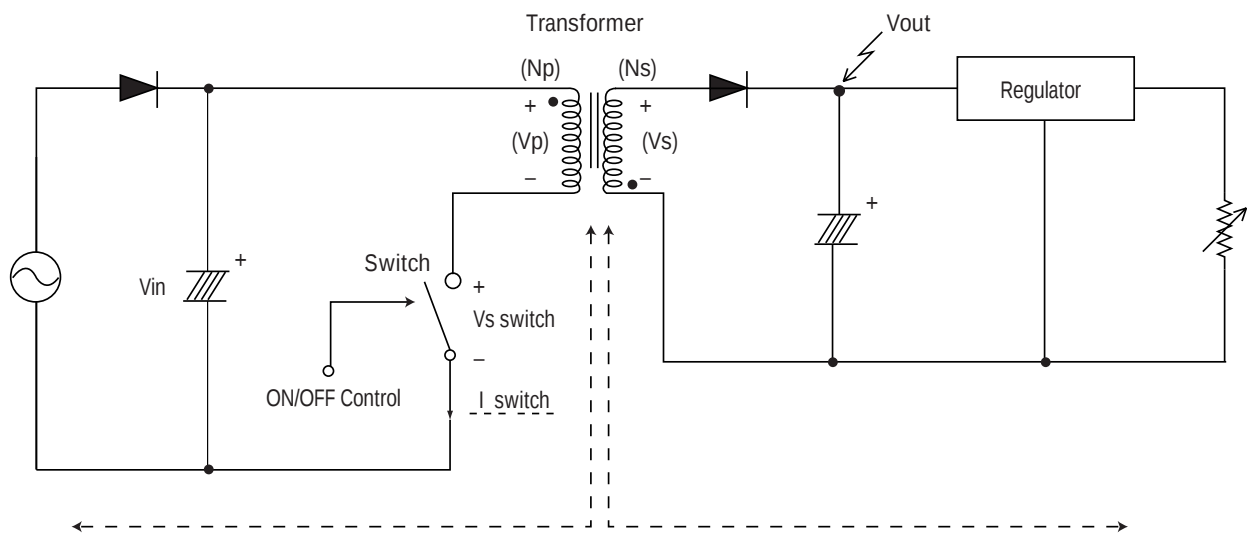


Fig. 2-6

◆ Terms

- 1st : Common power input to 1st winding.
- 2d : Circuit followings output winding of transformer.
- $f$ (Frequency) : Switching frequency( $T$  : Switching cycle)
- Duty :  $(T_{on}/T) \times 100$

## ◆ Waveform

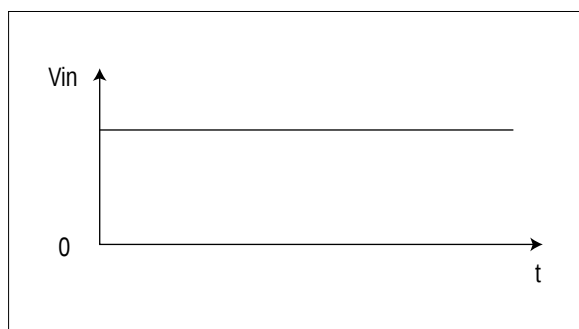


Fig. 2-7

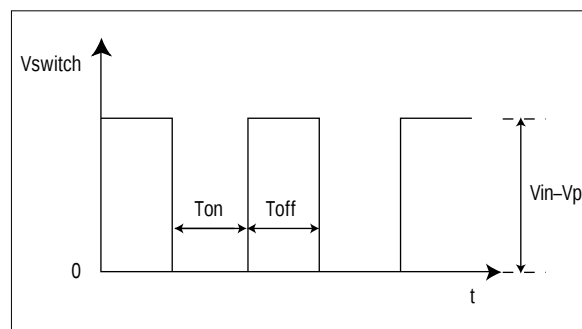


Fig. 2-11

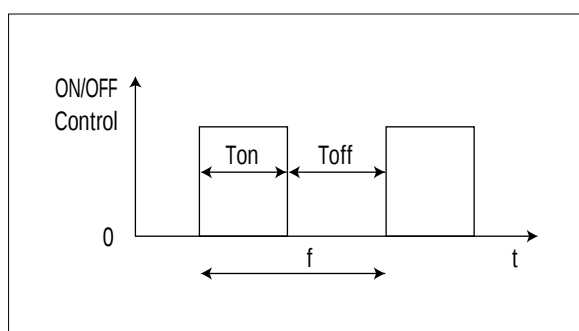


Fig. 2-8

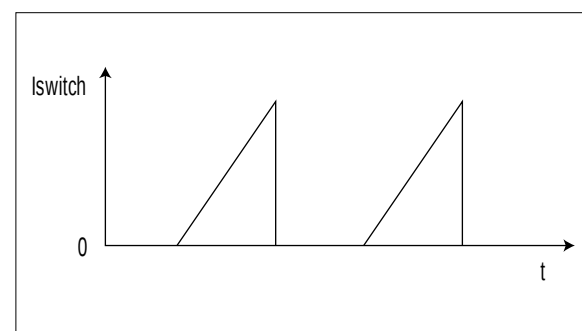


Fig. 2-12

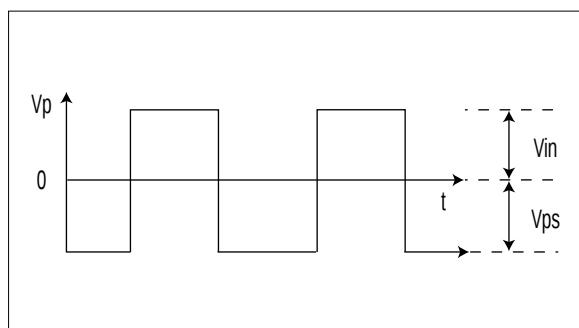


Fig. 2-9

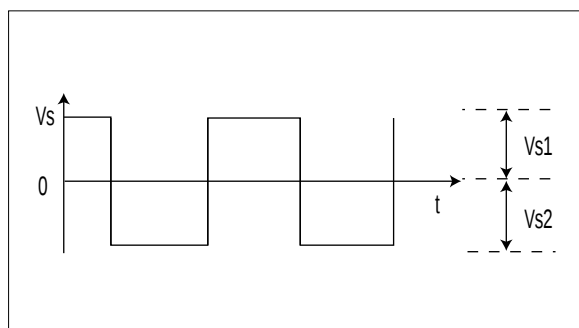


Fig. 2-10

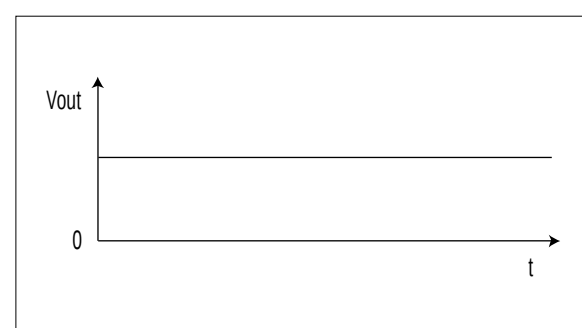


Fig. 2-13

## 2-1-1(c) INTERNAL BLOCK DIAGRAM

## 1. Internal block diagram of SMPS circuit

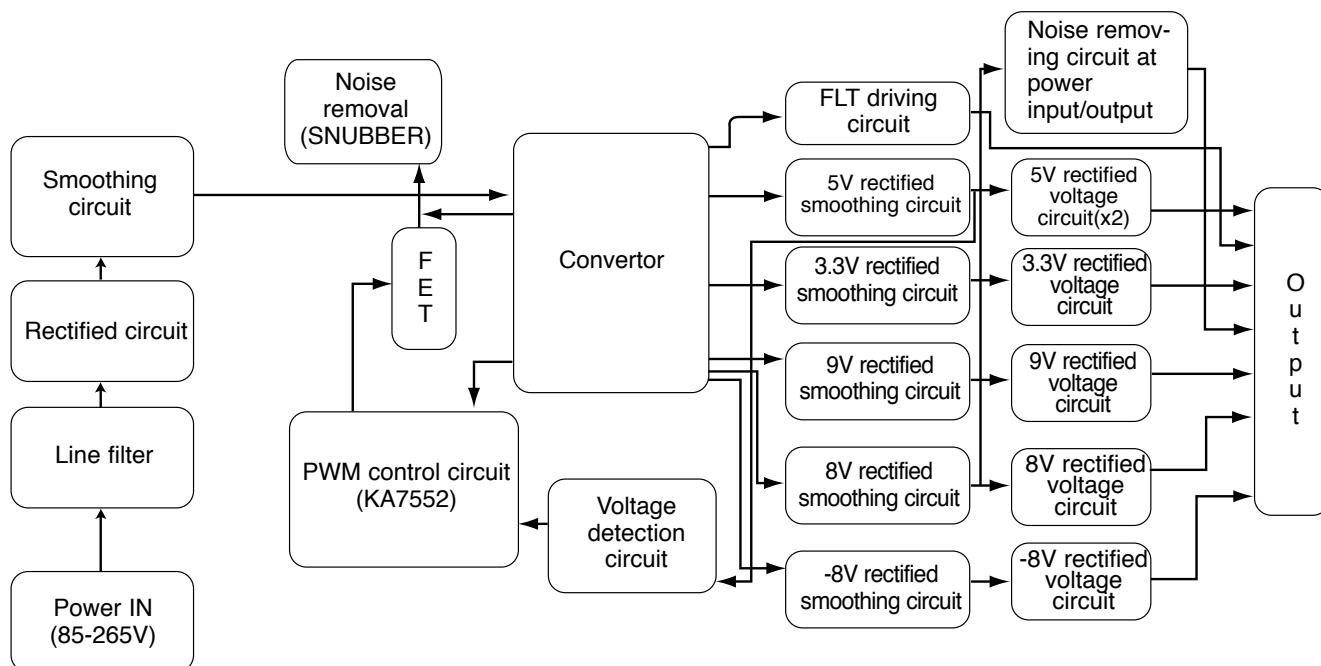


Fig. 2-14

## 2. PIC1(KA7552) internal block diagram

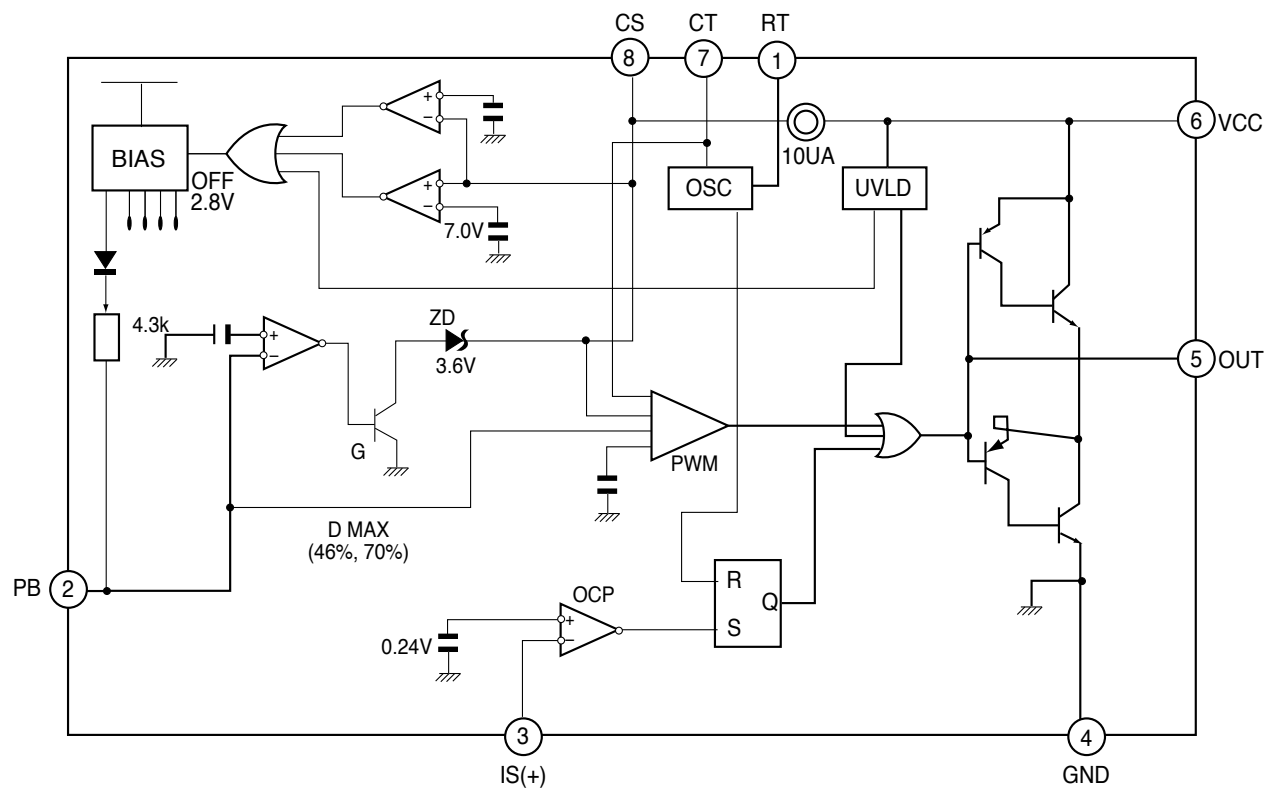


Fig. 2-15

## 2-1-2 SMPS circuit description

### 2-1-2(a) CIRCUIT METHOD

FLY-BACK PWM(Pulse width modulation) control

### 2-1-2(b) CIRCUIT DESCRIPTIONS

#### 1. AC power rectification/smoothing terminal

- PD01 : Convert AC power to DC(Wave rectification)
- PO10 : Smooth the voltage converted to DC(Refer to Vin of Fig. 2-7)
- PC01, PC02, PC03, PC04, PC05, PC06, PL01, PL02, PL03 : Noise removal at power input/output
- PVA1 : SMPS protection at power surge input
- PVA2 : SMPS protection at 2st ground surge input(PVA1 pattern open : to remove noise)
- PR10 : Rush current limit resistance during power cord insertion.
  - » Rush current = (AC input voltage × 1.414 - Diode drop voltage) / Pattern resistance + PL02.01 resistance + PC10 resistance + PR10) (AC230V based : approx. 26A)
  - » Without PR10, the bridge diode might be damaged as the rush current increases.

#### 2. SNUBBER circuit : PR17, PR18, PC11, PD10

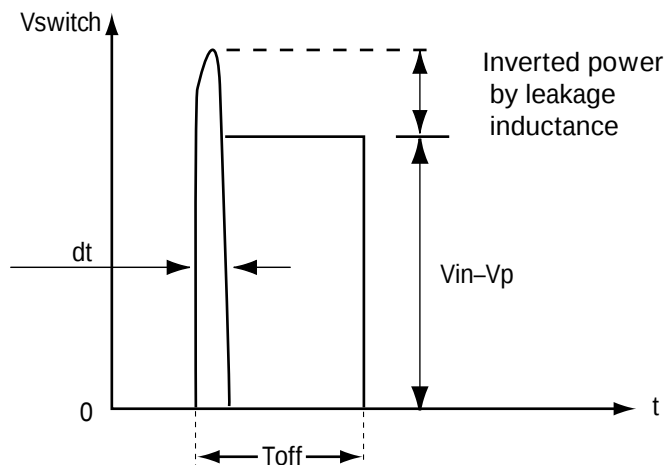


Fig. 2-16

- Prevent residual high voltage at the terminals of switch during switch off/Suppress noise. High inverted power occurs at switch off, because of the 1st winding of transformer: ( $V=L1 \times di/dt$ . LI : Leakage Induction)  
A very high residual voltage exists on both terminals of PQ1 because dt is a very short.
- SNUBBER circuit protects PQ1 from damage through leakage voltage suppression by RC, (Charges the leakage voltage to PD10 and PC11, and discharges to PR17 and PR18).
- PC12, PL11 : For noise removal

#### 3. PIC1 Vcc circuit

- PR11, PR12, PR13, PR14 : PIC1 driving resistance (PIC1 works through driving resistance at power cord in)
- PIC1 Vcc : PR20, PD12, PC17
  - 1) Use the output of transformer as Vcc, because the current starts to flow into transformer while PIC1 is active.
  - 2) Rectify to PD12 and smooth to PC17.
  - 3) Use the output of transformer as PIC1 Vcc : The loads are different before and after PIC1 driving.  
(Vcc of PIC1 decreases below OFF voltage, using only the resistance due to load increase after PIC1 driving.)
- PR20 : For noise removal

## 4. PIC1 function : PWM control (Refer to Switch ON/OFF Control of Fig. 2-6)

| PIN | NAME | CLASS                    | SPEC. | FEATURES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-----|------|--------------------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | RT   | -                        | 0.56V | * Resistance to determine OUT terminal(pin5) ON/OFF control frequency<br>- Determined with CT terminal(pin7) and for DVDP, 50KHz<br>RT : PR24, CT : PC13                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 2   | F/B  | -                        | -     | * OUT terminal duty is determined by F/B potential<br>(Duty control : 2st output constant-voltage control)<br>* The voltage of PIC2(Output voltage feedback) is input to F/B terminal.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|     |      | OFF voltage              | 0.75V | * If F/B terminal potential decreases below 0.75V, OUT duty is zero.<br>- SMPS 2st output voltage is zero.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|     |      | SHUT OFF voltage         | 2.8V  | * If F/B potential is above 2.8V, CS terminal(8pin) potential ascends in IC.<br>If CS potential rises above 7V, SHUT OFF mode is maintained.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|     |      | DUTY MAX voltage         | 2.3V  | * SHUT OFF mode : IC internal bias OFF state.(Operation stop)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 3   | IS   | LIMIT voltage            | 0.24V | * If IS terminal potential is above 0.24V, maintain on time only when IS terminal potential is 0.24V without holding OUT duty determined in F/B terminal(Duty limit).<br>* PQ1(F,E,T) current is distributed to PR22, PR21 in voltage, and input to IS terminal.<br>* Purpose : Limit the overcurrent of PQ1(Current waveform : See Fig. 2-10)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 4   | GND  | -                        | -     | * Ground(SMPS 1st ground)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 5   | OUT  | -                        | -     | * ON/OFF control pulse output terminal(f : fixed, ON TIME : variable)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|     |      | Maximum DUTY             | 70%   | * Maximum duty is 70% (Maximum).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 6   | VCC  | ON voltage               | 16V   | * IC power supply terminal. IC function starts at exceeding 16V. Vcc less than 8.7V will be OFF after IC working.(See Clause 3. Vcc circuit)<br>- Vcc voltage is 10-12V at normal operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|     |      | OFF voltage              | 8.7V  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 7   | CT   | -                        | -     | * ON/OFF frequency determining terminal(Refer to 1 pin RT terminal)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 8   | CS   | OFF voltage              | 0.42V | * OS potential setting : Connect the condenser to OS terminal(PC14)<br>* ON/OFF control : If CS potential is above 0.56V, IC function starts and if below 0.42V, IC function stops.<br>* At normal operation : Maintain 3.6V in IC<br>* SHUT OFF mode : If CS potential is above 7V, shut off.(Overload prevention)<br>- SHUT OFF function : When IS, F/B, CS terminal are all operated normally.<br>(Refer to Clause 6. MAX. POWER limiting circuit)<br>* SOFT START : Switch protection at initial starting<br>- F/B potential is 3.6V internally at initial starting.(Duty max.)<br>- PQ1 damage occurs due to overcurrent on switch at duty max.<br>- CS terminal sets the duty with F/B terminal<br>- Connect PC14 to CS terminal and set the voltage charging time at initial starting.<br>- Increase the duty by raising the voltage gradually via PC14 at initial starting for normal operation.<br>(Duty max. is limited by F/B potential at initial starting) |
|     |      | ON voltage               | 0.56V |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|     |      | Normal operation voltage | 3.6V  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|     |      | SHUT OFF voltage         | 7V    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|     |      | MAX DUTY voltage         | 2.3V  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## 5. Feedback control circuit

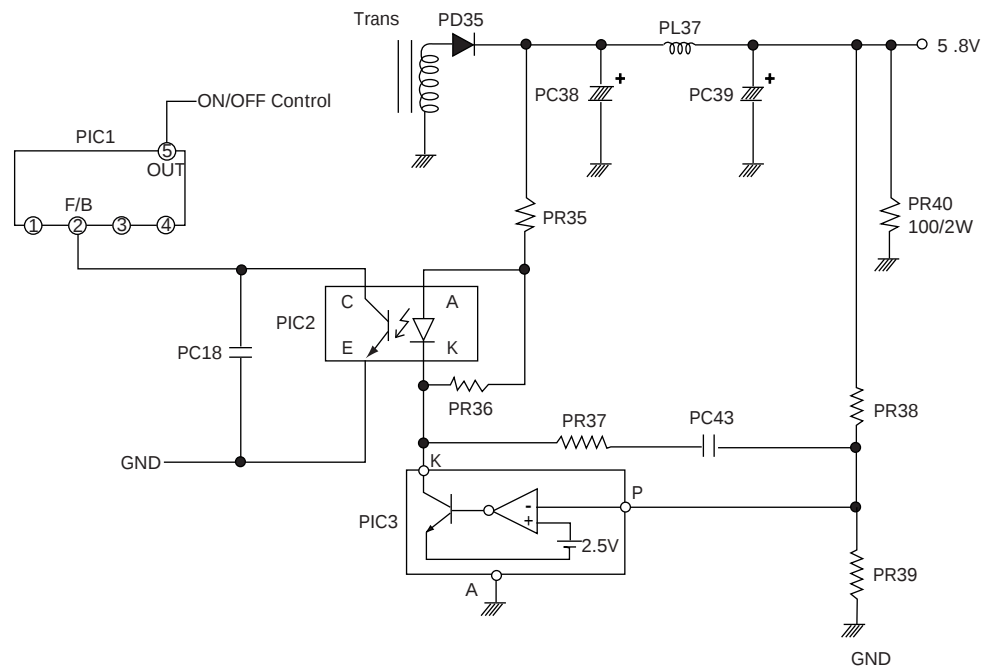


Fig. 2-17

- F/B terminal of PIC1 determines output duty cycle.
- Duty definition : Refer to Vs1 in Fig4-10.(Duty up: Vs1 up, Duty down: Vs2 down)
- C-E(Collector-Emitter) of PIC2 and F/B potential of PIC1 are same.
- At F/B terminal open : SHUT OFF mode
  - » F/B potential is set to 3.6V internally.
  - F/B potential decreases to 1-2V by C-E voltage of PIC2 ( controlled by normal operation. )
  - » When F/B terminal is open, shut off occurs because 2.8V is exceeded.
  - (Refer to clause 4.)

## ◆ Operation descriptions

- a. Internal OP-Amp '+' base potential of PIC3 is 2.5V and external '-' input potential is connected with PR38 and PR39 to maintain Vout of 5.8V. ( $V_{out} = ((PR36 \times PR39) / PR39) \times 2.5V$ )
- b. If load of 5.8 V terminal increases(or AC input voltage decreases) and Vout decreases below 5.8V, then :  
 PIC3 'P' potential down below 2.5V --> PIC3 A-K of base current down --> PIC3 of A-K current down --> PIC2 Diode current down --> PIC2 C-E current down --> PIC2 C-E voltage up --> PIC1 F/B voltage up --> OUT Duty up --> Transformer 1st current up --> Transformer 1st power up --> Vout up --> Maintain Vout 5.8V
- c. If load of 5.8 V terminal decreases(or AC input voltage rises) and Vout rises above 5.8V, then :  
 Reverse sequence of the above description → Duty down → Vout down → Maintain 5.8V (i.e., the feedback to maintains 5.8V).
  - PR35, PR36 : Reduce 5.8V overshoot
  - PR37, PC43 : Prevent IC3 oscillation(for phase correction)
  - PC18 : Adjust feedback response rate

## 6. Maximum power limit circuit

- \* Circuit configuration : PIC1 F/B, CS, IS terminal PR23, PR21, PR22, PC13A
- \* Role : Switch overcurrent protection
- \* The current on switch inputs to IS and outputs as voltage via PR23, PR21, PR22.
- \* If the current on switch increases and IS terminal input voltage exceeds 0.24V, duty is determined by F/B terminal. Accordingly, the current on switch is limited less than specific current. (If 2d load rises, the switch current increases. Refer to clause 5. in circuit description).
- \* If I/S terminal is open : Switch and other parts are damaged because the switch is not limited during abnormal status (for example, 2d output terminal short).

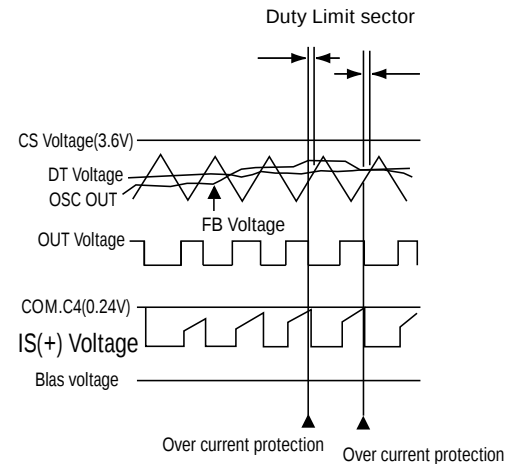


Fig. 2-18

## 1) Intermittent operation mode

- Definition : PIC1 can't deliver normal output, and repeats Vcc ON/OFF operation (Vcc voltage is swing between 16V(ON) and 8.7V(OFF)).
- Operation description : for example. 2d output terminals shorted, then :  
 Specific 2d terminal short → 2d power is concentrated on short terminal → 5.8V(PC39)  
 voltage down → F/B voltage up (Refer to clause 5.) → Duty up → Switch current up → Limit switch current to IS terminal (Duty limit) → Apply 1st supply power in comparison with 2d power →  
 Concentrate on 2d power short terminal → PIC1 Vcc terminal TRANS. output voltage down below 8.7V → PIC1 OFF → PIC1 ON via driving resistance → Above operations repeated → Maintain intermittent operation mode (See Fig. 2-19 Waveform).  
 At short release : normal operation

## 2) Short OFF mode

- Main examples : Feedback circuit Open, Max, Power excess (Design spec.), 5.8V Terminal short
- Operation description :  
 Ex - 2d load is high abnormally;  
 1st supply power is low in comparison with 2d output power.  
 5.8V down → Duty up → Switch current up →  
 IS terminal duty limit → 1st supply power limit → 5.8V  
 voltage down → F/B potential above 2.8V (Shut OFF voltage)  
 → OS terminal potential up (Refer to Clause 4.) F/B →  
 OS potential above 7V → Shut OFF mode
- The output voltage of SMPS is zero because PIC1 doesn't work during Shut OFF mode.
- Shut OFF mode release : OS potential decreases below 7V. (Charge OS terminal forcibly)
- Feedback terminal open : Shut OFF (Refer to clause 5.);  
 PC13A : For IS terminal input noise removal

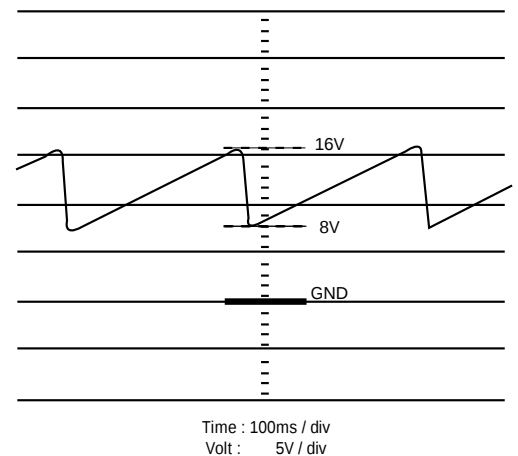


Fig. 2-19

#### 7. Shut Off mode prevention circuit at instant load increase : PC15, PZD13

- During a sudden load increase;  
By means of current concentration on specific output terminal, 5.8V voltage down --> F/B potential up --> Maintain Shut Off mode.  
Stablize F/B potential (Loading completion) below 7V by lengthening CS potential rise time to 7V (in order to prevent Shut Off mode).
- Normal operation : CS potential is 3.6V and PZD13(4.7V ZENER) is open.
- OD potential above 4.7V at instant load increase --> PZD13, PC15 work --> OS terminal condenser capacity increases in parallel with PC14 and PC15 --> CS potential rising rate down --> Instant operation completed --> F/B potential stable --> Normal operation

#### 8. Maximum power limiting circuit addition : PZD11, PR19

- SMPS efficiency : Below 25W : High efficiency at AC110V input  
Above 25W : High efficiency at AC230V input
- The peak value of current on switch at overload is lower than that at 110V input because SMPS is highly efficient above 25W at 230V input. Therefore, maximum power increases at 230V as compared to 110V at overload. Add PZD11, PR19 and set to the same level as 110V.
- Higher at 230V input than at PZD11 input, limit maximum power because IS terminal potential goes up.

#### 9. PQ1(F,E,T) Gate Drive Circuit : PR15, PR16, PD11

- PIC1 OUT is square wave but charging and discharging by PR15, PR16 occurs due to internal condenser between gate-sources of PQ1.
- PR15, PR16 : Switch ON Time setting - PD11 is reverse : PIC1 OUT --> PR15 --> PR16 --> Charge to gate
- PR16, PD11 : Switch OFF Time setting - PD11 is proper : GATE - PR16 --> PD11 --> Discharge to PIC1 OUT(GND)
- Switch ON/OFF time : Related to switch loss and noise

#### 10. PIC1 overcurrent protection : PZD12

- Operate PZD12 and protect PIC1 from damage from residual overcurrent (PIC1 Vcc, due to external surge inflow and feedback line open).

## 2-2 RF circuit description

### 2-2-1 RIC1(TA1236F)

TA1236F is combined with TA1253FN, TC9240F and TC90A19F as bipolar IC developed for DVD SERVO system. Main features include DVD waveform equalizing, CD waveform equalizing, focus error signal generation, 3-beam tracking error signal generation, laser power control, etc. after receiving the pick-up output converted into I/V.

#### 1. Basic potentiometer

TA1236F uses a single power method and each circuit is based on  $V_{REF}$  of 2.1V. Note : symmetrical about GND for  $V_{REF}$  because  $V_{REF}$ (pin20) terminal is needed for IC, which uses the peripheral  $V_{REF}$  and  $2V_{REF}$  output(pin18).

#### 2. RF signal

Fig. 2-20 shows the flow of signal generated by the pick-up.

A, B, C, D signals detected from pick-up are converted in to RF signal( $A+B+C+D$ ) via RF summing AMP.

RF signal is inputted to RFN(pin55) among input terminals and RFP(pin54) is used for AC ground.

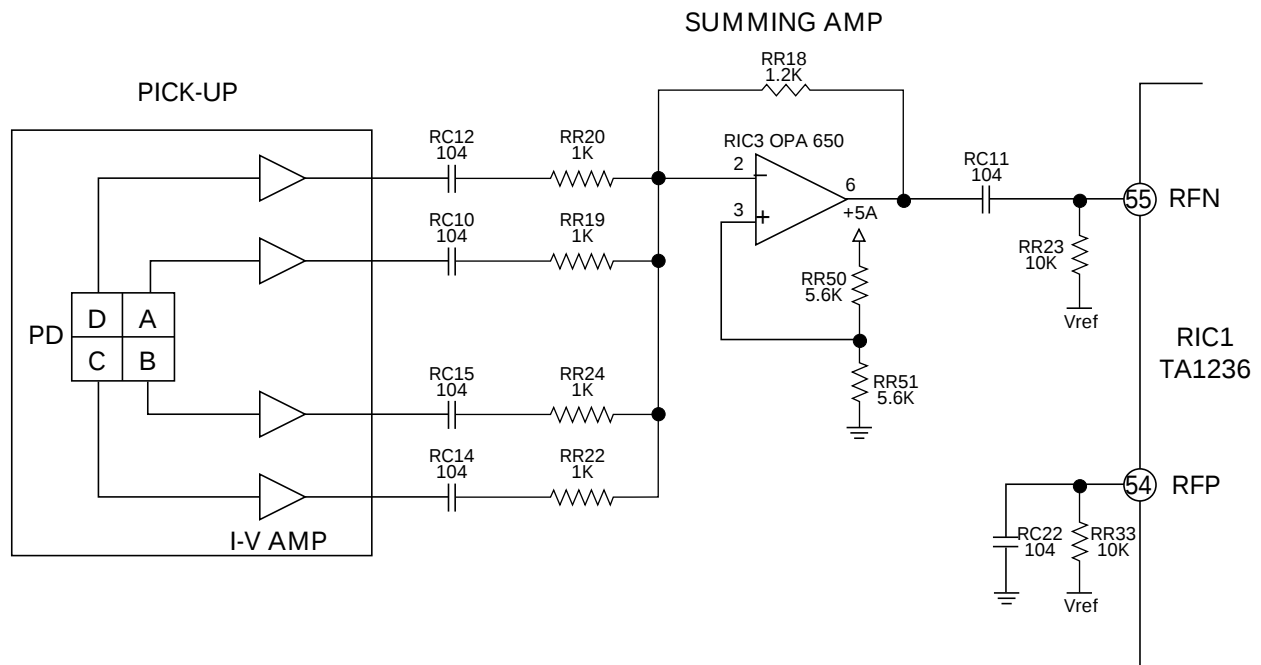


Fig. 2-20

Fig. 2-21 shows the waveform-equalizing block diagram for the RF signal.

It outputs to EQout(pin 46) terminal by initially changing switching AMP gain of DVD and CD, and then adjusting the level in VCA. It controls VCA gain by means of RF gain(pin 48) and interfaces with PWM signal, (output from RFGC terminal of TC9420F, via low-pass filter to constitute a loop for adjustment of constant amplitude). The gain in EQout is 1.0 for DVD and 1.67 for CD.

EQout terminal is connected with EQin(pin 45) externally, and inputs into DVD EQ and CD EQ(Waveform equalizing circuit).

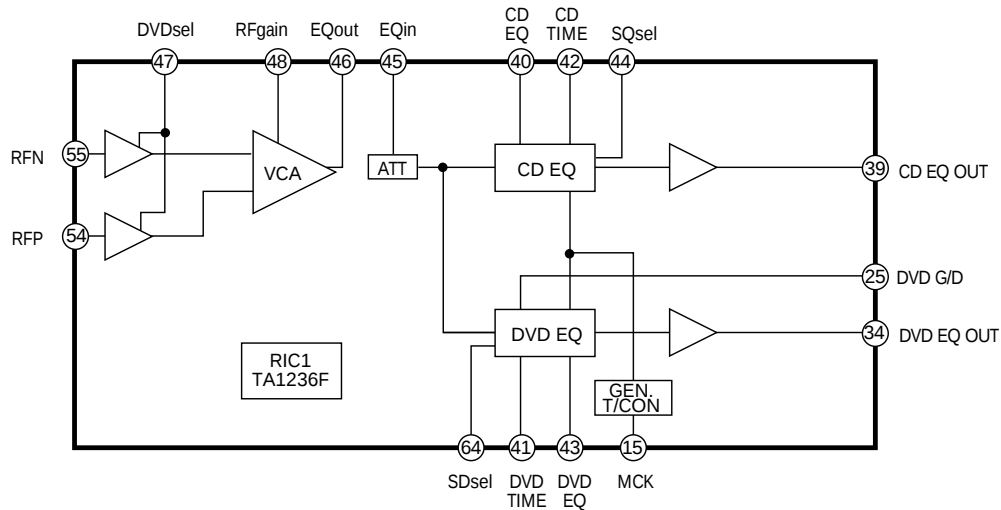


Fig. 2-21

The control parameters of DVD EQ and CD EQ are as follows.

1) DVD EQ control parameter

- DVDEQ(pin 43) : Changes the gain of peak frequency with EQ frequency characteristic. Convert PWM signal, output from TC90A19F, into DC via low-pass filter.
- DVDTIME(pin 41) : Changes the peak frequency with EQ frequency characteristic. Convert PWM signal, output from TC90A19F, into DC via low-pass filter.
- S/Dse1(pin 64) : Changes the peak frequency (like DVD TIME) as 2d control. ( Switched according to regeneration speed ratio of single/ double layer).
- MCK(pin 15) : Input the base clock and link the peak frequency with it. The amplitude of MCK might be small (500mVp-p).
- DVDGD(pin 25) : Changes the group delay characteristics with EQ frequency characteristic.

2) CD EQ control parameter

- CD EQ(pin 40) : Changes the gain of peak frequency with EQ frequency characteristic. The constant DC is supplied to a resistive voltage divider.
- CD TIME(pin 42) : Changes the peak frequency with EQ frequency characteristic. The constant DC is supplied to a resistive voltage divider.
- S/Qse1(pin 44) : Changes the peak frequency (such as CD TIME) as 2d control. (Switched according to play linear velocity ratio of quadruple/ single rate. Set to '0' because only one rate is valid in this system).

**Note** : CD and DVD signals are equalized according to the above control parameters ,and then output to CD EQ OUT (pin39) and DVD EQ OUT (pin34). Then, CD signal is transferred to TC9420F, DVD signal is sent to TC90A19F and detected.

## 2-2-2 Description of data processor for DVD

(Including DIC1 and DIC5 protection IC)

### 1. Outline

The data processor IC for DVD does the following :

- 1) Converts RF signal to digital, demodulates original signal and corrects errors,
- 2) PLL circuit to generate the clock for data detection in accordance with play velocity,
- 3) CLV control circuit to control the rotation rate of disc,
- 4) DIC5 Protection IC, connected with input/output of data processor, which releases the protection for the protected data (which is then transmitted to video decoder and Micom).

## 2. Operation

### 1) Input circuit

RF data equalized in RF stage is AC-coupled via pin 50 and input as 2.1Vpp. Then, the bias voltage becomes 1.65V by means of DC bias in IC.

### 2) PLL circuit

The input data generates the clock necessary for the PLL circuit. PLL circuit for clock generation generates the phase error signal through RLLD (pin 38), PDOP (pin 37), PDON (pin 36). The loop filter consists of built-in OP Amp and external parts.

The RLLD signal occurs only when the velocity difference between clock and data is large, and it sets the PLL operational velocity. RLLD signal doesn't occur at normal play except during searches

### 3) Data slicer

As the PLL generates the clocks, the slice circuit converts the analog signal to digital. that is, it switches to 1 if greater than regular reference voltage, and to 0 if less. The sliced signal may be observed at pin 34 (ED7) with a scope. If the signal has an error, it is necessary to check that the bias of input RF signal is correct, as well as the condensor at pin 42 (SLCO).

### 4) CLV circuit]

The signal is input to the circuit which generates DMO and CLV signals to control the rotation of the spindle motor. The control signal is output via pin 54(DMO). Then, the output signal is the 3d signal (a pulse derived from the midpoint voltage). If an error occurs in spindle motor during DVD play, check this signal.

### 5) Modulation and ID. Sync detection

The signal is synchronized, using the generated clocks, and Sync. signal is detected through Sync. signal detection circuit for modulation and all other signal processes. Sync. signal can't be observed externally, but the interrupt at each 1.4ms cycle may be checked on pin 23 (during normal detection, the interrupt signal is generated periodically). It is difficult to precisely define 1.4ms cycle, because other interrupts are also occurring.

During Sync. detection, the recorded signal is converted to data by means of an 8/16 modulation circuit.

The modulated signal is saved in memory, and interfaced externally for error correction.

### 7) Error correction circuit]

The data saved in external buffer memory after modulation are read by data processor sequentially for error correction. The data with all corrections are output by request of the next stage (video decoder).

### 8) VBR buffering]

The disc jumps the track repeatedly on waveform while checking each signal during normal play of DVD because it uses the VBR method (completely different from existing CD, video CD, etc). VBR play method enhances the data efficiency to improve the screen quality twofold, by using additional data for complex video and less data for simple video at compression. It saves the data in memory, and if the memory is full, it stops the play instantly to reset. If the data is removed, it repeats play because the play velocity varies according to data compression ratio. This process is known as VBR, and the used memory is known as the track buffer (or VBR buffer). A 4MIT DRAM attached to data processor includes this function.

### 9) Protection circuit]

Read if protected, and key for protection release from Read-in area (starting at first disc play). These operations are performed by TC6804 automatically.

Protection IC is located between output of data processor and input of video decoder, (the next stage).

it decodes the protected data after recognizing the key information read from disc and data status. If a disc violates the protection method, it stops the operation and reports to Micom.

## 2-3 System control circuit description

---

### 2-3-1 Outline

The main micom peripheral circuit is composed of 16bit Micom, 2M EPROM for Microcord and data save, 1M SRAM for data read/write on running, 512 byte EEPROM for permanent storage of data needed at power off, MIC4(74AC573) to latch only address in the bus where address and data are mixed, address decoder for selection of external device chip and 20MHz clock oscillator for micom operation. The micom(MIC1, TMP93CS41) mounted in main board analyzes the key commands of front panel or instructions of remote control through communication with micom(FIC1, LC86P6232) of front and controls the devices on board to execute the corresponding commands after initializing the devices connected with micom on board at power on.

2-3-2 System control block diagram

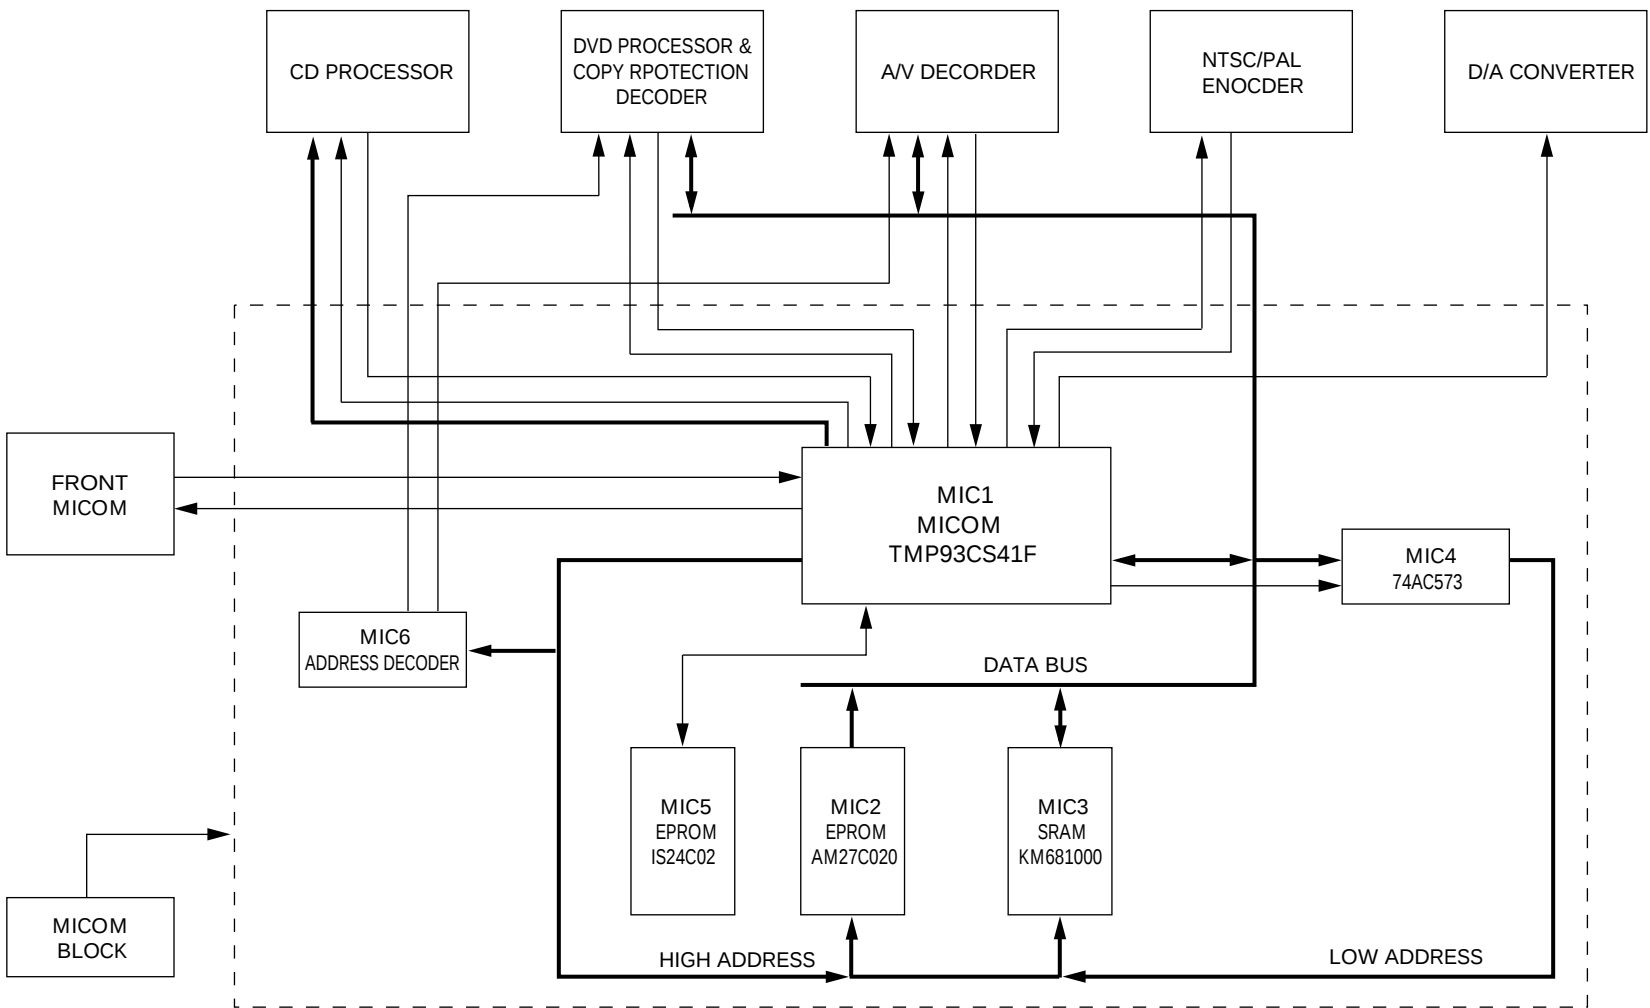


Fig. 2-22

### 2-3-3 Waveform description

The setup time is approx. 18 nsec. at falling edge of ALE(Address Latch Enable) signal, which has enough hold time.

At power of 5V, the min. setup time of MIC4(TC74AC573) is 5 nsec, and min. hold time is 3 nsec. It can be known that data input condition meets setup time and hold time. The eye part of input data in falling edge of ALE signal corresponds to address on the bus where address and data are mixed.

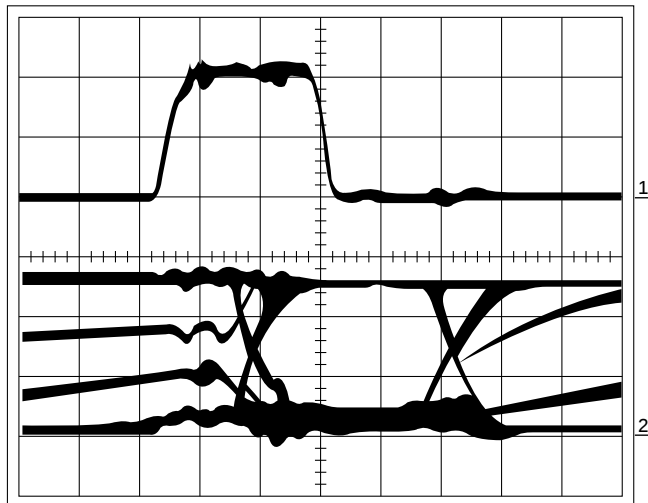


Fig. 2-23

- CH1 : ALE  
(MIC4-11, Address Latch Enable Signal)
- CH2 : HAD0-9  
(Input data of MIC4, Common bus data)

The inclining and rising part indicate floating range of data bus.

That is, there is no operational problem because micom is time area not to access any devices sharing a common bus. The waveform is shown to incline and rise by pull-up resistance and capacitance on PCB pattern.

When micom accesses each device sharing bus, it falls the chip select signal of corresponding chip to 0(Low) before trial. So to speak, the bus is used by time-division as shown in Fig 2-25, 26. Two and more devices can't be accessed simultaneously.

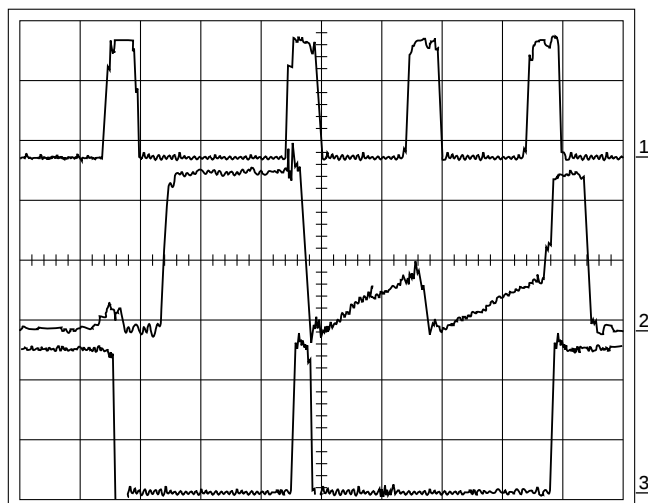


Fig. 2-24

- CH1 : ALE  
(MIC4-11, Address Latch Enable Signal)
- CH2 : HAD0-7 (MIC4-2 to 9, Input data)
- CH3 : HA0-7 (MIC4-19 to 12, Output data)

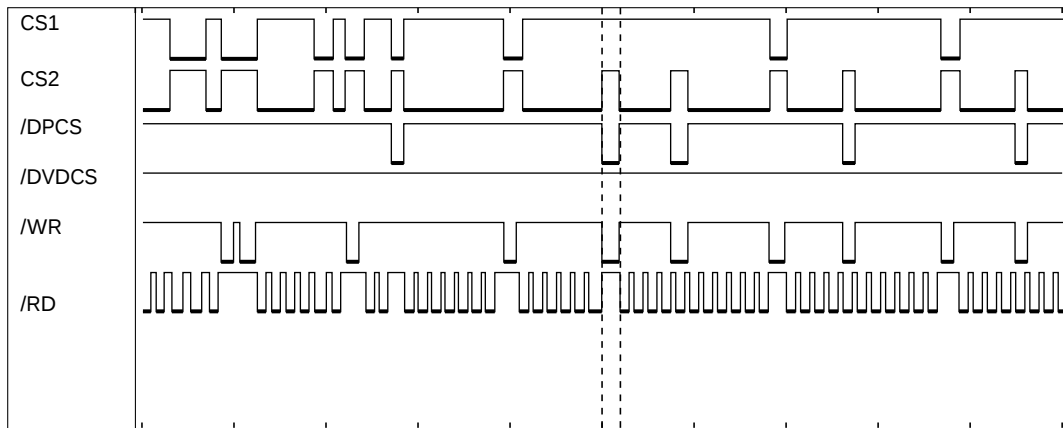


Fig. 2-25

- CH1 : CS1 (MIC3-22, SRAM CHIP SELECT)
- CH2 : CS2 (MIC2-22, EPROM CHIP SELECT)
- CH3 : DPCS (DIC6-76, COPY PROTECTION DECODER CHIP SELECT)
- CH4 : DVDCS (VIC1-175, A/V DECODER CHIP SELECT)
- CH5 : WR (MIC1-73, MICOM OUTPUT WRITE SIGNAL)
- CH6 : RD (MIC1-72, MICOM OUTPUT READ SIGNAL)

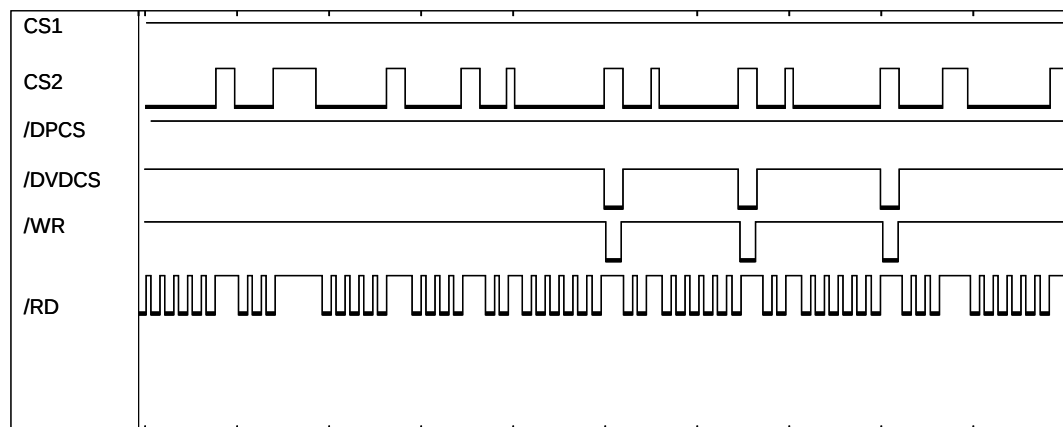


Fig. 2-26

- CH1 : CS1 (MIC3-22, SRAM CHIP SELECT)
- CH2 : CS2 (MIC2-22, EPROM CHIP SELECT)
- CH3 : DPCS (DIC6-76, COPY PROTECTION DECODER CHIP SELECT)
- CH4 : DVDCS (VIC1-175, A/V DECODER CHIP SELECT)
- CH5 : WR (MIC1-73, MICOM OUTPUT WRITE SIGNAL)
- CH6 : RD (MIC1-72, MICOM OUTPUT READ SIGNAL)

## 2-4 Signal control chip DIC1, DIC6 description

---

### 2-4-1 Outline

DIC1(TC90A19F) performs PLL(Phase Locked Loop), Sync detection, demodulation and error correction after converting RF signal inputted at DVD regeneration into digital data.

DIC6(TC6804F) receives signal-processed data in DIC1 and releases digital copy protection.

TC90A19F uses external memory(4M DRAM) as buffer as well as for error correction and carries out variable bit rate transfer function. VBR function uses the external buffer as buffer to absorb the difference of transfer rate occurring because the transfer rate of disk playback is faster than data transfer rate demanded by MPEG decoder(Video/ Audio Signal Process Chip).

In case of general disk refresh, the memory is almost filled up periodically. It is because Write rate to memory after disk playback and signal process is faster than Read rate of MPEG decoder. When the memory is filled, the fact is reported by interrupt to main micom, which controls the servo and kicks back the pick-up to the previous track after memorizing the last data read from disk until now. It takes some times to jump to the previous track and return to the original position(jump location) again. The full memory will have an empty space because MPEG decoder reads out data of memory.

When the memory has an empty space, where data can be processed and written and the pick-up correctly gets to the original location(kick back location) again, it reads data again and avoids the interrupt of data read previously.

The basic operation repeats to perform disk data read --> memory full --> move pick-up to previous track --> disk data read --> memory full --> move pick-up to previous track as described above.

## 2-4-2 System control block diagram

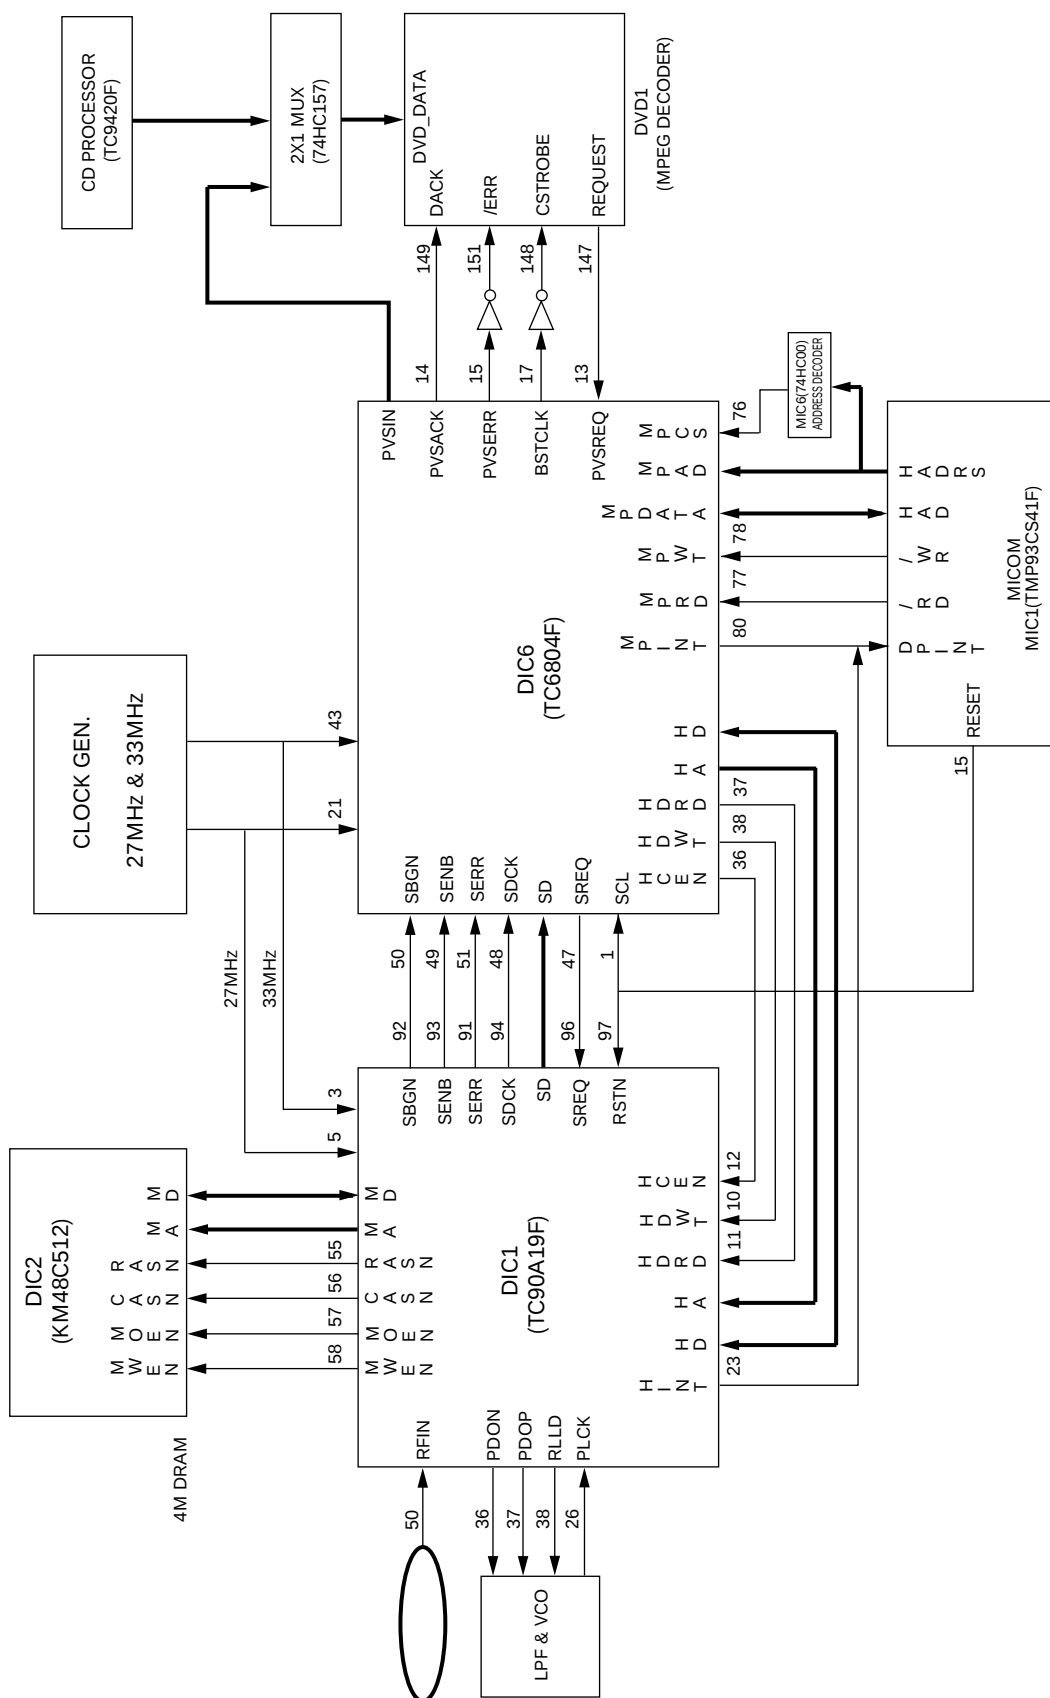


Fig. 2-27

### 2-4-3 Waveform description

It is used for internal digital signal process as 33MHz clock input waveform of DIC1 (TC90A19F) and carries out swing in 1.4V level on the basis of DC level 1.65V.

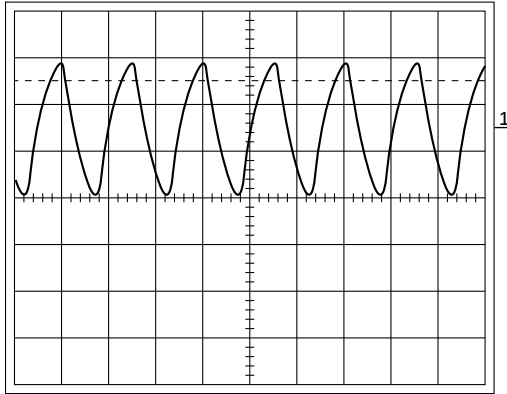


Fig. 2-28

- CH1 : DPCK1(DIC1-3, 33MHz input clock)

It is used for PLL and CLV control as 27MHz servo clock input and output waveform of DIC1. The input swings in approx. 2V of amplitude and the output swings in 3.3V.

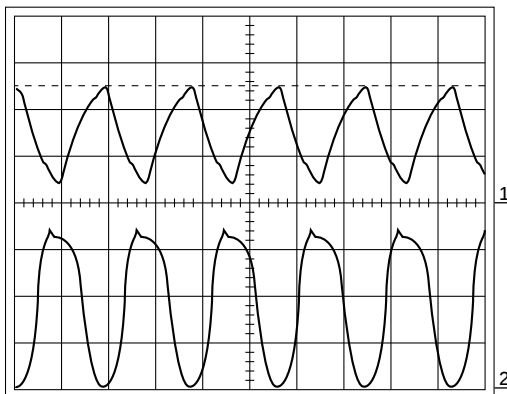


Fig. 2-29

- CH1 : SVCKI (DIC1-5)
- CH2 : SVCKO (DIC1-6)

CH1 is RF signal waveform inputted to DIC1 and inputted with 2.5V of amplitude on the basis of approx. 1.65V level. If RF signal is higher than slice level, CH2 of slice level is cut digital 1(HIGH) and if lower, digital 0(LOW) and converted into digital data. CH3 indicates a waveform that RF signal is cut by slice level and converted into digital data.

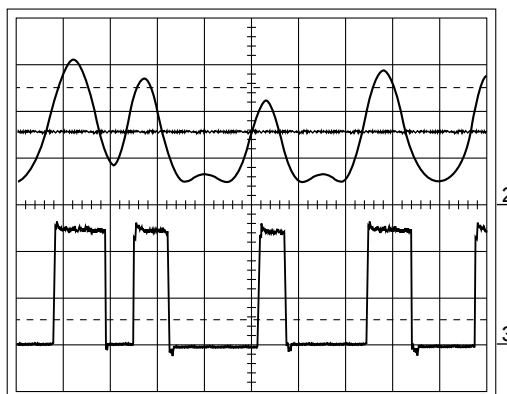


Fig. 2-30

- CH1 : RFIN(DIC1-50, RF Input signal)
- CH2 : SLCO (DIC1-42, Slice level)
- CH3 : ED7 (DIC1-34, Sliced data of RF signal)

CH1 is RF signal waveform at refresh the error area of disk. It shows RF waveform swing lower than slice level. At the end, this part is displayed as error which is recovered to the original data by error correction signal of DIC1.

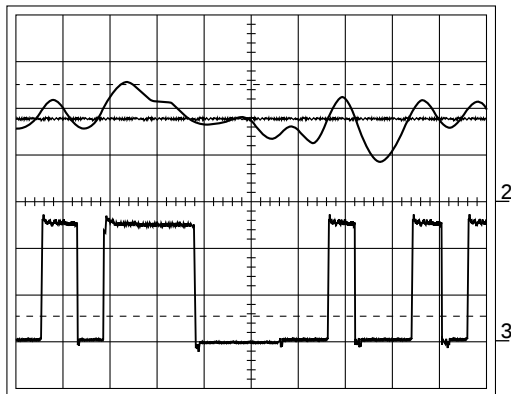


Fig. 2-31

- CH1 : RFIN(at refreshing small error area of disk)
- CH2 : SLCO (Slice level)
- CH3 : ED7 (Sliced and outputted data of RF signal)

It shows error signal output, comparing PLL clock and phase difference in DIC1 when RF signal is inputted. The phase difference signals is inputted into VCO after summing in external PLL circuit of DIC1. VCO changes PLL clock frequency according to input voltage. The middle frequency of external PLL circuit is approx. 27MHz and a clock(DIC1-26) swung by PLL on the basis of 27MHz may be shown at DVD refresh.

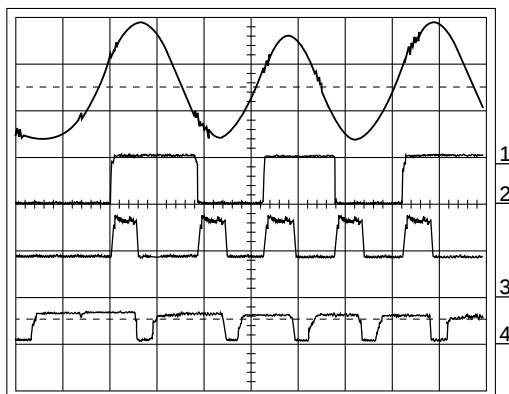


Fig.2-32

- CH1 : RFIN(DIC1-50, RF Input signal)
- CH2 : SLCO (DIC1-34, Sliced data)
- CH3 : PDON (DIC1-36, Phase difference signal)
- CH4 : PDOP (DIC1-37, Phase difference signal)

PLL lock at DVD playback

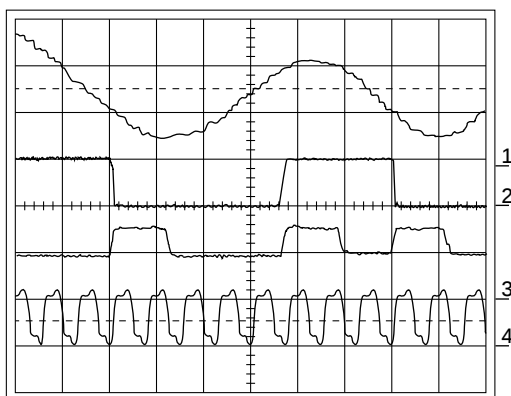


Fig. 2-33

- CH1 : RFIN(DIC1-50, RF Input signal)
- CH2 : SLCO (DIC1-34, Sliced data)
- CH3 : PDON (DIC1-36, Phase difference signal)
- CH4 : PLCK (DIC1-26, PLL clock)

It shows PLL clock swung on the right and left on the basis of input RF signal, PLL clock and trigger at DVD playback. The eye of RF signal is open in PLL lock state.

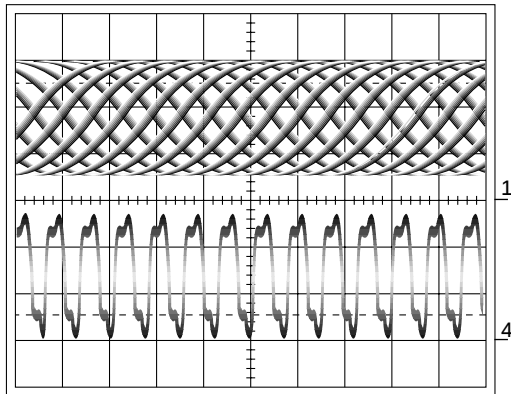


Fig. 2-34

- CH1 : RFIN(DIC1-50, RF Input signal)  
(V<sub>p-p</sub> is approx. 2.5V)
- CH4 : PLCK (DIC1-26, PLL clock)

It shows RF signal and RLLD signal waveform at DVD refresh and RLLD waveform is regular as 1.65V. If a serious error occurs in disk, RLLD signal is outputted as correction signal and enters PLL control system after summing with phase difference signal.

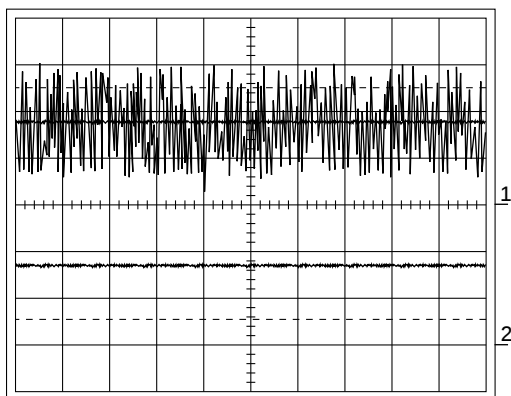


Fig. 2-35

- CH1 : RFIN(DIC1-50, RF Input signal)
- CH2 : RLLD (DIC1-38, RLLD signal at disk refresh)

RLLD signal is outputted at disk halt or occurrence of serious error.

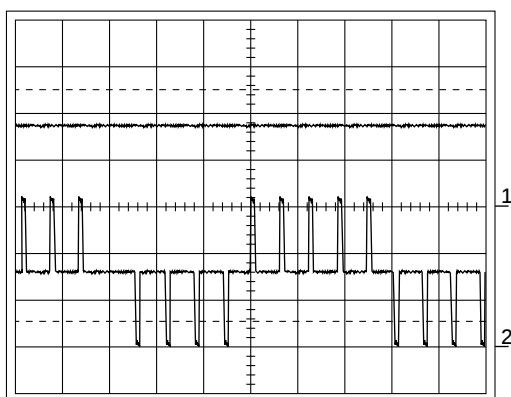


Fig. 2-36

- CH1 : RFIN(DIC1-50, RF Input signal)
- CH2 : RLLD (DIC1-38, RLLD at disk halt or occurrence of serious error)

Because RF signal, external VCO input voltage and VCO control voltage swings terribly at disk halt, PLL output clock changes largely.(PLL not unlock state)

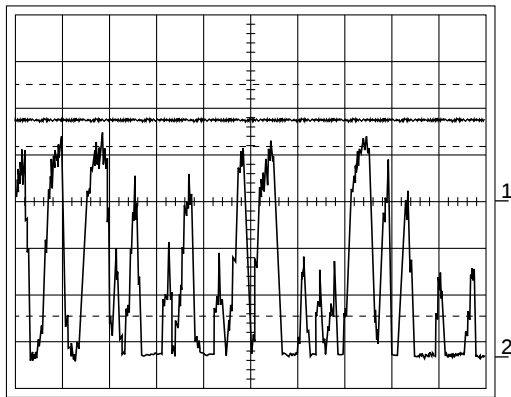


Fig. 2-37

- CH1 : RFIN(DIC1-50, RF Input signal at disk halt)
- CH2 : VCO control signal (DD1-3, Variable capacitance diode)

The input voltage of VCO becomes a regular voltage level(approx. 3.59V in Figure) at DVD playback and VCO outputs PLL clock depending on this control voltage. The input voltage of VCO swings a little and appears as frequency variation of VCO as much as change amount. As the control voltage of VCO is higher, PLL clock frequency becomes high.

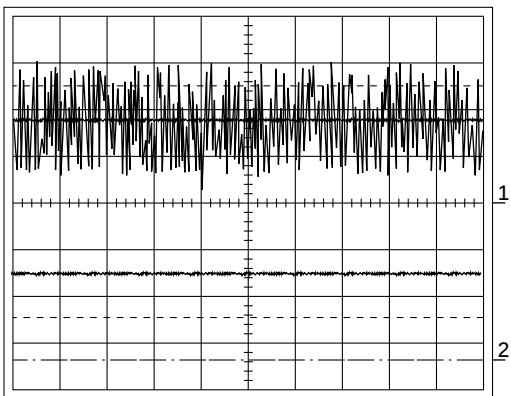


Fig. 2-38

- CH1 : RFIN(DIC1-50, RF Input signal at disk playback)
- CH2 : VCO control signal (DD1-3, Variable capacitance diode)

When the inputted RF signal is error-correction processed in DIC1 and inputted into DIC6, it is processed to release the digital copy protection. The digital copy protection released data makes the acknowledge signal of CH2 LOW and outputs data(CH4)

when MPEG decoder(Video, Audio signal process chip) falls the request signal to 0(LOW) and demands data. The data acknowledge signal of CH2 and data of CH4 are synchronized with BSTCLK(CH3) and outputted. BSTCLK of CH3 is made by division of 27MHz into 16.

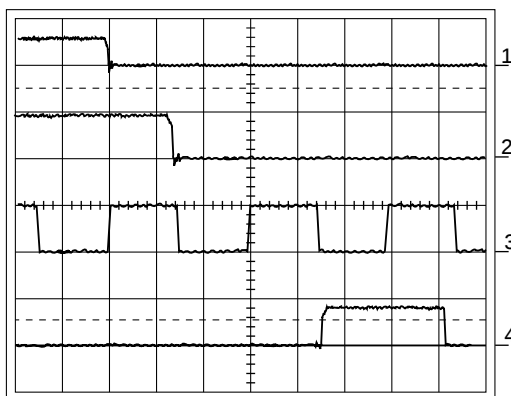


Fig. 2-39

- CH1 : PVSREQ (DIC6-13, Data request signal from DVD1)
- CH2 : PVSACK (DIC6-14, Output data acknowledge signal)
- CH3 : BSTCLK (DIC6-17, Output clock)
- CH4 : PVSIN (DIC6-5 to 11, Output data)

DIC6 shares the data bus of micom with other devices(DVD1, EPROM, SRAM). CH2 shows the measurement of a signal line of data bus. The inclining and rising part in CH2 indicates high impedance state after data bus floating. The data bus is pulled up by 4.7K resistance.

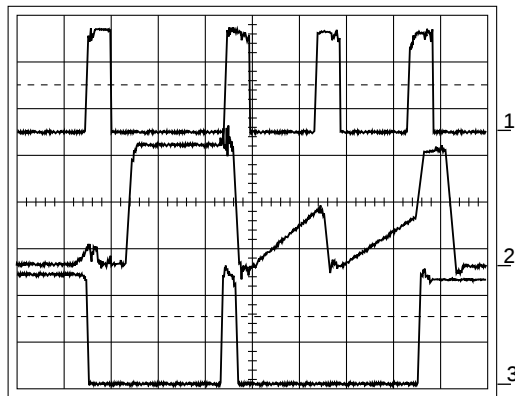


Fig. 2-40

- CH1 : ALE (MIC4-11, Address latch enable signal)
- CH2 : HAD0-7 (MIC402 to 9, Main micom address and data multiplexed bus)
- CH3 : HA0-7 (MIC4-19 to 12, Main micom address 0-7)

It shows access in fast page mode as waveform when DIC1 accesses external memory(4Mbit DRAM) at DVD refresh.

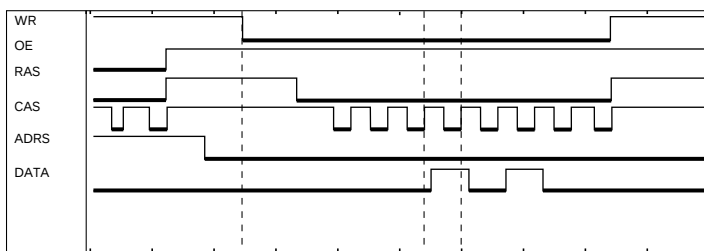


Fig. 2-41

- WE : Write enable(DIC2-7)
- OE : OUTPUT ENABLE (DIC2-22)
- RAS : RAW ADDRESS STROBE (DIC2-8)
- CAS : COLUMN ADDRESS STROBE (DIC2-23)
- ADRS : ADDRESS
- DATA : DATA

It shows the external memory refresh of DIC1 and uses Cas Before Ras Refresh.

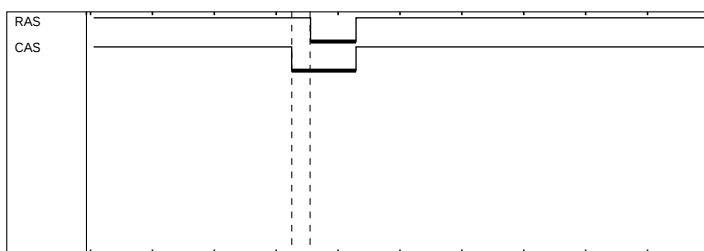


Fig. 2-42

- DIC2 (4MDRAM) REFRESH TIME

It shows refresh per approx. 31 usec as measurement of refresh waveform outputted by DIC1 in large timing.

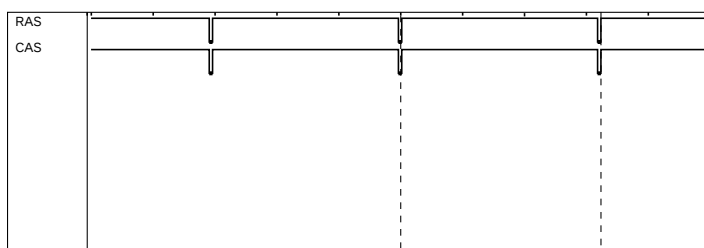


Fig. 2-43

Refresh time(PERIOD) of DIC2(4MDRAM)

It measures the timing that data processed in DIC1 at DVD playback enters DIC6

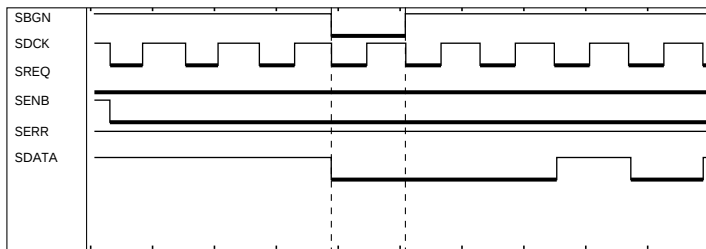


Fig. 2-44

- CH1 : SBGN (DICI-92, SECTOR BEGIN)
- CH2 : SDCK (DICI-94, CLOCK)
- CH3 : SREQ (DICI-96, DATA REQUEST)
- CH4 : SERR (DICI-91, DATA ERROR)
- CH5 : SDATA (DICI-81~84, 87~90, DATA)

It shows the timing of control signal, address and data bus when micom accesses DIC1 and DIC6.  
So to speak, timing at writing a value in the internal register of DIC1 and DIC6.

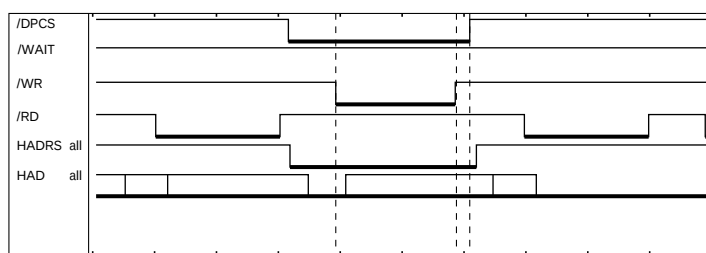


Fig. 2-45

- CH1 : DPCS (DIC6-76, TC90A19/TC6804F chip select)
- CH3 : WR (DIC6-78, TC90A19F/TC6804F register write)
- CH4 : RD (DIC6-77, TC90A19F/TC6804F register read)
- CH5 : HADRS (DIC6-74, 75, Micom address bus)
- CH6 : HAD (DIC6-65 to 72, Micom data bus)

It shows a waveform that DIC1 requests a management to micom by interrupt generation.

Micom recognizes the interrupt and writes a value in register of DIC1 to respond (instruction) for interrupt. Micom accesses DIC1 five times in Figure. Micom recognizes the operation of chip and makes a necessary instruction after receiving the interrupt generated in DIC1 and DIC6 and accessing the corresponding chip. The instruction is executed by accessing the corresponding chip and writing a value(digital) into register. Micom accesses DIC1 via DIC6.

The block diagram shows that the same type as signal line connecting DIC6 and micom is composed between DIC1 and DIC6. That is, DIC1 is interfaced with micom through DIC6.

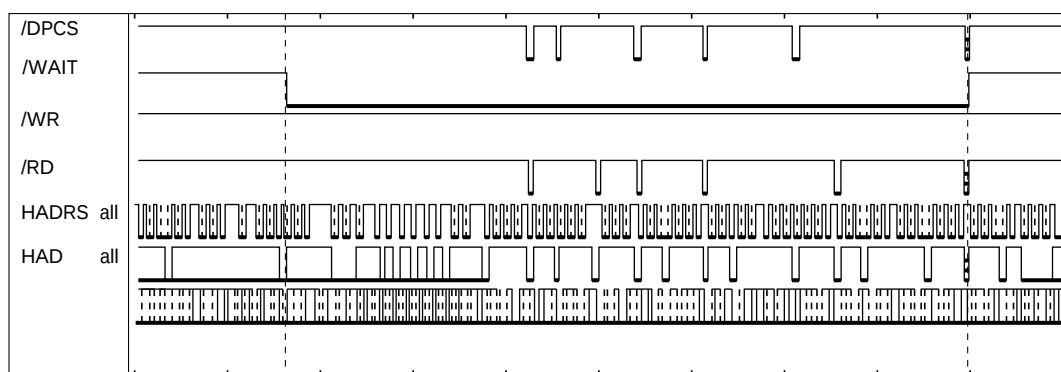


Fig. 2-46

- CH1 : DPCS (DIC6-76, TC90A19/TC6804F chip select)
- CH2 : DPRINT (DIC1-23, DIC6-80, TC90A19F/TC6804F interface)
- CH3 : WR (DIC6-78, TC90A19F/TC6804F register write)
- CH4 : RD (DIC6-77, TC90A19F/TC6804F register read)
- CH5 : HADRS (DIC6-74, 75, Micom address bus)
- CH6 : HAD (DIC6-65 to 72, Micom data bus)

## 2-5 SERVO circuit

---

### 2-5-1 Outline

SERVO system of DVD is divided into Focusing SERVO, Tracking SERVO, SLED Linked SERVO and CLV SERVO(DISC Motor Control SERVO).

1. Focusing SERVO

Focuses the optical spot output from object lens onto the disc surface. Maintains a uniform distance between object lens of Pick-up and disc (for surface vibration of disc).

2. Tracking SERVO

Make the object lens follow the disc track in use of tracking error signal (created from Pick-up).

3. SLED Linked SERVO

When the tracking actuator inclines outwardly as the object lens follows the track during play, the SLED motor moves slightly (and counteracts the incline).

4. CLV SERVO (DISC Motor Control SERVO)

Controls the disc motor to maintain a constant linear velocity (necessary for RF signal).

## 2-5-2 SERVO system block diagram

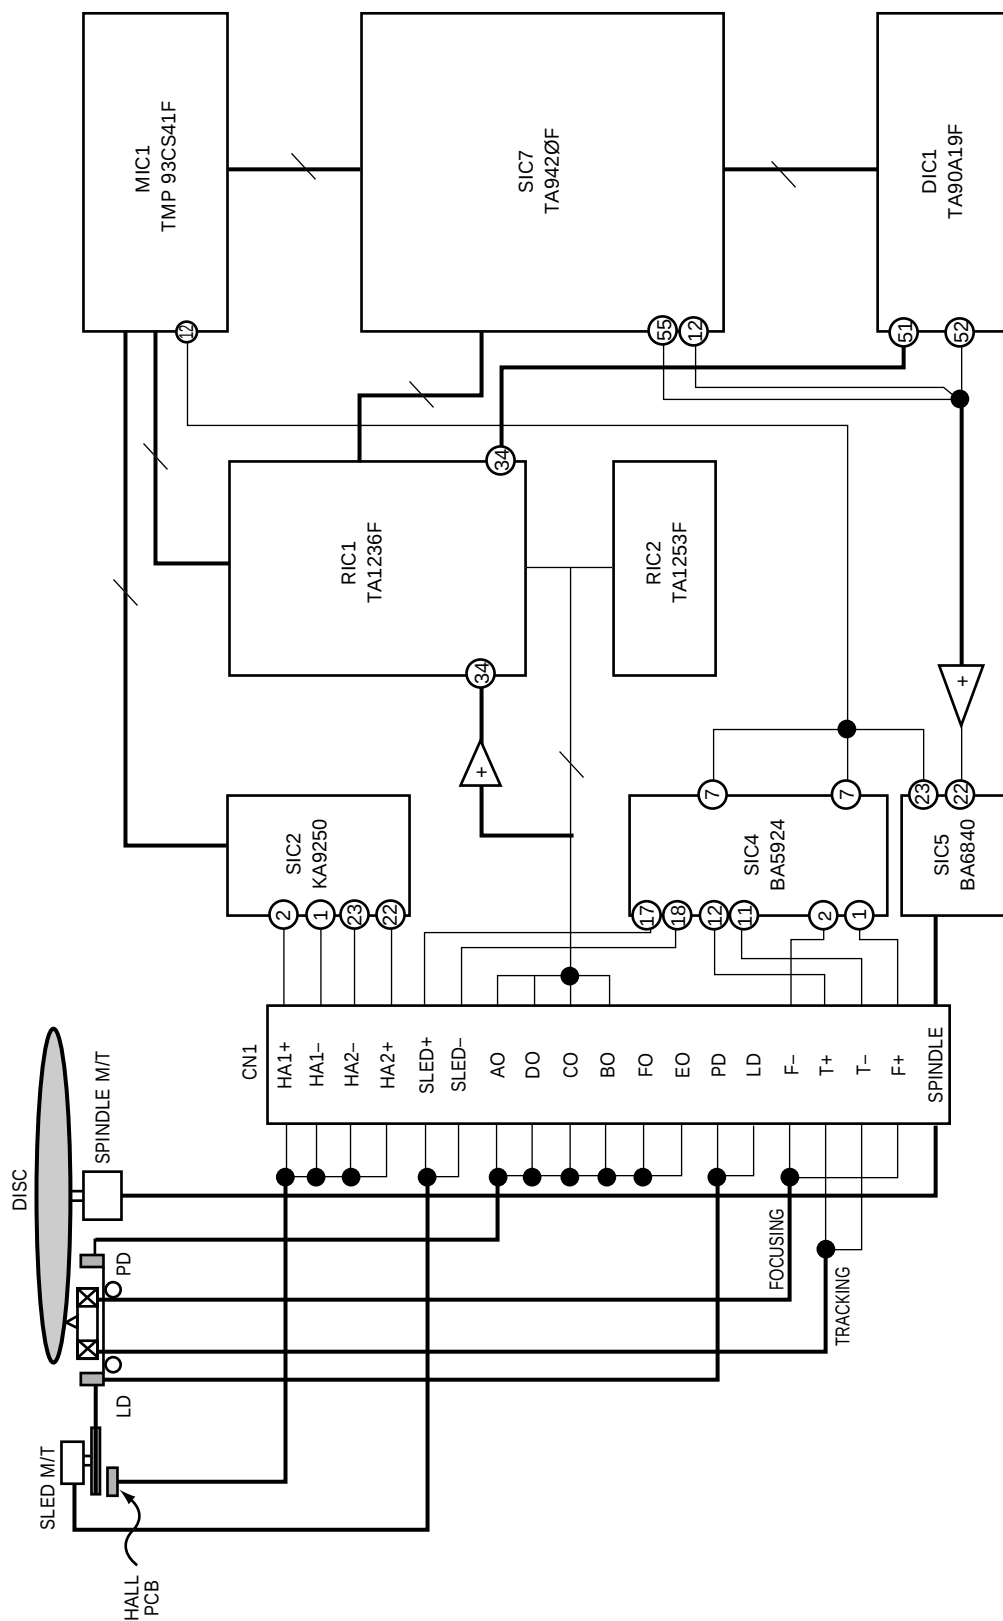


Fig. 2-47


## 2-5-3 Operation

### 2-5-3(a) FOCUSING SERVO

#### 1. Focus input

The focus loop is changed from open loop to closed loop, and the triangular waveform moves the object lens up and down (at pin 48 of SIC7 during Focus SERVO ON.) At that time, S curve is input to pin 43 of SIC7.

SBAD (pin 44 of SIC7) signal, summing signal of PD 1, B, C, D, is generated by S curve, and zero cross(2.1V) point occurs when S curve is focused and SBAD signal exceeds a preset, constant value. The focus loop is changed to closed loop, and the object lens follows the disc movement, maintaining a constant distance from the disc.

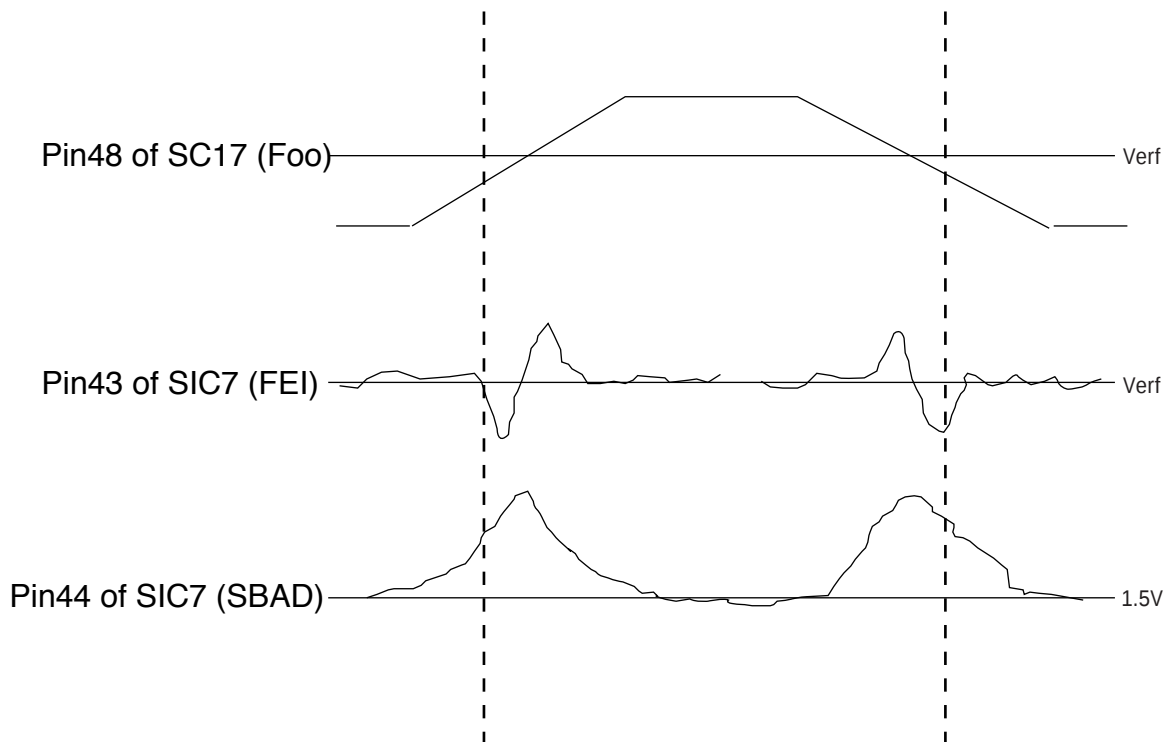

(these operations are same in CD and DVD).

Fig. 2-48

#### 2. Play

When focus loop closes the loop during focus servo on, both pin 43 and pin 48 of SIC7 are controlled by VREF voltage(approx. 2.1V), and pin 1, 2 of SIC4 are approximately 4.5V.

### 2-5-3(b) TRACKING SERVO

#### 1. Normal play mode

##### 1) For DVD

Composite : The signal output from PD A, B, C, D of Pick-up, the tracking error signal (RIC2 pin 14) uses the phase difference of A+C and B+D in RIC2, and inputs to terminal 8 of RIC1. The signal is output to RIC1 pin 21, and input to SIC7 pin46(TEI). Then, it is output to SIC7 pin 49 via digital equalizer, and applied to the tracking actuator through SIC4. Pins 46, 49 of SIC7 are controlled by VREF(approx. 2.1V) during normal play.

Meanwhile, DVD repeats the track jump from 1 to 4 in inner direction at normal play ( because data- read speed from disc is faster than data output speed on screen).

2) For CD, VCD

Receive the signal output through E, F of Pick-up, from RIC1, differently from DVD and make the tracking error signal through RIC1 pin21. The tracking error signal is similar to DVD.

2. SEARCH Mode :

Search mode : Fine seek,(Moving the tracking actuator slightly little below 255 track) and coarse search, moving much in use of sled motor. The coarse search will be described in sled linked servo and now, the fine seek is explained shortly.

If the object lens is located near target, cut off the tracking loop and give the control signal as many as desired count to move the tracking actuator via SIC7 pin 49 terminal(TRO).

2-5-3(c) SLED LINKED SERVO

1. Normal play mode

Move SLED motor slightly by means of PWM signal in SIC7 pin 54, as the tracking actuator moves along with track during play. Control to move the entire Pick-up as the tracking actuator moves.

2. Coarse search mode

In case of long-distance search(such as chapter search), pin 48 uses sled FG (SIC2 pin 19, which is generated) by rotation of sled motor via hall PCB. Then, read ID and compute the existing track count after input of next track. If the existing track count is within fine seek range, tracking begins using fine seek.

2-5-3(d) CLV SERVO(DISC MOTOR CONTROL SERVO)

1. For DVD mode

Input RF signal (from Pick-up) to DIC1 pin50. Detect SYNC signal from RF in DIC1, and output PWM signal to DIC1 pin 54 for constant linear velocity.

2. For DC, VCD mode

Input RF signal (from Pick-up) to SIC7 pin 36, Detect SYNC signal from RF in SIC7, and output PWM signal to SIC7 pin 55 for constant linear velocity.

## 2-6 A/V decoder and output circuit description

### 2-6-1 Outline

VIC1(A/V decoder, CL61209P) transfers video data to VIC3(PAL/NTSC digital encoder, STV0119) and audio data to AIC3(PCM1720), AIC9(PCM1720), AIC14(PCM1723), KIC3(PCM1710, Audio D/A converter) after receiving and decoding A/V signal compressed from DIC6(Digital copy guard, TC6804AF) and SIC7(Servo processor, TC9420). VIC31 performs RGB encoding, copy guard processing and D/A conversion for the inputted signal and the converted analog video signal is outputted to exterior via amplifier, low pass filter and buffer of back analog part. The audio signal is D/A converted via AIC3, AIC9, AIC14 and KIC14, too and outputted to exterior through analog signal process similar to video signal.

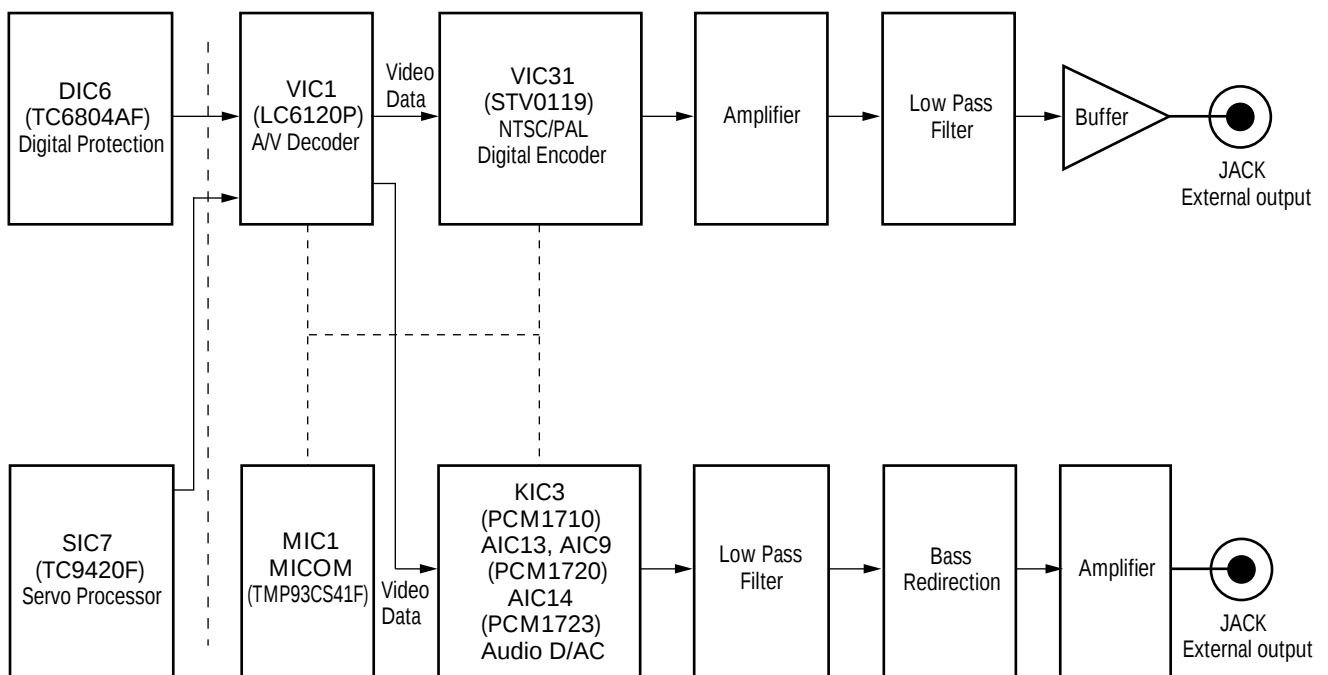


Fig. 2-49 A/V decoder and output block diagram

## 1. A/V decoder VIC1(CL6120P)

VIC1 receives DVD data compressed from DIC6(Digital protection GA) and VCD and CD data compressed from SIC7(Servo processor) for decoding. VIC8 and VIC9(74HC157, Digital mux.) are used to select one out of two types of signals and the control signal is DVD\_SEL signal inputted from pin 83 of main micom. DRAM(VIC3, 4, 5, 6, 7 ; KM416C254DJ-6) of 20Mbytes is used for decoding data storage and EPROM(VIC2 : AM27C4096-120) of 4Mbytes is used to save the decoding program. The signals of PVSREQ, BSTCLK, PLRERR, PVSACK, etc. indicate a decoding state during DVD refresh and help a smooth decoding for communication with DIC6.

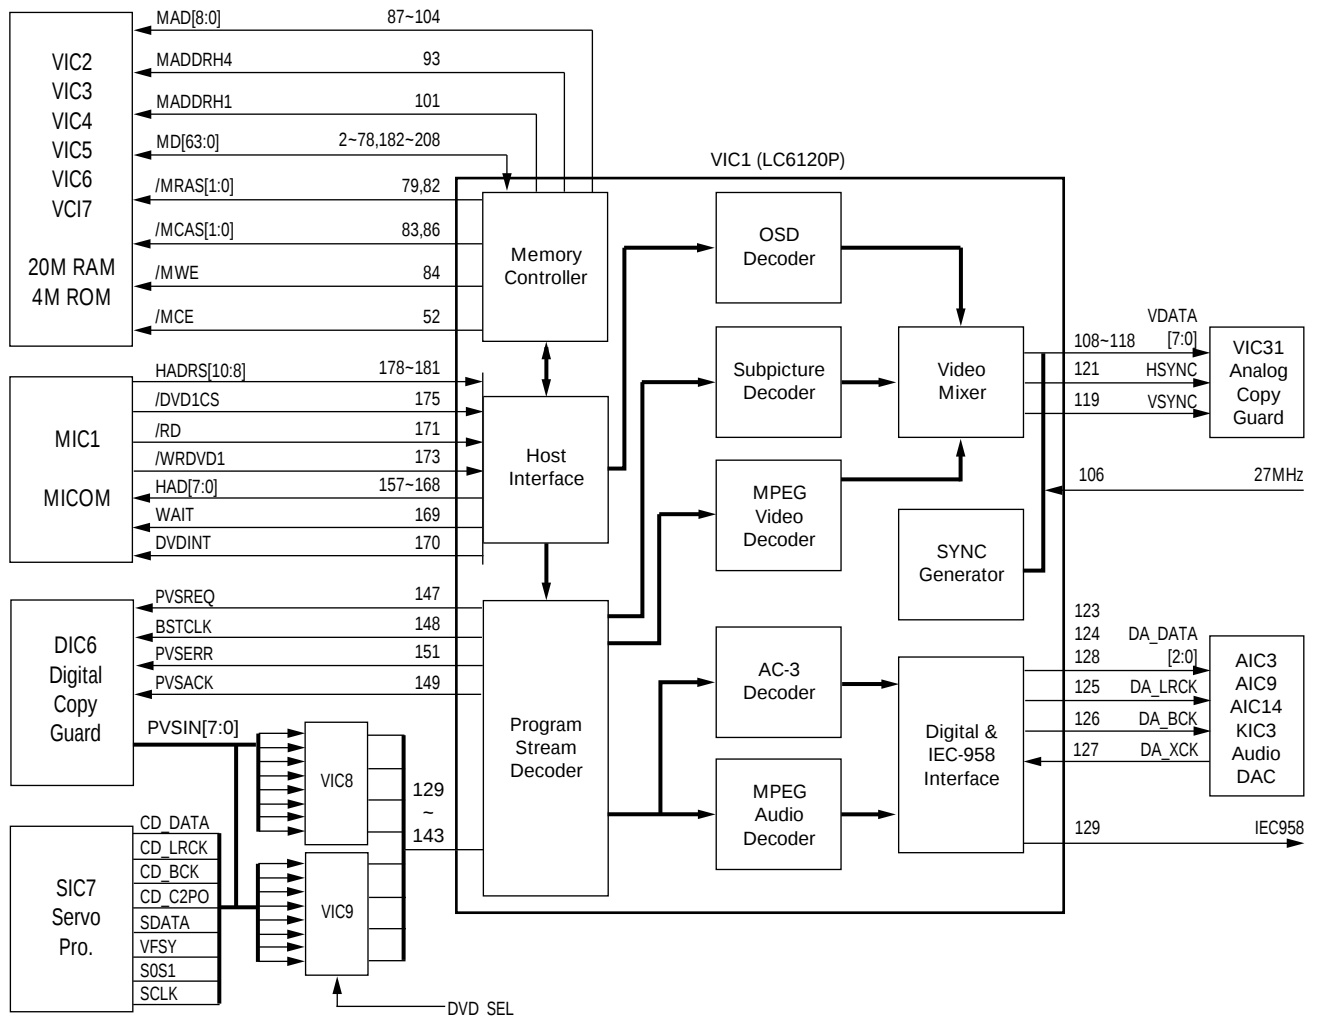


Fig. 2-50 A/V decoder VIC1(LC6120P) signal

## 2. NTSC/PAL digital encoder(STV0119)

A/V decoder receives 8 bit digital video signal(VDATA[7..0]) of ITU-R656 format, HSYMC and VSYNC from VIC1(CL6120P). When CR/CB/Y signal muxed ITU-R656 format is inputted, first demuxing is performed to release the format. The demuxed signal obtains each RGB/Y/C signal via RGB encoding, uminance processing and chroma processing. At that time, a signal transformation and addition are made by copy guard processing and obstruct the normal signal copy.

The composite signal is formed by addition of luminance and chrominance signal among them. The above signals select RGB or Y/C/CVBS by means of switch and are outputted out of chip through DAC.

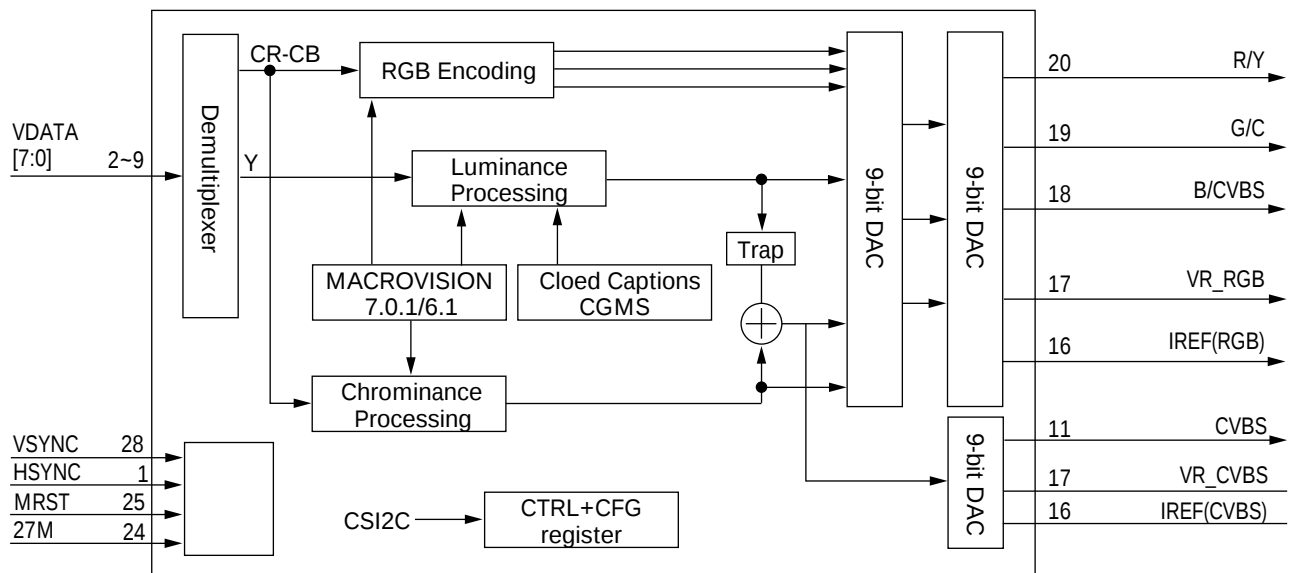


Fig. 2-51 VIC3(STVO119) internal block diagram

## 3. Amplifier

VQ2, VQ8, VQ14 and VQ18 peripheral circuits are amplifier parts to set the video signal outputted from STV0119 to rated output level. VR57 is load resistance demanded by STV0119 and the gain is determined by resistance ratio interfaced with collector and emitted of each transistor.

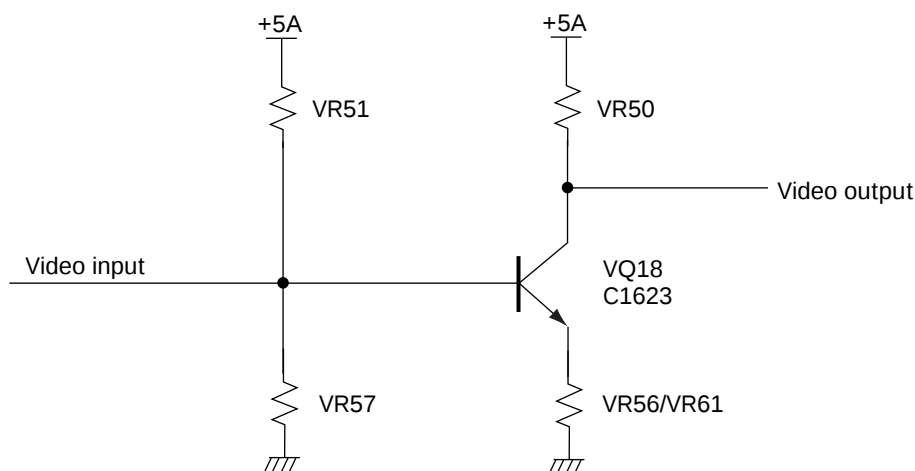


Fig. 2-52

#### 4. Low pass filter VFLT2, VFLT4

VFLT2 and VFLT4 remove quantization noise occurring in the course of D/A conversion as low pass filter with cut-off frequency of 6.75MHz.

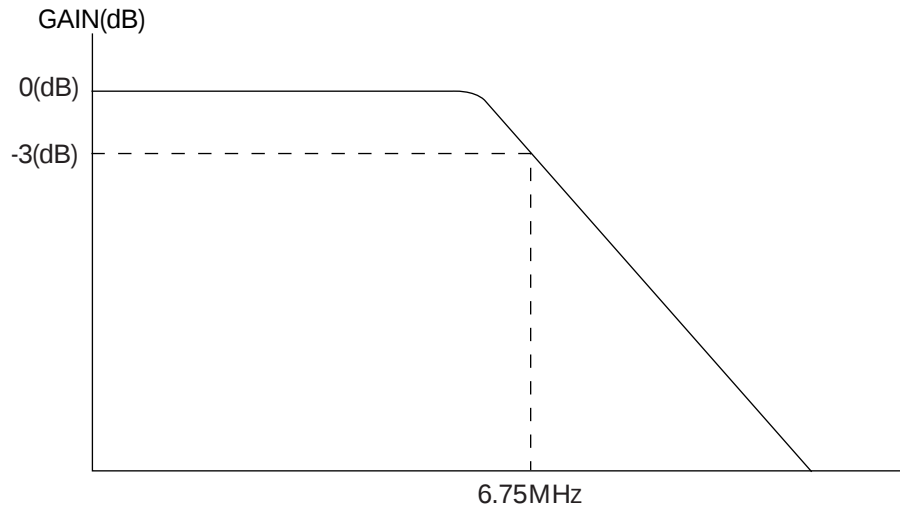


Fig. 2-53 Frequency features of VFLT2/VFLT4

#### 5. Switch

This system selects and outputs RGB or Y/C by register setting of STV0119. If Y/C is selected, Y/C signal is outputted to Y/C jack and RGB jack. These signals are abnormal and had better not to be outputted, seeing in RGB jack. It is same at RGB output. So, analog switch VIC32(14053) is used.

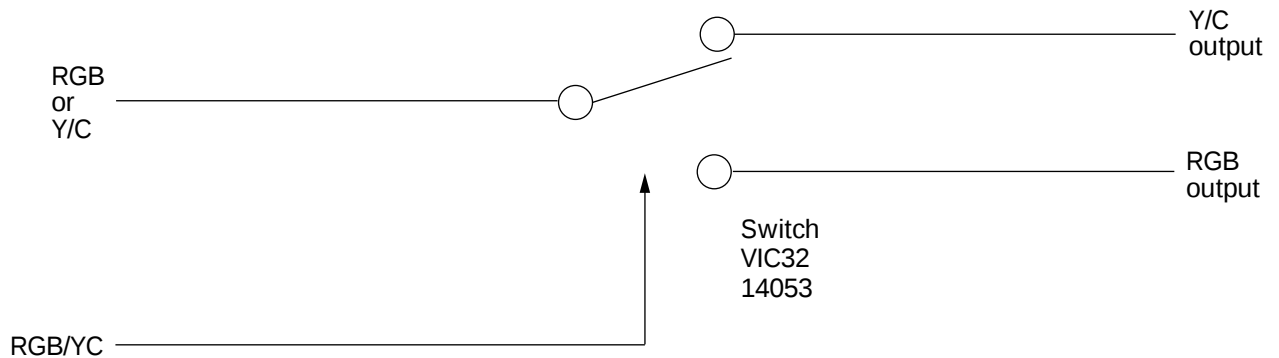


Fig. 2-54 RGB, Y/C switching



## 2-7-2 DVD audio output

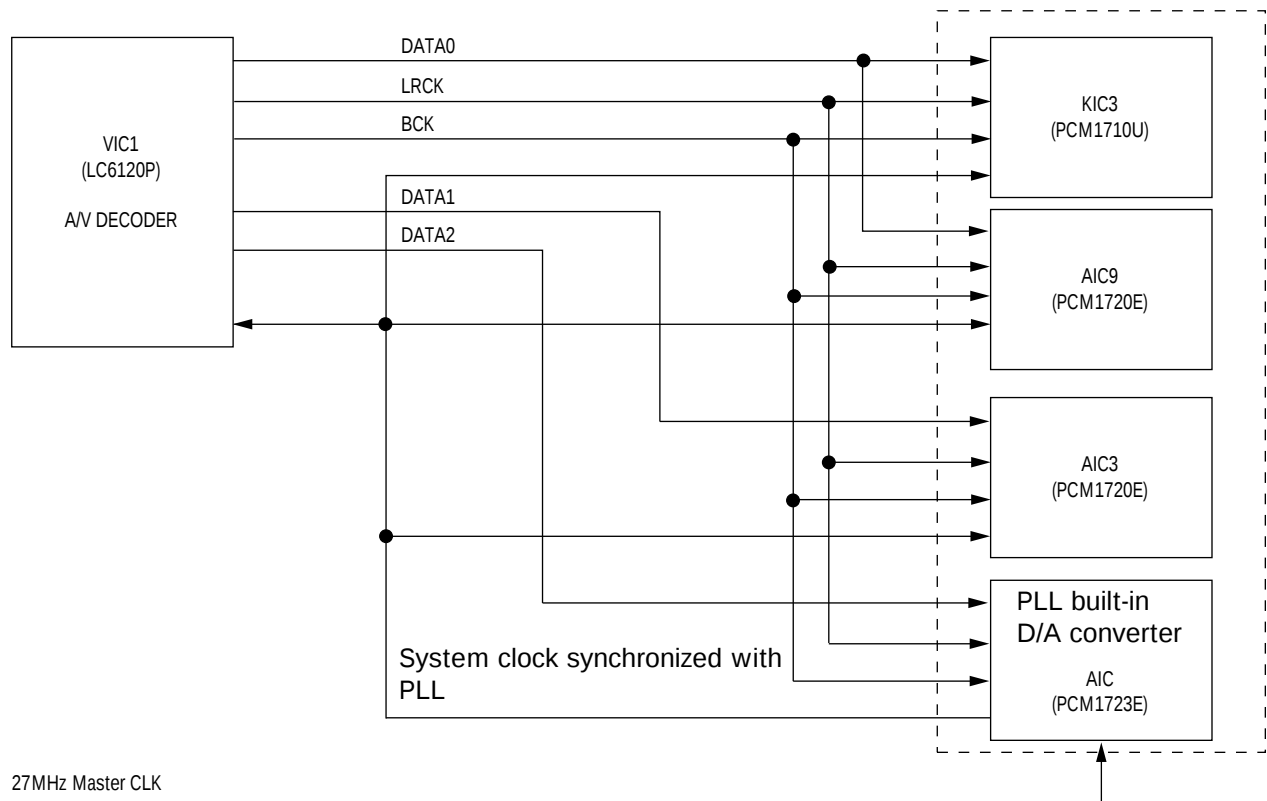


Fig. 2-56 Audio data and CLK

### 1. AC-3 5.1 channel

The system CLK generated by AIC14 built-in PLL circuit is provided for A/V decoder and audio D/A converter and Sync. of each channel is agreed.

DVD audio data outputted from VIC1 A/V decoder are supplied to DATA0 for 2 channels and to DATA0-2 for 5.1 channel. Then, LRCK is outputted by 48KHz or 96KHz.

Front L/R channel is outputted in DATA0, rear L/R channel in DATA1 and center and sub woofer channel in DATA2. DATA0 data are outputted to front L/R channel after D/A conversion and filtering of AIC3(PCM1720E).

DATA1 data are outputted by analog signal of D/A converter of AIC9 and to rear L/R via HPF after filtering.

DATA2 data are converted into analog signal by D/A converter of AIC14 and to rear L/R via HPF after filtering and a channel is outputted by center signal via post filter nad HPF.

The other channel of AIC14 is outputted by subwoofer signal through amplifier of +4.5dB and LPF.

### 2. Bass redirection(2 Channel down mixing)

If only 2 speakers are used in spite of output to 5.1 channel, center/rear and subwoofer signal may be down mixed in 2 channel L/R.

If there is a subwoofer speaker, it is outputted directly to subwoofer without down mixing.

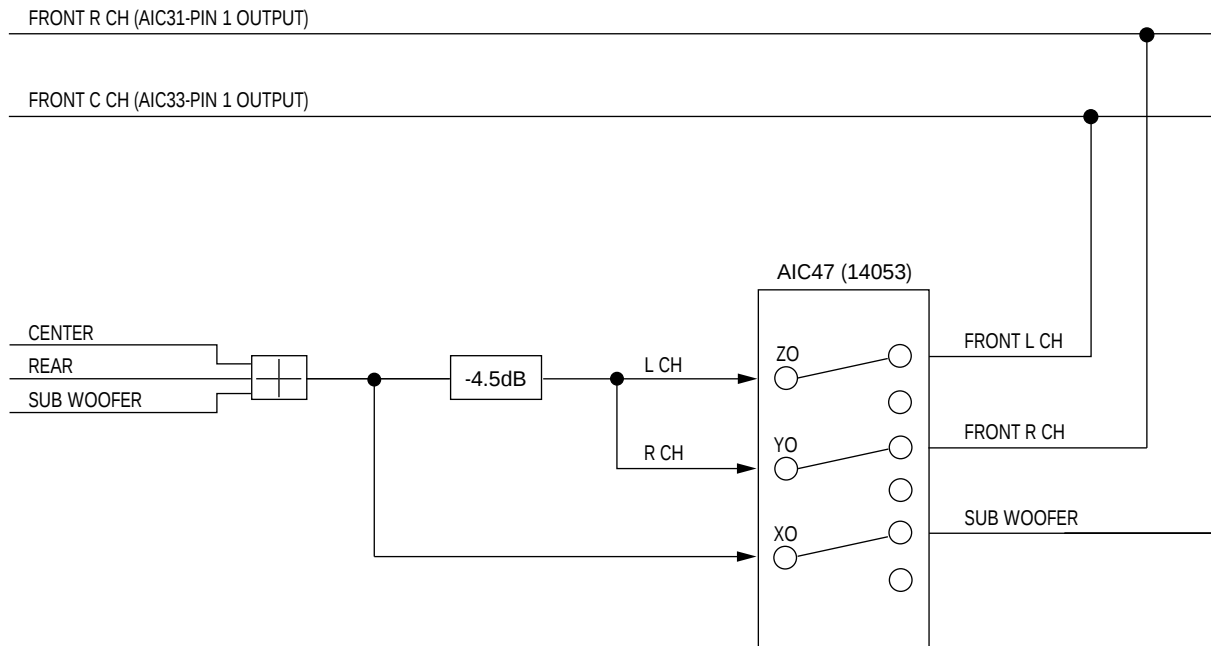


Fig. 2-57 2 Channel down mixing

The switch operations are carried out by AIC47(14053) in case of 2 Channel down mixing and sub woofer speaker using.

|                    | CD/VCD                                | DVD                               |                                       |
|--------------------|---------------------------------------|-----------------------------------|---------------------------------------|
|                    |                                       | Down mixing                       | Sub woofer speaker using              |
| AIC47(9,10,11 pin) | L                                     | H                                 | L                                     |
| Output             | AIC17-2, 5 pin<br>No down mixing:open | AIC17-1, 2 pin<br>Mixed L/R ouput | AIC17-12<br>Sub woofer speaker output |

Table 2-1 Down mixing output table

### 2-7-3 CD/VCD audio output


The audio of CD and VIDEO-CD bypasses the audio data of SIC7(TC9420F) in VIC1 A/A decoder and outputs them to DATA0. Also, they are outputted in stereo 2 channel(L/R channel) via D/A conversion and filtering of KIC3. Then, the switching of DVD audio output outputted from AIC3 and CD/VCD audio output of KIC3 at output in stereo 2 channels is describes in the below table.

|                      | CD/VCD                       | DVD                          |
|----------------------|------------------------------|------------------------------|
| KIC5-9, 10 pin (A,B) | H                            | L                            |
| Output               | KIC5-1, 13 Pin signal output | KIC5-2, 12 Pin signal output |


Table 2-2 CD/DVD Ouput table

2-8 IC Blocks


2-8-1 D1C1 (TC90A19F)

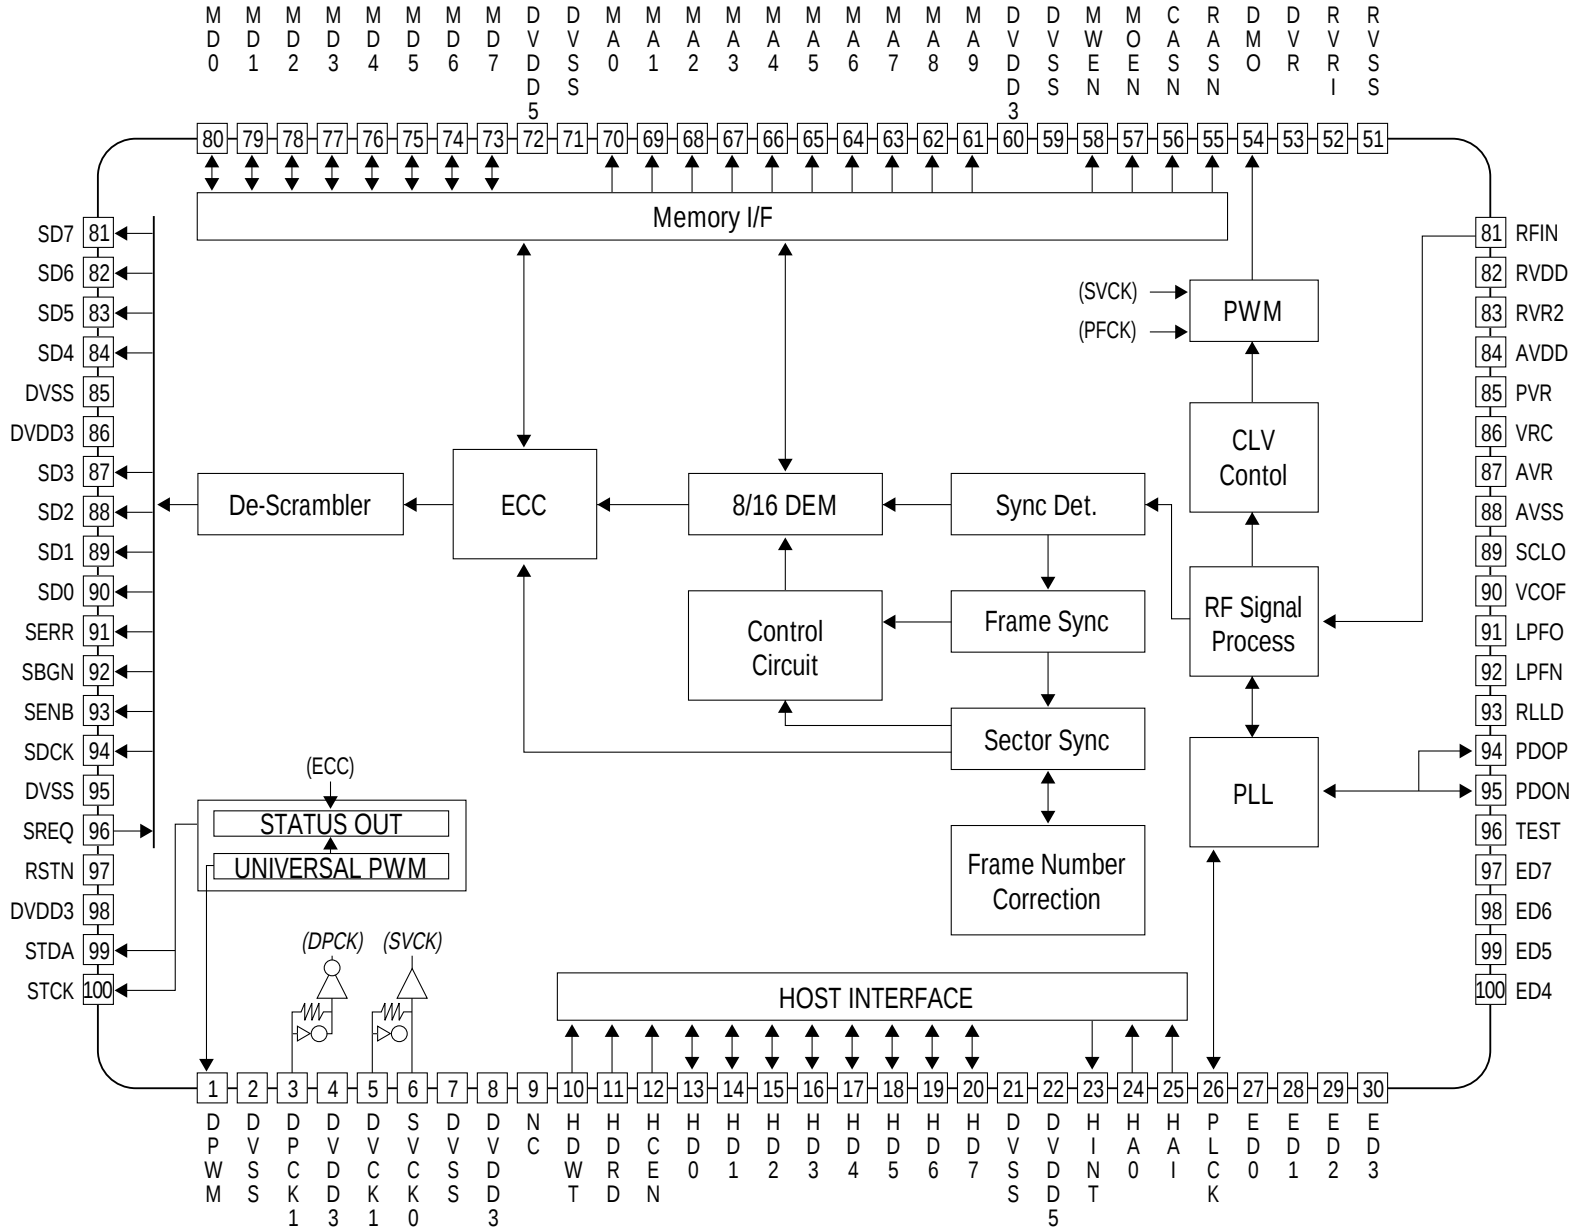


## 2-8-2 DIC2 (KM48C512)

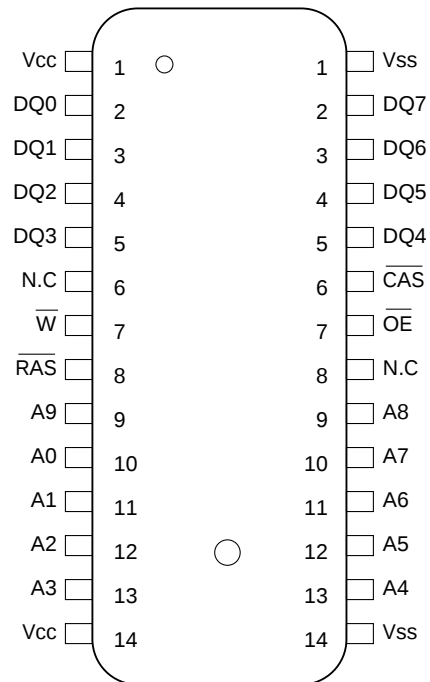


## 2-8-3 DIC6 (TC6804AF)

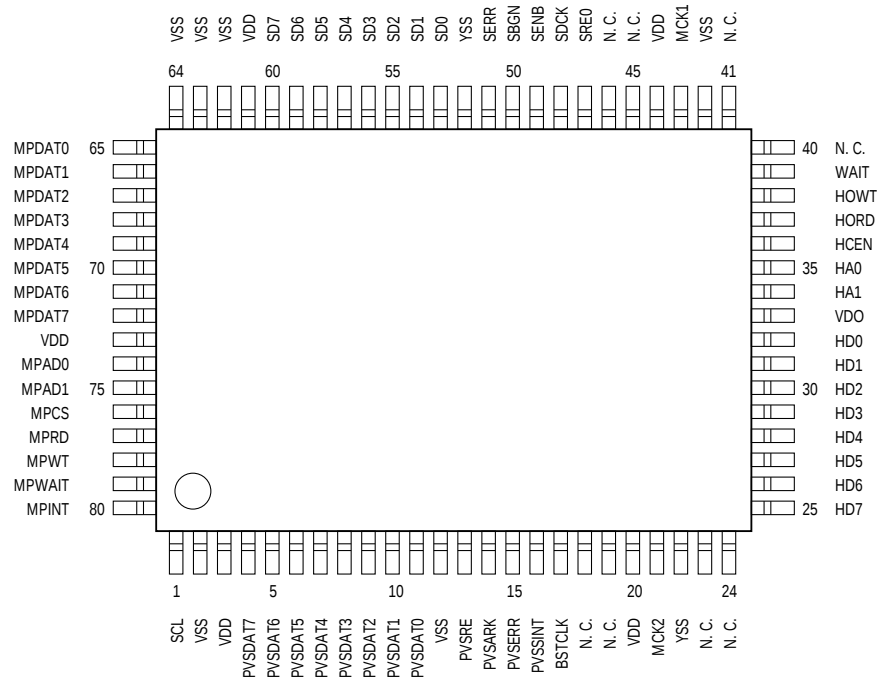


2-8-4 AIC3/AIC9 (PCM1720)

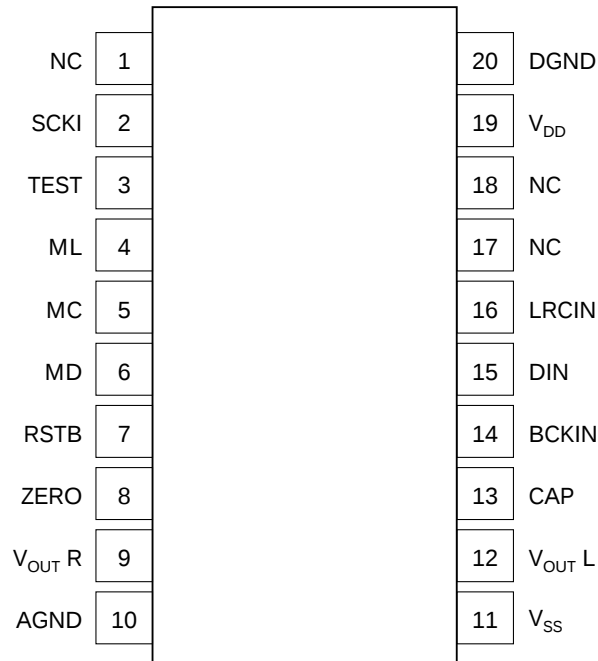


2-8-5 AIC14 (PCM1723)

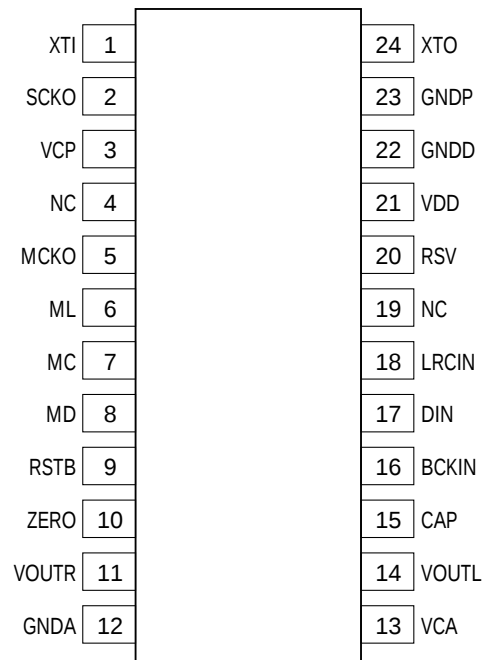


## 2-8-6 RIC1 (TA1236F)

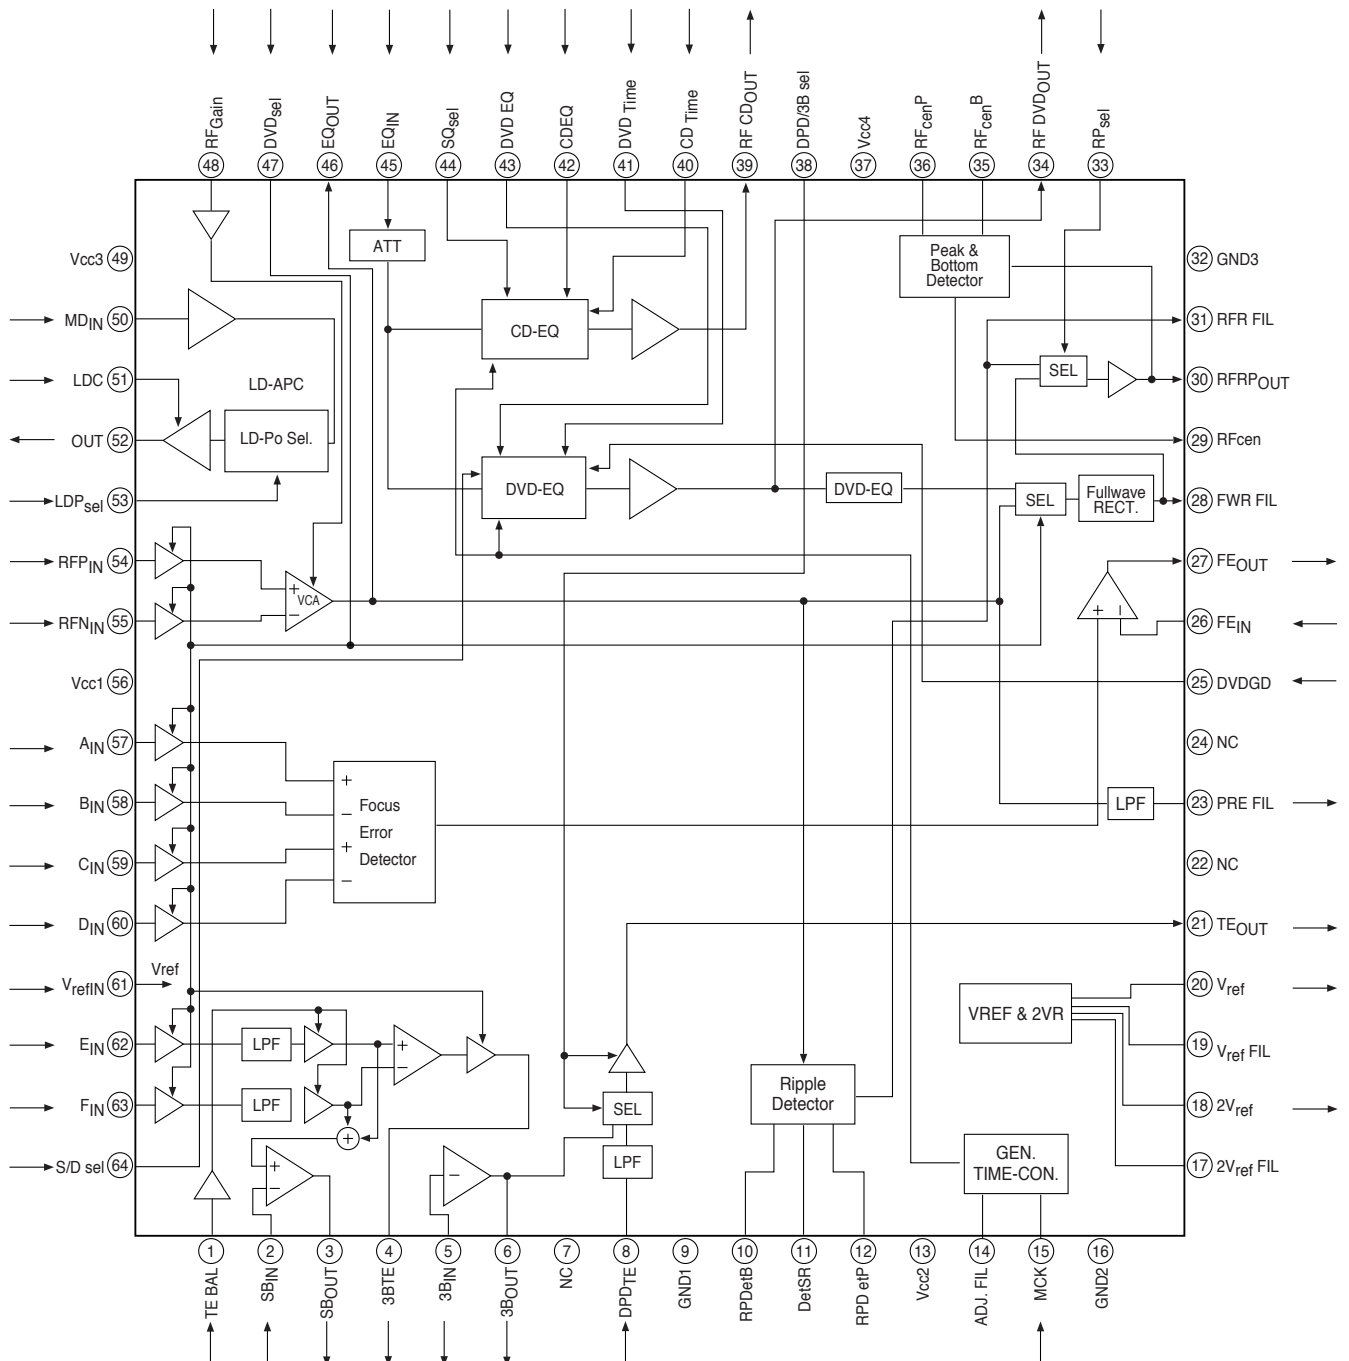


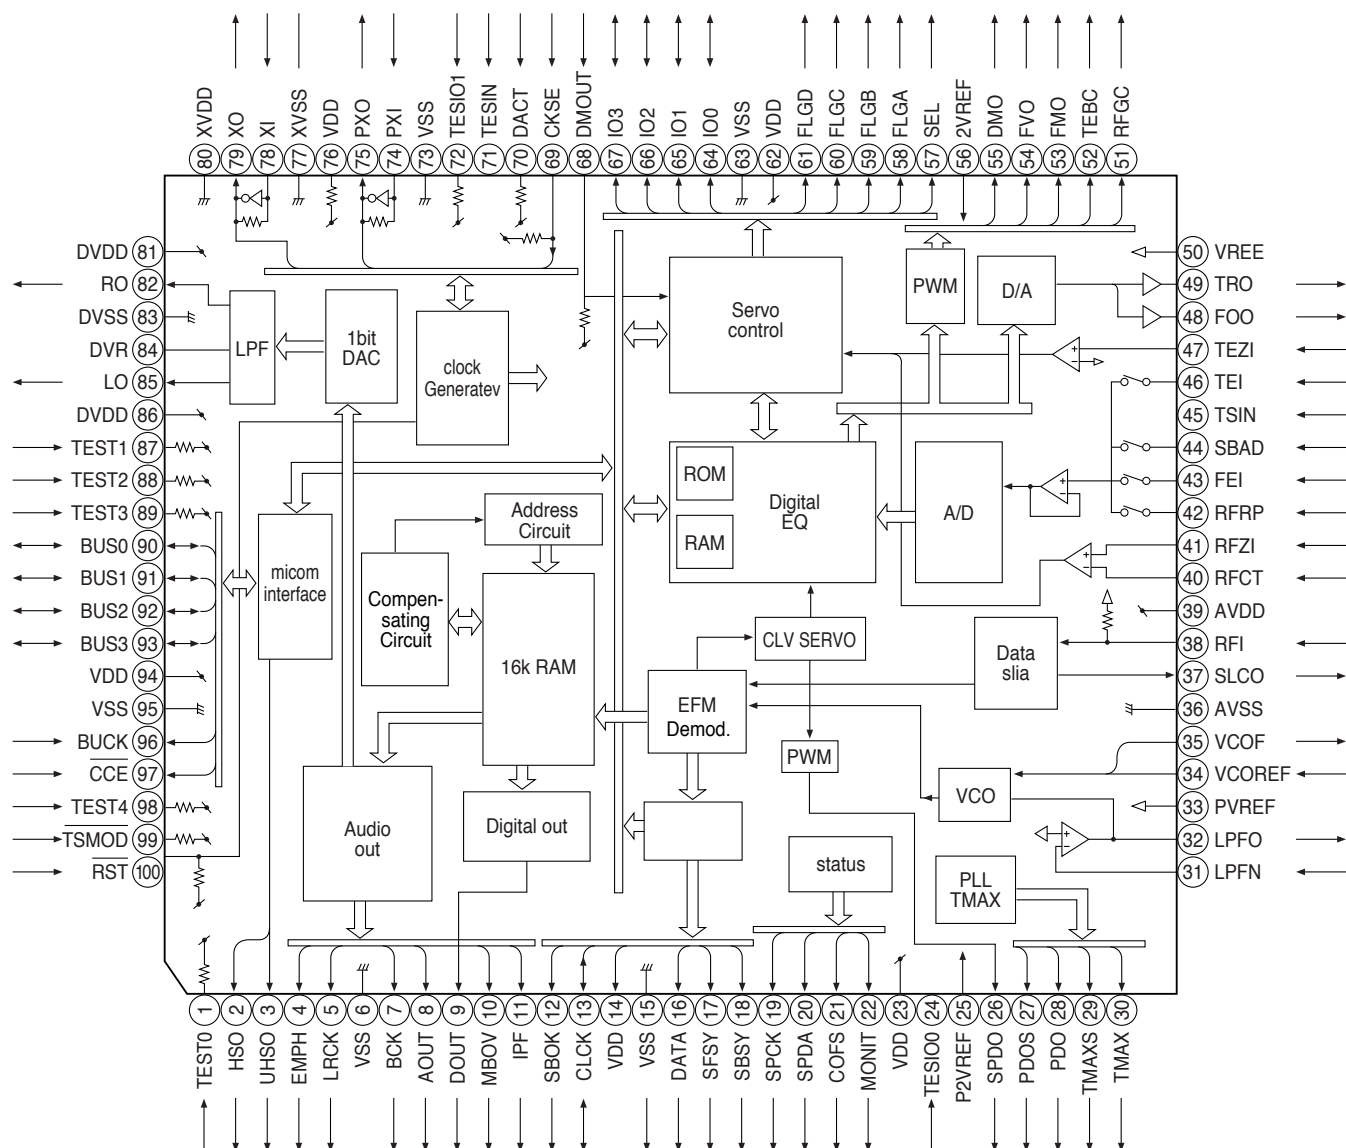**2-8-7 SIC (TC9420F)**

## 2-8-9 VIC1 (CL1620)


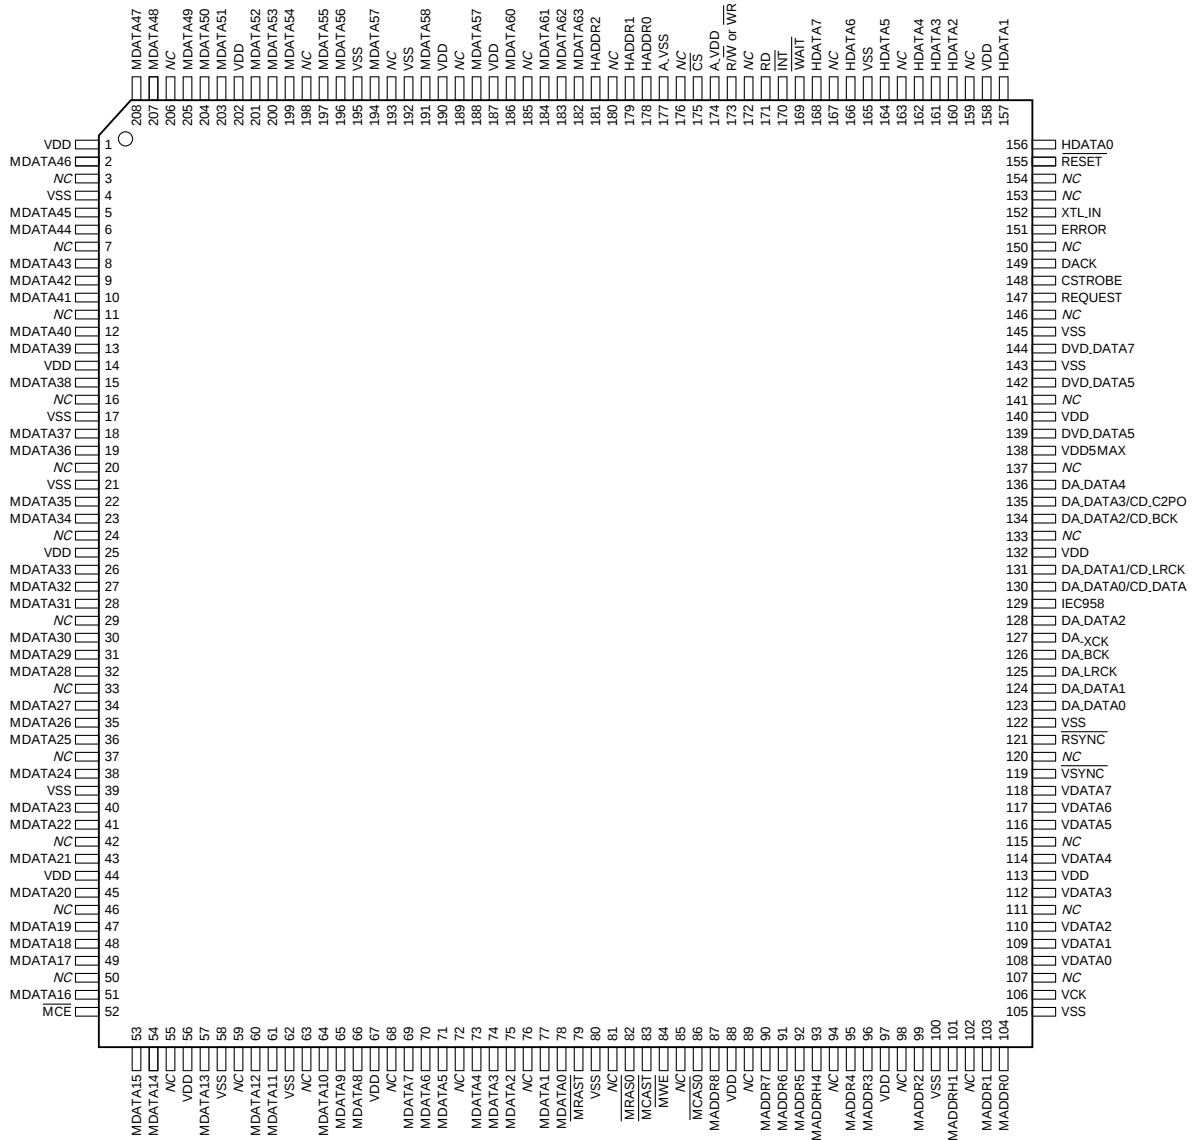


### 2-8-10 VIC2 (AM27C4096)

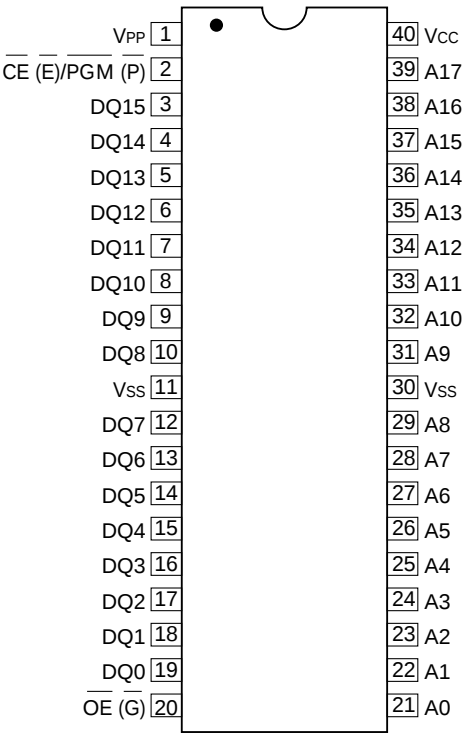

### 2-8-11 VIC3/4/5/6/7 (KM416C254BJ)


### 2-8-12 VIC31 (STV0119)

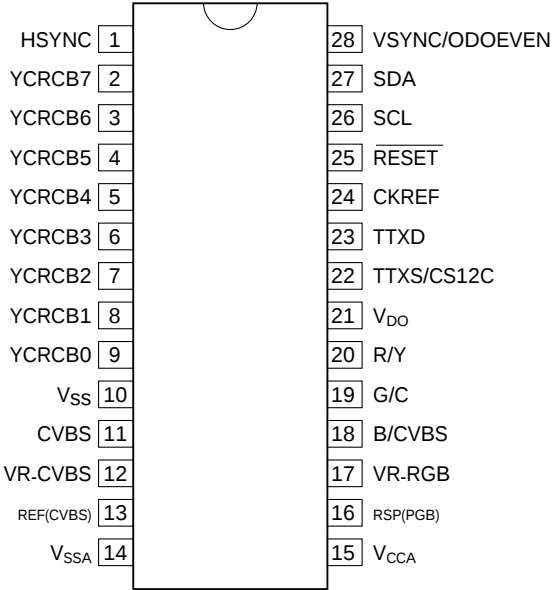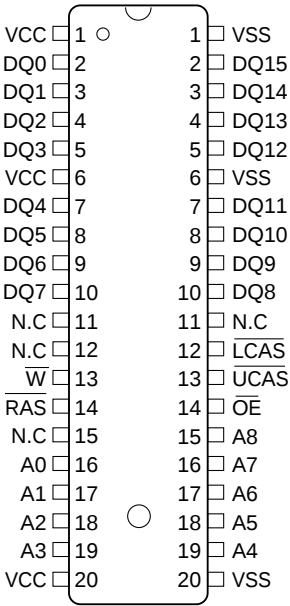



---


## 5. Thoubleshooting


---

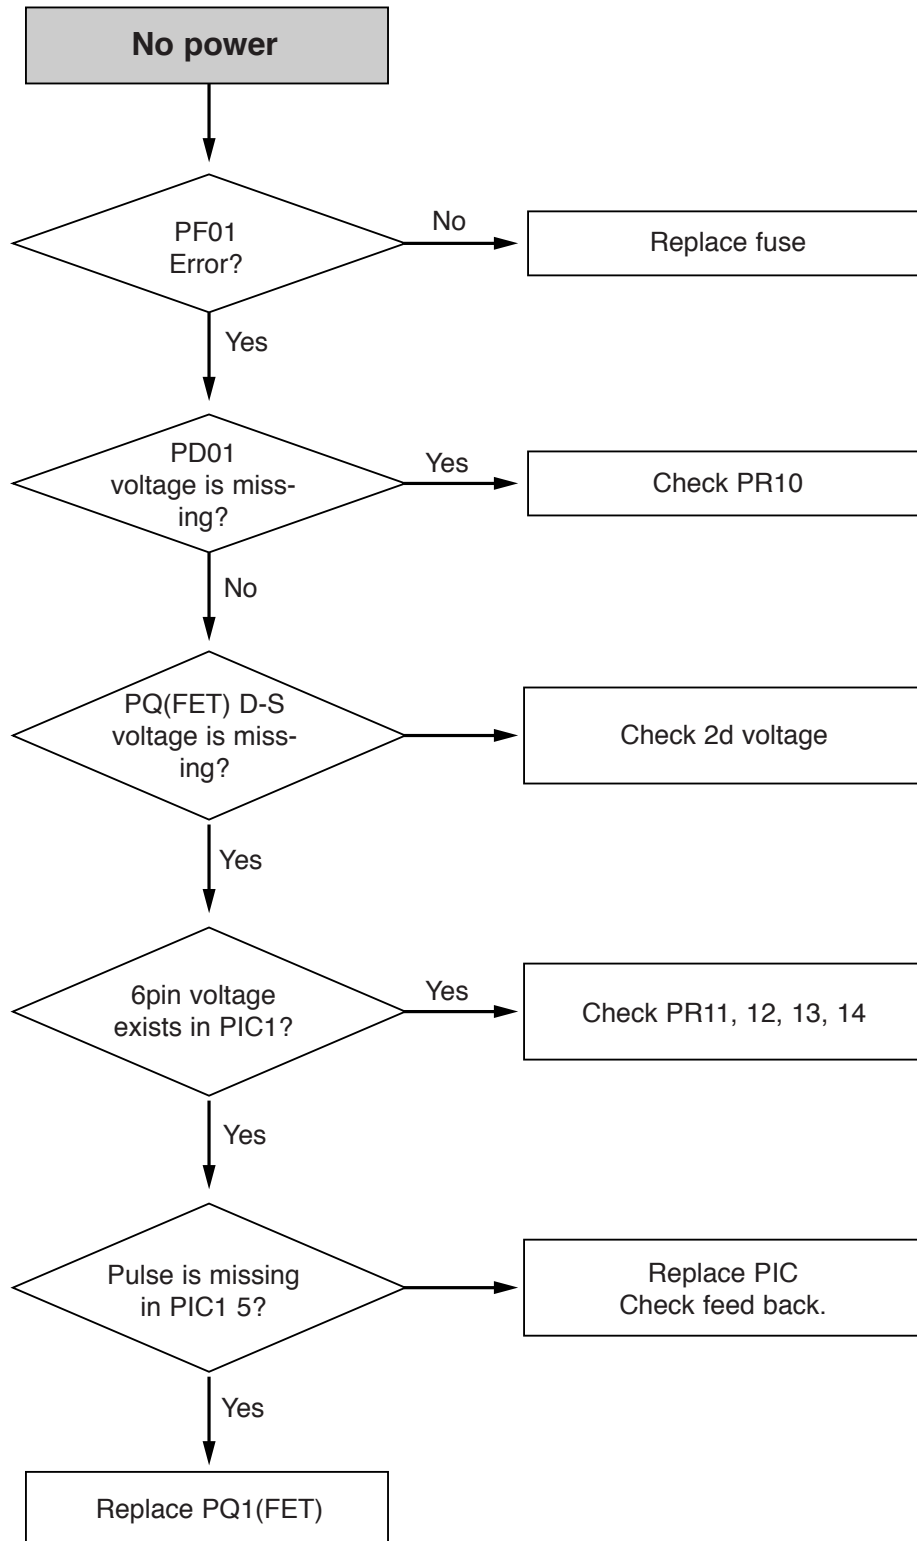


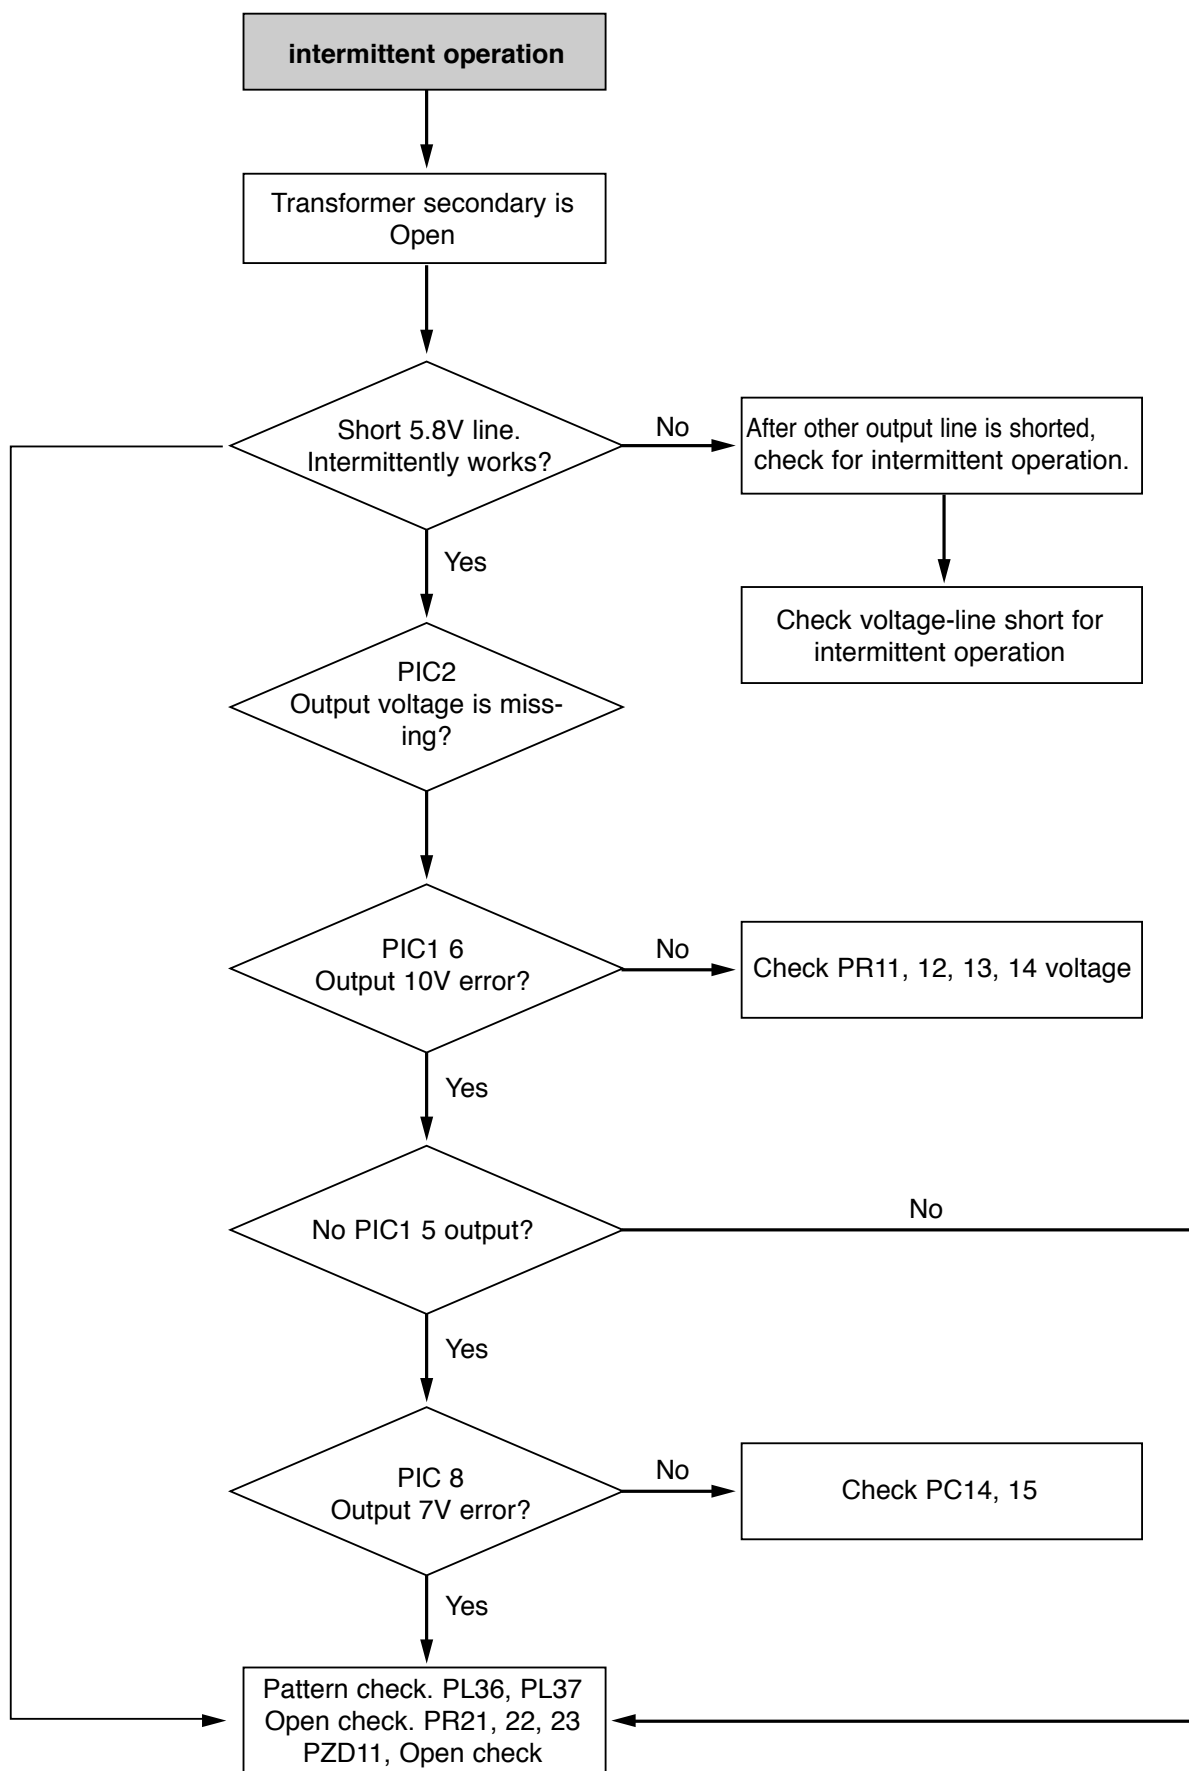


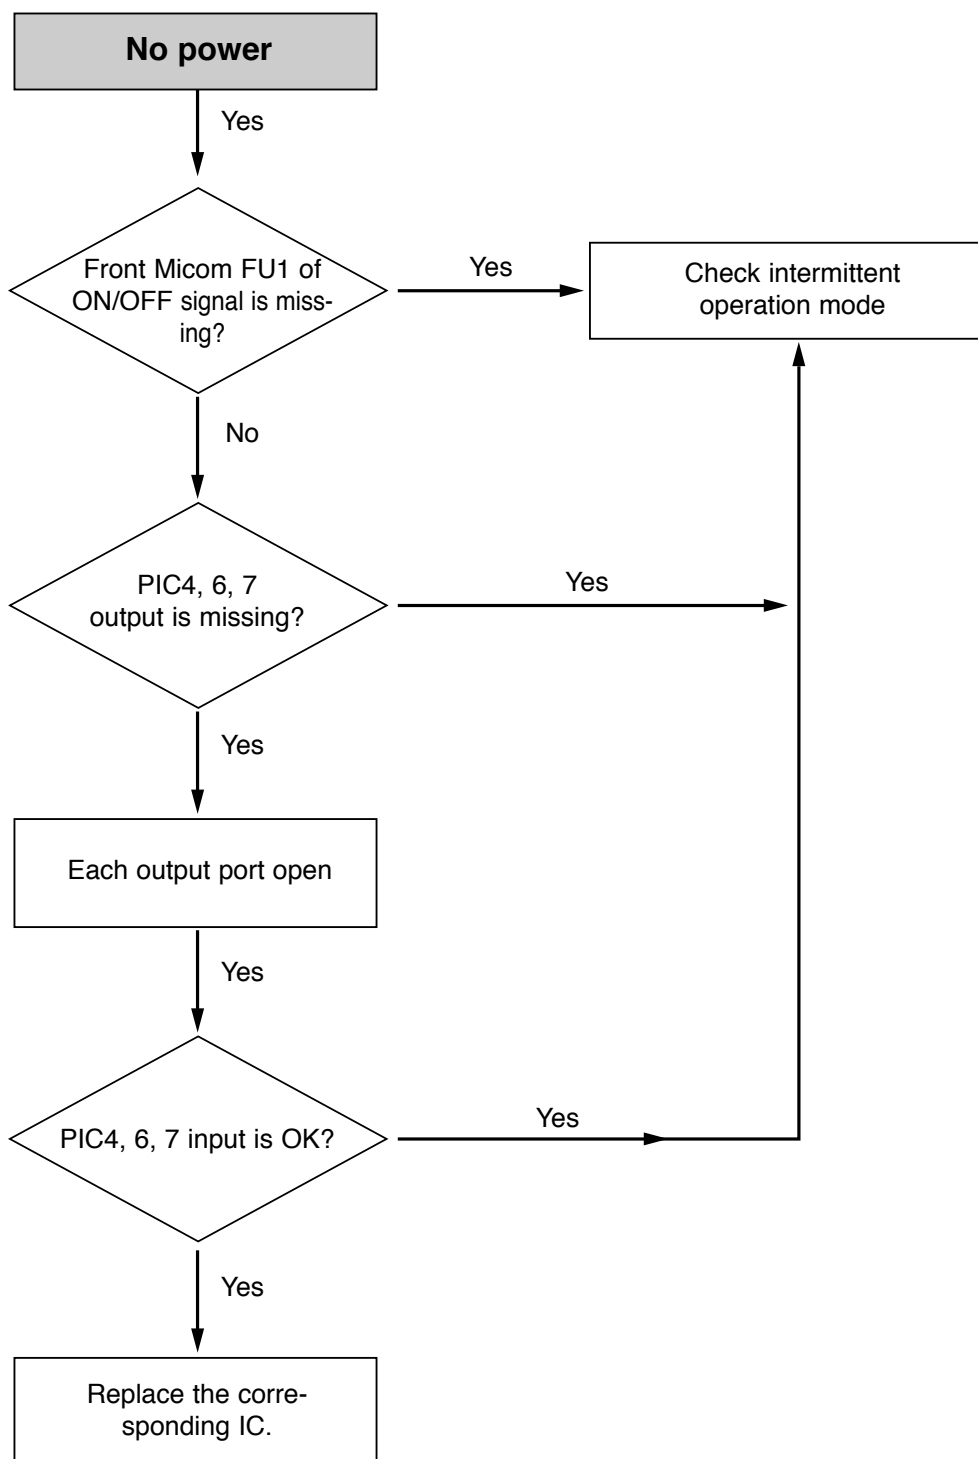


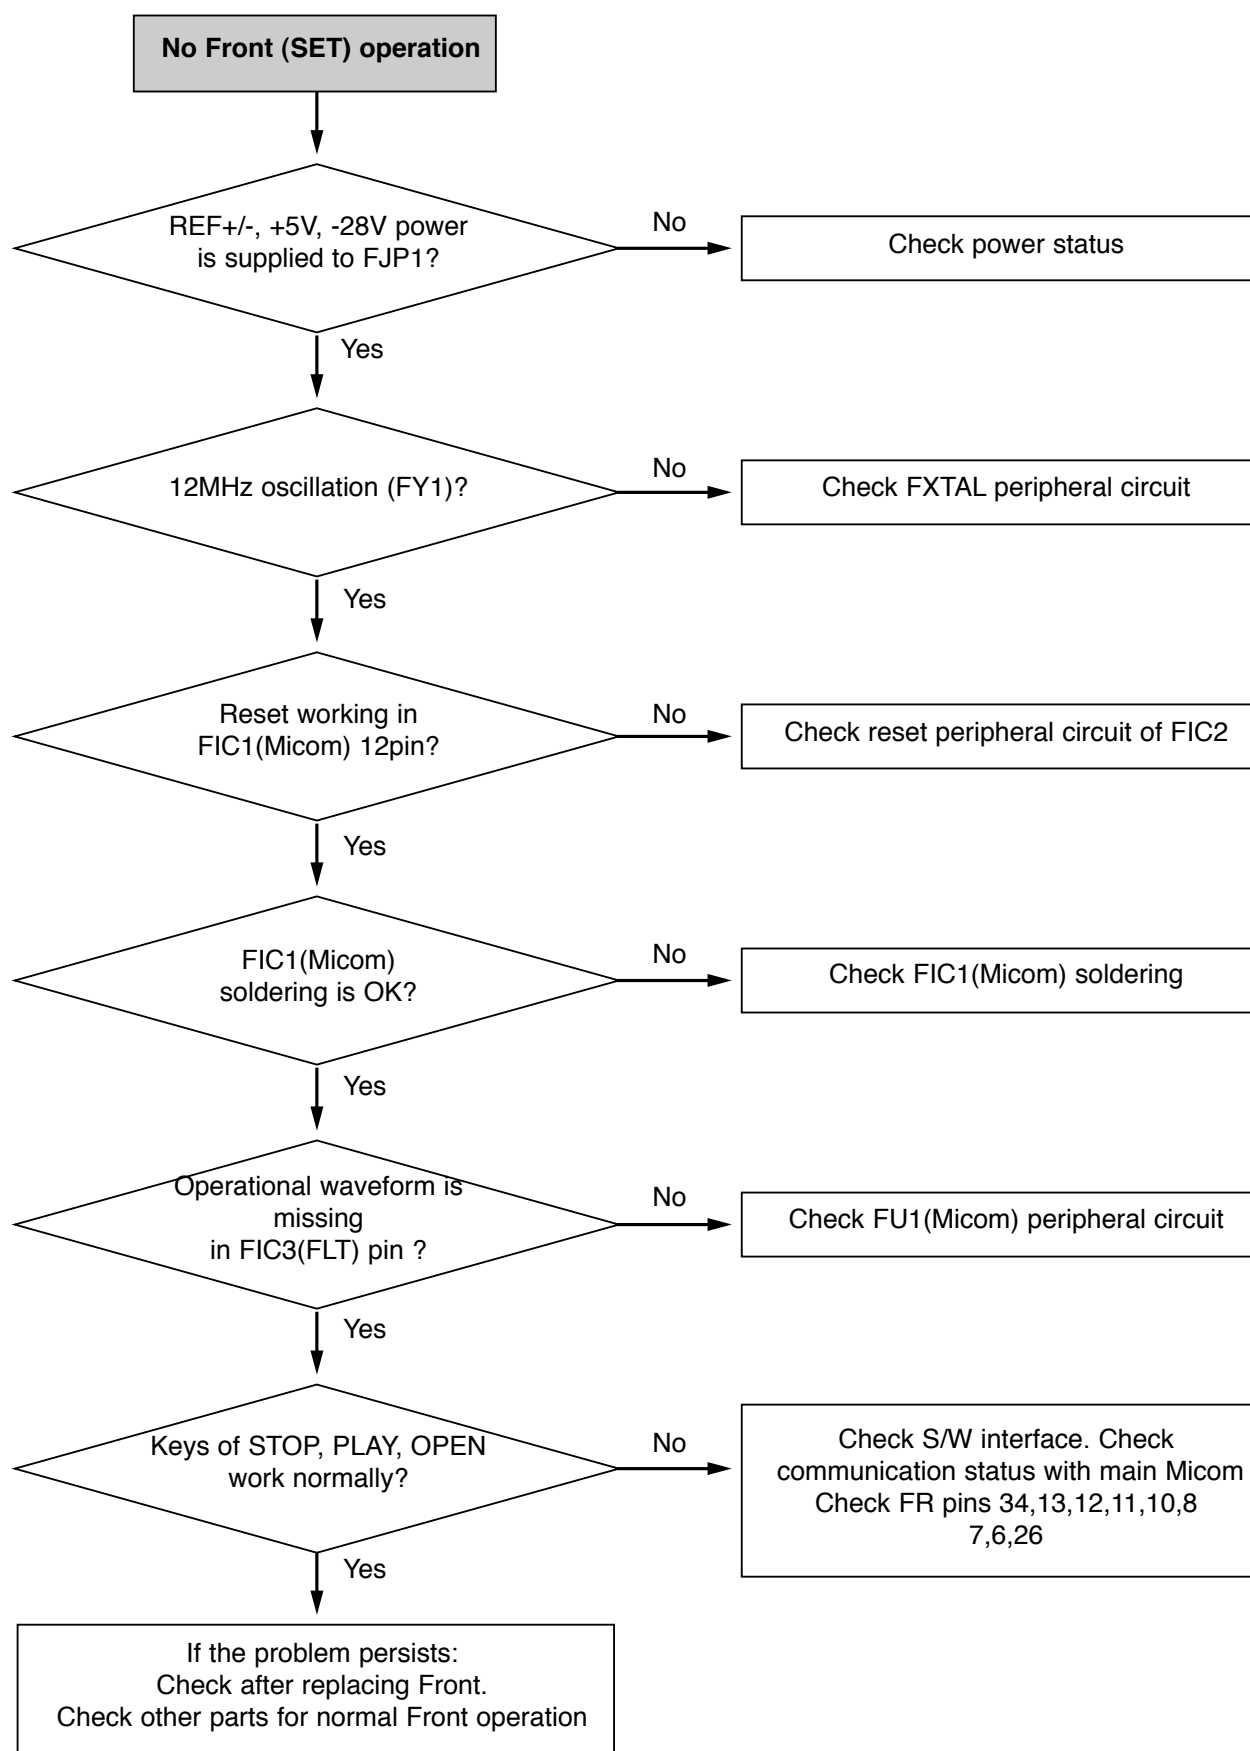


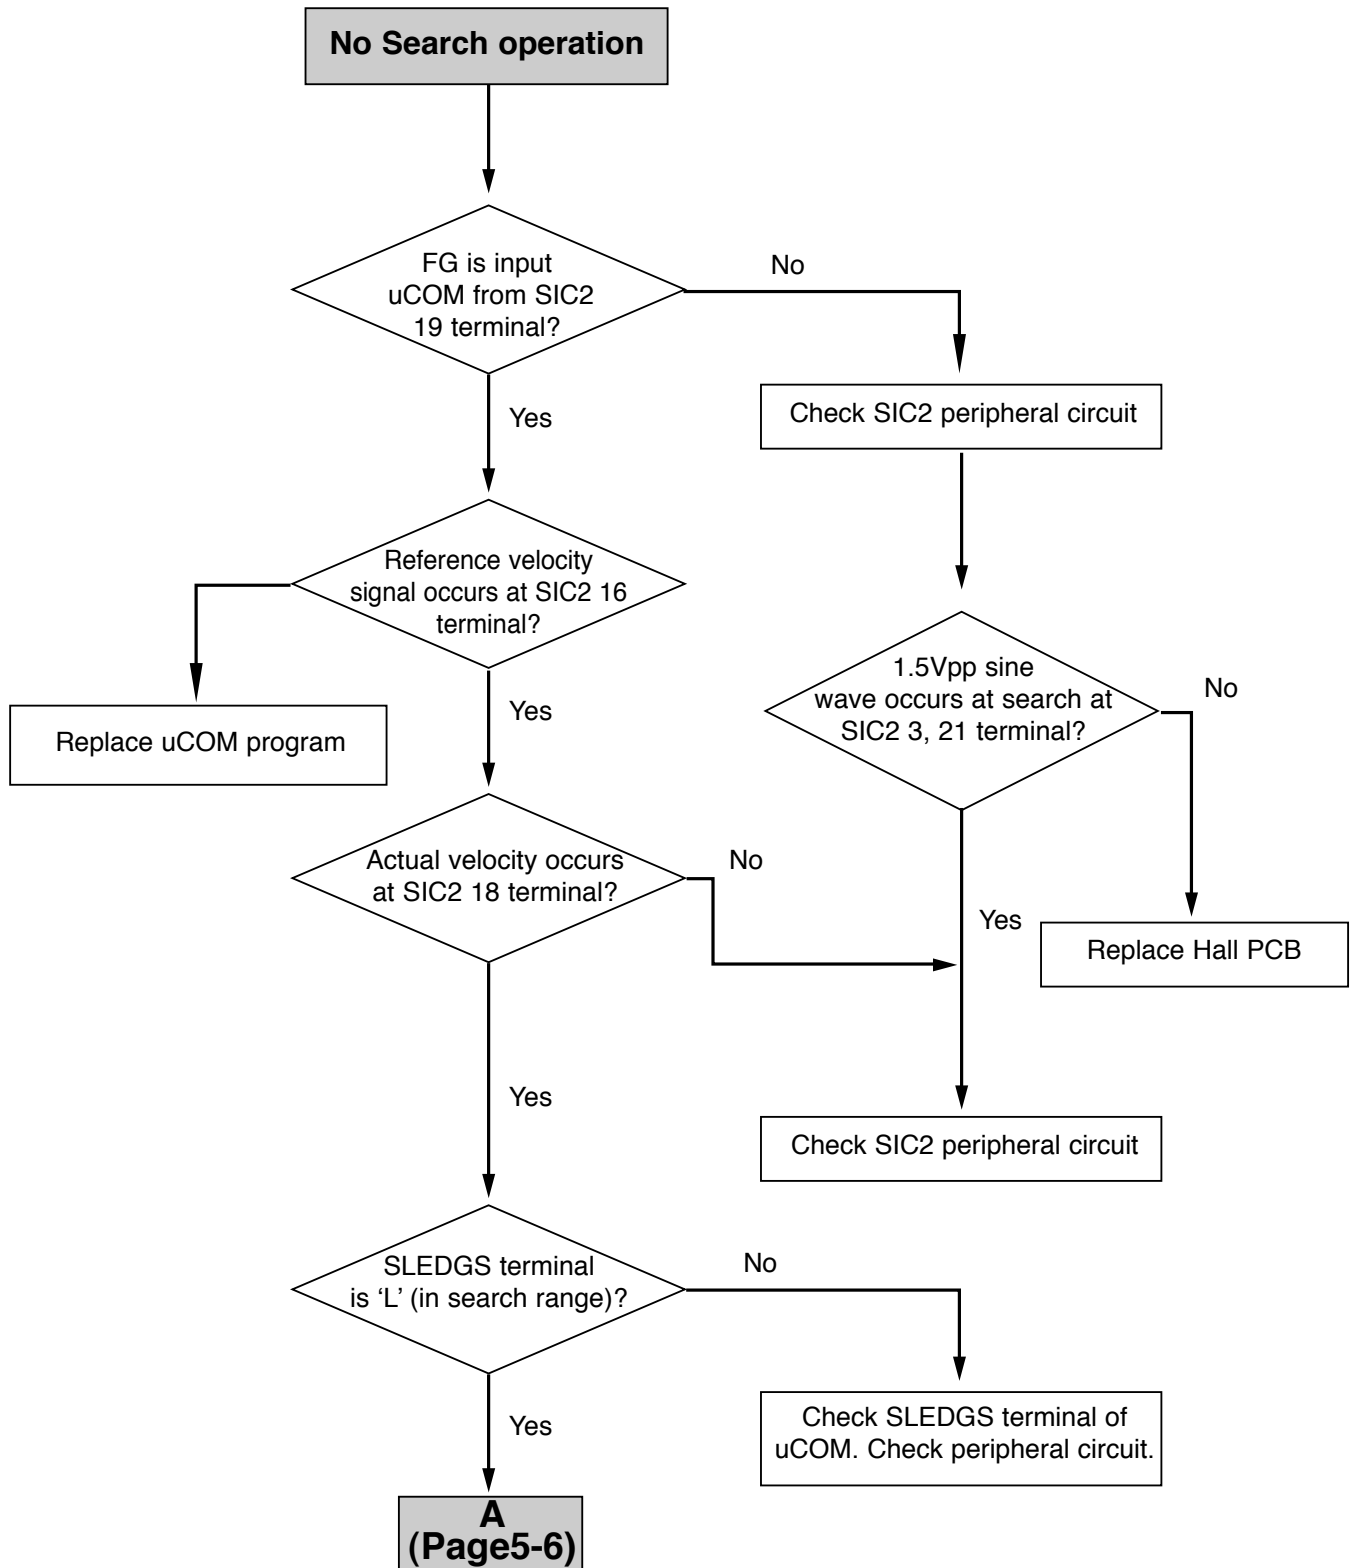


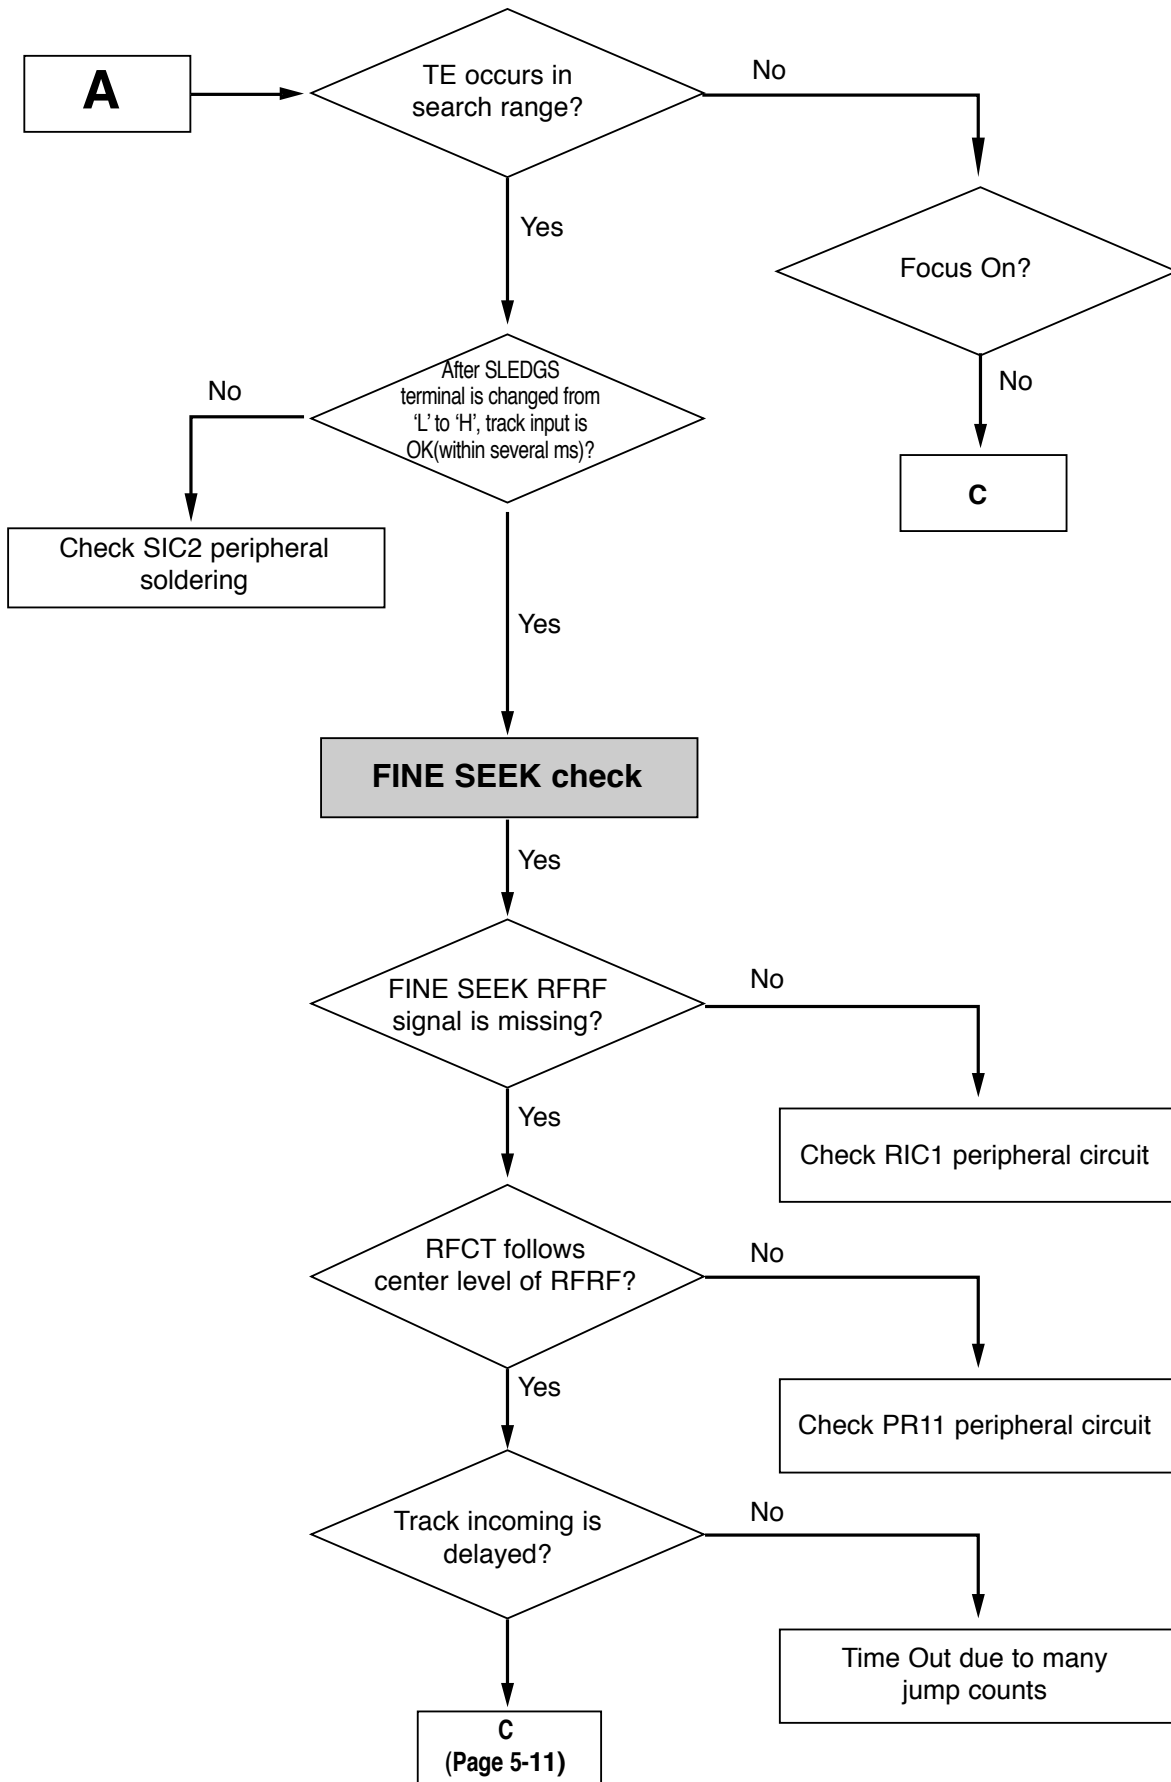


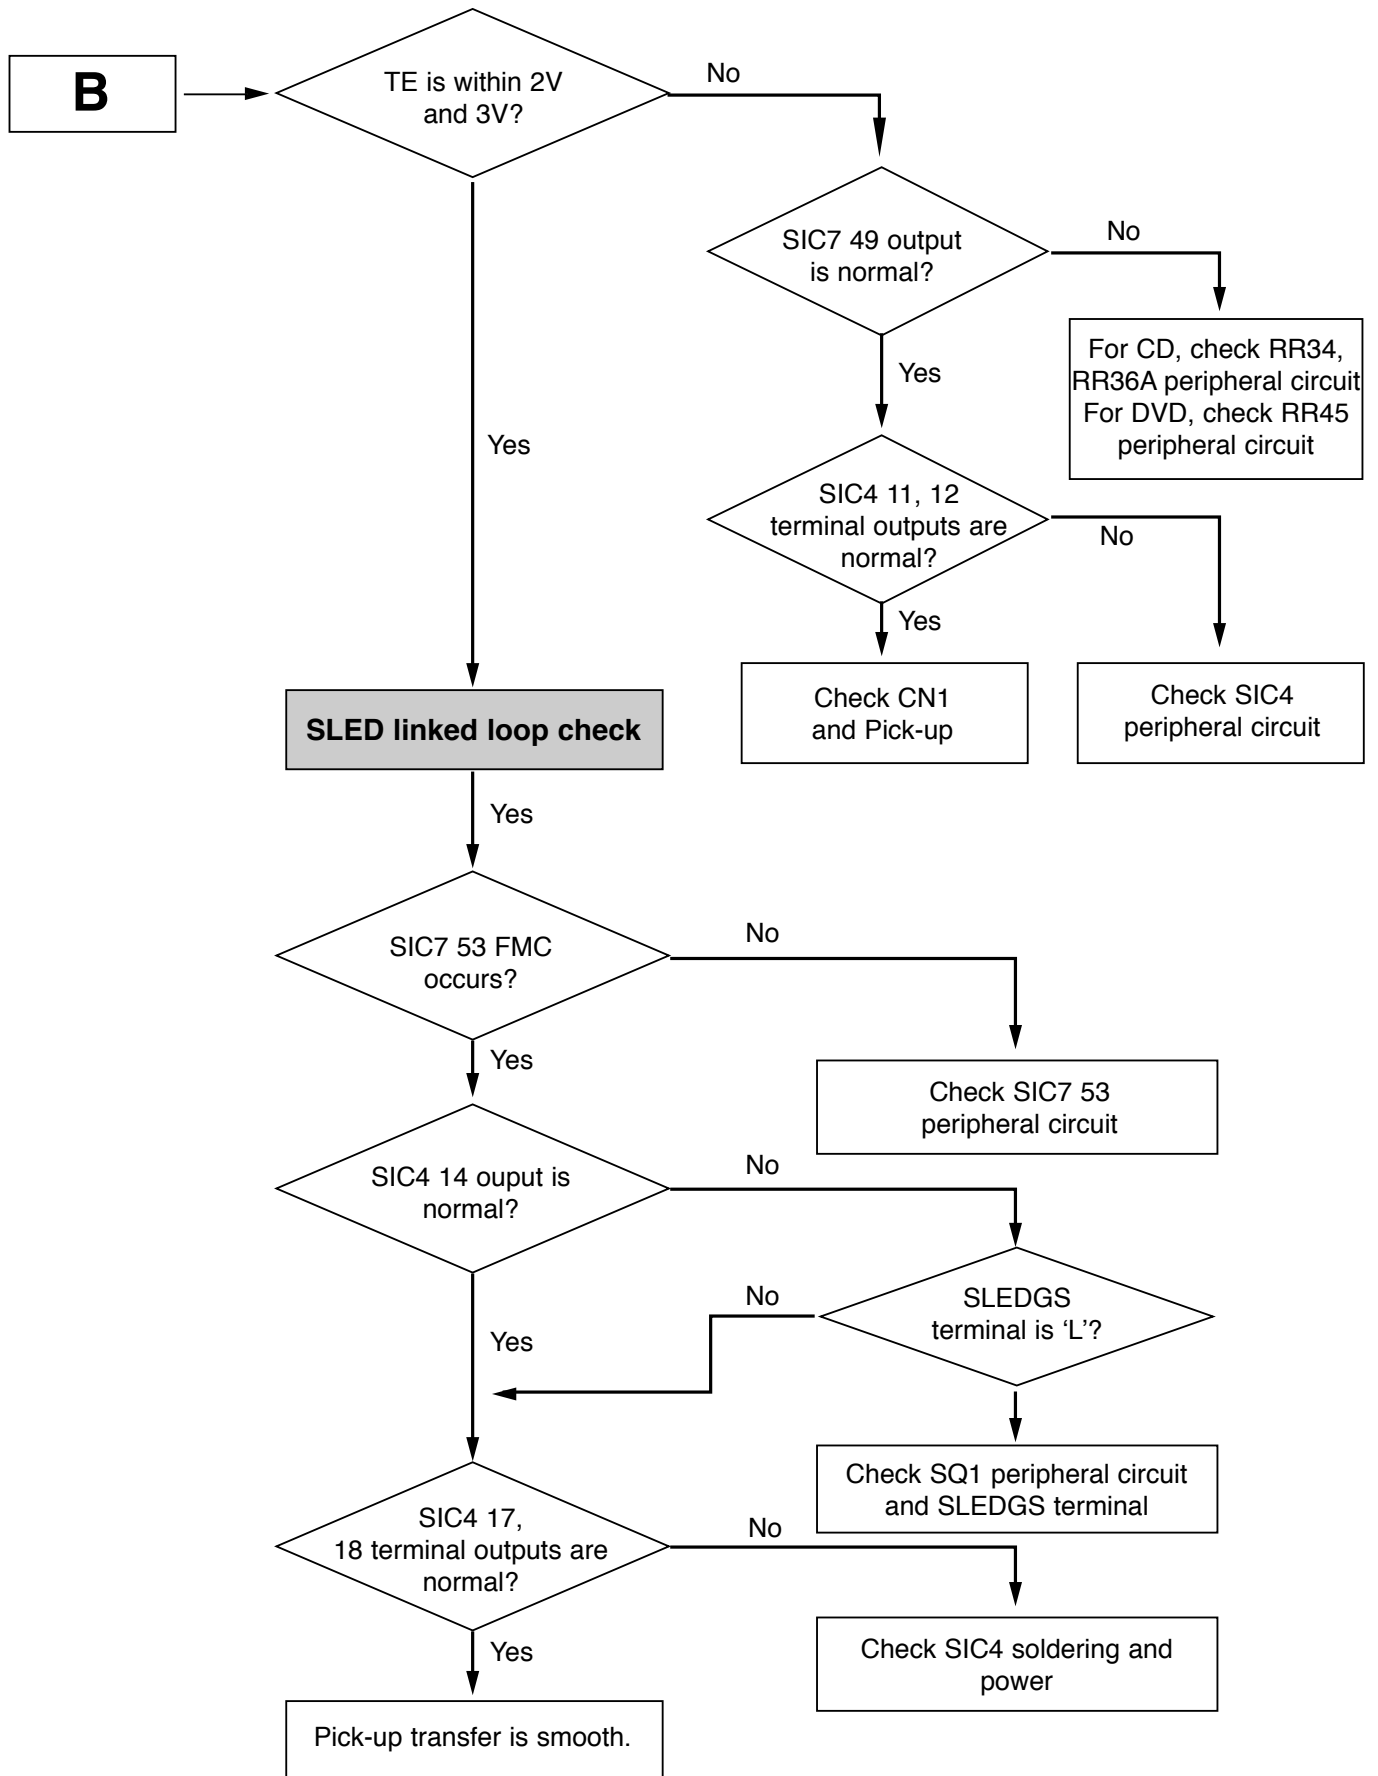


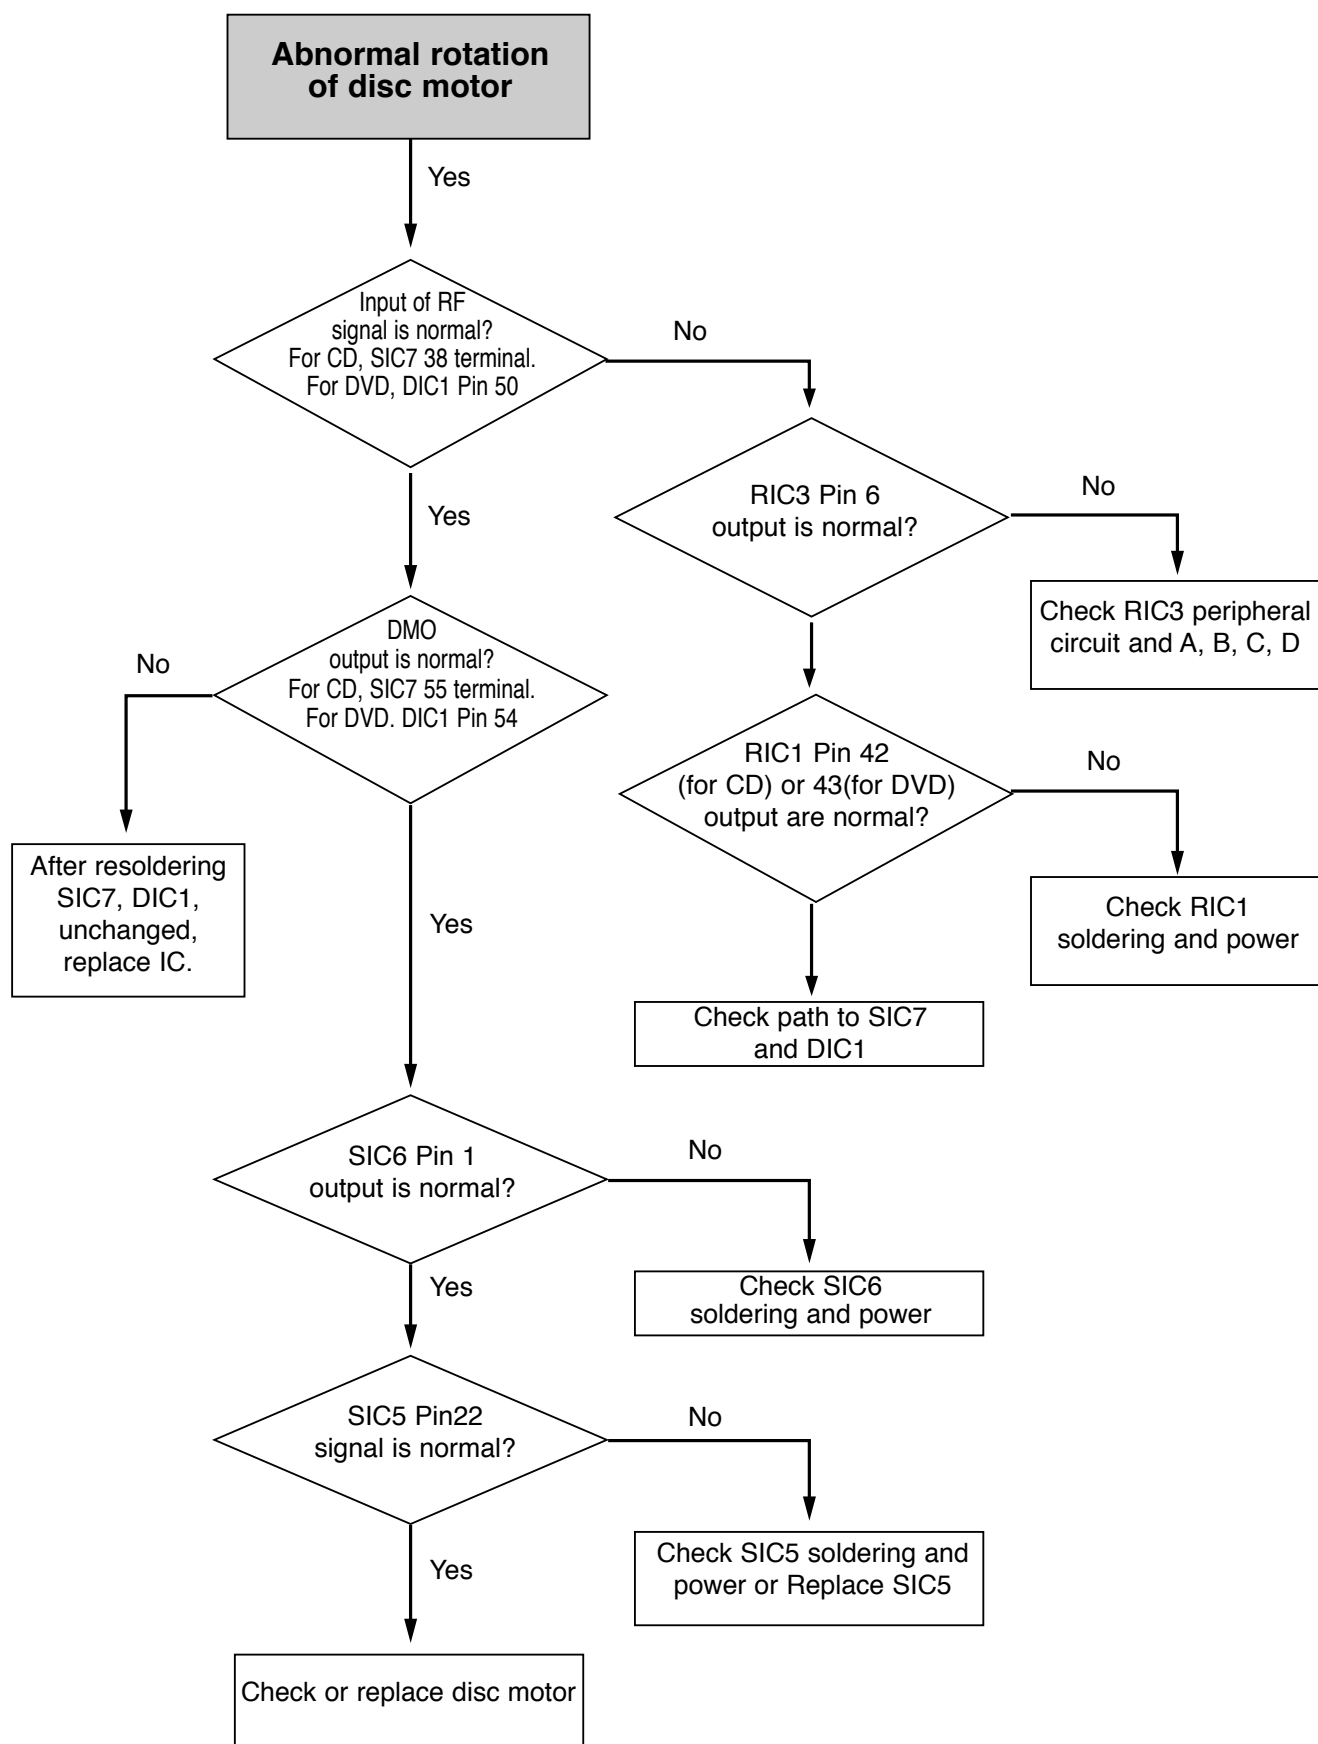


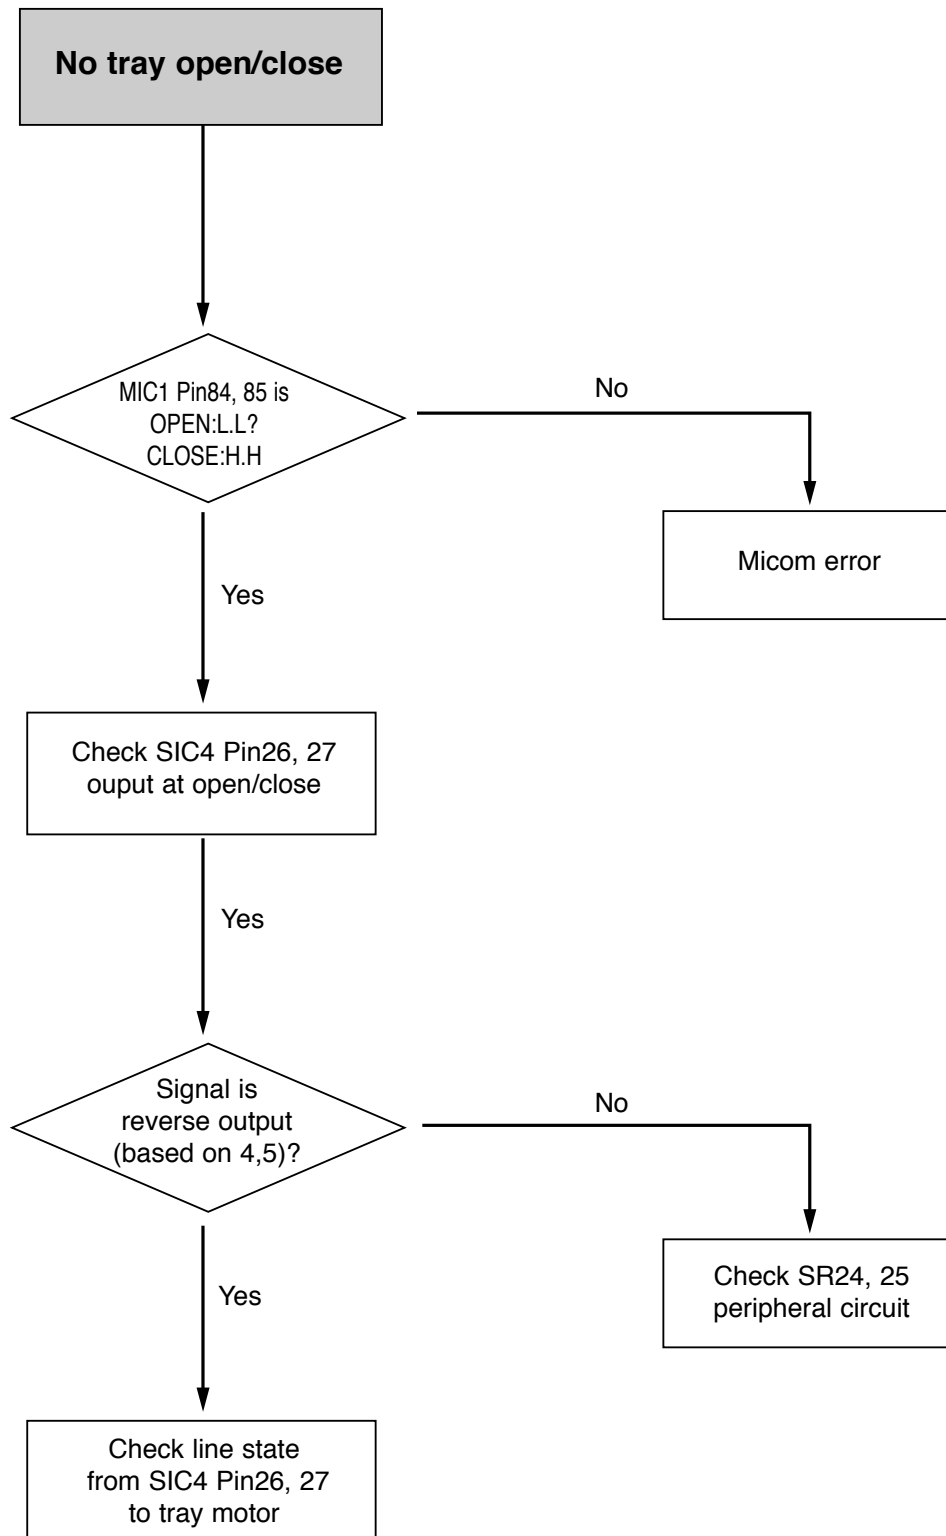


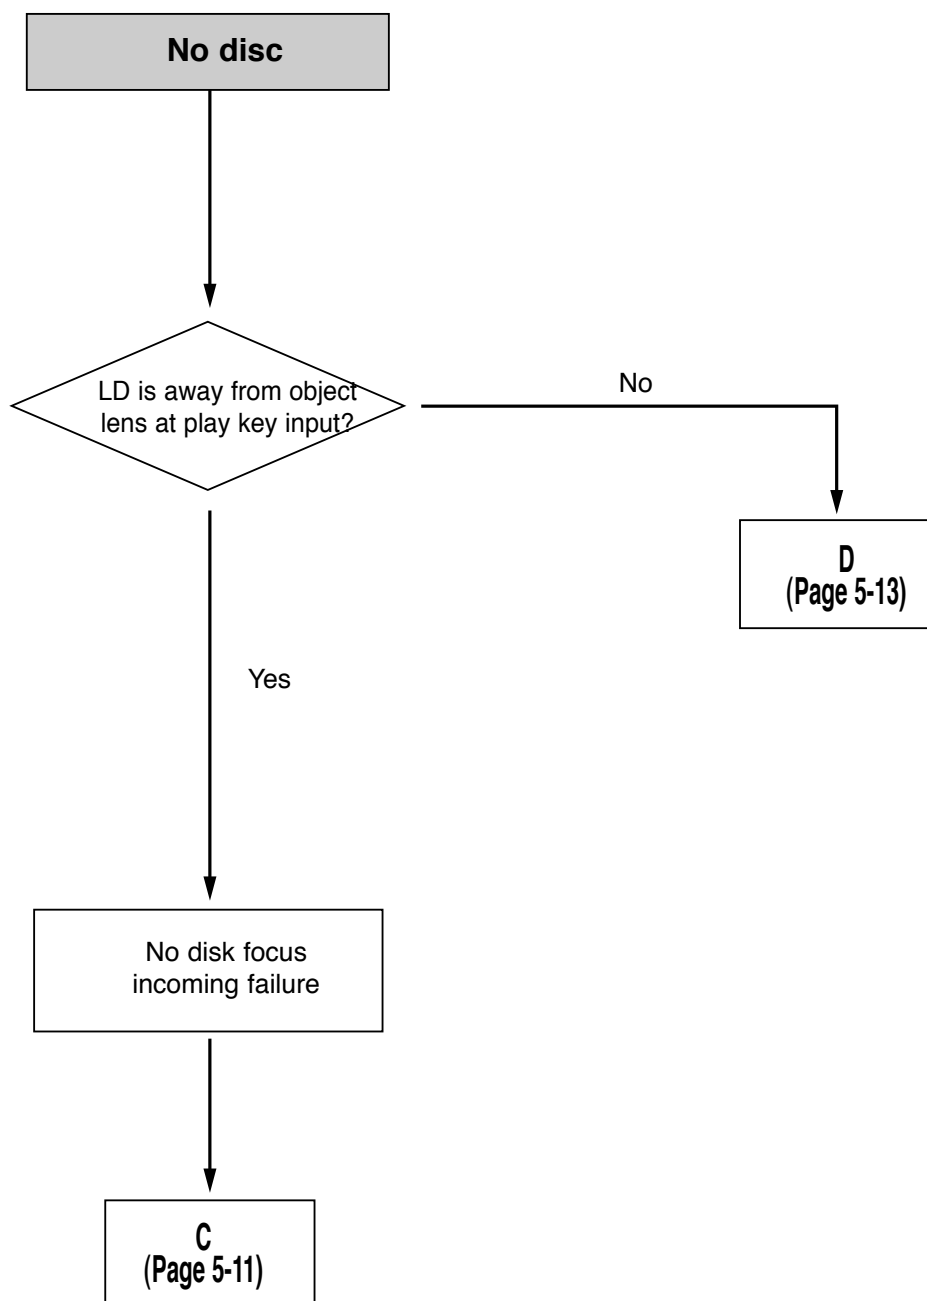


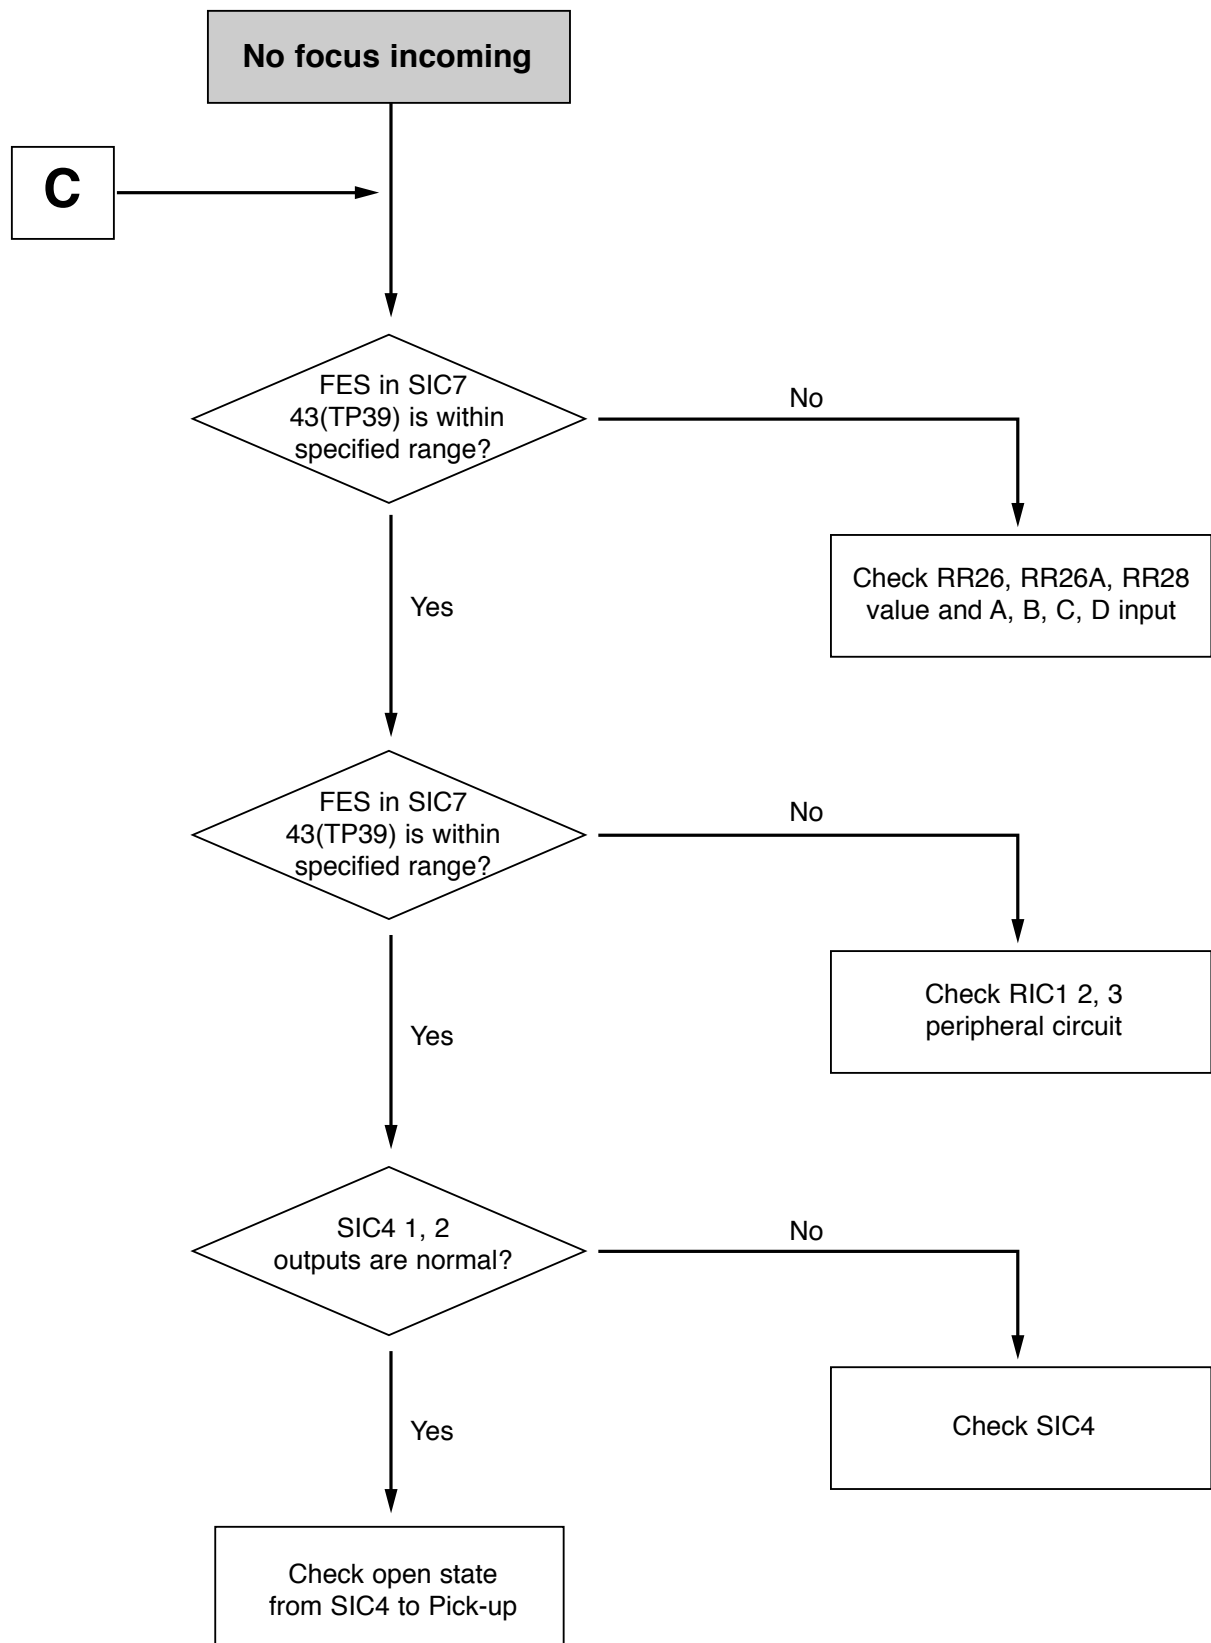


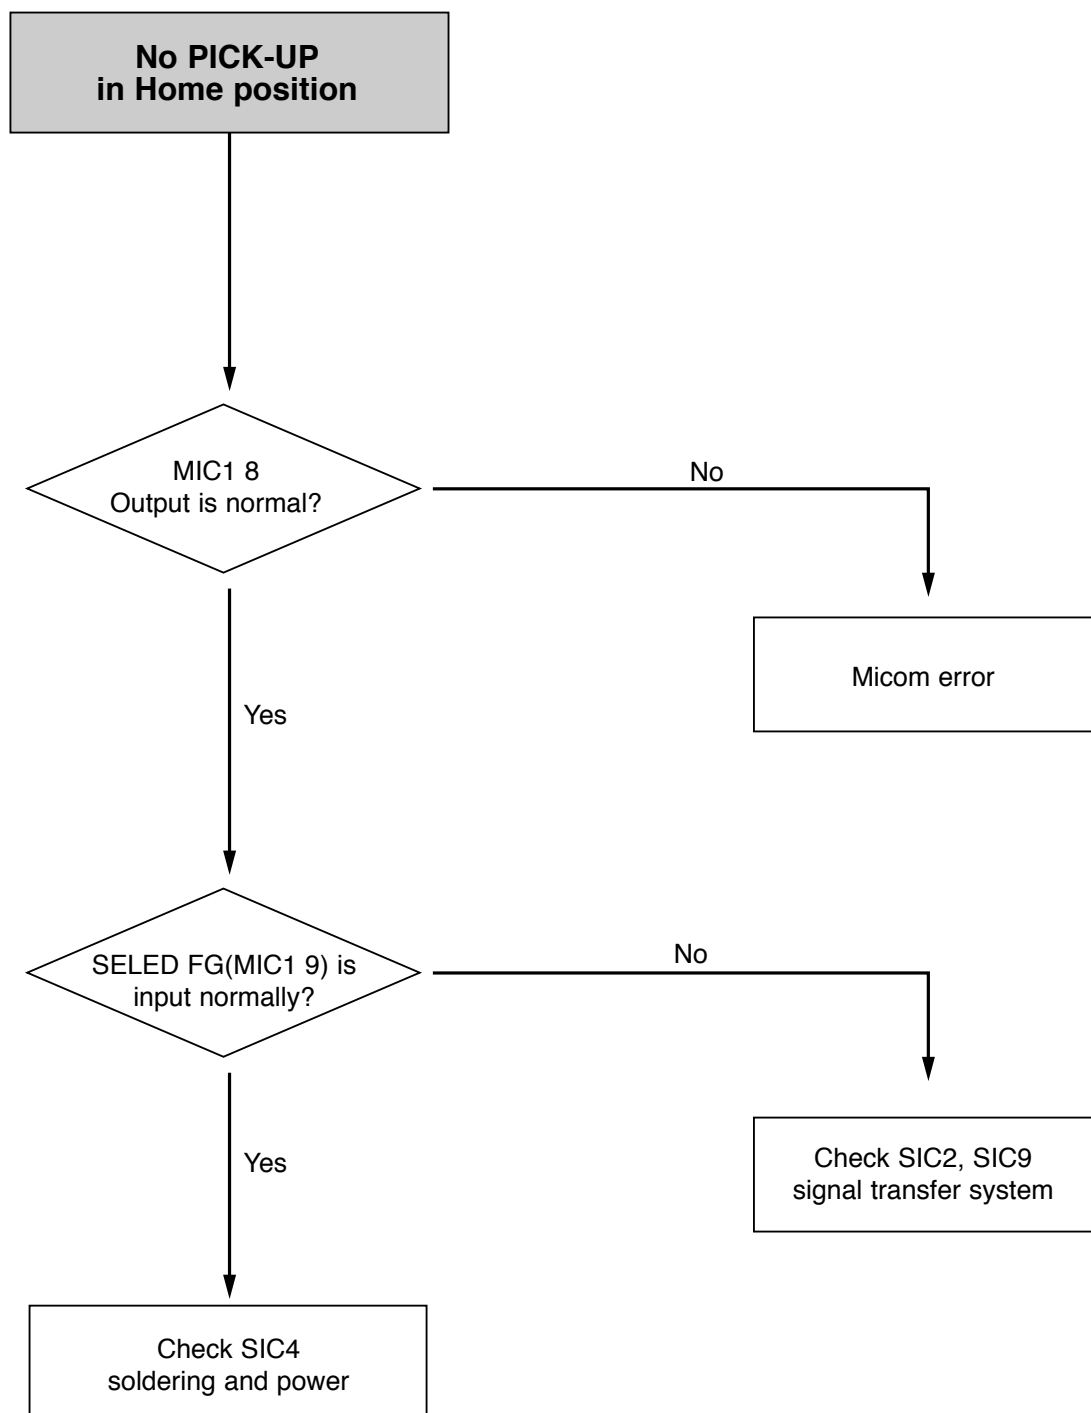


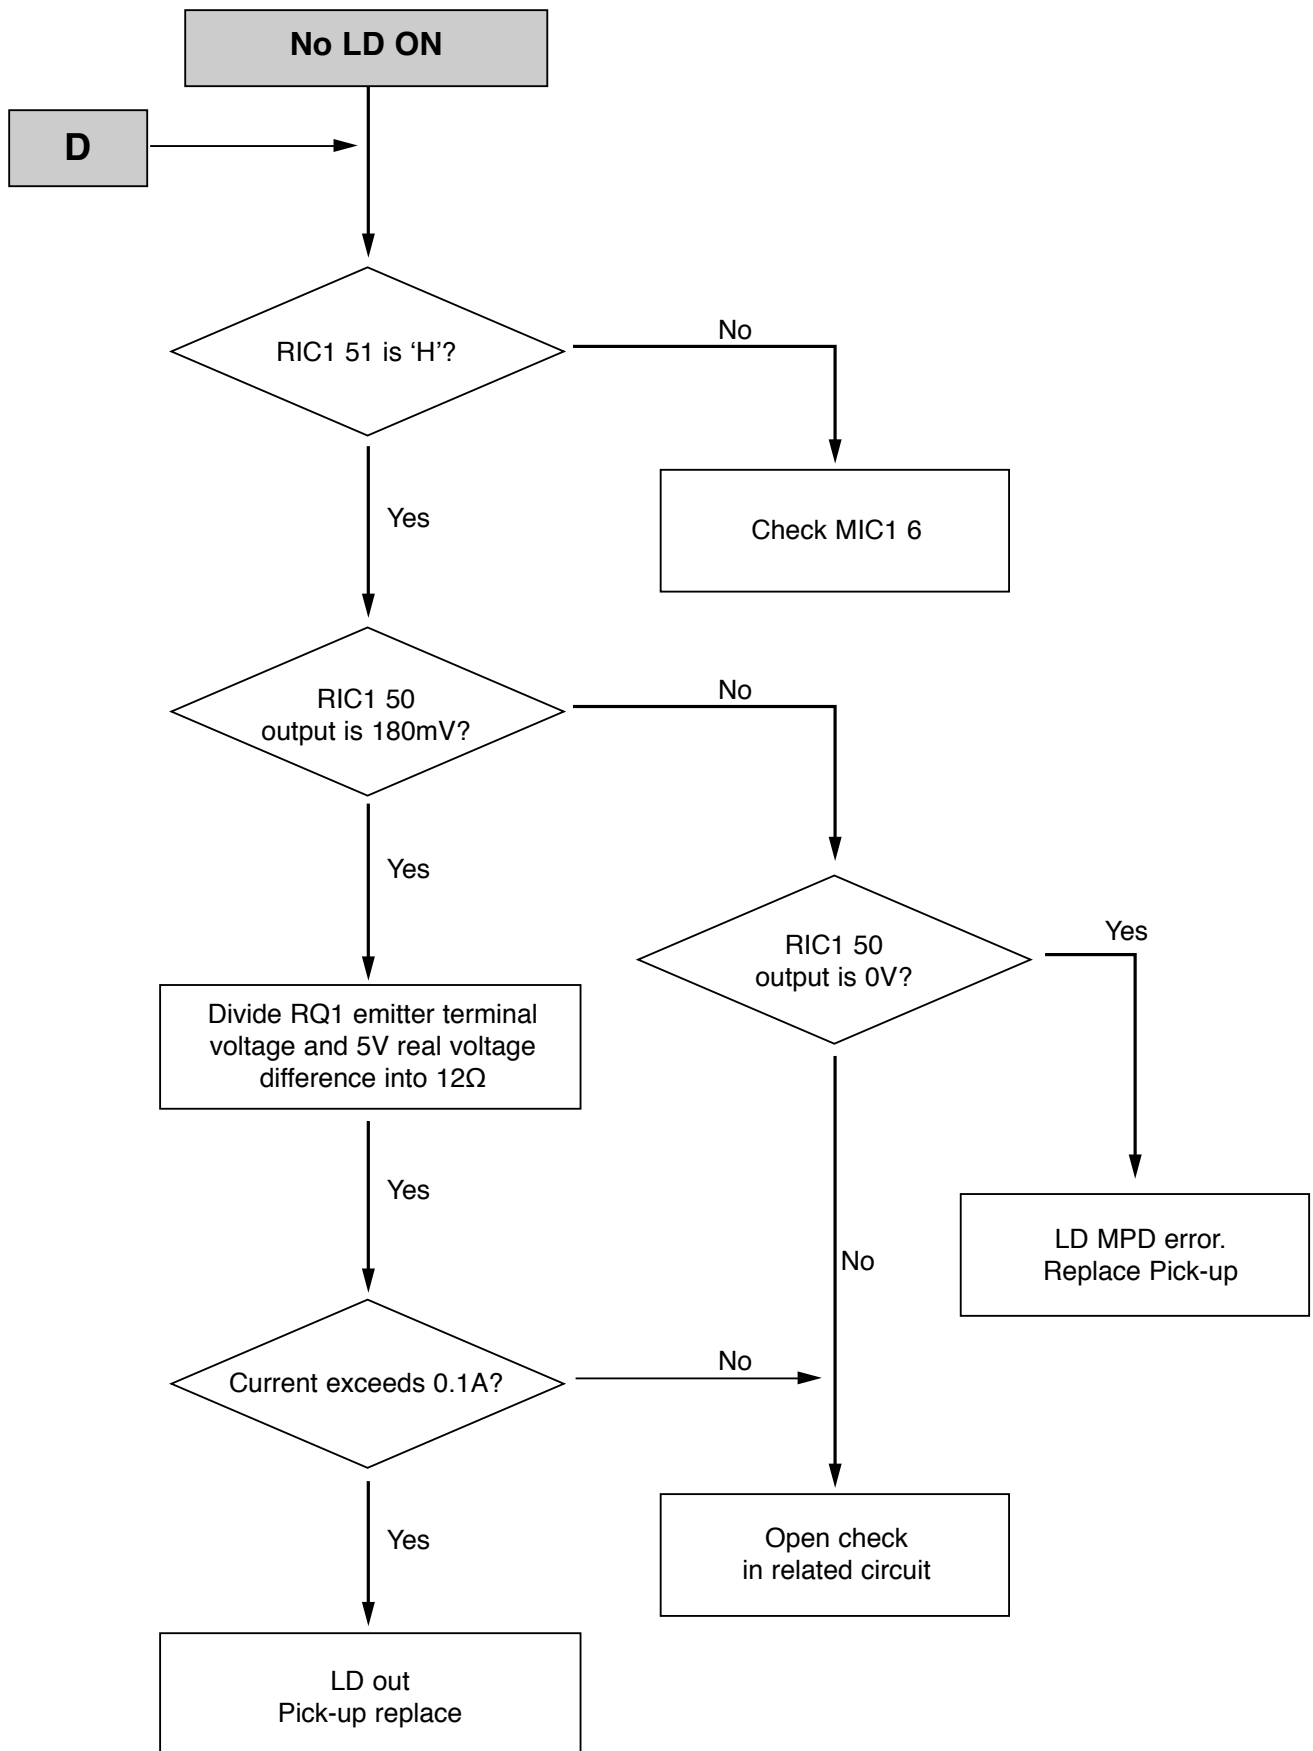


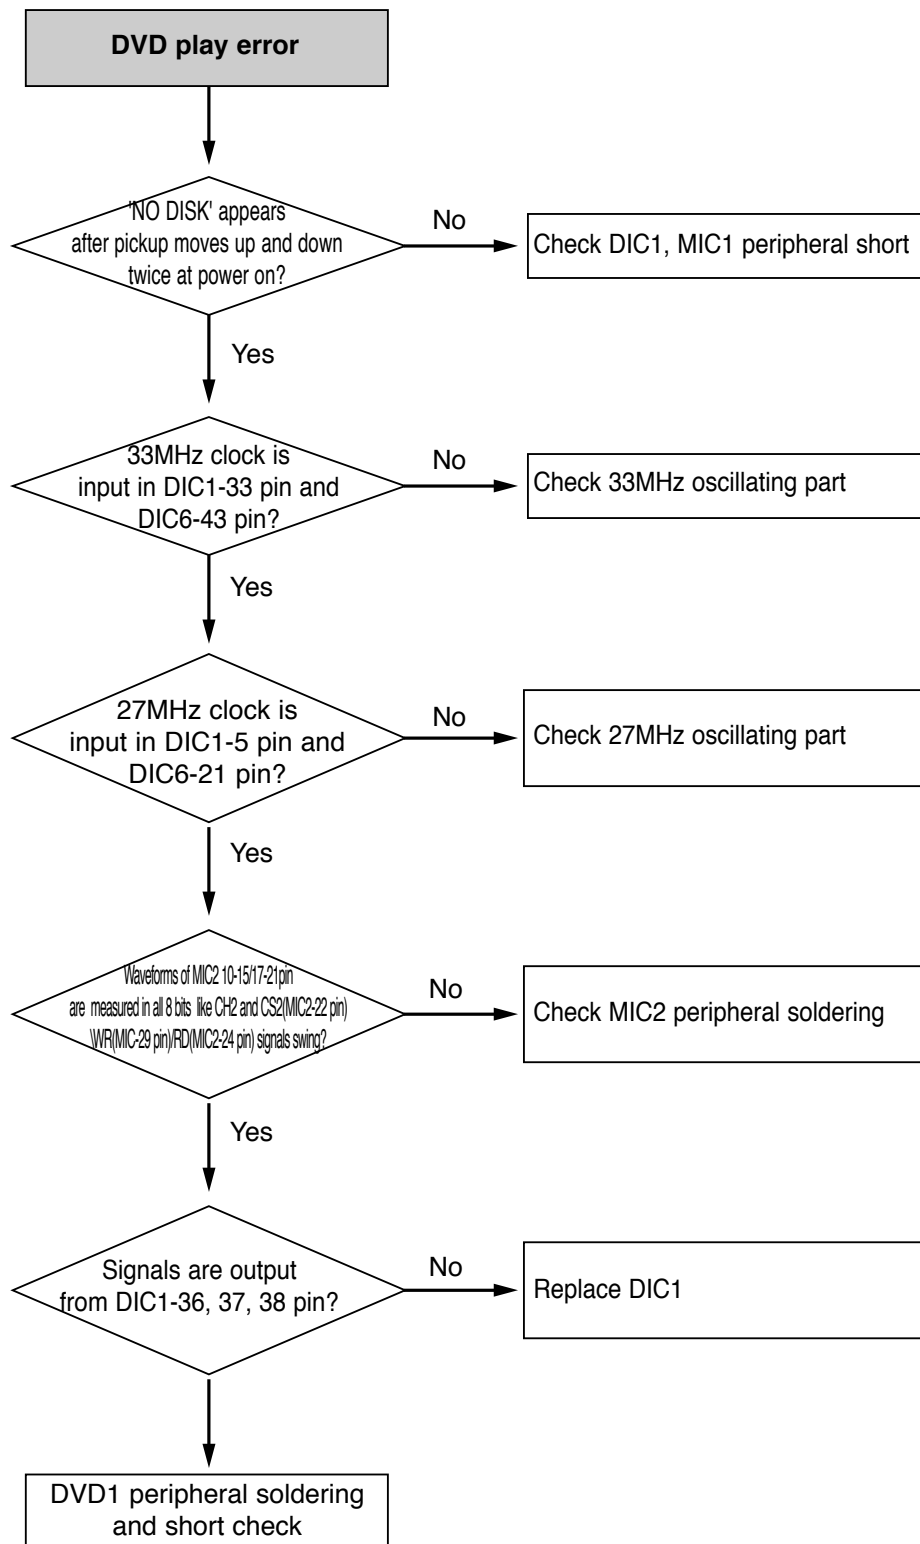


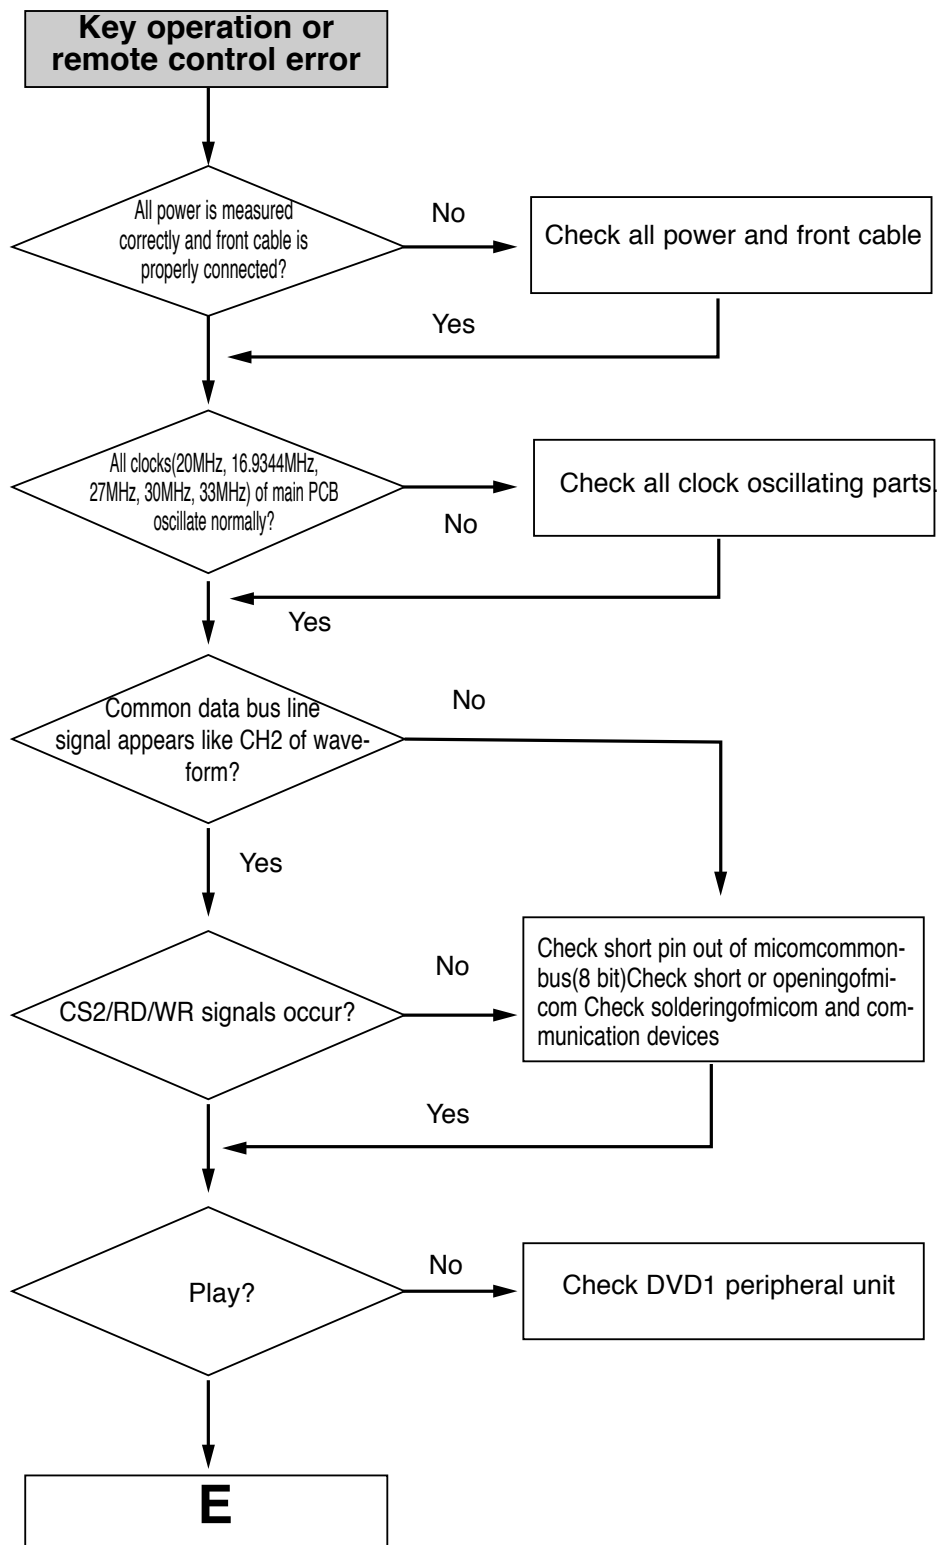


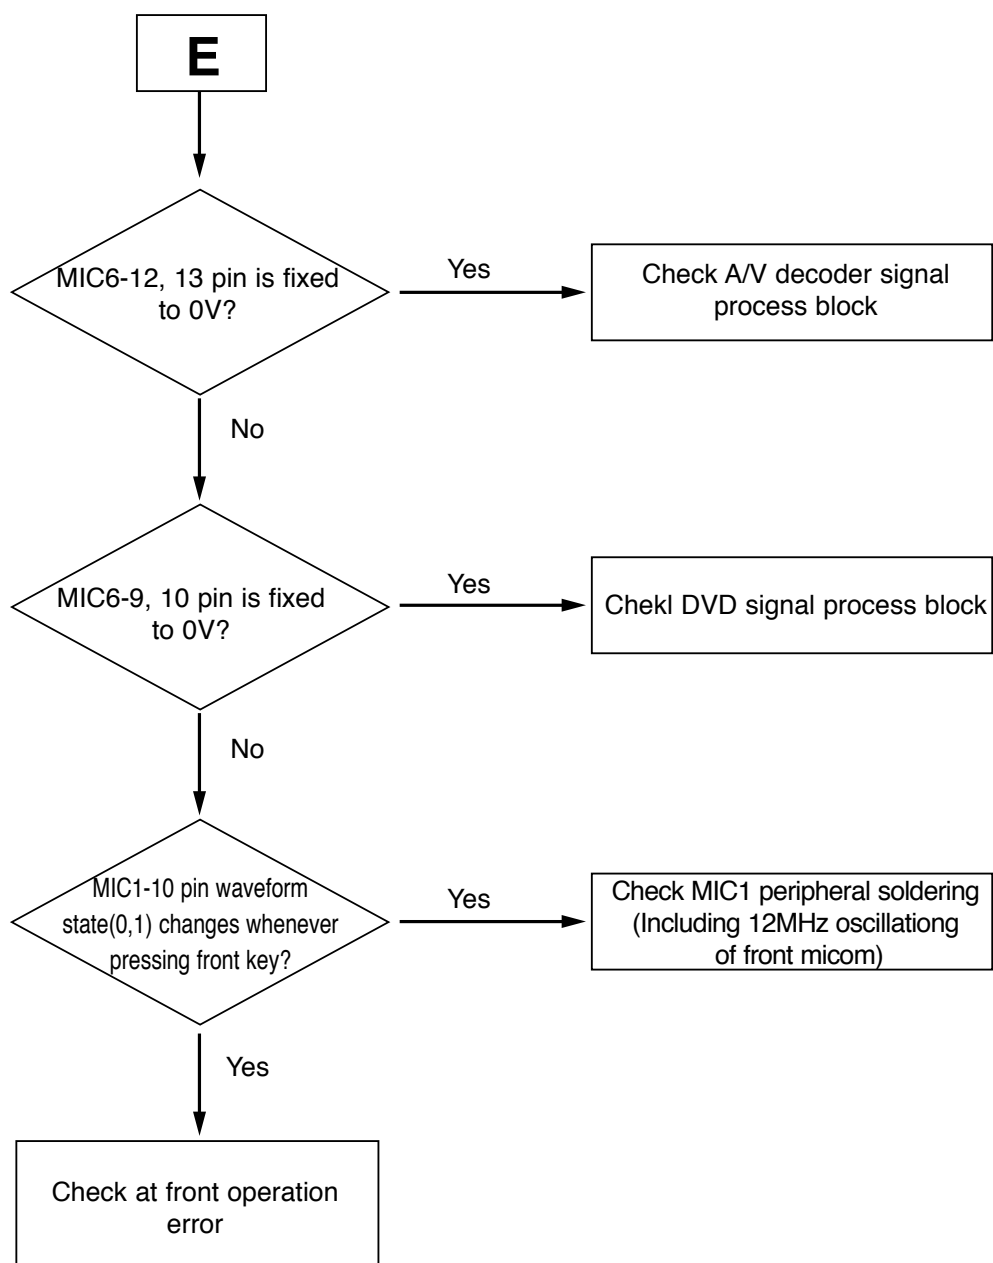


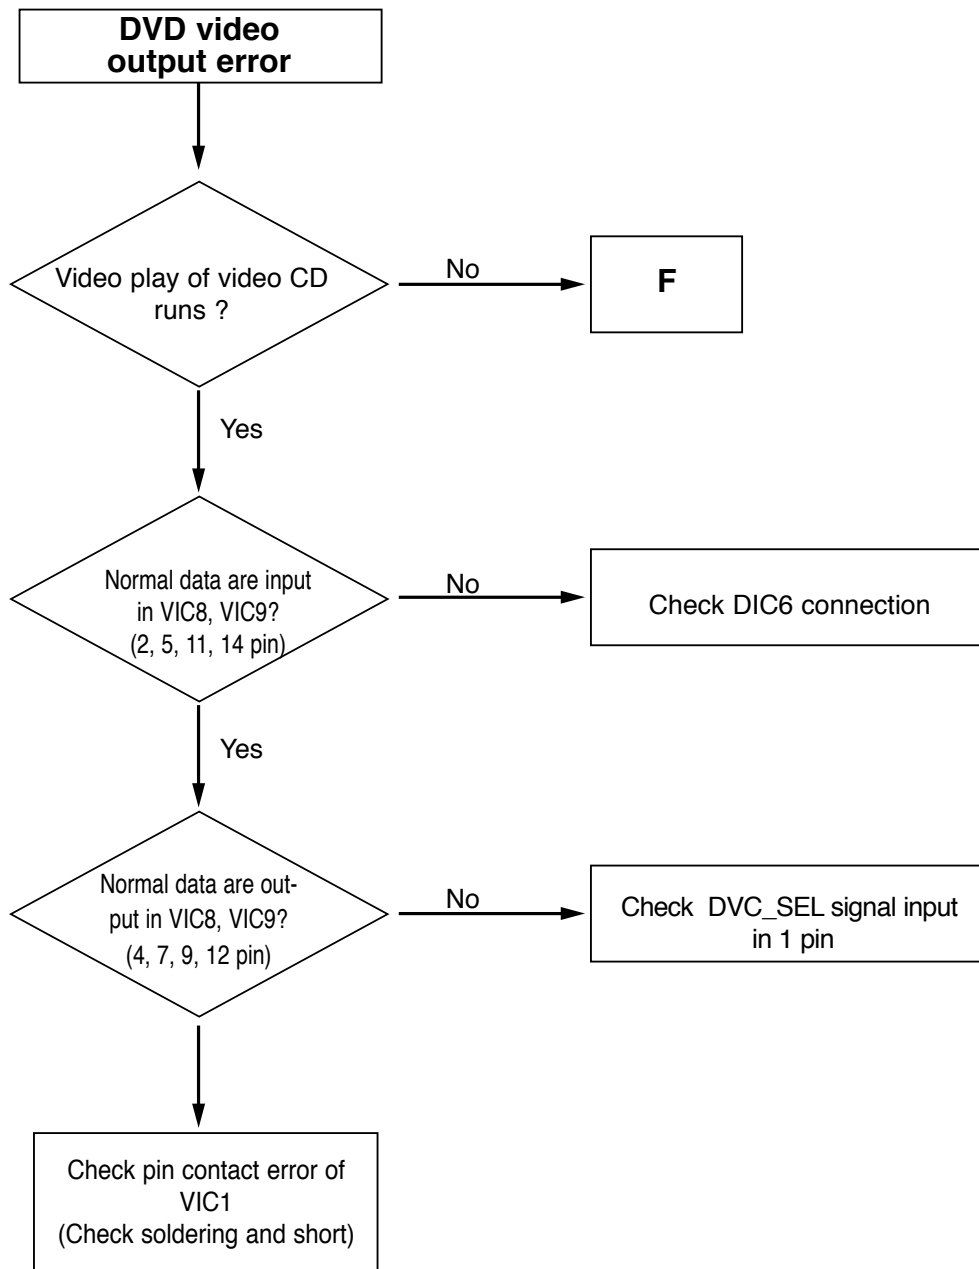


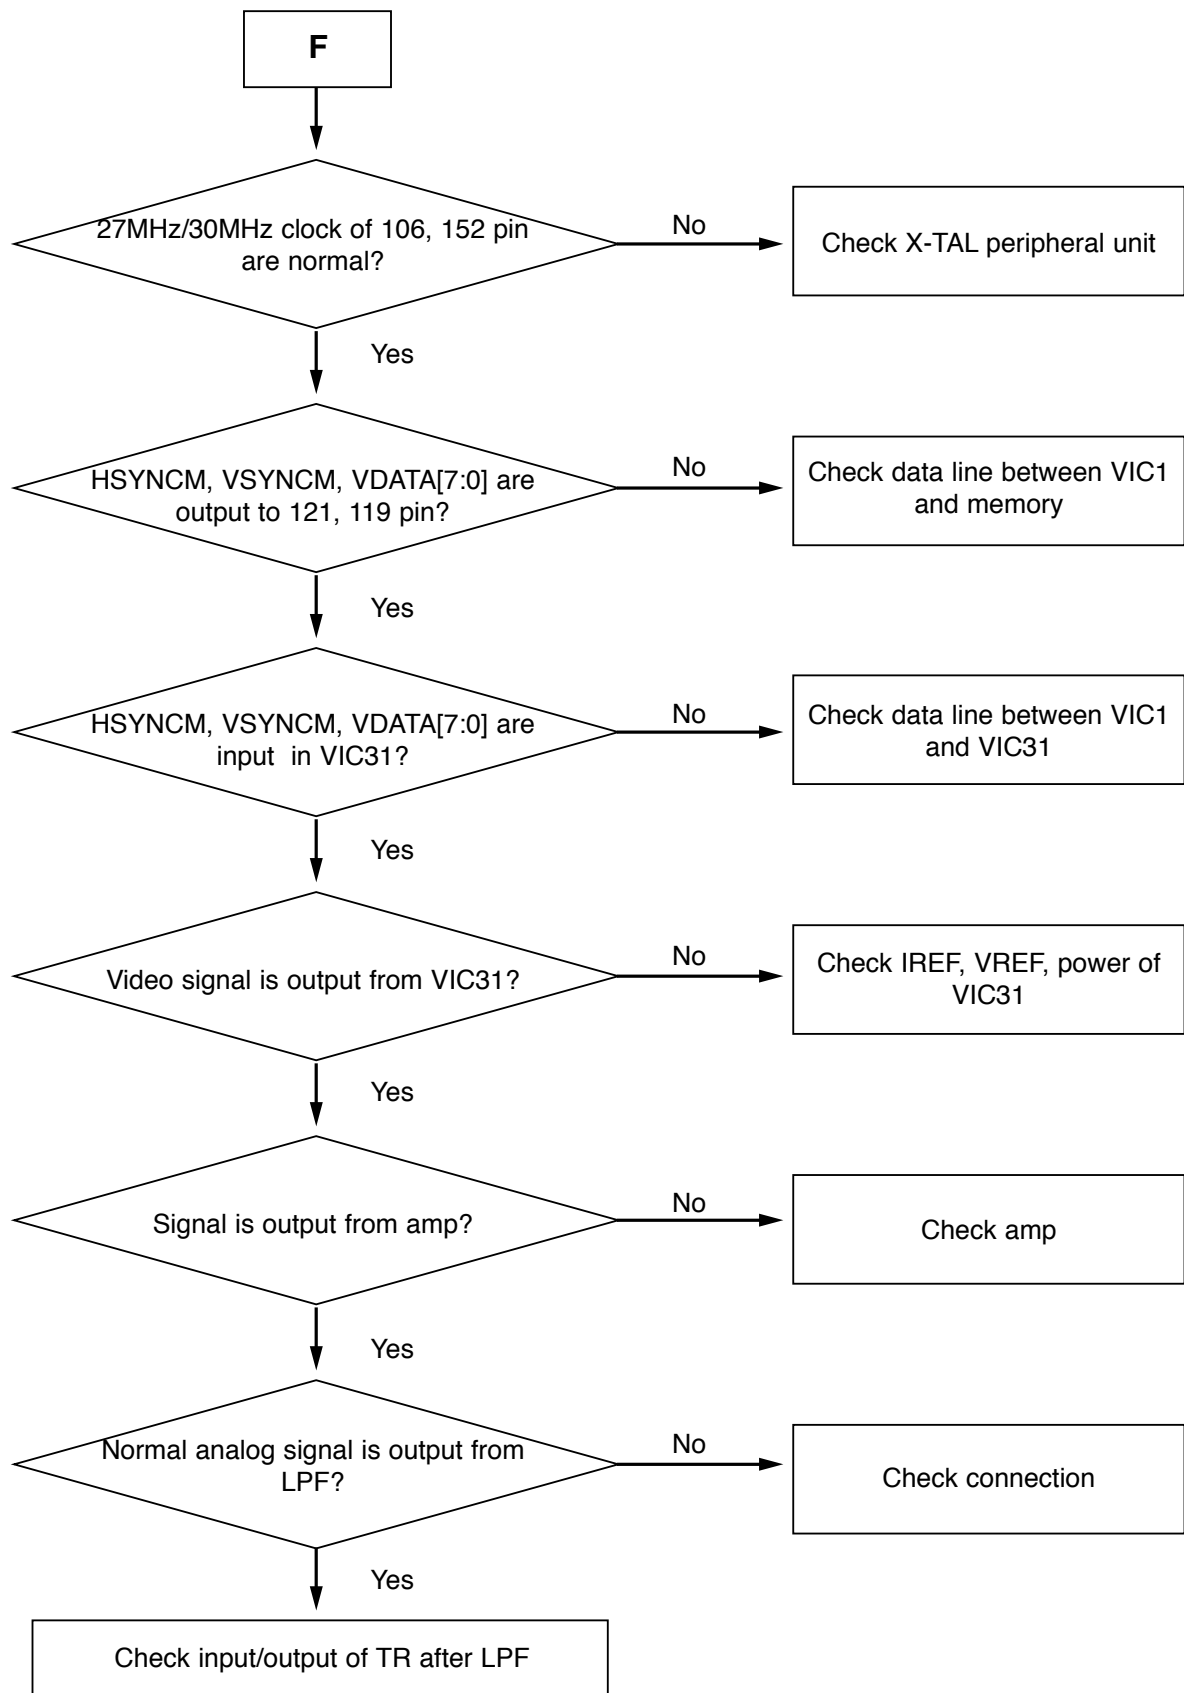


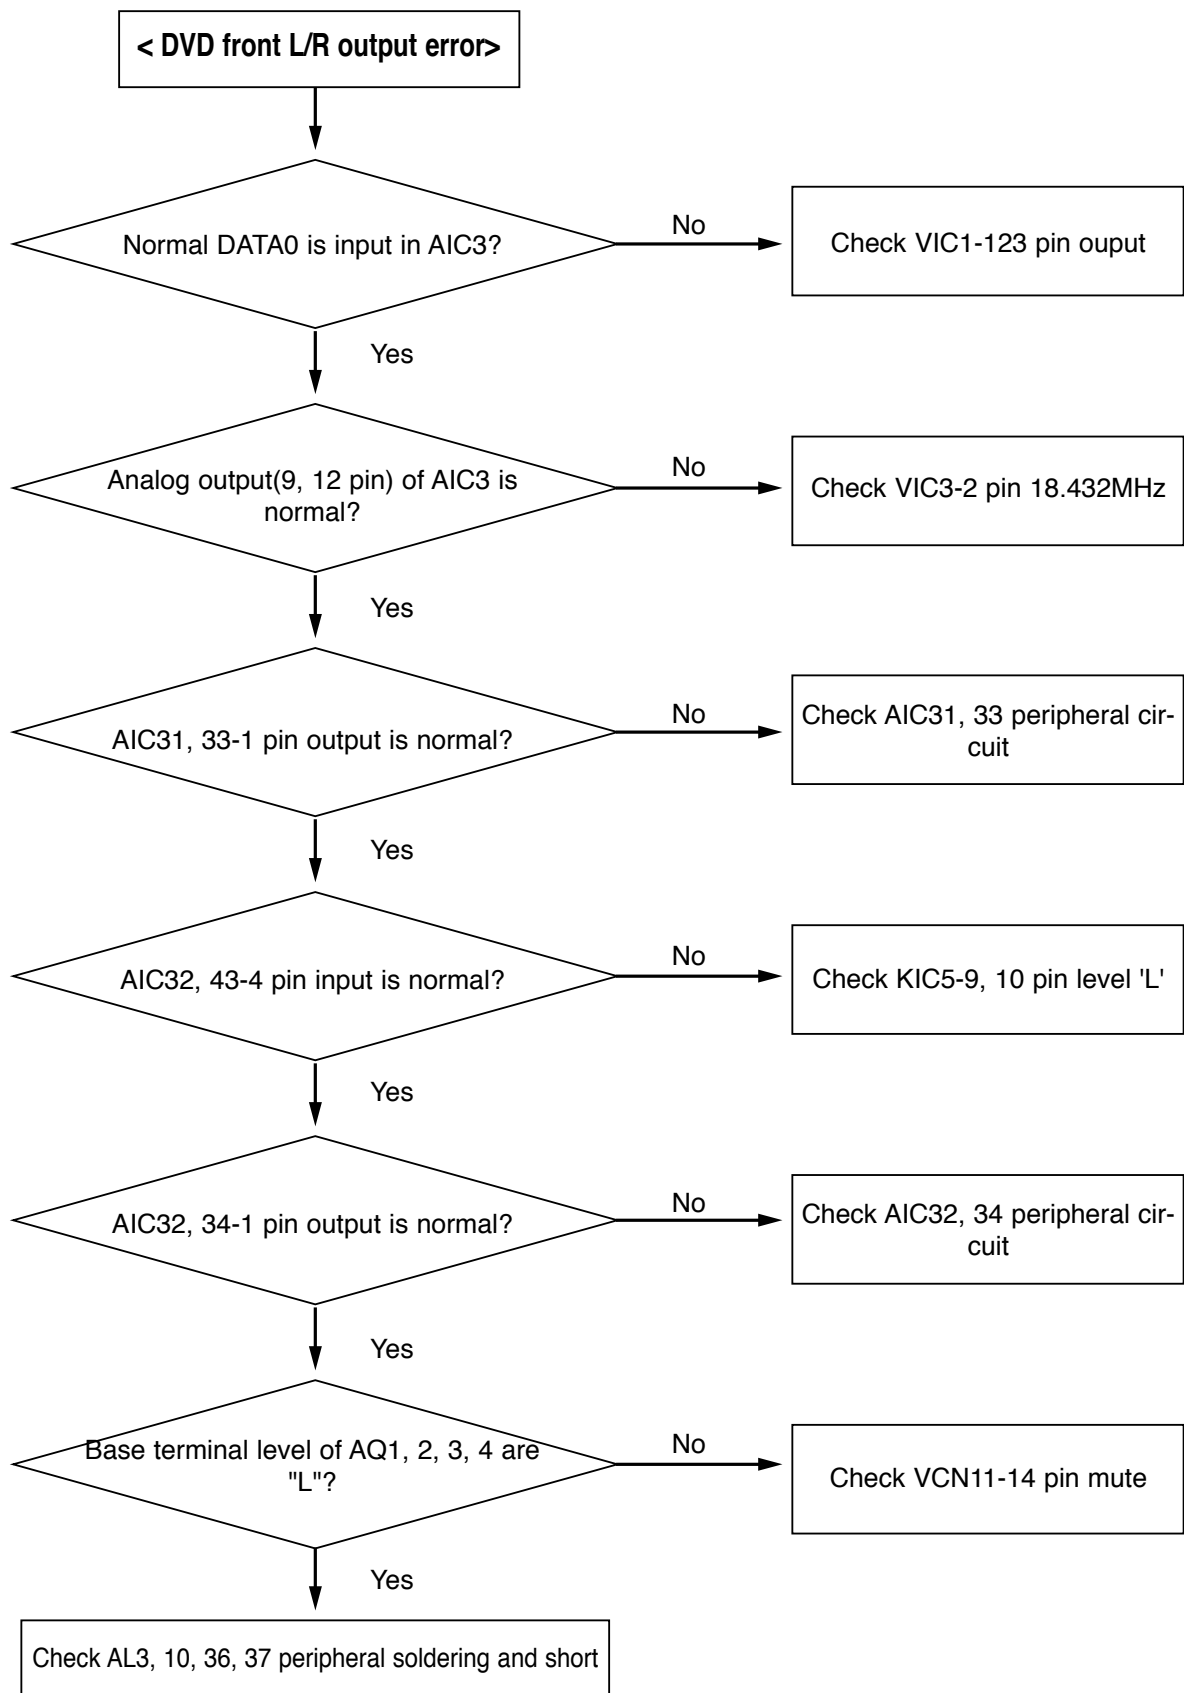


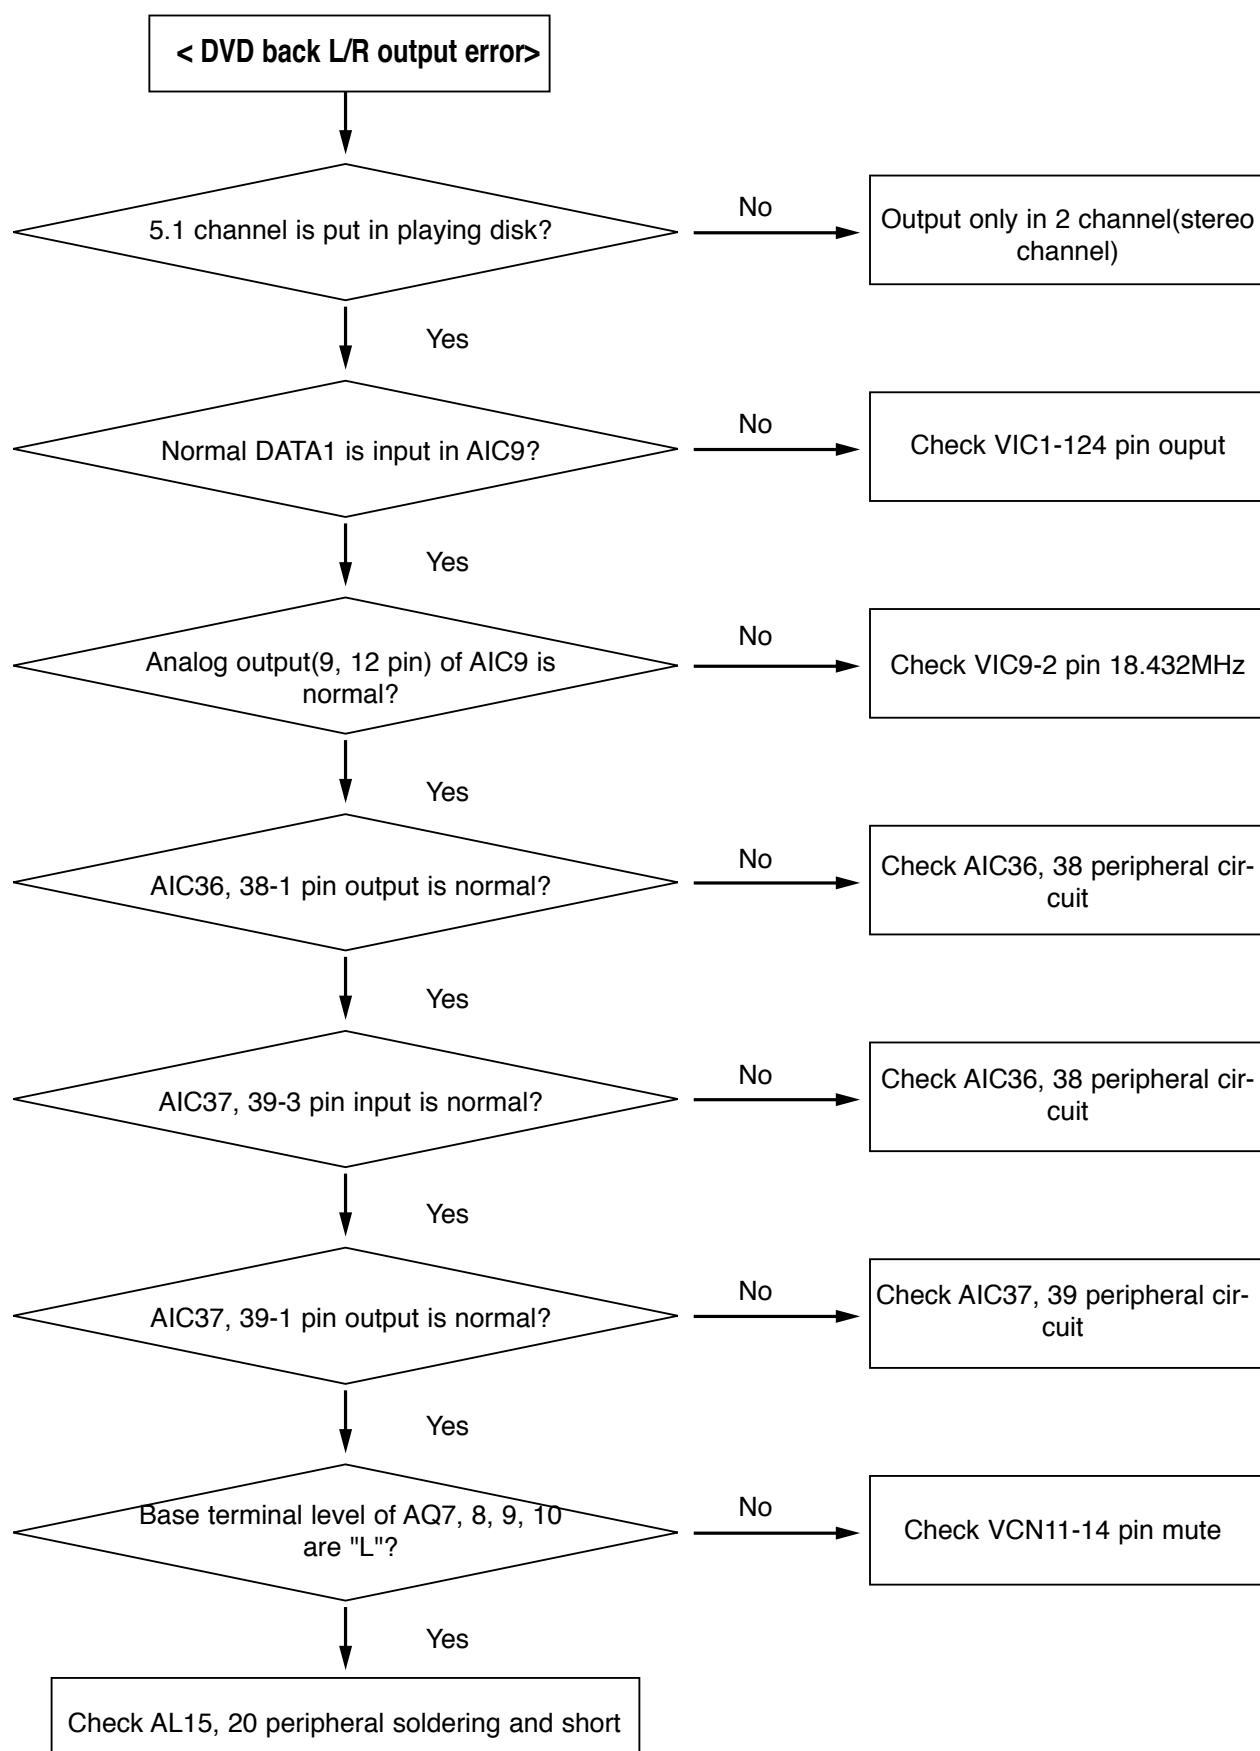


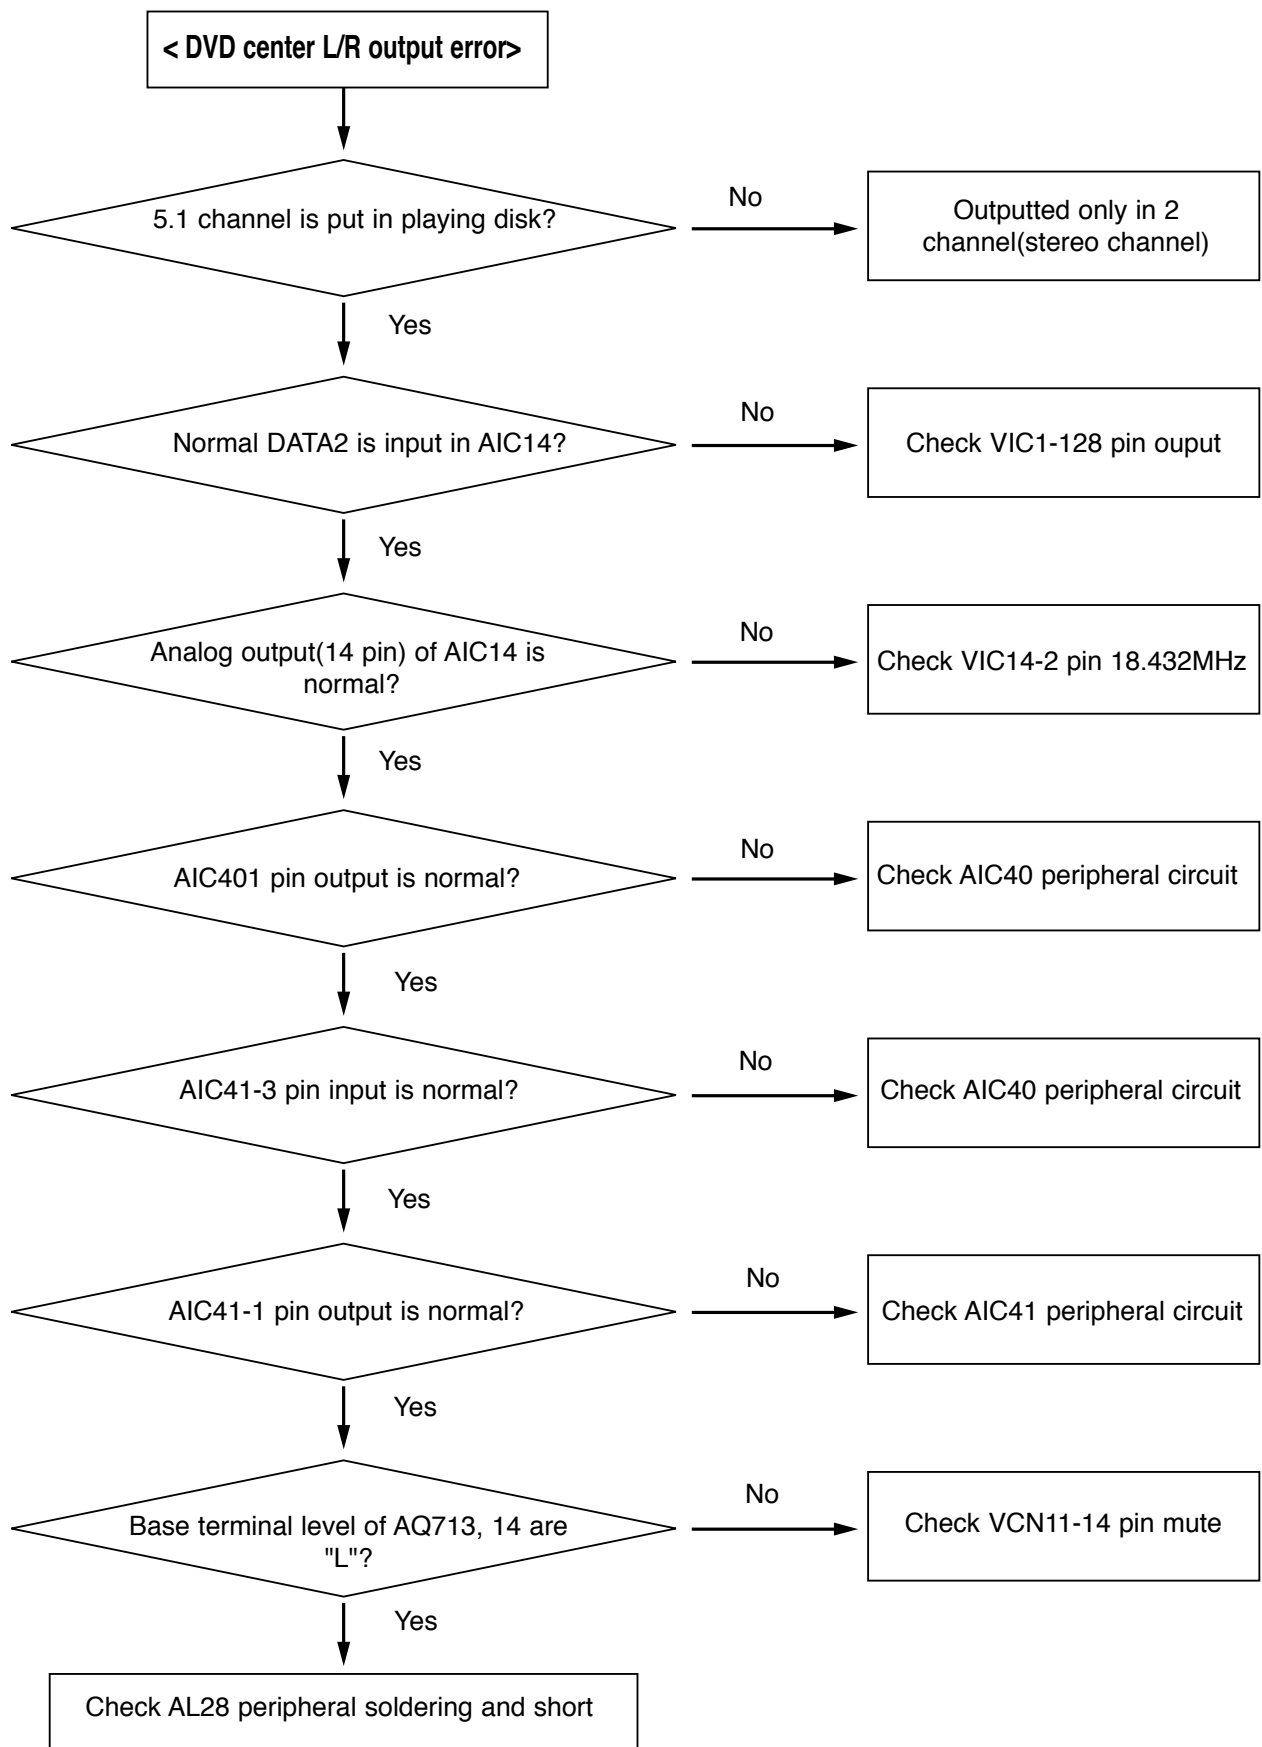

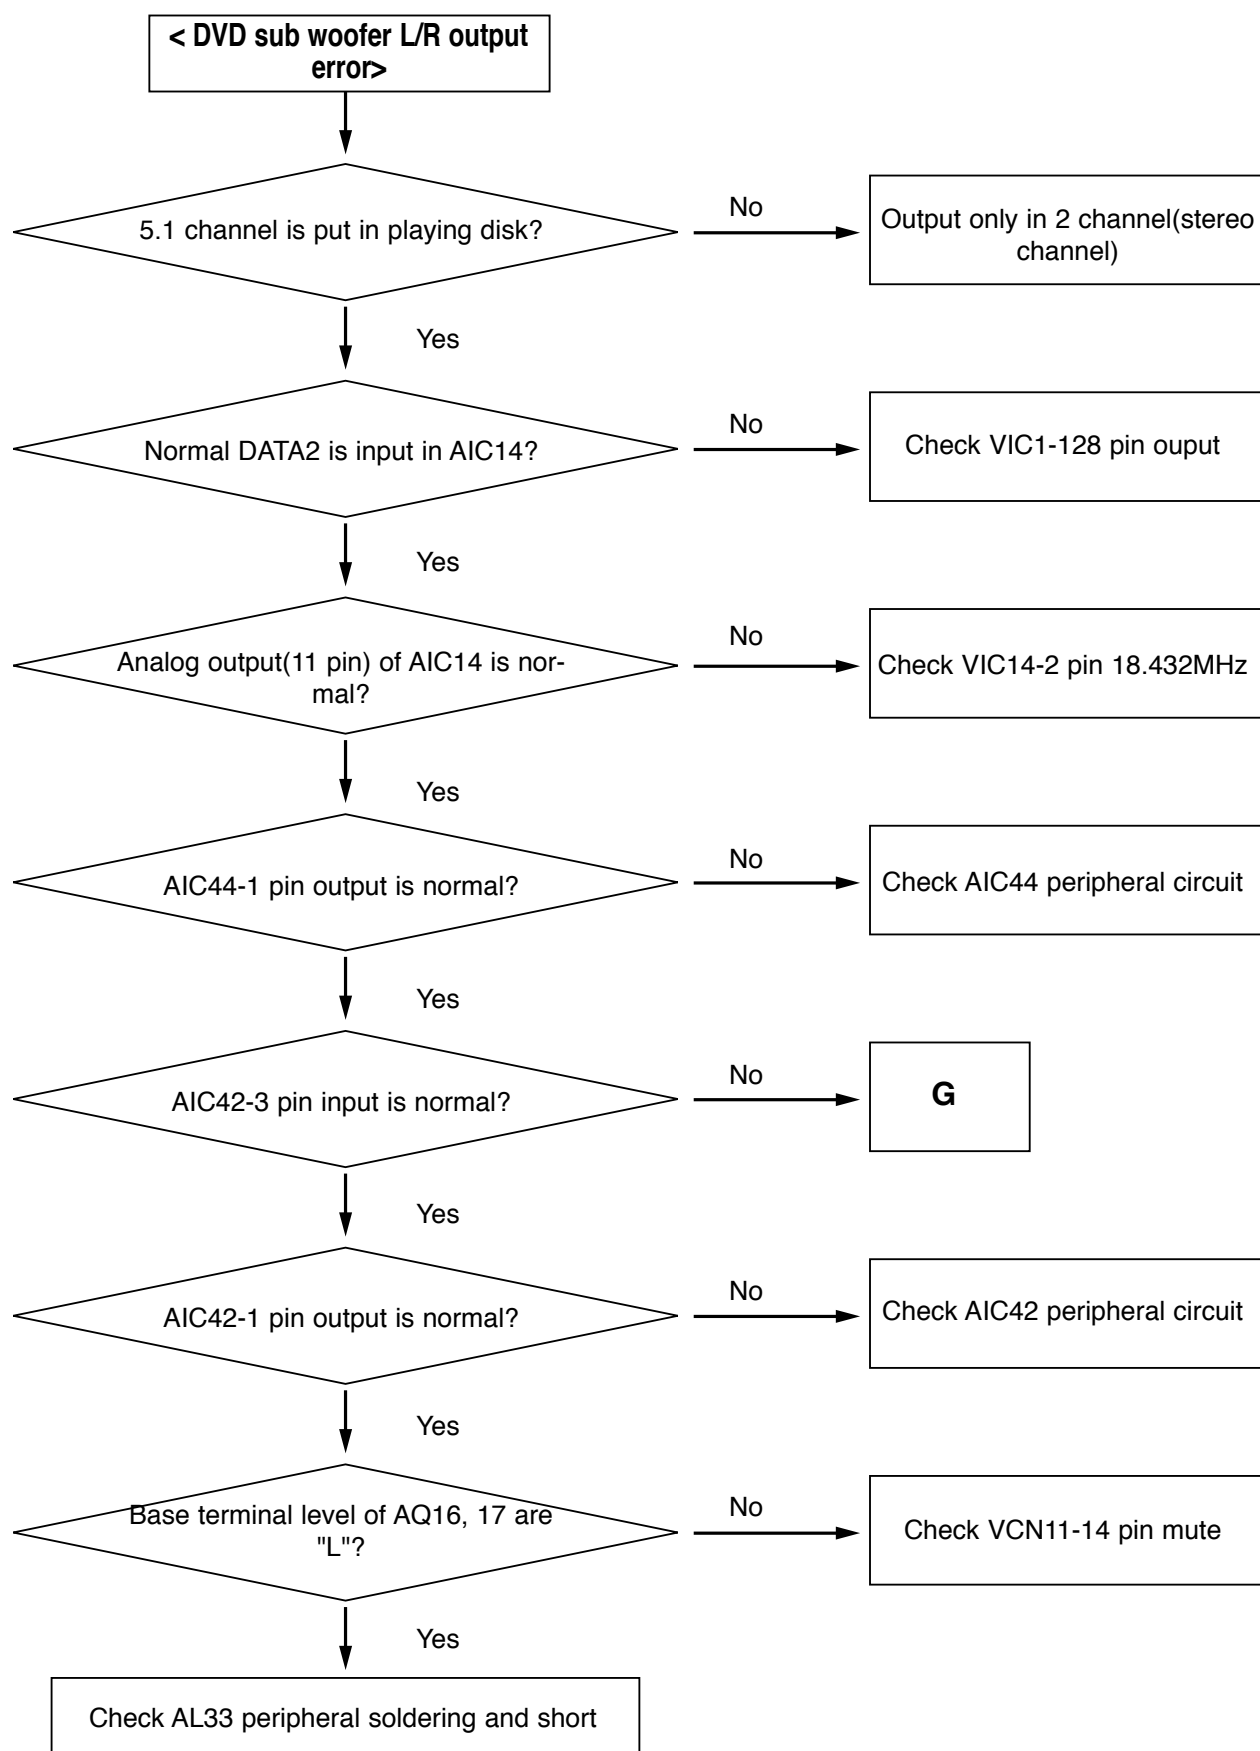

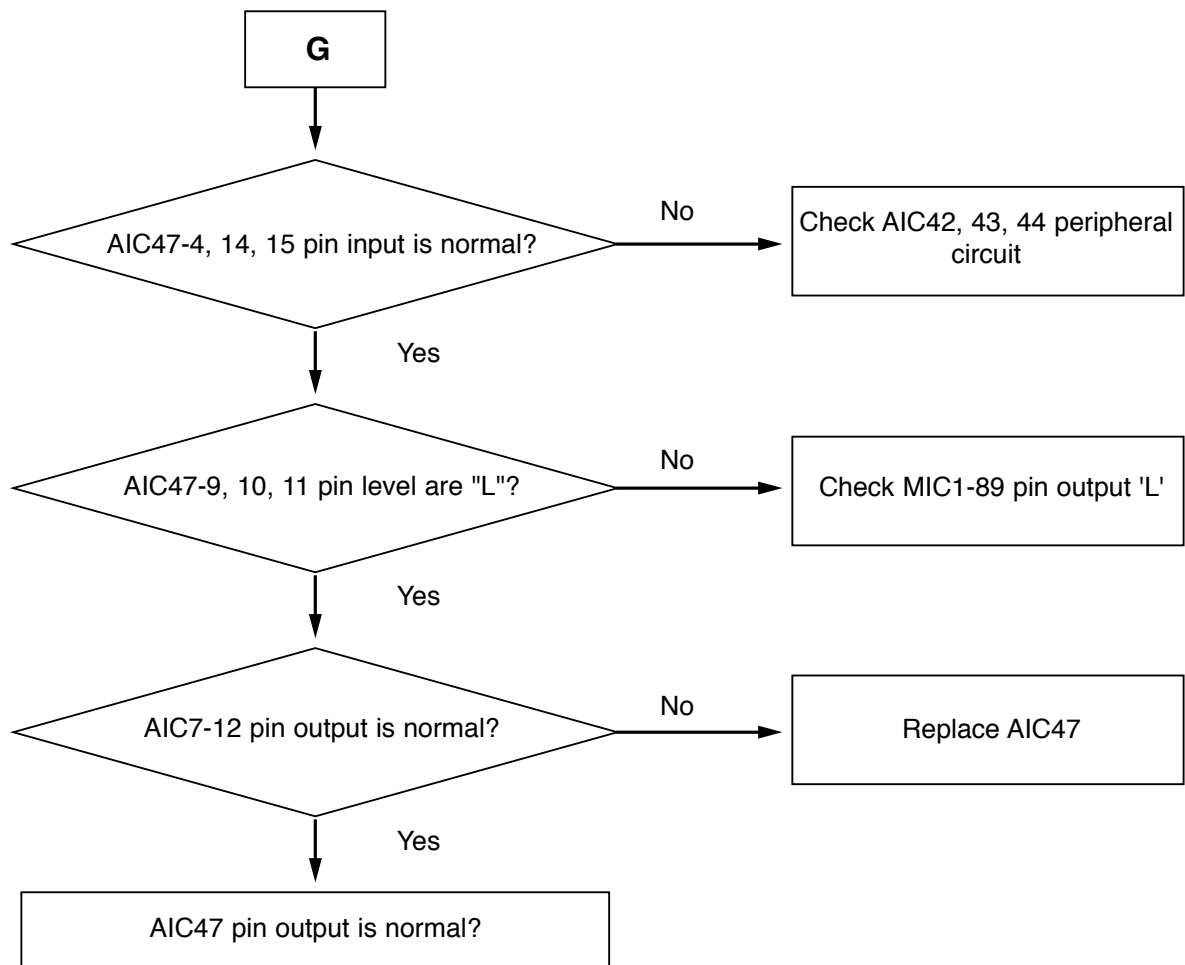

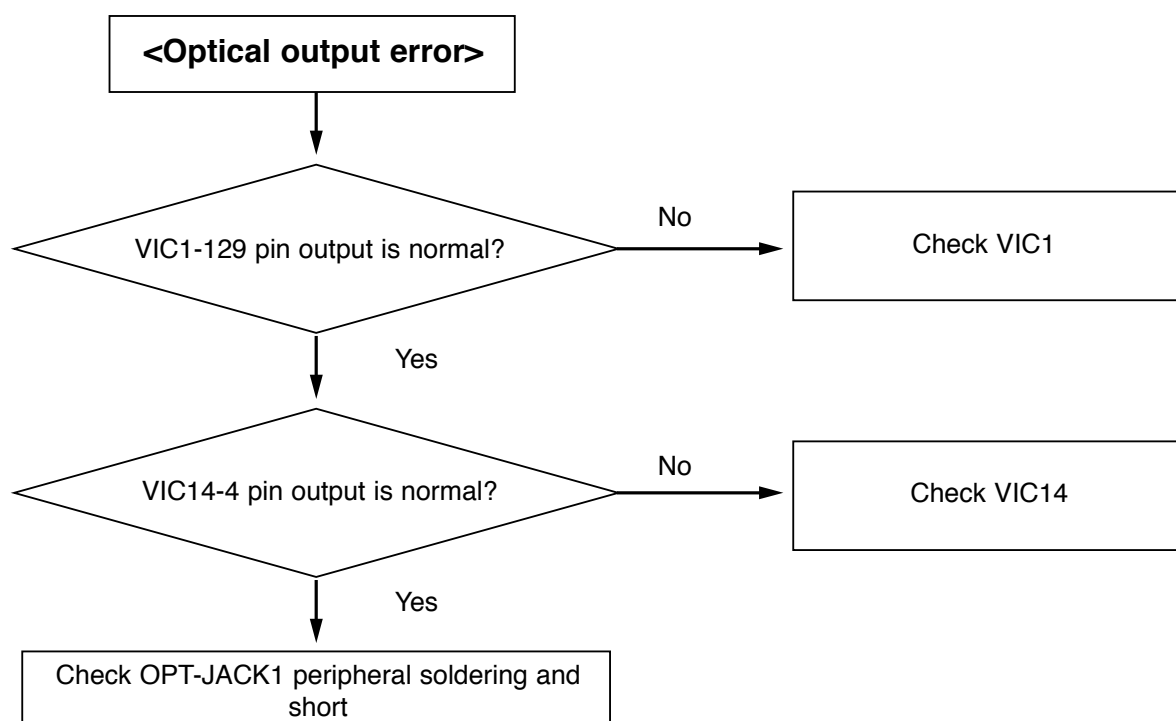

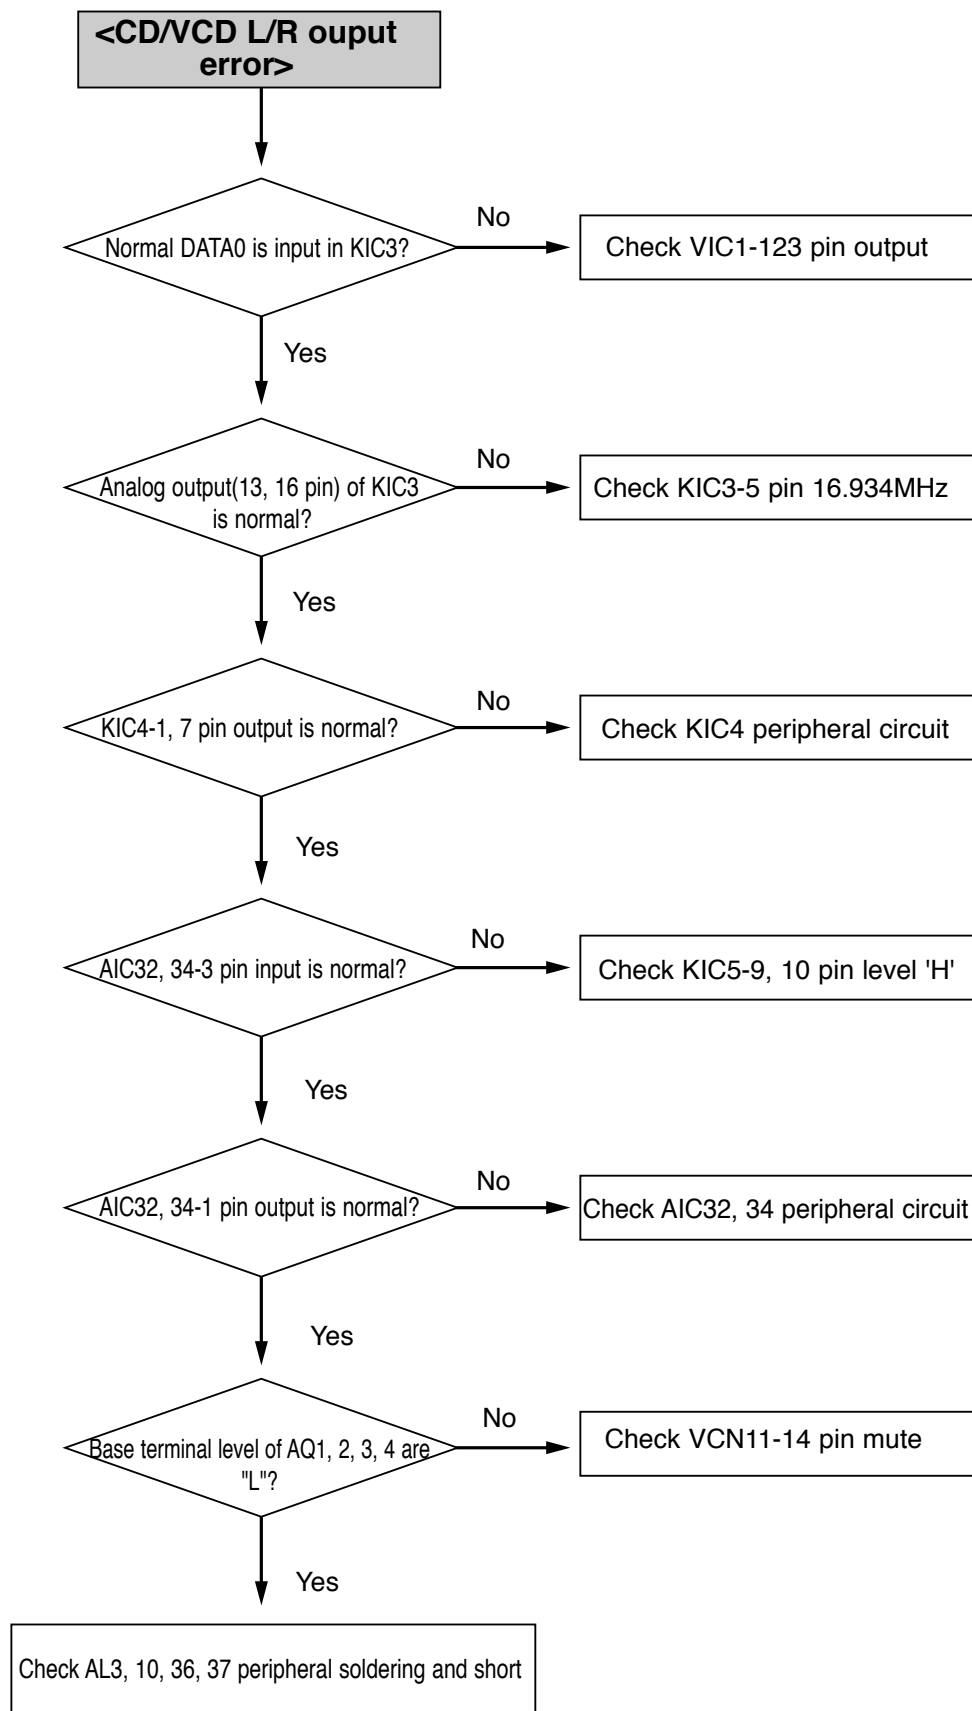

## MEMO


---

## 6. Exploded View and Parts List

---


|                                       | Page       |
|---------------------------------------|------------|
| <b>6-1 Cabinet Assembly - - - - -</b> | <b>6-2</b> |
| <b>6-2 Mechanical Parts - - - - -</b> | <b>6-4</b> |
| <b>6-3 Remote Control - - - - -</b>   | <b>6-6</b> |

# 6-1 Cabinet Assembly

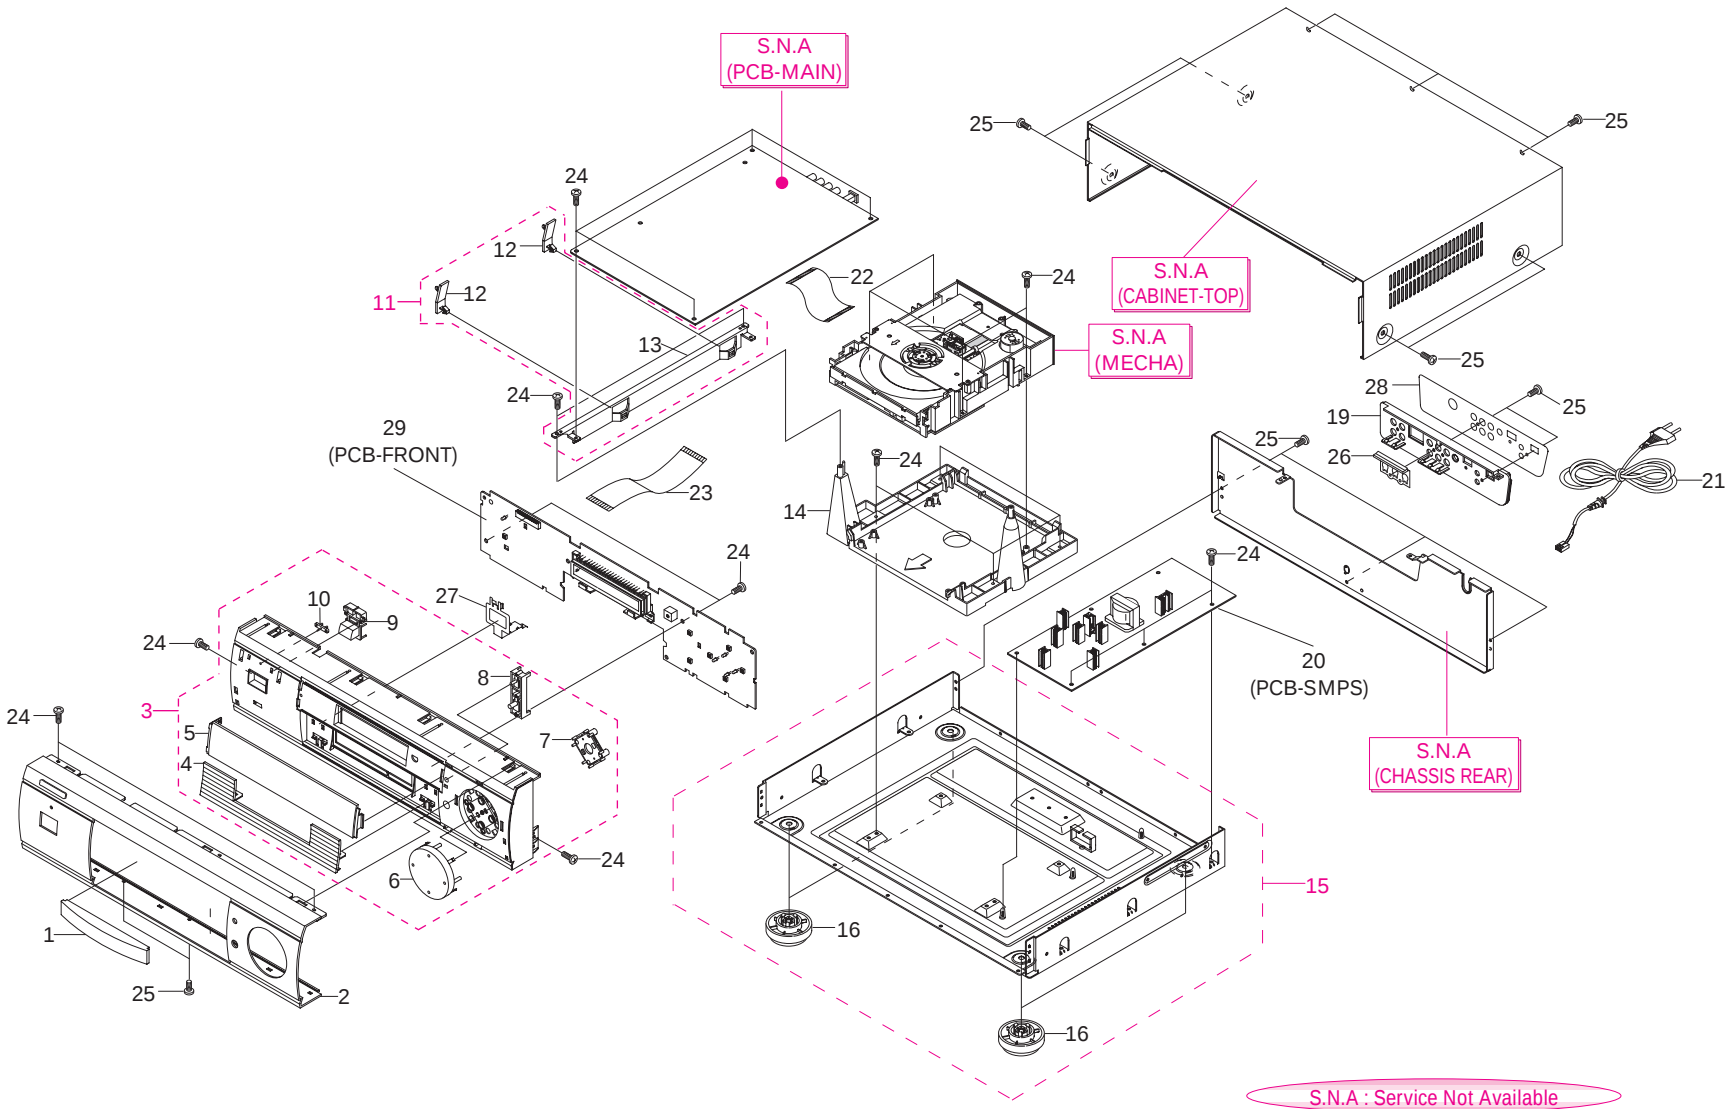

| Loc. No | New Part No | Description and Specification                   | Remark |
|---------|-------------|-------------------------------------------------|--------|
| 1       | AH95-50295A | ASSY-DOOR;DVD-905,ABS+PBS T0.2,DVD BADGE        |        |
| 2       | AH95-50239E | ASSY-COVER PANEL;DVD905/SEA,AL+BADGE,GOLD BADGE |        |
| 3       | AH95-10321A | ASSY-CABINET FRONT;DVD-860,ABS,-                |        |
| 4       | AH63-30220A | COVER-CENTER;- ,AL,-,T2.0,TITAN,HAIRLINE,-,D    |        |
| 5       | AH64-40401A | WINDOW-FLT;- ,PMMA,V0,T2.5,VIOLET,-,DVD-86      |        |
| 6       | AH95-50251A | ASSY-KNOB PLAY;DVD-860,ABS,-                    |        |
| 7       | AH61-20438A | HOLDER-PLAY;- ,ABS,HB,WHT,-,DVD-860             |        |
| 8       | AH64-11144A | KNOB-OPEN;- ,ABS94,HB,BLK,-,DVD-860             |        |
| 9       | AH64-11143A | KNOB-POWER;- ,ABS94,HB,BLK,-,DVD-860            |        |
| 10      | AH64-40402A | INDICATOR-POWER;- ,PMMA,HB,T2.5,MILK,-,DVD-860  |        |
| 11      | AH95-50238A | ASSY-BRKT PCB;DVD-860K,SECC+NYLON,-             |        |
| 12      | AH61-20279A | HOLDER-PWB;NYLON66,-,-,VIP680T,                 |        |
| 13      | AH61-10692A | BRACKET-PCB;- ,SECC,-,T1.0,NTR,-,DVD-860K       |        |
| 14      | AH61-10694A | FRAME-CHASSIS;- ,ABS94,HB,T3,L200,W180,H100,B   |        |
| 15      | AH95-10322A | ASSY-CABINET BOTTOM;DVD-860K,SECC+ABS,-         |        |
| 16      | AH95-50252A | ASSY-FOOT;DVD-860,ABS+EVA SPONGE,-              |        |
| 19      | AH63-30228A | COVER-REAR;- ,ABS94,HB,T2,BLK,-,DVD-860         |        |
| 20      | AH90-10725L | ASSY-POWER PCB;DVD760U,SEA                      |        |
| 21      | AH39-10002P | POWER CORD;EP2,SPT-1#2/18,2.0M,5239,UL/CSA      |        |
| 22      | 3809-001025 | CABLE-FLAT;30V,80C,270MM,28P,1.25MM,UL289       |        |
| 23      | 3809-001024 | CABLE-FLAT;30V,80C,150MM,40P,1.25MM,UL289       |        |
| 24      | 6003-000276 | SCREW-TAPTITE;BH,+,B,M3,L10,ZPC(YEL),SWCH1018AK |        |
| 25      | 6003-000275 | SCREW-TAPTITE;BH,+,B,M3,L10,BLK ,SWCH1018AK     |        |
| 26      | AH63-40163A | GROUND-REAR;- ,PBS,T0.2,-,DVD-860               |        |
| 27      | AH63-40161A | GROUND-FRONT;- ,PBS,T0.2,-,DVD-860              |        |

## 6-2 Mechanical Parts

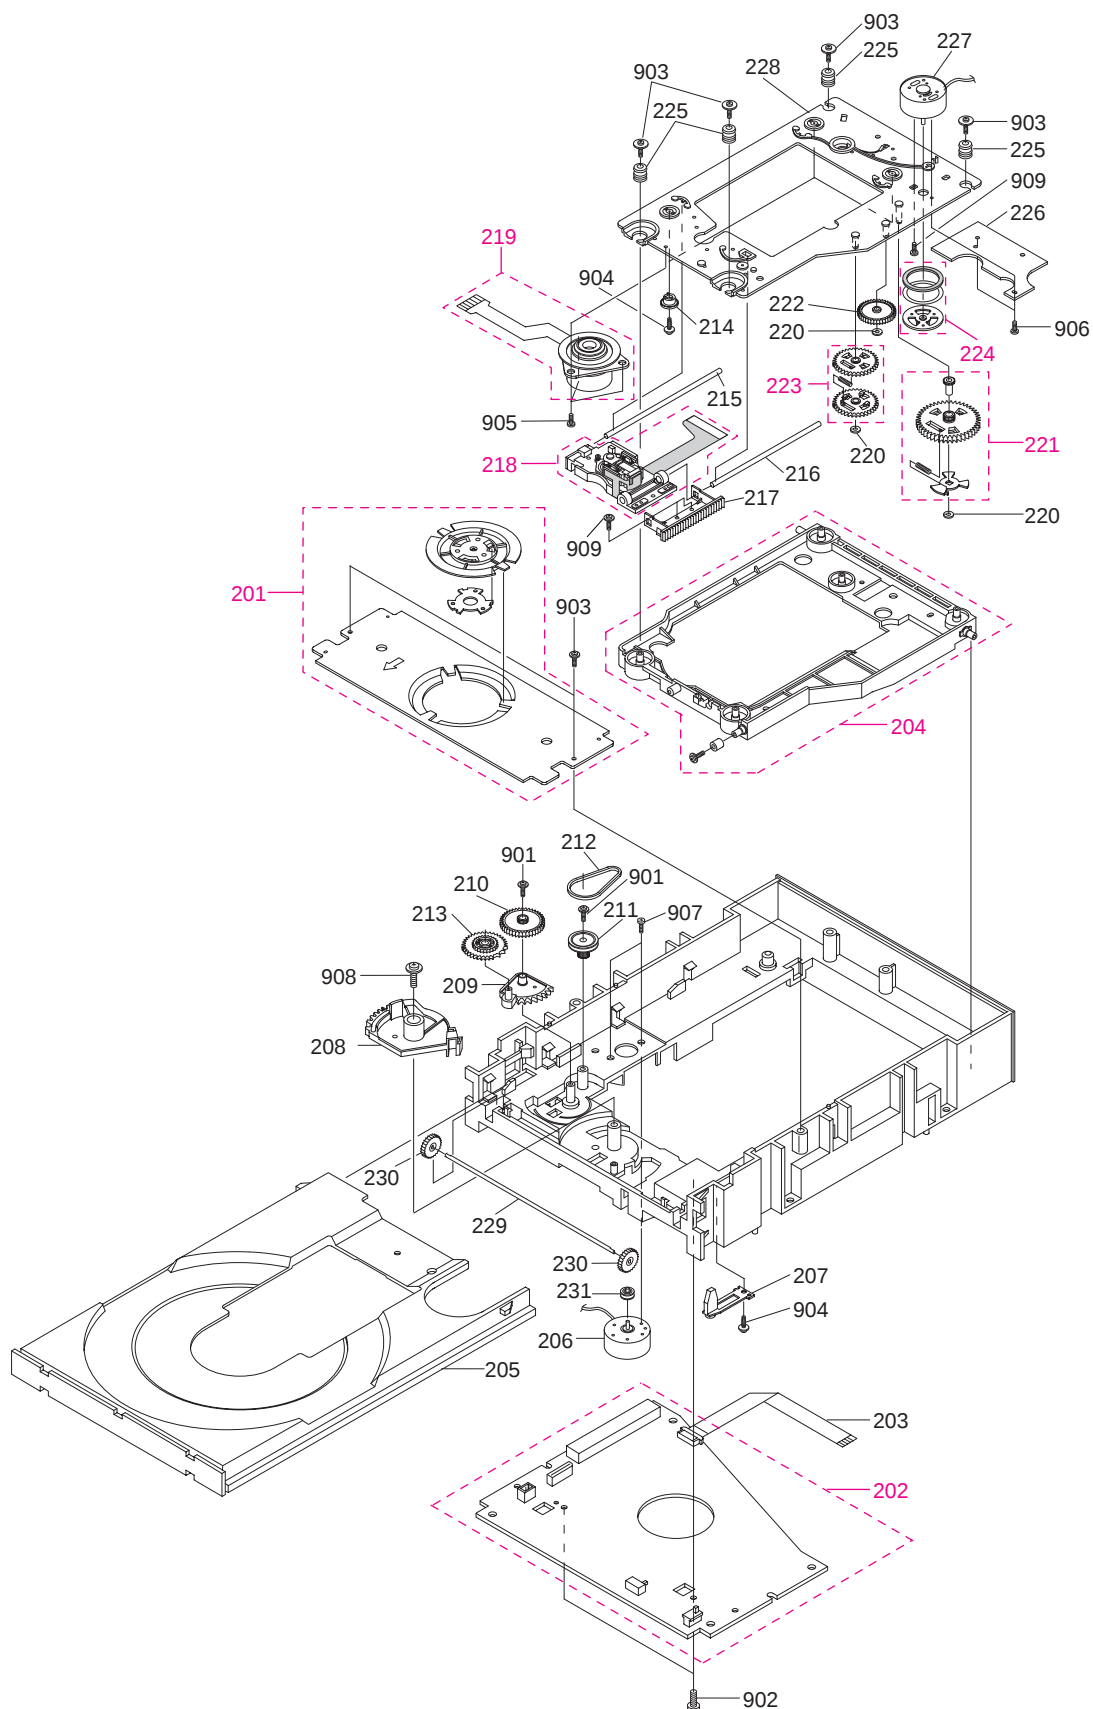

| Loc. No | New Part No | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| 201     | AH91-60117A | ASSY-DECK CLAMPER;DVD860,-,DP-1                |        |
| 202     | AH90-10736C | ASSY-PCB DECK;DP-2, DVD905                     |        |
| 203     | 3809-001030 | CABLE-FLAT;30V,80C,110MM,8P,1MM,UL2896         |        |
| 204     | AH91-60126A | ASSY-CHASSIS SUB;DP-1,DVD860,-                 |        |
| 205     | AH66-90054A | TRAY-DVD;DP,ABS,-,BLK,-,DP-1                   |        |
| 206     | AH31-10028A | MOTOR-FEED;DP,RF-300C-11440,D/V5.9,60HZ        |        |
| 207     | AH66-30087A | LEVER-OPEN SW;DP,KEPITAL,T0.7,L26,F20-03 BLK   |        |
| 208     | AH66-20194A | GEAR-CAM CENTER;DP,KEPITAL F20-03,M1.2,Z7,BLK, |        |
| 209     | AH66-20183A | GEAR-CAM SUB;DP,KEPITAL FT2020,M1,2,Z7,-,PC    |        |
| 210     | AH66-20185A | GEAR-TRAY A;DP,KEPITAL F20-03,M0.4/M0.5,Z5     |        |
| 211     | AH66-10024A | PULLEY-GEAR;DP,KEPITAL F20-03,BLK,DP-1         |        |
| 212     | AH66-60033A | BELT-PULLEY;DP,CR,T1.5,0.08,L82.7,BLK,DP-1     |        |
| 213     | AH66-20184A | GEAR-TRAY;DP,KEPITAL F20-03,M0.5/M0.6,Z4       |        |
| 214     | AH61-20424A | HOLDER-CAM;DP,KEPITAL,-,BLK,F20-03,DP-1        |        |
| 215     | AH61-50284A | SHAFT-P.U(L);DP,SUS420J2,OD3,L79,S/FINISHIN    |        |
| 216     | AH61-50278A | SHAFT-P.U(R);DP,SUS420J2,OD3,L87,-,NTR,DP-1    |        |
| 217     | AH66-20178A | RACK-SLIDE;DP,KEPITAL F20-03,WHT,M0.4,P1.      |        |
| 218     | AJ30-20035F | PICK-UP;SOH-D1A                                |        |
| 219     | AH91-60127A | ASSY-MOTOR SPINDLE;DP-1,DVD860,-               |        |
| 220     | AH60-30020A | WASHER-PLAIN;DP,-,ID3.1,OD6,T0.3,RED COLOR,    |        |
| 221     | AH91-60120A | ASSY-GEAR-FEED-AU/AL;DP-1,DVD-860,-            |        |
| 222     | AH66-20182A | GEAR-FEED B;DP,KEPITAL F20-03,M0.4,Z44,WHT     |        |
| 223     | AH91-60121A | ASSY-GEAR-FEED-CU/CL;DP-1,DVD-860,-            |        |
| 224     | AH91-60122A | ASSY-GEAR-MAGNET;DP-1,DVD-860,-                |        |
| 225     | AH73-10017A | RUBBER-INSULATOR;RUBBER(LB-40),OD11,DP-1,-     |        |
| 226     | AH90-10694A | ASSY-PCB HALL SENSOR;SDR-130,DOM               |        |
| 227     | AH31-10028A | MOTOR-FEED;DP,RF-300C-11440,D/V5.9,60HZ        |        |
| 228     | AH91-60125A | ASSY-BRKT DECK;DP-1,DVD860,-                   |        |
| 229     | AH61-50279A | SHAFT-SYNCRO;DP,SUM24L+ZN,OD2,L119,ZPC,YEL,    |        |
| 230     | AH66-22005A | GEAR-SYNCRO-A;KEPITAL F20-03,M0.8,Z9,-,PCD7.   |        |
| 231     | AH66-10023A | PULLEY-MOTOR;DP,KEPITAL F20-03,BLK,DP-1        |        |
| 901     | AH60-10151A | SCREW-TAP TITE;DP,SPEC6.8 ,PH,+,CP,M2,L5,ZPC   |        |
| 902     | AC60-10051A | SCREW-TAPPING;BH,-,-,M3,L8,FZY                 |        |
| 903     | AH60-10143U | SCREW-TAP TITE;DP,PH,+,SPEC,TAP1.7,L5,ZPC      |        |
| 904     | AH60-10145A | SCREW-TAP TITE;DP,PH,+,SPEC OD5.5 FP,TAP1.7,L  |        |
| 905     | AH60-10147A | SCREW-MACHINE;DP,CH,+,FP,M2,L4,ZPC,SWRCH10A,   |        |
| 906     | AH60-10143Q | SCREW-MACHINE;DP,CH,+,FP,M1.7,L4,ZPC,SWRCH10   |        |
| 907     | 6001-000012 | SCREW-MACHINE;CH,+,M1.7,L2.0,NYLOCK(WHT),SW    |        |
| 908     | AC60-10042A | SCREW-TAPPING;PWH,+,,-,M3,L8,-                 |        |
| 909     | 6001-000002 | SCREW-MACHINE;CH,+,M1.7,L3                     |        |

## 6-3 Remote Control

---



## 7. Electrical Parts List

| Loc. No |   | Part No     | Description and Specification                    | Remark |
|---------|---|-------------|--------------------------------------------------|--------|
| 20      |   | AH90-10725L | ASSY-POWER PCB;DVD760U,SEA                       |        |
| PC01    | ⚠ | 2305-001021 | C-FILM,MPEF;100NF,20%,275V,TP,17.5X7X13.5,       |        |
| PC02    | ⚠ | 2305-001021 | C-FILM,MPEF;100NF,20%,275V,TP,17.5X7X13.5,       |        |
| PC03    | ⚠ | 2201-000916 | C-CERAMIC,DISC;100PF,10%,400V,Y5P,TP,10X8,10     |        |
| PC04    | ⚠ | 2201-000916 | C-CERAMIC,DISC;100PF,10%,400V,Y5P,TP,10X8,10     |        |
| PC05    |   | 2201-000812 | C-CERAMIC,DISC;2.2NF,20%,400V,Y5P,BK,11X7,7.5    |        |
| PC06    |   | 2201-000812 | C-CERAMIC,DISC;2.2NF,20%,400V,Y5P,BK,11X7,7.5    |        |
| PC10    | ⚠ | 2401-000342 | C-AL;100UF,20%,400V,WT,-,33X30,10MM              |        |
| PC11    |   | 2301-000140 | C-FILM,PEF;10NF,10%,630V,BK,16.5X9.5X5.7X        |        |
| PC12    |   | 2201-000915 | C-CERAMIC,DISC;100PF,10%,1KV,Y5P,TP,6X5,5        |        |
| PC13    |   | B1102-0260  | C-FILM;CQ 922 M 50V T 102-J ECQB1H102JF3         |        |
| PC13A   |   | 2301-000289 | C-FILM,PEF;5.6NF,5%,50V,TP,6.5X5.5X3.0X5,        |        |
| PC14    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC15    |   | 2401-001919 | C-AL;2.2UF,20%,50V,-,TP,4X7MM,5                  |        |
| PC17    |   | 2401-001939 | C-AL;22UF,20%,50V,GP,BK,6.3X11MM,2.              |        |
| PC18    |   | 2301-000415 | C-FILM,PEF;22NF,5%,50V,TP,6.5X10.5X4MM,5M        |        |
| PC31    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC32    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC33    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC34    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC36    |   | 2401-002162 | C-AL;1000UF,20%,25V,GP,TP,10X20,5MM              |        |
| PC37    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC38    |   | 2401-001992 | C-AL;2200UF,20%,10V,GP,TP,10X20MM,5              |        |
| PC39    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC40    |   | 2401-001902 | C-AL;100UF,20%,50V,GP,-,6.3X11,2.5               |        |
| PC41    |   | 2401-001125 | C-AL;330UF,20%,25V,WT,TP,10X12.5,5M              |        |
| PC42    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC43    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC45    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC46    |   | 2401-001507 | C-AL;47UF,20%,16V,GP,TP,6.3X5,5                  |        |
| PC47    |   | 2401-001507 | C-AL;47UF,20%,16V,GP,TP,6.3X5,5                  |        |
| PC48    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC49    |   | 2401-001507 | C-AL;47UF,20%,16V,GP,TP,6.3X5,5                  |        |
| PC50    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC51    |   | 2401-001507 | C-AL;47UF,20%,16V,GP,TP,6.3X5,5                  |        |
| PC52    |   | 2301-000129 | C-FILM,PEF;100NF,5%,50V,TP,10X9X4.3X5,5MM        |        |
| PC54    |   | 2401-002011 | C-AL;100UF,20%,25V,GP,TP,6.3X11,5MM              |        |
| PCNO1   |   | 3711-000190 | CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN  |        |
| PCNO2   |   | AH39-20559E | LEAD CONNECTOR-ASSY;-;5264-18,51088-18,18P,350MM |        |
| PD01    | ⚠ | 0402-000103 | DIODE-BRIDGE;D2SBA60,600V,1.5A,-                 |        |
| PD10    |   | 0402-000378 | DIODE-RECTIFIER;EG01C,1000V,500MA,DO-41          |        |
| PD11    |   | 0401-000101 | DIODE-SWITCHING;1N4148,100V,200MA,500MW,4NS,DO   |        |
| PD12    |   | 0402-001013 | DIODE-RECTIFIER;1SR153-400,400V,800MA,DO-41      |        |
| PD31    |   | 0402-000383 | DIODE-RECTIFIER;S2L20U,200V,1.5A,-               |        |
| PD32    |   | 0402-000431 | DIODE-RECTIFIER;FML-M02S,200V,2.5A,TO-220F       |        |
| PD33    |   | 0402-000383 | DIODE-RECTIFIER;S2L20U,200V,1.5A,-               |        |
| PD34    |   | 0402-000431 | DIODE-RECTIFIER;FML-M02S,200V,2.5A,TO-220F       |        |
| PD35    |   | 0404-000128 | DIODE-SCHOTTKY;FMB-G14L,45V,5A,TO-220F,TP        |        |
| PD36    |   | 0402-001013 | DIODE-RECTIFIER;1SR153-400,400V,800MA,DO-41      |        |

| Loc. No | Part No       | Description and Specification                    | Remark |
|---------|---------------|--------------------------------------------------|--------|
| PD37    | 0402-001013   | DIODE-RECTIFIER;1SR153-400,400V,800MA,DO-41      |        |
| PD38    | 0402-001013   | DIODE-RECTIFIER;1SR153-400,400V,800MA,DO-41      |        |
| PD39    | 0402-001013   | DIODE-RECTIFIER;1SR153-400,400V,800MA,DO-41      |        |
| PD42    | 0402-000127   | DIODE-RECTIFIER;1N4002,100V,1A,DO-41             |        |
| PF01    | ⚠ 3601-000238 | FUSE                                             |        |
| PIC1    | 1203-000304   | IC-PWM CONTROLLER;7552,DIP,8P,-,PLASTIC,30V,-,-, |        |
| PIC2    | ⚠ B4161-0027  | PHOTO-COUPLER;PC817XF ST                         |        |
| PIC3    | AC14-12006D   | IC;KA431Z,TO-92,TAPING                           |        |
| PIC4    | 1203-001083   | IC-VOLTAGE REGULATOR;3RF23,TO-202,4P,12.0MIL,PLA |        |
| PIC5    | B4008-1134    | IC-VOLT REGU;PQ09RF11 SIP                        |        |
| PIC8    | 1203-000122   | IC-NEGA.FIXED REG.;7908,TO-220,3P,-,PLASTIC,-7.7 |        |
| PIC9    | 1203-000294   | IC-POS.FIXED REG.;7808,TO-220,3P,-,PLASTIC,7.7/  |        |
| PL02    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL11    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL31    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL32    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL33    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL34    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL35    | AC27-92001M   | INDUCTOR;70UH-M RT BFS3565R2F,-,-,-              |        |
| PL36    | AC27-12001N   | COIL-CHOKE;10UH-15%,RA,K-30,Q80,150KHZ,-,        |        |
| PL37    | AC27-12001N   | COIL-CHOKE;10UH-15%,RA,K-30,Q80,150KHZ,-,        |        |
| PLO1    | ⚠ AH29-30010C | FILTER-LINE NOISE;-0.4MH MIN,-,AC250V,FTZ-FILTE  |        |
| PLO3    | ⚠ AC29-30050A | FILTER-LINE NOISE;-400UH,-,250V,-                |        |
| PQ1     | 0505-001044   | FET-SILICON;SSS3N80,N,800V,1.8A,50HM,35W,T       |        |
| PQ2     | 0504-000118   | TR-DIGITAL;KSR1003,NPN,300MW,22K-22K,TO-9        |        |
| PQ3     | 0504-000118   | TR-DIGITAL;KSR1003,NPN,300MW,22K-22K,TO-9        |        |
| PQ4     | 0504-001003   | TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9        |        |
| PR10    | 2006-000262   | R-CEMENT;2.7OHM,10%,2W,CB,ST,7.5X11X20.          |        |
| PR13    | 2004-000801   | R-METAL;33KOHM,5%,1/4W,AA,TP,2.4X6.4MM           |        |
| PR14    | 2004-001167   | R-METAL;62KOHM,5%,1/4W,AD,TP,2.4X6.4MM           |        |
| PR15    | 2001-000362   | R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PR16    | 2001-000527   | R-CARBON;22OHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| PR17    | 2003-000273   | R-METAL OXIDE;33KOHM,5%,2W,AA,TP,6X16MM          |        |
| PR18    | 2003-000273   | R-METAL OXIDE;33KOHM,5%,2W,AA,TP,6X16MM          |        |
| PR19    | 2001-000273   | R-CARBON;100KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| PR20    | ⚠ 2001-000021 | R-CARBON;27OHM,5%,1/4W,AA,TP,2.4X6.4MM           |        |
| PR21    | 2001-000362   | R-CARBON;150OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PR22    | 2001-000281   | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PR23    | 2006-000260   | R-CEMENT;0.47OHM,10%,2W,CB,ST,7.5X11X20          |        |
| PR24    | A1000-0560    | R-METAL FILM;RM 1/8 T 512-F                      |        |
| PR31    | 2001-000027   | R-CARBON;100OHM,5%,1/4W,AA,TP,2.4X6.4MM          |        |
| PR32    | 2001-000105   | R-CARBON;1.5KOHM,5%,1/4W,AA,TP,2.4X6.4M          |        |
| PR35    | 2001-000005   | R-CARBON;390OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PR36    | 2001-000221   | R-CARBON;1.2KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| PR37    | 2001-000429   | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| PR38    | 2004-000869   | R-METAL;3KOHM,1%,1/8W,AA,TP,1.8X3.2MM            |        |
| PR39    | 2004-000459   | R-METAL;2.2KOHM,1%,1/8W,AA,TP,1.8X3.2M           |        |
| PR40    | 2003-000148   | R-METAL OXIDE;100OHM,5%,2W,AE,TP,6X16MM          |        |
| PR41    | 2001-000780   | R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PR41A   | 2001-000780   | R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PR41B   | 2001-000780   | R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| PT1     | ⚠ AH26-22001A | TRANS-SWITCHING;110-220V,UL/CSA,ER3530,0.6,ST,   |        |
| PVA1    | ⚠ 1405-000186 | VARIATOR;470V,4500A,17X12MM,TP                   |        |
| PZD11   | 0403-000555   | DIODE-ZENER;MTZ30D,30V,29.02-30.51V,500MW,       |        |
| PZD12   | 0403-000539   | DIODE-ZENER;MTZ18C,18V,17.42-18.33V,500MW,       |        |

| Loc. No | Part No      | Description and Specification                 | Remark |
|---------|--------------|-----------------------------------------------|--------|
| PZD13   | 0403-000294  | DIODE-ZENER;MTZ4.7B,4.7V,4.55-4.80V,500MW,    |        |
| -       | Do not order | ASSY-PCB MAIN;DVD858V,CHN                     | S.N.A  |
| AC1     | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC10    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC11    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC12    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC13    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC15    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC16    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC18    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC19    | 2401-000419  | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| AC2     | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC20    | 2203-001222  | C-CERAMIC,CHIP;820PF,10%,50V,X7R,TP,1608,-    |        |
| AC21    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC22    | 2401-000419  | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| AC23    | 2203-001632  | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM  |        |
| AC24    | 2203-001559  | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| AC26    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC3     | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC30    | 2401-000907  | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| AC31    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC32    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC33    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC34    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC35    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC36    | 2203-001222  | C-CERAMIC,CHIP;820PF,10%,50V,X7R,TP,1608,-    |        |
| AC37    | 2401-000419  | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| AC38    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC39    | 2401-000907  | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| AC4     | 2203-001222  | C-CERAMIC,CHIP;820PF,10%,50V,X7R,TP,1608,-    |        |
| AC40    | 2203-001632  | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM  |        |
| AC41    | 2203-001559  | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| AC42    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC43    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC44    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC45    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC46    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC47    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC48    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC49    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC5     | 2401-000419  | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| AC50    | 2401-000419  | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| AC51    | 2203-001222  | C-CERAMIC,CHIP;820PF,10%,50V,X7R,TP,1608,-    |        |
| AC52    | 2401-000419  | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| AC53    | 2401-000907  | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| AC54    | 2203-001632  | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM  |        |
| AC55    | 2203-001559  | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| AC56    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC57    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC58    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| AC6     | 2401-000907  | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| AC61    | 2401-001975  | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| AC62    | 2203-001556  | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |

| Loc. No | Part No     | Description and Specification                    | Remark |
|---------|-------------|--------------------------------------------------|--------|
| AC63    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC64    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC65    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                 |        |
| AC66    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC67    | 2203-001222 | C-CERAMIC,CHIP;820PF,10%,50V,X7R,TP,1608,-       |        |
| AC68    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC69    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC7     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC70    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| AC71    | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM                  |        |
| AC72    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                 |        |
| AC73    | 2203-001632 | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM     |        |
| AC74    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM    |        |
| AC75    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC76    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC77    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                 |        |
| AC78    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| AC79    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC8     | 2203-001632 | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM     |        |
| AC80    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC81    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                 |        |
| AC82    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                 |        |
| AC83    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC84    | 2203-001222 | C-CERAMIC,CHIP;820PF,10%,50V,X7R,TP,1608,-       |        |
| AC85    | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM                  |        |
| AC86    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| AC87    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC88    | 2203-001632 | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM     |        |
| AC89    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM    |        |
| AC9     | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM    |        |
| AC90    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC93    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                 |        |
| AC94    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC97    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AC98    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| AD1     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT   |        |
| AD2     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT   |        |
| AD3     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT   |        |
| AD4     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT   |        |
| AIC14   | 1002-001051 | IC-D/A CONVERTER;PCM1723E,16BIT,SOP,24P,204MIL,  |        |
| AIC3    | 1002-001052 | IC-D/A CONVERTER;PCM1720E,16BIT,SOP,20P,-,-,ST,  |        |
| AIC31   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC32   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC33   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC34   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC36   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC37   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC38   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC39   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC40   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC41   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC42   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC43   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC44   | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| AIC47   | AH14-10004T | IC-ANALOG M/PLEXER;MC14053BD,SOP,TAPE 16P ANALOG |        |

| Loc. No | Part No     | Description and Specification                   | Remark |
|---------|-------------|-------------------------------------------------|--------|
| AIC9    | 1002-001052 | IC-D/A CONVERTER;PCM1720E,16BIT,SOP,20P,-,-,ST, |        |
| AL1     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL10    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL11    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL12    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL13    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL14    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL15    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL16    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL17    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL18    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL19    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL2     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL20    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL21    | 3301-000325 | CORE-FERRITE BEAD;AB,3.2X2.5X1.3MM,-,-          |        |
| AL22    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL23    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL24    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL25    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL26    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL27    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL28    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL29    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL3     | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL30    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL31    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL32    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL33    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL34    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL35    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL36    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL37    | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP     |        |
| AL38    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL39    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL4     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL40    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL5     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL51    | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                 |        |
| AL52    | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                 |        |
| AL7     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AL8     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| AQ1     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ10    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ11    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ12    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-  |        |
| AQ13    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ14    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ15    | 0504-000156 | TR-DIGITAL;KSR2103,PNP,200MW,22K-22K,SOT-       |        |
| AQ16    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ17    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ18    | 0504-000128 | TR-DIGITAL;- ,NPN,200MW,22K-22KOHM,SOT-23,      |        |
| AQ2     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ3     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ4     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |
| AQ7     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,  |        |

| Loc. No | Part No     | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| AQ8     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| AQ9     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| AR1     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR101   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR102   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR103   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR104   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR105   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR107   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                |        |
| AR11    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR110   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR12    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608             |        |
| AR14    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR15    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR16    | 2007-000539 | R-CHIP;200OHM,5%,1/16W,DA,TP,1608              |        |
| AR17    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR18    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR19    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR2     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR20    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR21    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR22    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608             |        |
| AR23    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR25    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR26    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR29    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608              |        |
| AR3     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR30    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR32    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR33    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608             |        |
| AR38    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR39    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR4     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR40    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR41    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR42    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR43    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608             |        |
| AR44    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608              |        |
| AR45    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| AR46    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR47    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608             |        |
| AR48    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608              |        |
| AR49    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR5     | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608              |        |
| AR50    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR51    | 2007-000539 | R-CHIP;200OHM,5%,1/16W,DA,TP,1608              |        |
| AR52    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR53    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR54    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR55    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR56    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR57    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| AR58    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| AR59    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608              |        |
| AR6     | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |

| Loc. No | Part No     | Description and Specification                 | Remark |
|---------|-------------|-----------------------------------------------|--------|
| AR60    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| AR61    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR62    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR64    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608             |        |
| AR65    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR67    | 2007-000076 | R-CHIP;330OHM,5%,1/16W,DA,TP,1608             |        |
| AR68    | 2007-000075 | R-CHIP;220OHM,5%,1/16W,DA,TP,1608             |        |
| AR69    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| AR7     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR70    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR71    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR72    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR73    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR74    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608             |        |
| AR75    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| AR76    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR77    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR78    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR79    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608             |        |
| AR8     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR80    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR81    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR82    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR83    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR84    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR85    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR86    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608             |        |
| AR87    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| AR88    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR89    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR9     | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR90    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR91    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| AR92    | 2007-000708 | R-CHIP;3.9KOHM,1%,1/16W,DA,TP,1608            |        |
| AR93    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR94    | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| AR95    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| AR96    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| AR98    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| AR99    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| C101    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| C11     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| C12     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| C17     | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| C22     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| C23     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| C25     | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| C29     | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| C3      | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| C30     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| C31     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| C35     | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| C36     | 2203-001034 | C-CERAMIC,CHIP;5.6NF,10%,50V,X7R,1608,-,TP    |        |
| C38     | 2203-001034 | C-CERAMIC,CHIP;5.6NF,10%,50V,X7R,1608,-,TP    |        |
| C39     | 2203-001034 | C-CERAMIC,CHIP;5.6NF,10%,50V,X7R,1608,-,TP    |        |

| Loc. No | Part No     | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| C40     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| C42     | 2203-005012 | C-CERAMIC,CHIP;150NF,20%,16V,Y5V,TP,1608,-     |        |
| C43     | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM                |        |
| C46     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| C48     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| C6      | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM                |        |
| CN1     | 3708-001085 | CONNECTOR-FPC/FC/PIC;40P,1.25MM,STRAIGHT,SN    |        |
| D101    | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT |        |
| DA1     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT |        |
| DA2     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT |        |
| DA3     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT |        |
| DA4     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT |        |
| DA5     | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT |        |
| DC1     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC10    | 2203-000308 | C-CERAMIC,CHIP;120PF,5%,50V,NPO,TP,1608,-      |        |
| DC100   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC11    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC12    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-      |        |
| DC13    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC14    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC15    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC17    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC18    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC18D   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC19    | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2            |        |
| DC2     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC20    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC21    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC22    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC23    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5               |        |
| DC24    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC25    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC26    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5               |        |
| DC27    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC28    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC29    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-     |        |
| DC30    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-     |        |
| DC31    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC32    | 2203-001636 | C-CERAMIC,CHIP;33PF,5%,50V,NPO,TP,1608,1.6MM   |        |
| DC35    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC36    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC37    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC38    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC39    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC40    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC41    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC42    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC43    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC44    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC47    | 2203-000384 | C-CERAMIC,CHIP;15PF,5%,50V,NPO,TP,1608,-       |        |
| DC48    | 2203-000384 | C-CERAMIC,CHIP;15PF,5%,50V,NPO,TP,1608,-       |        |
| DC49    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM  |        |
| DC5     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC50    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC51    | 2203-001636 | C-CERAMIC,CHIP;33PF,5%,50V,NPO,TP,1608,1.6MM   |        |

| Loc. No | Part No     | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| DC52    | 2203-001636 | C-CERAMIC,CHIP;33PF,5%,50V,NPO,TP,1608,1.6MM   |        |
| DC530   | 2203-000426 | C-CERAMIC,CHIP;18PF,5%,50V,NPO,TP,1608,-       |        |
| DC54    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5               |        |
| DC55    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC56    | 2203-001636 | C-CERAMIC,CHIP;33PF,5%,50V,NPO,TP,1608,1.6MM   |        |
| DC57    | 2203-000384 | C-CERAMIC,CHIP;15PF,5%,50V,NPO,TP,1608,-       |        |
| DC58    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC59    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC6     | 2203-001632 | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM   |        |
| DC60    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC61    | 2203-001632 | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM   |        |
| DC62    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| DC7     | 2203-001632 | C-CERAMIC,CHIP;330PF,5%,50V,CH,TP,1608,1.6MM   |        |
| DC8     | 2203-001397 | C-CERAMIC,CHIP;2.2NF,5%,50V,COG,1608,-,TP      |        |
| DC9     | 2203-001634 | C-CERAMIC,CHIP;33NF,10%,50V,X7R,TP,1608,1.6MM  |        |
| DD1     | 0405-000106 | DIODE-VARACTOR;1SV228,15V,10NA,SOT-23,TP       |        |
| DIC1    | AH13-10030F | IC-ASIC;-,TC90A19F,QFP,100,DATA PROC.I         |        |
| DIC10   | 0801-000885 | IC-CMOS LOGIC;7S04,INVERTER,SOP,5P,150MIL,SI   |        |
| DIC11   | 0801-002166 | IC-CMOS LOGIC;7SHU04,INVERTER GATE,SOP,5P,6.   |        |
| DIC12   | 0801-002166 | IC-CMOS LOGIC;7SHU04,INVERTER GATE,SOP,5P,6.   |        |
| DIC13   | 0801-002096 | IC-CMOS LOGIC;7SH08,AND GATE,SOP,5P,110MIL,S   |        |
| DIC2    | 1105-001038 | IC-DRAM;48C512,512KX8BIT,SOJ,28P,400MI         |        |
| DIC3    | 0801-002166 | IC-CMOS LOGIC;7SHU04,INVERTER GATE,SOP,5P,6.   |        |
| DIC6    | AH13-10030L | IC-ASIC;-,TC6804AF,QFP,80P,COPY RPOTEC         |        |
| DIC7    | 0801-000885 | IC-CMOS LOGIC;7S04,INVERTER,SOP,5P,150MIL,SI   |        |
| DIC8    | 1201-000211 | IC-OP AMP;272A,SOP,8P,150MIL,DUAL,7.5V/M       |        |
| DIC9    | 0801-002115 | IC-CMOS LOGIC;7SH04F,INVERTER,SOP,5P,49.2MIL   |        |
| DL1     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| DL2     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DL3     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DL4     | 2703-000401 | INDUCTOR-SMD;1UH,10%,3.2X2.5X2.2MM             |        |
| DL5     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DL6     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DL7     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DL8     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DL9     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| DQ1     | 0501-000199 | TR-SMALL SIGNAL;2SC2714-Y,NPN,100MW,SOT-23,TP, |        |
| DR1     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| DR10    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| DR100   | 2007-000402 | R-CHIP;150OHM,5%,1/16W,DA,TP,1608              |        |
| DR101   | 2007-000729 | R-CHIP;300OHM,5%,1/16W,DA,TP,1608              |        |
| DR102   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR103   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR104   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR105   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR11    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| DR12    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| DR2     | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608              |        |
| DR24    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR25    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR27    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| DR28    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| DR29    | 2007-000072 | R-CHIP;47OHM,5%,1/16W,DA,TP,1608               |        |
| DR3     | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608              |        |
| DR30    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |

| Loc. No | Part No     | Description and Specification                    | Remark |
|---------|-------------|--------------------------------------------------|--------|
| DR35    | 2007-000120 | R-CHIP;680OHM,5%,1/16W,DA,TP,1608                |        |
| DR36    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| DR37    | 2007-000127 | R-CHIP;9.1KOHM,5%,1/16W,DA,TP,1608               |        |
| DR39    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| DR4     | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608                |        |
| DR40    | 2007-000129 | R-CHIP;27KOHM,5%,1/16W,DA,TP,1608                |        |
| DR41    | 2007-000134 | R-CHIP;33KOHM,5%,1/16W,DA,TP,1608                |        |
| DR42    | 2007-000079 | R-CHIP;1.8KOHM,5%,1/16W,DA,TP,1608               |        |
| DR43    | 2007-000109 | R-CHIP;1MOHM,5%,1/16W,DA,TP,1608                 |        |
| DR45    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| DR46    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| DR47    | 2007-000109 | R-CHIP;1MOHM,5%,1/16W,DA,TP,1608                 |        |
| DR48    | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608                 |        |
| DR49    | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608                 |        |
| DR5     | 2007-000127 | R-CHIP;9.1KOHM,5%,1/16W,DA,TP,1608               |        |
| DR50    | 2007-000120 | R-CHIP;680OHM,5%,1/16W,DA,TP,1608                |        |
| DR6     | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| DR7     | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608               |        |
| DR8     | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608               |        |
| DR9     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| DY1     | 2801-003255 | CRYSTAL-UNIT;33MHZ,20PPM,28-AAA,16PF,30OHM,      |        |
| DY2     | 2801-003348 | CRYSTAL-UNIT;27MHZ,20PPM,28-AAM,20PF,20OHM,      |        |
| F-CABI  | 3809-001025 | CABLE-FLAT;30V,80C,270MM,28P,1.25MM,UL289        |        |
| FLAT-C  | 3809-001024 | CABLE-FLAT;30V,80C,150MM,40P,1.25MM,UL289        |        |
| KC25    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC26    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC27    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| KC28    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC29    | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM                |        |
| KC30    | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM                |        |
| KC31    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC32    | 2203-000888 | C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,1608,-       |        |
| KC33    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| KC34    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC35    | 2401-002180 | C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM                |        |
| KC37    | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM                |        |
| KC39    | 2203-001703 | C-CERAMIC,CHIP;560PF,10%,50V,X7R,TP,1608,-       |        |
| KC40    | 2203-000140 | C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,1608,-,TP       |        |
| KC41    | 2203-000888 | C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,1608,-       |        |
| KC42    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| KC43    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC44    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| KC45    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KC46    | 2401-002180 | C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM                |        |
| KC48    | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM                |        |
| KC50    | 2203-001703 | C-CERAMIC,CHIP;560PF,10%,50V,X7R,TP,1608,-       |        |
| KC51    | 2203-000140 | C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,1608,-,TP       |        |
| KC52    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                     |        |
| KC53    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| KD10    | 0401-000008 | DIODE-SWITCHING;DAN217,80V,100MA,200MW,4NS,SOT   |        |
| KIC3    | 1002-000169 | IC-D/A CONVERTER;PCM1710U,16BIT,SOP,28P,-,ST,    |        |
| KIC4    | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M         |        |
| KIC5    | AH14-10004T | IC-ANALOG M/PLEXER;MC14053BD,SOP,TAPE 16P ANALOG |        |
| KL3     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| KL4     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |

| Loc. No | Part No     | Description and Specification                   | Remark |
|---------|-------------|-------------------------------------------------|--------|
| KL5     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| KL6     | 2007-000029 | R-CHIP;0OHM,5%,1/16W,DA,TP,2012                 |        |
| KR31A   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608               |        |
| KR35    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| KR39    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608               |        |
| KR40    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608               |        |
| KR41    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608               |        |
| KR42    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| KR44    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608              |        |
| KR45    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| KR48    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608               |        |
| KR49    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608               |        |
| KR50    | 2007-001240 | R-CHIP;910OHM,5%,1/16W,DA,TP,1608               |        |
| KR51    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| KR53    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608              |        |
| KR75    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                 |        |
| KR76    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608               |        |
| KR77    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608               |        |
| KR78    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608               |        |
| KR80    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                 |        |
| KR82    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| L101    | 3301-000325 | CORE-FERRITE BEAD;AB,3.2X2.5X1.3MM,-,-          |        |
| L4      | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| L6      | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G  |        |
| LC1     | 2203-001554 | C-CERAMIC,CHIP;1.8NF,10%,50V,X7R,TP,1608,-      |        |
| LC11    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LC12    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LC2     | 2203-001703 | C-CERAMIC,CHIP;560PF,10%,50V,X7R,TP,1608,-      |        |
| LC5     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LC6     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LC7     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LC8     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LC9     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| LIC1    | 0801-002146 | IC-CMOS LOGIC;7S86,X-OR GATE,SOP,5P,63MIL,SI    |        |
| LIC2    | 0801-002146 | IC-CMOS LOGIC;7S86,X-OR GATE,SOP,5P,63MIL,SI    |        |
| LIC3    | 1202-000143 | IC-VOLTAGE COMP.;75S393,SOP,5P,-,SINGLE,0V,-,PL |        |
| LIC4    | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M        |        |
| LIC6    | 0801-002145 | IC-CMOS LOGIC;7W74F,D FLIP-FLOP,SOP,8P,110MI    |        |
| LIC7    | 0801-002143 | IC-CMOS LOGIC;7S32,OR GATE,SOP,5P,49.3MIL,SI    |        |
| LIC8    | 0801-002144 | IC-CMOS LOGIC;7W04F,INVERTER,SOP,8P,122MIL,T    |        |
| LR1     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608               |        |
| LR10    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| LR11    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| LR12    | 2007-000098 | R-CHIP;56KOHM,5%,1/16W,DA,TP,1608               |        |
| LR14    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| LR16    | 2007-000965 | R-CHIP;5.1KOHM,5%,1/16W,DA,TP,1608              |        |
| LR17    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |
| LR2     | 2007-000098 | R-CHIP;56KOHM,5%,1/16W,DA,TP,1608               |        |
| LR3     | 2007-000094 | R-CHIP;22KOHM,5%,1/16W,DA,TP,1608               |        |
| LR4     | 2007-000098 | R-CHIP;56KOHM,5%,1/16W,DA,TP,1608               |        |
| LR5     | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608              |        |
| LR6     | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608              |        |
| LR7     | 2007-000123 | R-CHIP;1.5KOHM,5%,1/16W,DA,TP,1608              |        |
| LR8     | 2007-000259 | R-CHIP;1.6KOHM,5%,1/16W,DA,TP,1608              |        |
| LR9     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                |        |

| Loc. No | Part No     | Description and Specification                    | Remark |
|---------|-------------|--------------------------------------------------|--------|
| MC1     | 2203-001588 | C-CERAMIC,CHIP;18PF,5%,50V,CH,TP,1608,1.6MM      |        |
| MC10    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC11    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC12    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC13    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC14    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM    |        |
| MC15    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC16    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC18    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC19    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC2     | 2203-001588 | C-CERAMIC,CHIP;18PF,5%,50V,CH,TP,1608,1.6MM      |        |
| MC3     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC4     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC5     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC6     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC7     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MC9     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,    |        |
| MIC1    | 0903-001031 | IC-MICROCONTROLLER;93CS41,8BIT,FLAT,100P,-,20MHZ |        |
| MIC3    | 1106-000401 | IC-SRAM;681000,128KX8BIT,SOP,32P,525MI           |        |
| MIC4    | 0801-002207 | IC-CMOS LOGIC;74AC573,LATCH,SOP,20P,300MIL,O     |        |
| MIC5    | 1103-001048 | IC-EEPROM;24C02,256X8BIT,SOP,8P,150MIL,3         |        |
| MIC6    | 0801-000379 | IC-CMOS LOGIC;74HC00,NAND GATE,SOP,14P,150MI     |        |
| MIC8    | 0801-000885 | IC-CMOS LOGIC;7S04,INVERTER,SOP,5P,150MIL,SI     |        |
| MJP1    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| MJP20   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| MJP21   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| MJP24   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| MJP25   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| MJP4    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| MPL1    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| MPL2    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| MPL3    | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                  |        |
| MPL4    | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                  |        |
| MPL5    | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                  |        |
| MR1     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR10    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR11    | 2007-000109 | R-CHIP;1MOHM,5%,1/16W,DA,TP,1608                 |        |
| MR12    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR13    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| MR15    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608               |        |
| MR18    | 2007-000076 | R-CHIP;330OHM,5%,1/16W,DA,TP,1608                |        |
| MR19    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR2     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR20    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR21    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR22    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR23    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR24    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR25    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR26    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR27    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR28    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR3     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608               |        |
| MR31    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| MR32    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |

| Loc. No | Part No     | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| MR33    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR34    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR35    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR36    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR37    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR38    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR39    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR4     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MR40    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR41    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| MR42    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR43    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| MR44    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| MR45    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| MR46    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MR5     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MR6     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MR7     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MR8     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MR9     | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| MS1     | 3704-000472 | SOCKET-IC;32P,DIP,SN,2.54MM                    |        |
| MS2     | 3704-000272 | SOCKET-IC;40P,DIP,SN,2.54MM                    |        |
| MY1     | 2801-000199 | CRYSTAL-UNIT;20MHZ,50PPM,28-AAA,16PF,50OHM,    |        |
| OPT-JA  | 3707-001005 | CONNECTOR-OPTICAL;PLUG,SM,-,4.4/2.0MM          |        |
| PC1     | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2            |        |
| PC10    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| PC2     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| PC3     | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2            |        |
| PC4     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| PC5     | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2            |        |
| PC6     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| PC7     | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2            |        |
| PC8     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| PC9     | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2            |        |
| PCN1    | 3711-000736 | CONNECTOR-HEADER;BOX,18P,1R,2.5MM,BLACK,BRASS  |        |
| Q1      | 0501-002082 | TR-SMALL SIGNAL;HN1C01F,NPN,300MV,SC-74,TP,120 |        |
| Q101    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| Q102    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| Q103    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| Q104    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| Q2      | 0504-000126 | TR-DIGITAL;KSR1101,NPN,200MW,4.7K-4.7K,SO      |        |
| R1      | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608              |        |
| R101    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| R102    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| R103    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| R104    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| R105    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| R14     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| R18     | 2007-000458 | R-CHIP;18KOHM,5%,1/16W,DA,TP,1608              |        |
| R22     | 2007-000096 | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608              |        |
| R24     | 2007-000096 | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608              |        |
| R27     | 2007-000458 | R-CHIP;18KOHM,5%,1/16W,DA,TP,1608              |        |
| R29     | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608              |        |
| R31     | 2007-000096 | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608              |        |
| R33     | 2007-000096 | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608              |        |

| Loc. No | Part No     | Description and Specification                 | Remark |
|---------|-------------|-----------------------------------------------|--------|
| R38     | 2007-000458 | R-CHIP;18KOHM,5%,1/16W,DA,TP,1608             |        |
| R40     | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608             |        |
| R41     | 2007-000096 | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608             |        |
| R42     | 2007-000096 | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608             |        |
| R43     | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608            |        |
| R44     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| R45     | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608             |        |
| R46     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| R48     | 2007-000122 | R-CHIP;1.2KOHM,5%,1/16W,DA,TP,1608            |        |
| R49     | 2007-000708 | R-CHIP;3.9KOHM,1%,1/16W,DA,TP,1608            |        |
| R50     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| R51     | 2007-000088 | R-CHIP;7.5KOHM,5%,1/16W,DA,TP,1608            |        |
| R52     | 2007-000094 | R-CHIP;22KOHM,5%,1/16W,DA,TP,1608             |        |
| R54     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| R55     | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| R57     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| R60     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| R61     | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608             |        |
| R7      | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| RC1     | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| RC10    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC11    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC12    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC12A   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC13    | 2203-001697 | C-CERAMIC,CHIP;82PF,5%,50V,CH,TP,1608,1.6MM   |        |
| RC13A   | 2401-001022 | C-AL;3.3UF,20%,50V,GP,-,5X11,2MM              |        |
| RC14    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC15    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC16    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC17    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| RC18    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC19    | 2203-000308 | C-CERAMIC,CHIP;120PF,5%,50V,NPO,TP,1608,-     |        |
| RC2     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC20    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC21    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC21A   | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| RC22    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC22A   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC23    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC24    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC24A   | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| RC25    | 2203-001585 | C-CERAMIC,CHIP;180PF,5%,50V,CH,TP,1608,1.6MM  |        |
| RC26    | 2401-000419 | C-AL;10UF,20%,16V,GP,-,4X7,5                  |        |
| RC27    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| RC28    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| RC29    | 2203-000440 | C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,1608,-      |        |
| RC2A    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC3     | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| RC30A   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC30C   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC31    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| RC32    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| RC33    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| RC34    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| RC35    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |

| Loc. No | Part No     | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| RC36    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC37    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC38    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC39    | 2203-000440 | C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,1608,-       |        |
| RC4     | 2203-001609 | C-CERAMIC,CHIP;22NF,10%,16V,X7R,TP,1608,1.6MM  |        |
| RC40    | 2203-000440 | C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,1608,-       |        |
| RC41    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC50    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC50A   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC51    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC6     | 2203-001609 | C-CERAMIC,CHIP;22NF,10%,16V,X7R,TP,1608,1.6MM  |        |
| RC7     | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM              |        |
| RC8     | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5               |        |
| RC8A    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC9     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RC9A    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,  |        |
| RCA1    | 3722-001136 | JACK-RCA;6P,3.2MM,AU,R,G,B,-                   |        |
| RCA3    | 3722-001145 | JACK-RCA;6P/2C,3.2MM,AU,G/W/R,NO               |        |
| RCA5    | 3722-001134 | JACK-RCA;1P,3.2MM,AU,BLK,-                     |        |
| RCA8S   | 3722-001137 | JACK-RCA;2P,3.2MM,AU,BLACK,-                   |        |
| RIC1    | AH13-10030H | IC-ASIC;-,TA1236F,QFP,64P,RF IC                |        |
| RIC2    | AH13-10030J | IC-ASIC;-,TA1253FN,SSOP,24P,DPD IC             |        |
| RIC3    | 1201-001054 | IC-OP AMP;650,SOP,8P,-,SINGLE,-,PLASTIC,       |        |
| RL1     | 2703-000122 | INDUCTOR-SMD;10UH,10%,2.5X3.2X2MM              |        |
| RL10    | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RL10A   | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G |        |
| RL2     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RL3     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RL4     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RL7     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RL8     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RL9     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                |        |
| RQ1     | 0501-002034 | TR-SMALL SIGNAL;SS9012,PNP,-40V,-20V,-500MA,62 |        |
| RR10    | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608             |        |
| RR11    | 2007-001026 | R-CHIP;560KOHM,5%,1/16W,DA,TP,1608             |        |
| RR12A   | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| RR13A   | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608             |        |
| RR14    | 2007-000122 | R-CHIP;1.2KOHM,5%,1/16W,DA,TP,1608             |        |
| RR18    | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608             |        |
| RR18A   | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608             |        |
| RR18B   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| RR19    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| RR20    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| RR21    | 2007-000075 | R-CHIP;220OHM,5%,1/16W,DA,TP,1608              |        |
| RR22    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| RR23    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| RR24    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| RR25    | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608             |        |
| RR26    | 2007-000100 | R-CHIP;68KOHM,5%,1/16W,DA,TP,1608              |        |
| RR26A   | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| RR28    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| RR28A   | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608             |        |
| RR29    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                |        |
| RR3     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| RR30    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                |        |

| Loc. No | Part No     | Description and Specification                 | Remark |
|---------|-------------|-----------------------------------------------|--------|
| RR31    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| RR31A   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| RR33    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| RR34    | 2007-000093 | R-CHIP;20KOHM,5%,1/16W,DA,TP,1608             |        |
| RR35    | 2007-000130 | R-CHIP;39KOHM,5%,1/16W,DA,TP,1608             |        |
| RR36    | 2007-001010 | R-CHIP;51KOHM,5%,1/16W,DA,TP,1608             |        |
| RR36A   | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| RR37    | 2007-000100 | R-CHIP;68KOHM,5%,1/16W,DA,TP,1608             |        |
| RR38    | 2007-000097 | R-CHIP;47KOHM,5%,1/16W,DA,TP,1608             |        |
| RR38A   | 2007-000102 | R-CHIP;100KOHM,5%,1/16W,DA,TP,1608            |        |
| RR38B   | 2007-000129 | R-CHIP;27KOHM,5%,1/16W,DA,TP,1608             |        |
| RR38C   | 2007-001010 | R-CHIP;51KOHM,5%,1/16W,DA,TP,1608             |        |
| RR40    | 2007-001179 | R-CHIP;8.2KOHM,5%,1/16W,DA,TP,1608            |        |
| RR40A   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| RR41A   | 2007-000101 | R-CHIP;82KOHM,5%,1/16W,DA,TP,1608             |        |
| RR43    | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608             |        |
| RR45    | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608            |        |
| RR46    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| RR5     | 2007-000119 | R-CHIP;560OHM,5%,1/16W,DA,TP,1608             |        |
| RR50    | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608            |        |
| RR51    | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608            |        |
| RR53    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| RR6     | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| RR7     | 2007-000361 | R-CHIP;12OHM,5%,1/10W,DA,TP,2012              |        |
| SC1     | 2203-001703 | C-CERAMIC,CHIP;560PF,10%,50V,X7R,TP,1608,-    |        |
| SC10    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| SC11    | 2203-001656 | C-CERAMIC,CHIP;470PF,5%,50V,CH,TP,1608,1.6MM  |        |
| SC15    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC19    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| SC2     | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| SC20    | 2203-000440 | C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,1608,-      |        |
| SC21    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC22    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC23    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC24    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC25    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC25A   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC26A   | 2203-000888 | C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,1608,-    |        |
| SC27    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| SC28    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC28A   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC29    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC3     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC31    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC32    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC33    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC34    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC35    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| SC36    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| SC37    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| SC39    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| SC4     | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| SC40    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| SC41    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| SC42    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |

| Loc. No | Part No     | Description and Specification                   | Remark |
|---------|-------------|-------------------------------------------------|--------|
| SC43    | 2203-001588 | C-CERAMIC,CHIP;18PF,5%,50V,CH,TP,1608,1.6MM     |        |
| SC43A   | 2203-001609 | C-CERAMIC,CHIP;22NF,10%,16V,X7R,TP,1608,1.6MM   |        |
| SC44    | 2203-001588 | C-CERAMIC,CHIP;18PF,5%,50V,CH,TP,1608,1.6MM     |        |
| SC45    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC46    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC47    | 2203-000054 | C-CERAMIC,CHIP;15NF,0.1,50V,X7R,1608,-,TP       |        |
| SC48    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                |        |
| SC49    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC5     | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC50    | 2203-000726 | C-CERAMIC,CHIP;3.9NF,10%,50V,X7R,TP,1608,-      |        |
| SC50A   | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM   |        |
| SC51    | 2203-000726 | C-CERAMIC,CHIP;3.9NF,10%,50V,X7R,TP,1608,-      |        |
| SC52    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                |        |
| SC53    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC54    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC55    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC55A   | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC56    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC57    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC58    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC59    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                |        |
| SC5A    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC5B    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC5C    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC6     | 2203-001703 | C-CERAMIC,CHIP;560PF,10%,50V,X7R,TP,1608,-      |        |
| SC60    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC62    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC63    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC65    | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-       |        |
| SC67    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC69    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                |        |
| SC7     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC70    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC71    | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM   |        |
| SC72    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5                |        |
| SC73    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SC8     | 2203-001634 | C-CERAMIC,CHIP;33NF,10%,50V,X7R,TP,1608,1.6MM   |        |
| SC9     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608,   |        |
| SIC1    | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M        |        |
| SIC2    | BG13-10030A | IC-ASIC;SCR-730,SEC,SOP,24P,HALL CONTRBG13      |        |
| SIC4    | 1003-001083 | IC-MOTOR DRIVER;BA5924FP,SOP,28P,767MIL,SINGLE  |        |
| SIC5    | 1003-001044 | IC-MOTOR DRIVER;BA6840BFP,SOP,28P,292MIL,SINGL  |        |
| SIC6    | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M        |        |
| SIC6A   | 1202-000143 | IC-VOLTAGE COMP.;75S393,SOP,5P,-,SINGLE,0V,-,PL |        |
| SIC7    | AH13-10030G | IC-ASIC;-TC9420F,QFP,100P,DIGITAL SER           |        |
| SIC8    | 1201-000163 | IC-OP AMP;4560,SOP,8P,150MIL,DUAL,100V/M        |        |
| SIC9    | 0803-001040 | IC-TTL;74LS14,SCHMITT INVERTER,SOP,1            |        |
| SQ1     | 0505-000191 | FET-SILICON;2SK184Y,N,-,-,200MW,TO-92           |        |
| SQ11    | 0504-000128 | TR-DIGITAL;-NPN,200MW,22K-22KOHM,SOT-23,        |        |
| SQ12    | 0504-000128 | TR-DIGITAL;-NPN,200MW,22K-22KOHM,SOT-23,        |        |
| SQ13    | 0504-000128 | TR-DIGITAL;-NPN,200MW,22K-22KOHM,SOT-23,        |        |
| SQ14    | 0504-000128 | TR-DIGITAL;-NPN,200MW,22K-22KOHM,SOT-23,        |        |
| SQ2     | 0504-000128 | TR-DIGITAL;-NPN,200MW,22K-22KOHM,SOT-23,        |        |
| SQ2A    | 0504-000128 | TR-DIGITAL;-NPN,200MW,22K-22KOHM,SOT-23,        |        |
| SQ3     | 0504-000156 | TR-DIGITAL;KSR2103,PNP,200MW,22K-22K,SOT-       |        |

| Loc. No | Part No     | Description and Specification      | Remark |
|---------|-------------|------------------------------------|--------|
| SR1     | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608  |        |
| SR10    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608 |        |
| SR11    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608  |        |
| SR12    | 2007-000087 | R-CHIP;6.8KOHM,5%,1/16W,DA,TP,1608 |        |
| SR13    | 2007-000079 | R-CHIP;1.8KOHM,5%,1/16W,DA,TP,1608 |        |
| SR13A   | 2007-000079 | R-CHIP;1.8KOHM,5%,1/16W,DA,TP,1608 |        |
| SR13B   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| SR14    | 2007-000097 | R-CHIP;47KOHM,5%,1/16W,DA,TP,1608  |        |
| SR15    | 2007-000079 | R-CHIP;1.8KOHM,5%,1/16W,DA,TP,1608 |        |
| SR16    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608  |        |
| SR17    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| SR18    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608  |        |
| SR19    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608  |        |
| SR2     | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608  |        |
| SR20    | 2007-000106 | R-CHIP;220KOHM,5%,1/16W,DA,TP,1608 |        |
| SR21    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608 |        |
| SR22    | 2007-000107 | R-CHIP;470KOHM,5%,1/16W,DA,TP,1608 |        |
| SR23    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608 |        |
| SR24    | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608  |        |
| SR24A   | 2007-000123 | R-CHIP;1.5KOHM,5%,1/16W,DA,TP,1608 |        |
| SR25    | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608  |        |
| SR25A   | 2007-000123 | R-CHIP;1.5KOHM,5%,1/16W,DA,TP,1608 |        |
| SR26    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608 |        |
| SR27    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608  |        |
| SR27A   | 2007-000133 | R-CHIP;330KOHM,5%,1/16W,DA,TP,1608 |        |
| SR28A   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| SR28B   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| SR28C   | 2007-001179 | R-CHIP;8.2KOHM,5%,1/16W,DA,TP,1608 |        |
| SR29    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| SR29A   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| SR3     | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608  |        |
| SR30    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| SR30A   | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608 |        |
| SR30B   | 2007-000127 | R-CHIP;9.1KOHM,5%,1/16W,DA,TP,1608 |        |
| SR31    | 2007-000101 | R-CHIP;82KOHM,5%,1/16W,DA,TP,1608  |        |
| SR32    | 2007-000101 | R-CHIP;82KOHM,5%,1/16W,DA,TP,1608  |        |
| SR33    | 2007-000087 | R-CHIP;6.8KOHM,5%,1/16W,DA,TP,1608 |        |
| SR34    | 2007-000450 | R-CHIP;180OHM,5%,1/16W,DA,TP,1608  |        |
| SR34A   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| SR34B   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| SR35    | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608 |        |
| SR36    | 2007-000450 | R-CHIP;180OHM,5%,1/16W,DA,TP,1608  |        |
| SR36A   | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608  |        |
| SR36B   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| SR37    | 2007-007157 | R-CHIP;1OHM,5%,1/4W,DA,TP,3216     |        |
| SR37A   | 2007-007157 | R-CHIP;1OHM,5%,1/4W,DA,TP,3216     |        |
| SR38    | 2007-000458 | R-CHIP;18KOHM,5%,1/16W,DA,TP,1608  |        |
| SR39    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608 |        |
| SR4     | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608  |        |
| SR40    | 2007-000100 | R-CHIP;68KOHM,5%,1/16W,DA,TP,1608  |        |
| SR41    | 2007-000091 | R-CHIP;12KOHM,5%,1/16W,DA,TP,1608  |        |
| SR42    | 2007-000086 | R-CHIP;5.6KOHM,5%,1/16W,DA,TP,1608 |        |
| SR43    | 2007-000458 | R-CHIP;18KOHM,5%,1/16W,DA,TP,1608  |        |
| SR44    | 2007-000099 | R-CHIP;62KOHM,5%,1/16W,DA,TP,1608  |        |
| SR44A   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |

| Loc. No | Part No     | Description and Specification                 | Remark |
|---------|-------------|-----------------------------------------------|--------|
| SR45    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR49    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608            |        |
| SR5     | 2007-000129 | R-CHIP;27KOHM,5%,1/16W,DA,TP,1608             |        |
| SR50    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR51    | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608             |        |
| SR52    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| SR53    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR54    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR55    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| SR56    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR56A   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| SR57    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR58    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| SR59    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608            |        |
| SR6     | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608            |        |
| SR60    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608            |        |
| SR61A   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR61B   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| SR63    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| SR63A   | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| SR68    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608               |        |
| SR7     | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608            |        |
| SR70    | 2007-000134 | R-CHIP;33KOHM,5%,1/16W,DA,TP,1608             |        |
| SR71    | 2007-000092 | R-CHIP;15KOHM,5%,1/16W,DA,TP,1608             |        |
| SR73    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR74    | 2007-000065 | R-CHIP;2.2MOHM,5%,1/16W,DA,TP,1608            |        |
| SR77    | 2007-000133 | R-CHIP;330KOHM,5%,1/16W,DA,TP,1608            |        |
| SR78    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608             |        |
| SR79    | 2007-000097 | R-CHIP;47KOHM,5%,1/16W,DA,TP,1608             |        |
| SR8     | 2007-000081 | R-CHIP;2.7KOHM,5%,1/16W,DA,TP,1608            |        |
| SR80    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR81    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR82    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR83    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR84    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR85    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR89    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR9     | 2007-000129 | R-CHIP;27KOHM,5%,1/16W,DA,TP,1608             |        |
| SR90    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR91    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR92    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR93    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608             |        |
| SR94    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608            |        |
| SR95    | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608            |        |
| SR96    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SR97    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608              |        |
| SUPER   | 3722-001133 | JACK-DIN;4P,-,NI,BLK,-                        |        |
| SX1     | 2801-003256 | CRYSTAL-UNIT;16.9344MHZ,20PPM,28-AAA,18PF,4   |        |
| VC1     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC10    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC100   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC103   | 2401-000778 | C-AL;220UF,20%,10V,GP,-,6.3X11,2.5M           |        |
| VC104   | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC105   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC107   | 2203-001609 | C-CERAMIC,CHIP;22NF,10%,16V,X7R,TP,1608,1.6MM |        |

| Loc. No | Part No     | Description and Specification                 | Remark |
|---------|-------------|-----------------------------------------------|--------|
| VC108   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC109   | 2203-000440 | C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,1608,-      |        |
| VC11    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC110   | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM             |        |
| VC111   | 2203-000531 | C-CERAMIC,CHIP;2.7NF,10%,50V,X7R,TP,1608,-    |        |
| VC112   | 2401-001912 | C-AL;1UF,20%,50V,GP,BK,5X11MM,2MM             |        |
| VC113   | 2203-001559 | C-CERAMIC,CHIP;100PF,5%,50V,NPO,TP,1608,1.6MM |        |
| VC114   | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC115   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC12    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC122   | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC123   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC124   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC125   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC126   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC127   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC128   | 2203-000257 | C-CERAMIC,CHIP;10NF,10%,50V,X7R,TP,1608,-     |        |
| VC129   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC13    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC131   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC132   | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2           |        |
| VC133   | 2401-001895 | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2           |        |
| VC135   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC136   | 2203-000384 | C-CERAMIC,CHIP;15PF,5%,50V,NPO,TP,1608,-      |        |
| VC137   | 2203-000384 | C-CERAMIC,CHIP;15PF,5%,50V,NPO,TP,1608,-      |        |
| VC138   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC139   | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC14    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC15    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC16    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC17    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC18    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC19    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC2     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC20    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC21    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC22    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC23    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC24    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC25    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC26    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC28    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC29    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC3     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC30    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC31    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC32    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC34    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC35    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC36    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC37    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC38    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC39    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC4     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC40    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |

| Loc. No | Part No     | Description and Specification                 | Remark |
|---------|-------------|-----------------------------------------------|--------|
| VC41    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC43    | 2401-000907 | C-AL;22UF,20%,16V,GP,-,5X11,2MM               |        |
| VC44    | 2401-000778 | C-AL;220UF,20%,10V,GP,-,6.3X11,2.5M           |        |
| VC47    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC48    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC5     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC50    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC51    | 2203-005083 | C-CERAMIC,CHIP;220NF,10%,50V,X7R,TP,1608,-    |        |
| VC52    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC53    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC54    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC55    | 2401-000778 | C-AL;220UF,20%,10V,GP,-,6.3X11,2.5M           |        |
| VC56    | 2401-000778 | C-AL;220UF,20%,10V,GP,-,6.3X11,2.5M           |        |
| VC57    | 2401-000778 | C-AL;220UF,20%,10V,GP,-,6.3X11,2.5M           |        |
| VC58    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC59    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC6     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC7     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC71    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC72    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC73    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC74    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC76    | 2401-000778 | C-AL;220UF,20%,10V,GP,-,6.3X11,2.5M           |        |
| VC79    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC8     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC80    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC83    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC84    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC85    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC88    | 2203-001609 | C-CERAMIC,CHIP;22NF,10%,16V,X7R,TP,1608,1.6MM |        |
| VC89    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC9     | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC90    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC91    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC93    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC94    | 2203-001556 | C-CERAMIC,CHIP;100NF,+80-20%,25V,Y5V,TP,1608, |        |
| VC95    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VC99    | 2401-001975 | C-AL;47UF,20%,16V,GP,TP,5X11MM,5              |        |
| VCN11   | 3708-001086 | CONNECTOR-FPC/FC/PIC;28P,1.25MM,STRAIGHT,SN   |        |
| VCN14   | AH37-20001U | JACK;M1795 D3.5,-                             |        |
| VFLT1   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT10  | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT2   | 2909-001022 | FILTER-LC;-,-,0~+7.5MHZ,4.5DB,TP,1.5~4.5DB    |        |
| VFLT3   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT4   | 2909-001038 | FILTER-LC;0.1MHZ,-,1DB,TP,3+-2.5DB/+7.5M      |        |
| VFLT5   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT6   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT7   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT8   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VFLT9   | 2901-001025 | FILTER-EMI SMD;25V,200MA,-,-,3.2X1.6X1.8,TP   |        |
| VIC1    | 1204-001196 | IC-DECODER;DVD-1,QFP,208P,-,PLASTIC,5V,1.     |        |
| VIC10   | 0801-002166 | IC-CMOS LOGIC;7SHU04,INVERTER GATE,SOP,5P,6.  |        |
| VIC12   | 0801-002096 | IC-CMOS LOGIC;7SH08,AND GATE,SOP,5P,110MIL,S  |        |
| VIC14   | 0801-002097 | IC-CMOS LOGIC;7SET08,AND GATE,SOP,5P,110MIL,  |        |
| VIC2    | 1102-001042 | IC-EPROM;27C4096,256KX16BIT,DIP,40P,600       |        |

| Loc. No | Part No     | Description and Specification                    | Remark |
|---------|-------------|--------------------------------------------------|--------|
| VIC3    | 1105-001009 | IC-DRAM;416C254,256KX16BIT,SOJ,40P,102           |        |
| VIC31   | 1204-001197 | IC-ENCODER;STV0119,SOP,28P,291MIL,PLASTIC        |        |
| VIC32   | AH14-10004T | IC-ANALOG M/PLEXER;MC14053BD,SOP,TAPE 16P ANALOG |        |
| VIC33   | AC14-12012B | IC;BA7046F-T1,SOP,-                              |        |
| VIC37   | 0801-000885 | IC-CMOS LOGIC;7S04,INVERTER,SOP,5P,150MIL,SI     |        |
| VIC4    | 1105-001009 | IC-DRAM;416C254,256KX16BIT,SOJ,40P,102           |        |
| VIC5    | 1105-001009 | IC-DRAM;416C254,256KX16BIT,SOJ,40P,102           |        |
| VIC6    | 1105-001009 | IC-DRAM;416C254,256KX16BIT,SOJ,40P,102           |        |
| VIC7    | 1105-001009 | IC-DRAM;416C254,256KX16BIT,SOJ,40P,102           |        |
| VIC8    | 0801-002206 | IC-CMOS LOGIC;74HC157,MULTIPLEXER,SOP,16P,15     |        |
| VIC9    | 0801-002206 | IC-CMOS LOGIC;74HC157,MULTIPLEXER,SOP,16P,15     |        |
| VJP2    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| VL1     | 2007-000029 | R-CHIP;0OHM,5%,1/10W,DA,TP,2012                  |        |
| VL11    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL12    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL14    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL15    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL16    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL17    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL19    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL2     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL20    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL21    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL23    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL24    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL25    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL26    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL27    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL28    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL29    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL3     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL30    | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL4     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL6     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL7     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL8     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VL9     | 3301-000319 | CORE-FERRITE BEAD;AB,2.0X1.25X0.9MM,1000,3000G   |        |
| VQ1     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ10    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ11    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ12    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-   |        |
| VQ13    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ14    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ15    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ16    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-   |        |
| VQ17    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ18    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ19    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ2     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ20    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-   |        |
| VQ21    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ22    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ24    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-   |        |
| VQ26    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |
| VQ27    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP,   |        |

| Loc. No | Part No     | Description and Specification                  | Remark |
|---------|-------------|------------------------------------------------|--------|
| VQ28    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ29    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ3     | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ30    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ31    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ32    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ35    | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ36    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ37    | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ38    | 0501-000616 | TR-SMALL SIGNAL;KSC2328A-Y,NPN,1W,TO-92L,TP,16 |        |
| VQ4     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ5     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ6     | 0501-000314 | TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90- |        |
| VQ7     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ8     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VQ9     | 0501-000341 | TR-SMALL SIGNAL;KSC1623-L,NPN,200MW,SOT-23,TP, |        |
| VR1     | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608             |        |
| VR10    | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608             |        |
| VR100   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR101   | 2007-001167 | R-CHIP;75OHM,5%,1/16W,DA,TP,1608               |        |
| VR103   | 2007-001167 | R-CHIP;75OHM,5%,1/16W,DA,TP,1608               |        |
| VR105   | 2007-001167 | R-CHIP;75OHM,5%,1/16W,DA,TP,1608               |        |
| VR106   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR109   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR11    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| VR110   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR111   | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| VR112   | 2007-000107 | R-CHIP;470KOHM,5%,1/16W,DA,TP,1608             |        |
| VR113   | 2007-000103 | R-CHIP;120KOHM,5%,1/16W,DA,TP,1608             |        |
| VR114   | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608              |        |
| VR115   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR119   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR12    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR120   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR121   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR122   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR123   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR124   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR125   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR126   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR127   | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| VR128   | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608             |        |
| VR129   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR13    | 2007-000572 | R-CHIP;220OHM,5%,1/10W,DA,TP,2012              |        |
| VR14    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR15    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR16    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR17    | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608             |        |
| VR18    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                |        |
| VR19    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608              |        |
| VR2     | 2007-000121 | R-CHIP;820OHM,5%,1/16W,DA,TP,1608              |        |
| VR20    | 2007-000822 | R-CHIP;390OHM,5%,1/10W,DA,TP,2012              |        |
| VR200   | 2007-000822 | R-CHIP;390OHM,5%,1/10W,DA,TP,2012              |        |
| VR201   | 2007-000575 | R-CHIP;220OHM,5%,1/8W,DA,TP,3216               |        |
| VR204   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608               |        |

| Loc. No | Part No     | Description and Specification      | Remark |
|---------|-------------|------------------------------------|--------|
| VR205   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR206   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR207   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR208   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR209   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR21    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR210   | 2007-000084 | R-CHIP;4.7KOHM,5%,1/16W,DA,TP,1608 |        |
| VR211   | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR212   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR213   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR214   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR215   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR216   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR217   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR218   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR219   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR22    | 2007-000121 | R-CHIP;820OHM,5%,1/16W,DA,TP,1608  |        |
| VR220   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR221   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR222   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR223   | 2007-000113 | R-CHIP;33OHM,5%,1/16W,DA,TP,1608   |        |
| VR224   | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR225   | 2007-000124 | R-CHIP;2.2KOHM,5%,1/16W,DA,TP,1608 |        |
| VR23    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR24    | 2007-001657 | R-CHIP;240OHM,1%,1/10W,DA,TP,2012  |        |
| VR25    | 2007-000539 | R-CHIP;200OHM,5%,1/16W,DA,TP,1608  |        |
| VR27    | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608  |        |
| VR28    | 2007-000572 | R-CHIP;220OHM,5%,1/10W,DA,TP,2012  |        |
| VR29    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR3     | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR30    | 2007-001167 | R-CHIP;75OHM,5%,1/16W,DA,TP,1608   |        |
| VR31    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608  |        |
| VR32    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR33    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR34    | 2007-000077 | R-CHIP;470OHM,5%,1/16W,DA,TP,1608  |        |
| VR35    | 2007-000822 | R-CHIP;390OHM,5%,1/10W,DA,TP,2012  |        |
| VR36    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR37    | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608 |        |
| VR38    | 2007-000070 | R-CHIP;0OHM,5%,1/16W,DA,TP,1608    |        |
| VR39    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR4     | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR40    | 2007-000121 | R-CHIP;820OHM,5%,1/16W,DA,TP,1608  |        |
| VR41    | 2007-000122 | R-CHIP;1.2KOHM,5%,1/16W,DA,TP,1608 |        |
| VR42    | 2007-000122 | R-CHIP;1.2KOHM,5%,1/16W,DA,TP,1608 |        |
| VR43    | 2007-001657 | R-CHIP;240OHM,1%,1/10W,DA,TP,2012  |        |
| VR44    | 2007-000539 | R-CHIP;200OHM,5%,1/16W,DA,TP,1608  |        |
| VR46    | 2007-000572 | R-CHIP;220OHM,5%,1/10W,DA,TP,2012  |        |
| VR47    | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR48    | 2007-000090 | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608  |        |
| VR49    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR5     | 2007-000074 | R-CHIP;100OHM,5%,1/16W,DA,TP,1608  |        |
| VR50    | 2007-000822 | R-CHIP;390OHM,5%,1/10W,DA,TP,2012  |        |
| VR51    | 2007-000078 | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608   |        |
| VR52    | 2007-000120 | R-CHIP;680OHM,5%,1/16W,DA,TP,1608  |        |
| VR53    | 2007-000082 | R-CHIP;3.3KOHM,5%,1/16W,DA,TP,1608 |        |


| Loc. No   | Part No            | Description and Specification                    | Remark |
|-----------|--------------------|--------------------------------------------------|--------|
| VR54      | 2007-000070        | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| VR55      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR56      | 2007-001657        | R-CHIP;240OHM,1%,1/10W,DA,TP,2012                |        |
| VR57      | 2007-000539        | R-CHIP;200OHM,5%,1/16W,DA,TP,1608                |        |
| VR59      | 2007-000121        | R-CHIP;820OHM,5%,1/16W,DA,TP,1608                |        |
| VR6       | 2007-001167        | R-CHIP;75OHM,5%,1/16W,DA,TP,1608                 |        |
| VR60      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR61      | 2007-000572        | R-CHIP;220OHM,5%,1/10W,DA,TP,2012                |        |
| VR62      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR63      | 2007-001167        | R-CHIP;75OHM,5%,1/16W,DA,TP,1608                 |        |
| VR64      | 2007-000078        | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| VR65      | 2007-000078        | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| VR66      | 2007-000078        | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| VR67      | 2007-000079        | R-CHIP;1.8KOHM,5%,1/16W,DA,TP,1608               |        |
| VR68      | 2007-000076        | R-CHIP;330OHM,5%,1/16W,DA,TP,1608                |        |
| VR69      | 2007-000070        | R-CHIP;0OHM,5%,1/16W,DA,TP,1608                  |        |
| VR7       | 2007-001657        | R-CHIP;240OHM,1%,1/10W,DA,TP,2012                |        |
| VR70      | 2007-000090        | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608                |        |
| VR72      | 2007-000965        | R-CHIP;5.1KOHM,5%,1/16W,DA,TP,1608               |        |
| VR74      | 2007-000076        | R-CHIP;330OHM,5%,1/16W,DA,TP,1608                |        |
| VR75      | 2007-000096        | R-CHIP;30KOHM,5%,1/16W,DA,TP,1608                |        |
| VR76      | 2007-000120        | R-CHIP;680OHM,5%,1/16W,DA,TP,1608                |        |
| VR77      | 2007-000079        | R-CHIP;1.8KOHM,5%,1/16W,DA,TP,1608               |        |
| VR78      | 2007-001010        | R-CHIP;51KOHM,5%,1/16W,DA,TP,1608                |        |
| VR8       | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR80      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR81      | 2007-000539        | R-CHIP;200OHM,5%,1/16W,DA,TP,1608                |        |
| VR83      | 2007-000090        | R-CHIP;10KOHM,5%,1/16W,DA,TP,1608                |        |
| VR84      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR85      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR86      | 2007-001167        | R-CHIP;75OHM,5%,1/16W,DA,TP,1608                 |        |
| VR87      | 2007-000120        | R-CHIP;680OHM,5%,1/16W,DA,TP,1608                |        |
| VR88      | 2007-000078        | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| VR9       | 2007-000539        | R-CHIP;200OHM,5%,1/16W,DA,TP,1608                |        |
| VR90      | 2007-000509        | R-CHIP;2.4KOHM,1%,1/16W,DA,TP,1608               |        |
| VR91      | 2007-001442        | R-CHIP;10OHM,5%,1/16W,DA,TP,1608                 |        |
| VR92      | 2007-000078        | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| VR93      | 2007-000078        | R-CHIP;1KOHM,5%,1/16W,DA,TP,1608                 |        |
| VR94      | 2007-000120        | R-CHIP;680OHM,5%,1/16W,DA,TP,1608                |        |
| VR95      | 2007-000074        | R-CHIP;100OHM,5%,1/16W,DA,TP,1608                |        |
| VR96      | 2007-000570        | R-CHIP;220OHM,1%,1/16W,DA,TP,1608                |        |
| VR97      | 2007-000570        | R-CHIP;220OHM,1%,1/16W,DA,TP,1608                |        |
| VR98      | 2007-000570        | R-CHIP;220OHM,1%,1/16W,DA,TP,1608                |        |
| VR99      | 2007-000570        | R-CHIP;220OHM,1%,1/16W,DA,TP,1608                |        |
| VY1       | 2801-003366        | CRYSTAL-UNIT;30MHZ,50PPM,28-AAM,20PF,60OHM,      |        |
| VZD1      | B4106-0230         | DIODE-ZENER,CHIP;UDZ3.9B-TE17 3.89/4.16V 5MA T   |        |
| <b>29</b> | <b>AH90-10727U</b> | <b>ASSY- PCB FRONT;DVD858V,CHN</b>               |        |
| FC1       | 2401-000907        | C-AL;22UF,20%,16V,GP,-,5X11,2MM                  |        |
| FC10      | 2202-000780        | C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5V,TP,3.5 |        |
| FC12      | 2401-001895        | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2              |        |
| FC13      | 2202-000780        | C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5V,TP,3.5 |        |
| FC14      | 2202-000780        | C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5V,TP,3.5 |        |
| FC15      | 2401-001895        | C-AL;100UF,20%,16V,GP,BK,6.3X11MM,2              |        |

| Loc. No | Part No      | Description and Specification                    | Remark |
|---------|--------------|--------------------------------------------------|--------|
| FC2     | 2202-000161  | C-CERAMIC,MLC-AXIAL;15PF,5%,50V,NPO,TP,2.5X4.3,- |        |
| FC3     | 2202-000161  | C-CERAMIC,MLC-AXIAL;15PF,5%,50V,NPO,TP,2.5X4.3,- |        |
| FC4     | 2202-000780  | C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5V,TP,3.5 |        |
| FC5     | 2401-001511  | C-AL;47UF,20%,16V,GP,-,6X7,5                     |        |
| FC6     | 2202-000780  | C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5V,TP,3.5 |        |
| FC7     | 2202-000780  | C-CERAMIC,MLC-AXIAL;100NF,+80-20%,50V,Y5V,TP,3.5 |        |
| FC8     | 2401-001511  | C-AL;47UF,20%,16V,GP,-,6X7,5                     |        |
| FC9     | 2401-001572  | C-AL;47UF,20%,50V,GP,-,6.3X11,2.5MM              |        |
| FD10    | 0401-000101  | DIODE-SWITCHING;1N4148,100V,200MA,500MW,4NS,DO   |        |
| FD5     | 0601-000218  | LED;INVERTER,RED,3MM,650NM                       |        |
| FD6     | 0401-000101  | DIODE-SWITCHING;1N4148,100V,200MA,500MW,4NS,DO   |        |
| FD7     | 0401-000101  | DIODE-SWITCHING;1N4148,100V,200MA,500MW,4NS,DO   |        |
| FD8     | 0401-000101  | DIODE-SWITCHING;1N4148,100V,200MA,500MW,4NS,DO   |        |
| FD9     | 0403-000551  | DIODE-ZENER;MTZ3.9B,3.9V,3.89-4.16V,500MW,       |        |
| FIC1    | AH11-10002F  | IC-MASK ROM;LC86P6232,-,DIP                      |        |
| FIC2    | 1203-001252  | IC-VOL. DETECTOR;7545,TO-92,3P,-,PLASTIC,-,200M  |        |
| FIC3    | AH07-20045K  | VF-DISPLAY;SVA-11MM08,14SEG,26X107.5MM,DV        |        |
| FIC4    | AH59-60001B  | REMOCON-MODULE;RC-38S2S 12MM,CD22R MESH,-,-,-    |        |
| FJP1    | 3708-001083  | CONNECTOR-FPC/FC/PIC;28P,1.25MM,ANGLE,SN         |        |
| FL1     | 2701-000114  | INDUCTOR-AXIAL;10UH,10%,2.5X3.4MM                |        |
| FLT-CU  | AH69-22001A  | CUSHION-FLT;-EVA SPONGE,50,12,T2,60,DVD-8        |        |
| FR10    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR11    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR12    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR13    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR14    | Do not order | WIRE-NO SHEATH CU;SPCW,300V,52.4MM,1/0.5MM,-,-   | S.N.A  |
| FR15    | Do not order | WIRE-NO SHEATH CU;SPCW,300V,52.4MM,1/0.5MM,-,-   | S.N.A  |
| FR16    | 2001-000027  | R-CARBON;100OHM,5%,1/4W,AA,TP,2.4X6.4MM          |        |
| FR17    | 2001-000027  | R-CARBON;100OHM,5%,1/4W,AA,TP,2.4X6.4MM          |        |
| FR18    | 2001-000449  | R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| FR19    | 2001-000449  | R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| FR20    | 2001-000449  | R-CARBON;2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| FR21    | 2001-000435  | R-CARBON;1MOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR23    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR24    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR25    | 2001-000780  | R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR26    | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR27    | 2001-000591  | R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| FR28    | 2001-000591  | R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| FR29    | 2001-000591  | R-CARBON;3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M          |        |
| FR30    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR31    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR32    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR33    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR34    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR43    | 2001-000793  | R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR44    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR45    | 2001-000429  | R-CARBON;1KOHM,5%,1/8W,AA,TP,1.8X3.2MM           |        |
| FR5     | 2001-000515  | R-CARBON;220OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR6     | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR7     | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR8     | 2001-000281  | R-CARBON;100OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FR9     | 2001-000780  | R-CARBON;470OHM,5%,1/8W,AA,TP,1.8X3.2MM          |        |
| FSW1    | 3404-001008  | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D       |        |
| FSW2    | 3404-001008  | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D       |        |

| Loc. No    | Part No            | Description and Specification                   | Remark |
|------------|--------------------|-------------------------------------------------|--------|
| FSW3       | 3404-001008        | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D      |        |
| FSW4       | 3404-001008        | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D      |        |
| FSW5       | 3404-001008        | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D      |        |
| FSW6       | 3404-001008        | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D      |        |
| FSW7       | 3404-001008        | SWITCH-TACT;12V,20MA,160+-50,6X7.9X3.5MM,D      |        |
| FY1        | 2802-000108        | RESONATOR-CERAMIC;12MHZ,0.5%,BK,10.0X5.0X10.0MM |        |
| HOLDER     | 1EDA1-008-212      | HOLDER FLT ABS BLK;CD-800                       |        |
| <b>REM</b> | <b>AH59-10087F</b> | <b>REMOCON-ASSY;-,-,-,48,DVD905/SEA,S.S</b>     |        |
|            | AH09-10062J        | IC-MCH ; KS56C401-72, DVD705/S,32P,SOP,-        |        |
|            | 0501-000592        | TR-SMALL SIGNAL;2SD1781K-QR,NPN,200MW,SOT-23,T  |        |
|            | B1283-0028         | RESONATOR-CERAMIC;910KHZ CSB910JB BEND J        |        |
|            | AH64-50327A        | DOOR-BATTERY;-;ABS94,HB,T2,L71 W60 H18,D/GR     |        |


## MEMO

# 8. Block Diagram

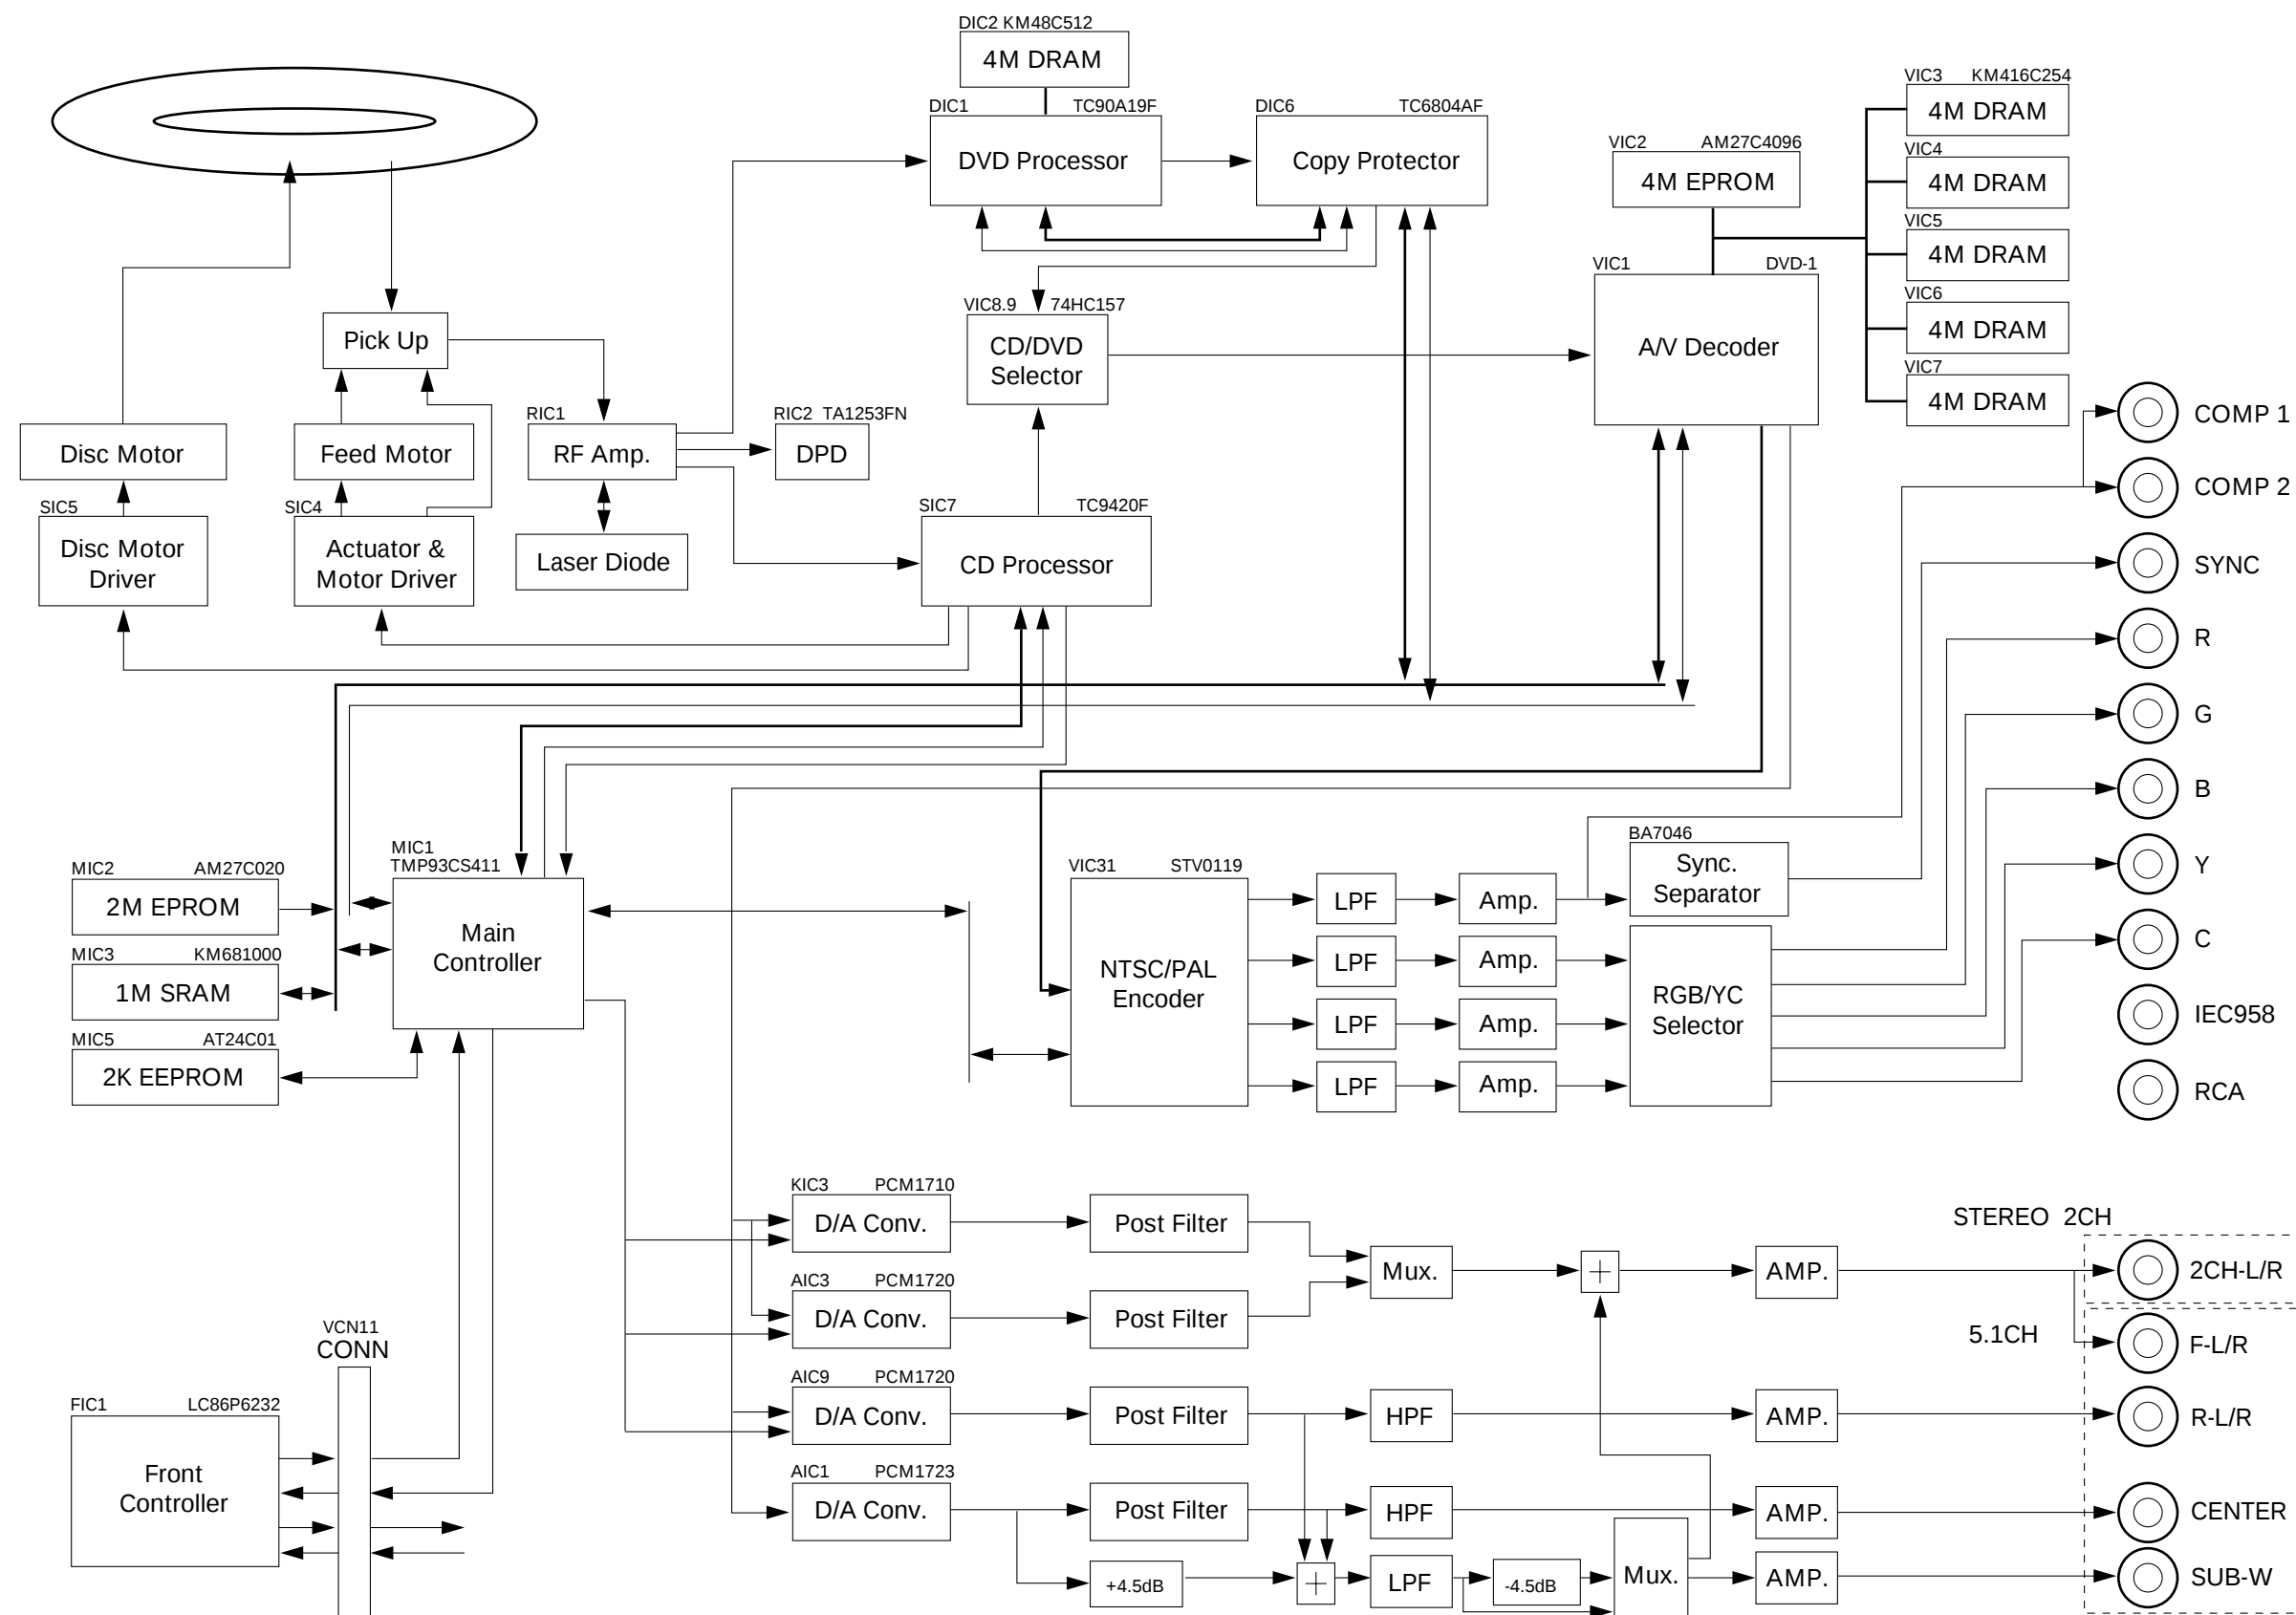

MEMO

10. Wiring Diagram

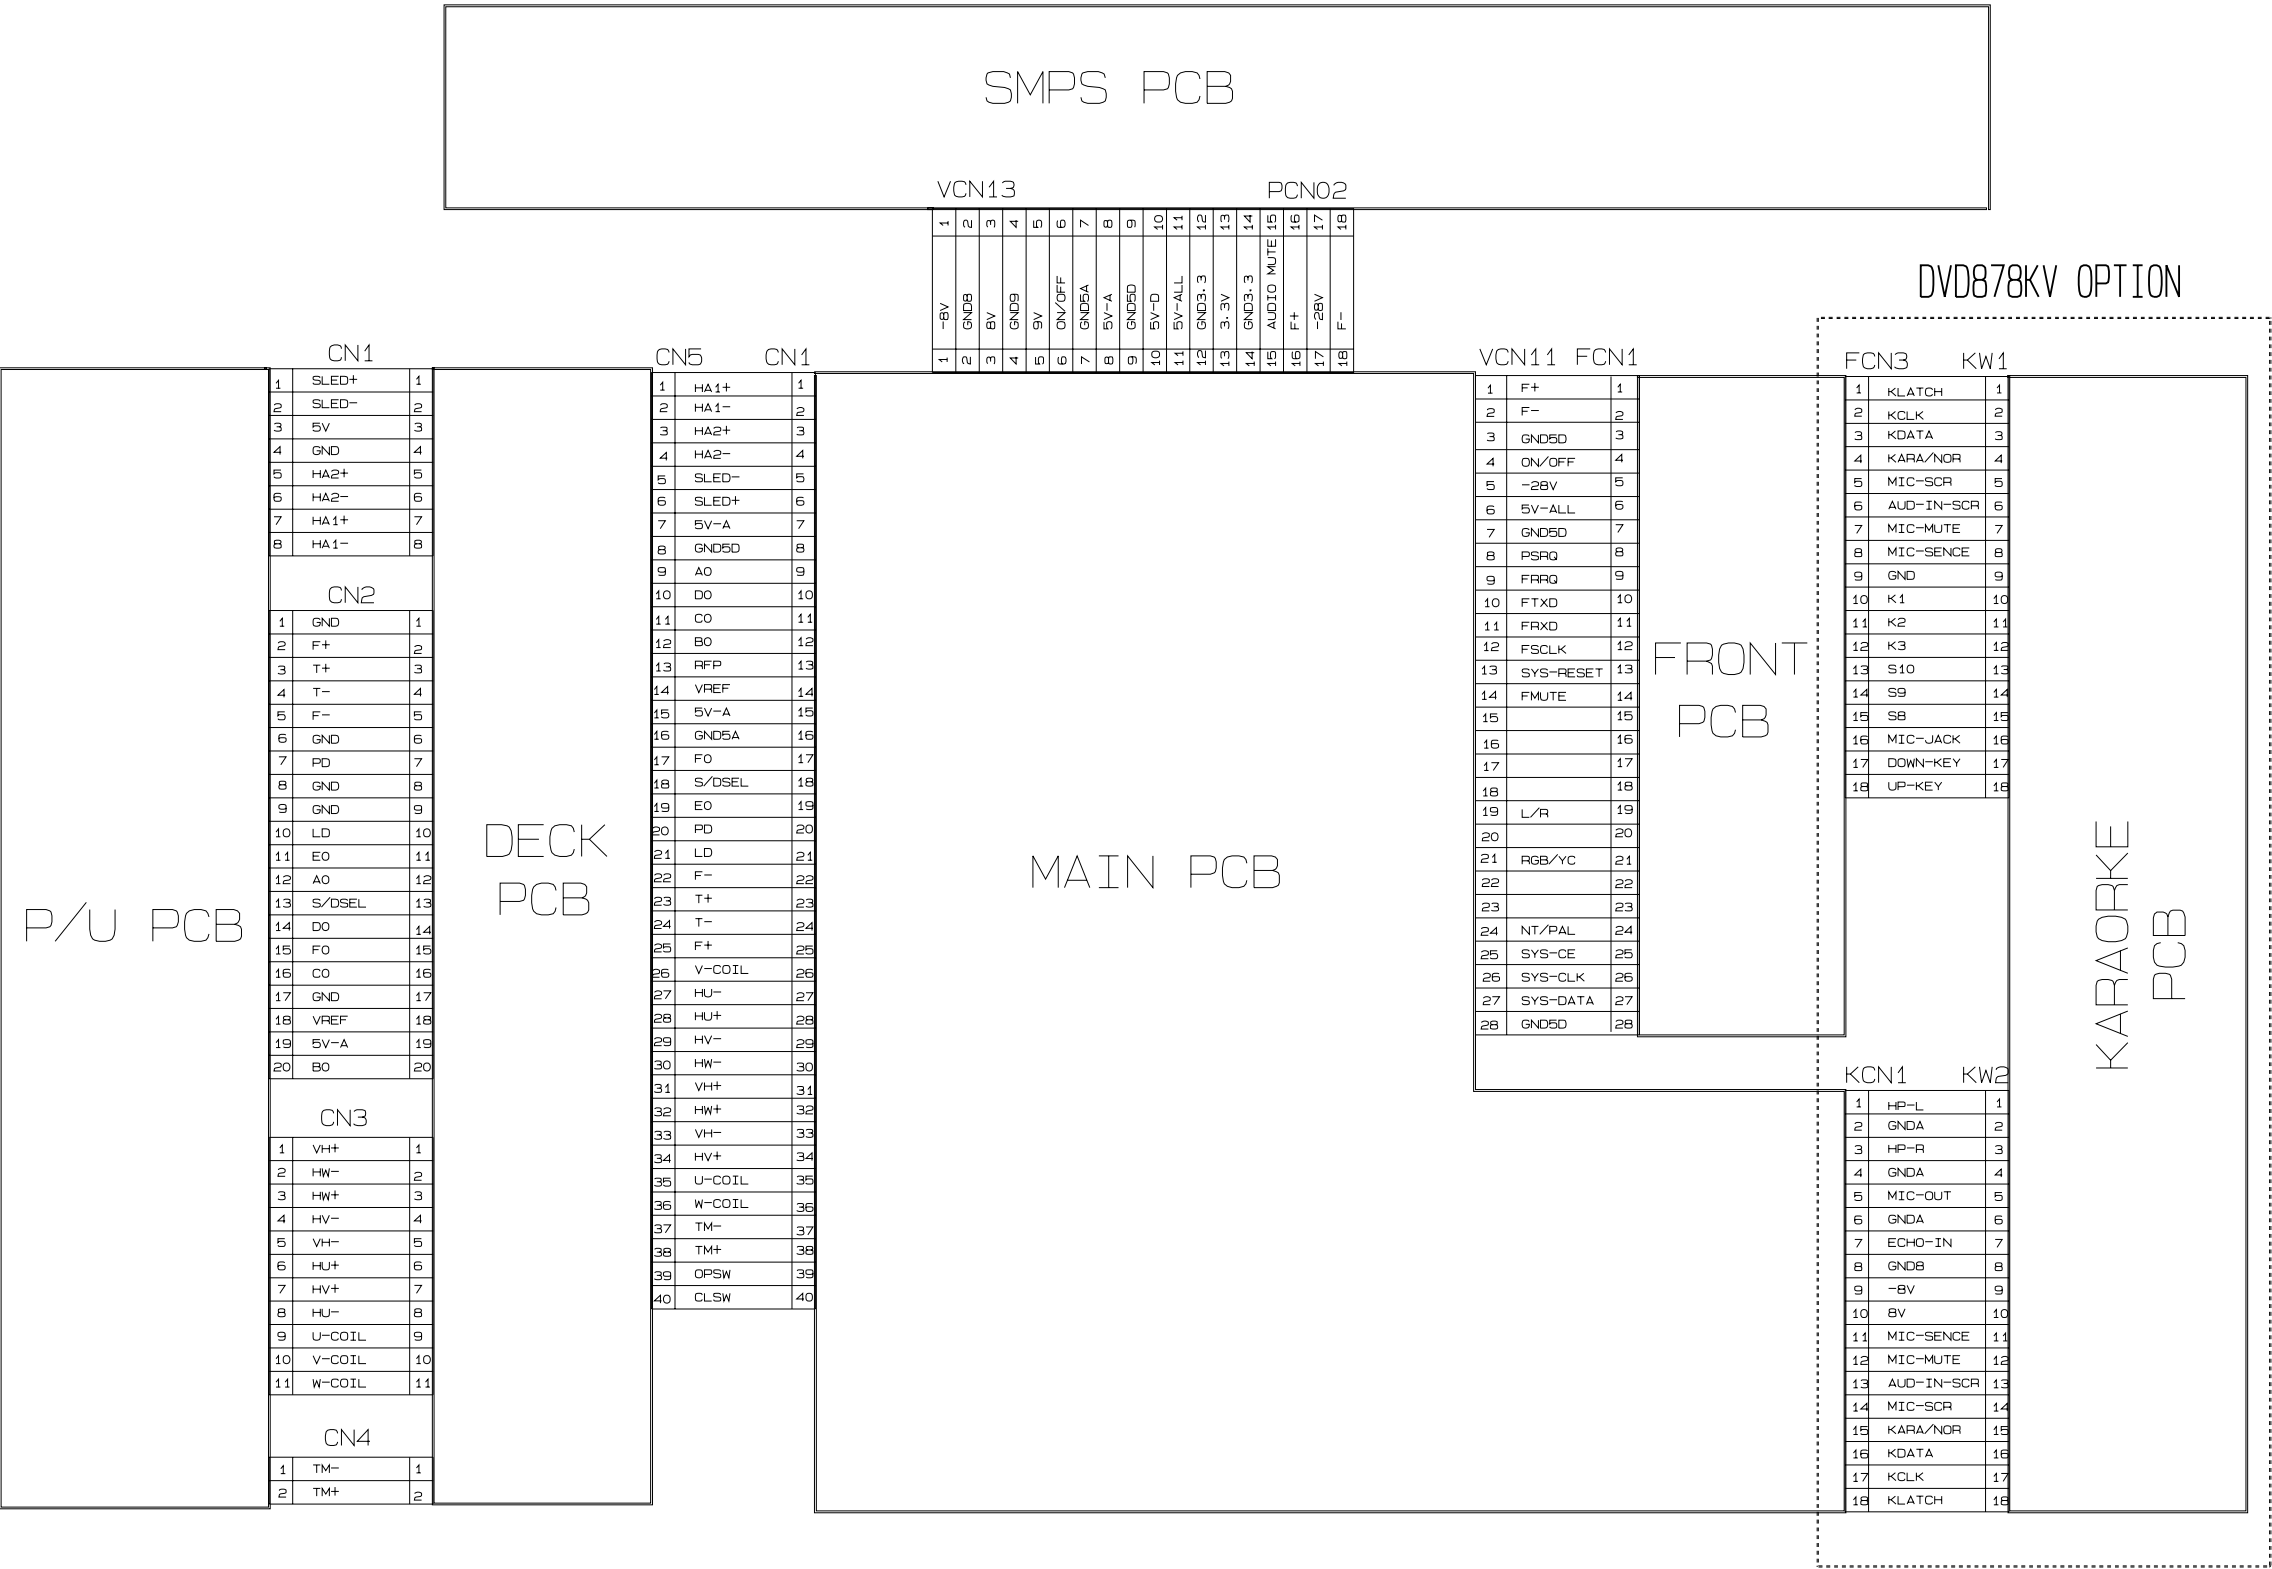

MEMO


---

**11. Schematic Diagrams**


---

|                                  | Page         |
|----------------------------------|--------------|
| <b>11-1 SMPS</b> .....           | <b>11-2</b>  |
| <b>11-2 FRONT</b> .....          | <b>11-3</b>  |
| <b>11-3 MICOM</b> .....          | <b>11-4</b>  |
| <b>11-4 SERVO</b> .....          | <b>11-5</b>  |
| <b>11-5 VIDEO</b> .....          | <b>11-6</b>  |
| <b>11-6 AUDIO-1</b> .....        | <b>11-7</b>  |
| <b>11-7 AUDIO-2</b> .....        | <b>11-8</b>  |
| <b>11-8 DATA PROCESSOR</b> ..... | <b>11-9</b>  |
| <b>11-9 A/V DECORDER</b> .....   | <b>11-10</b> |
| <b>11-10 PICK-UP/DECK</b> .....  | <b>11-11</b> |

11-1 SMPS


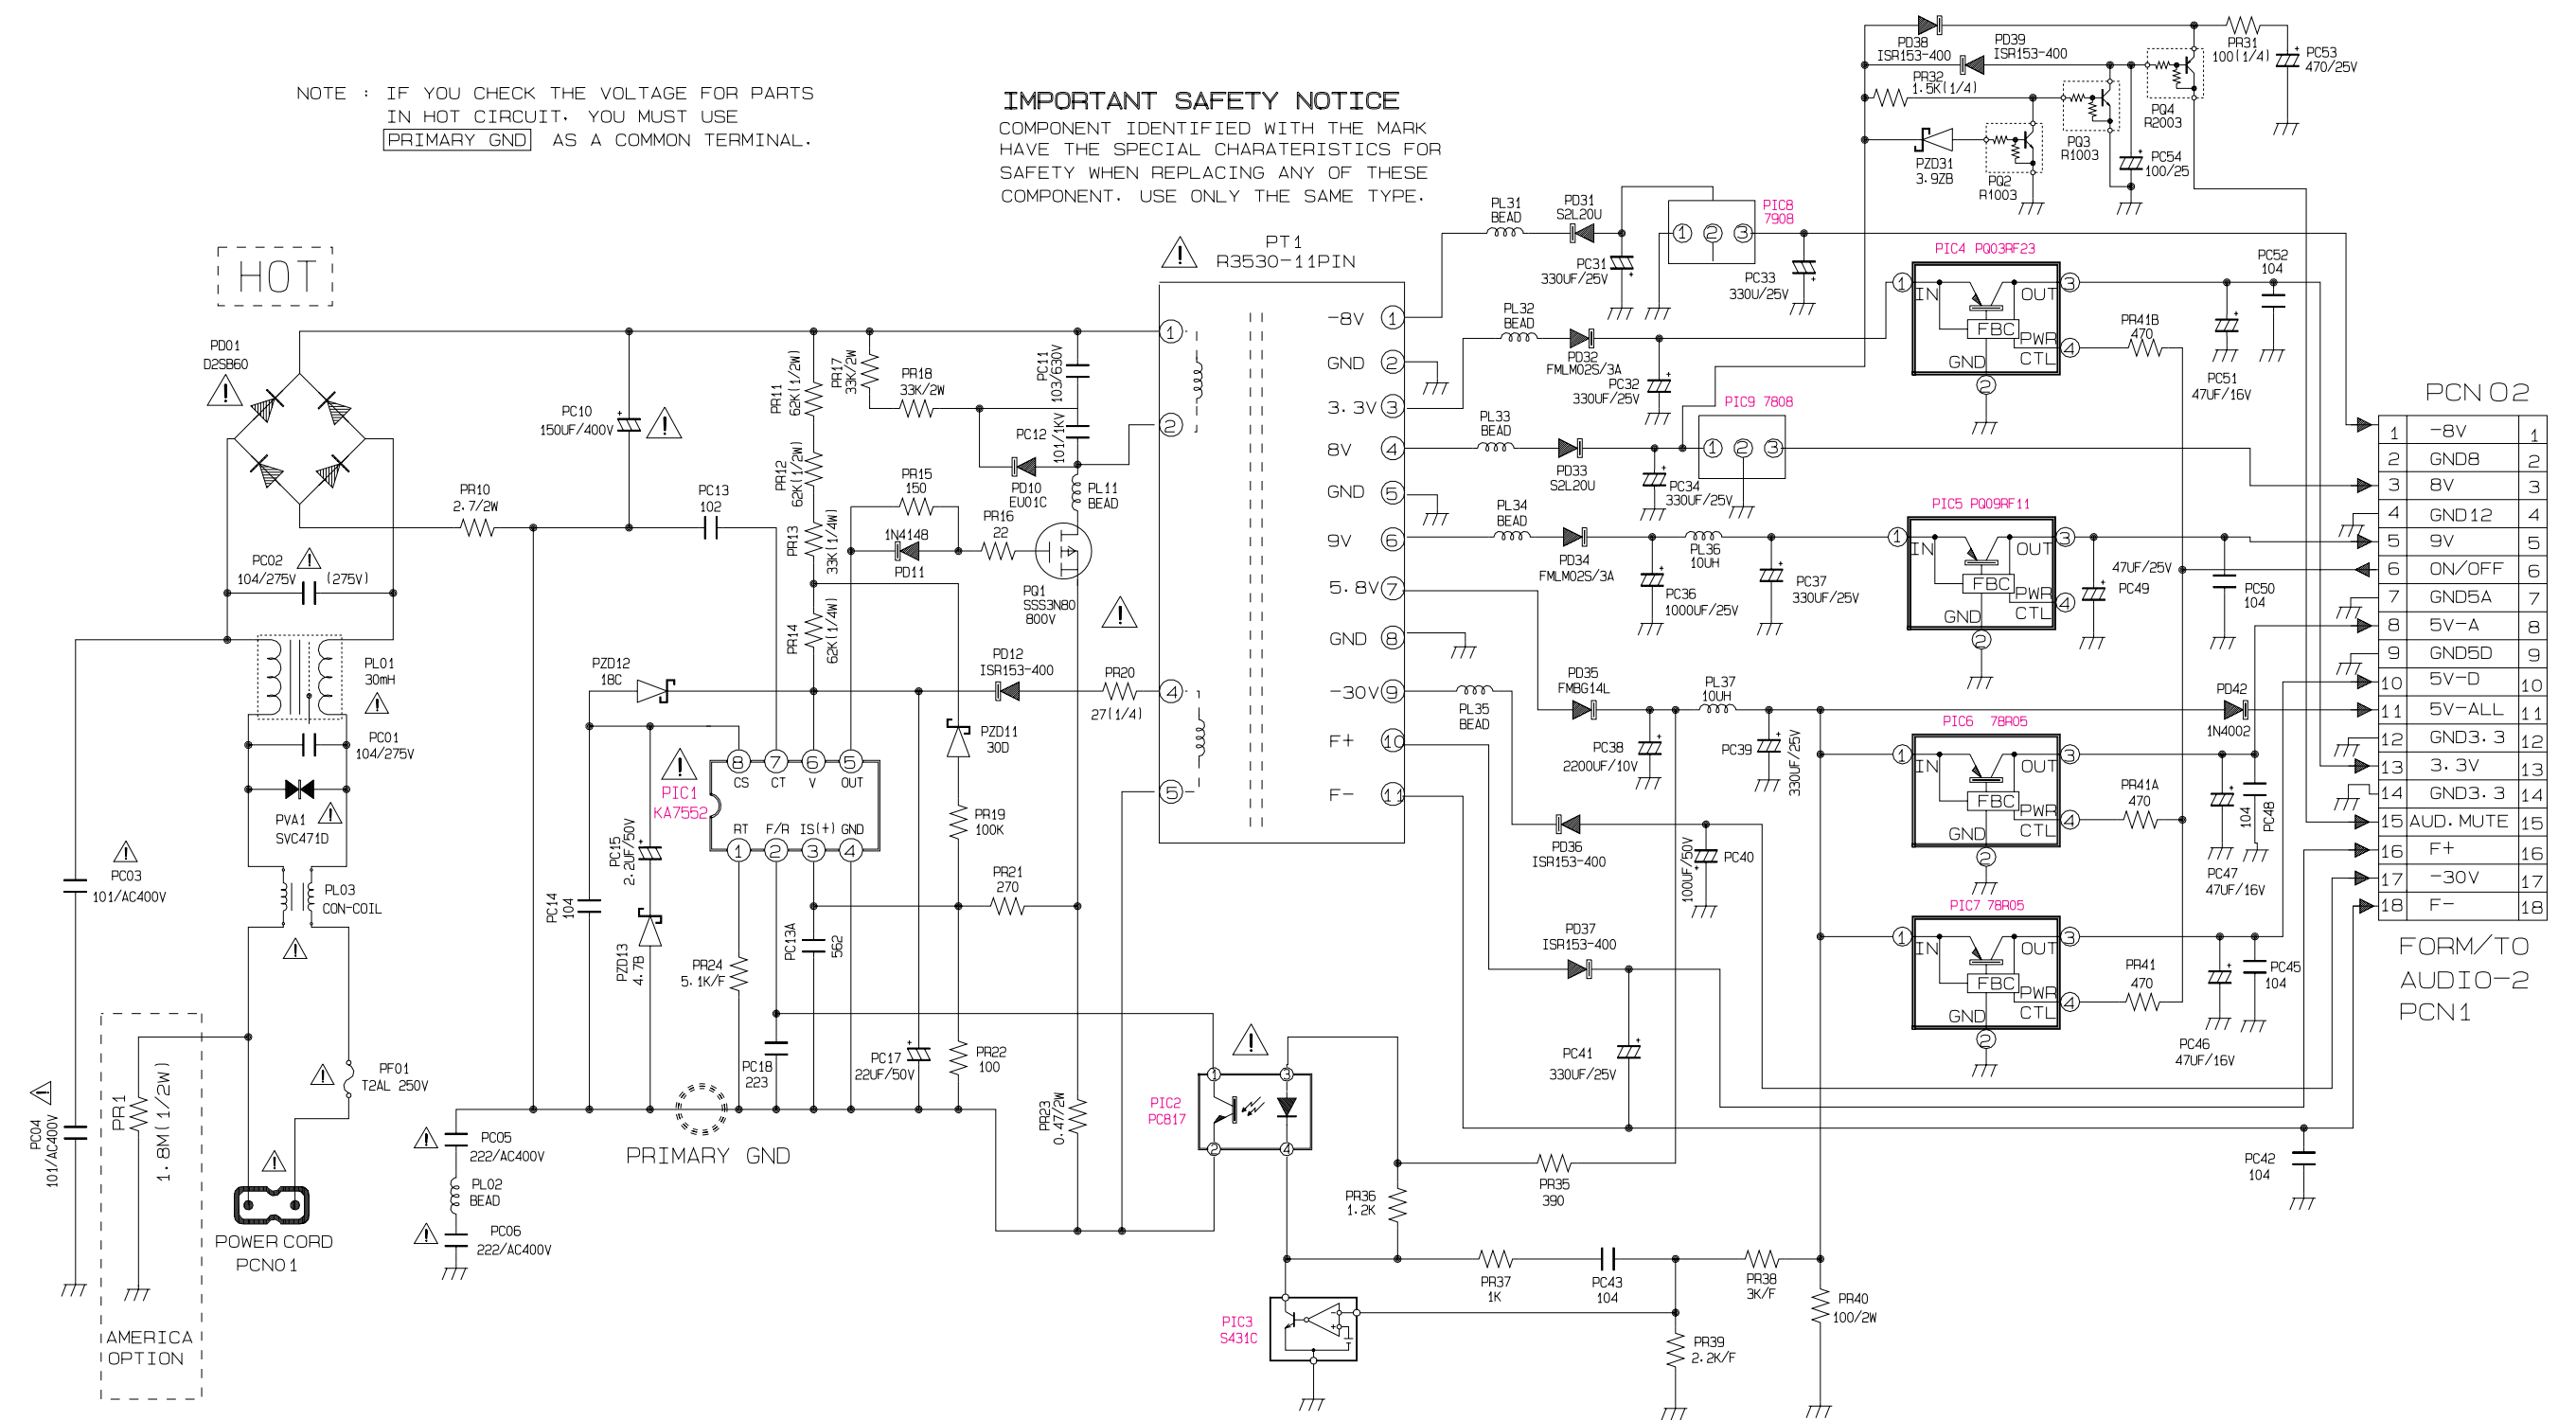


## 11-2 FRONT

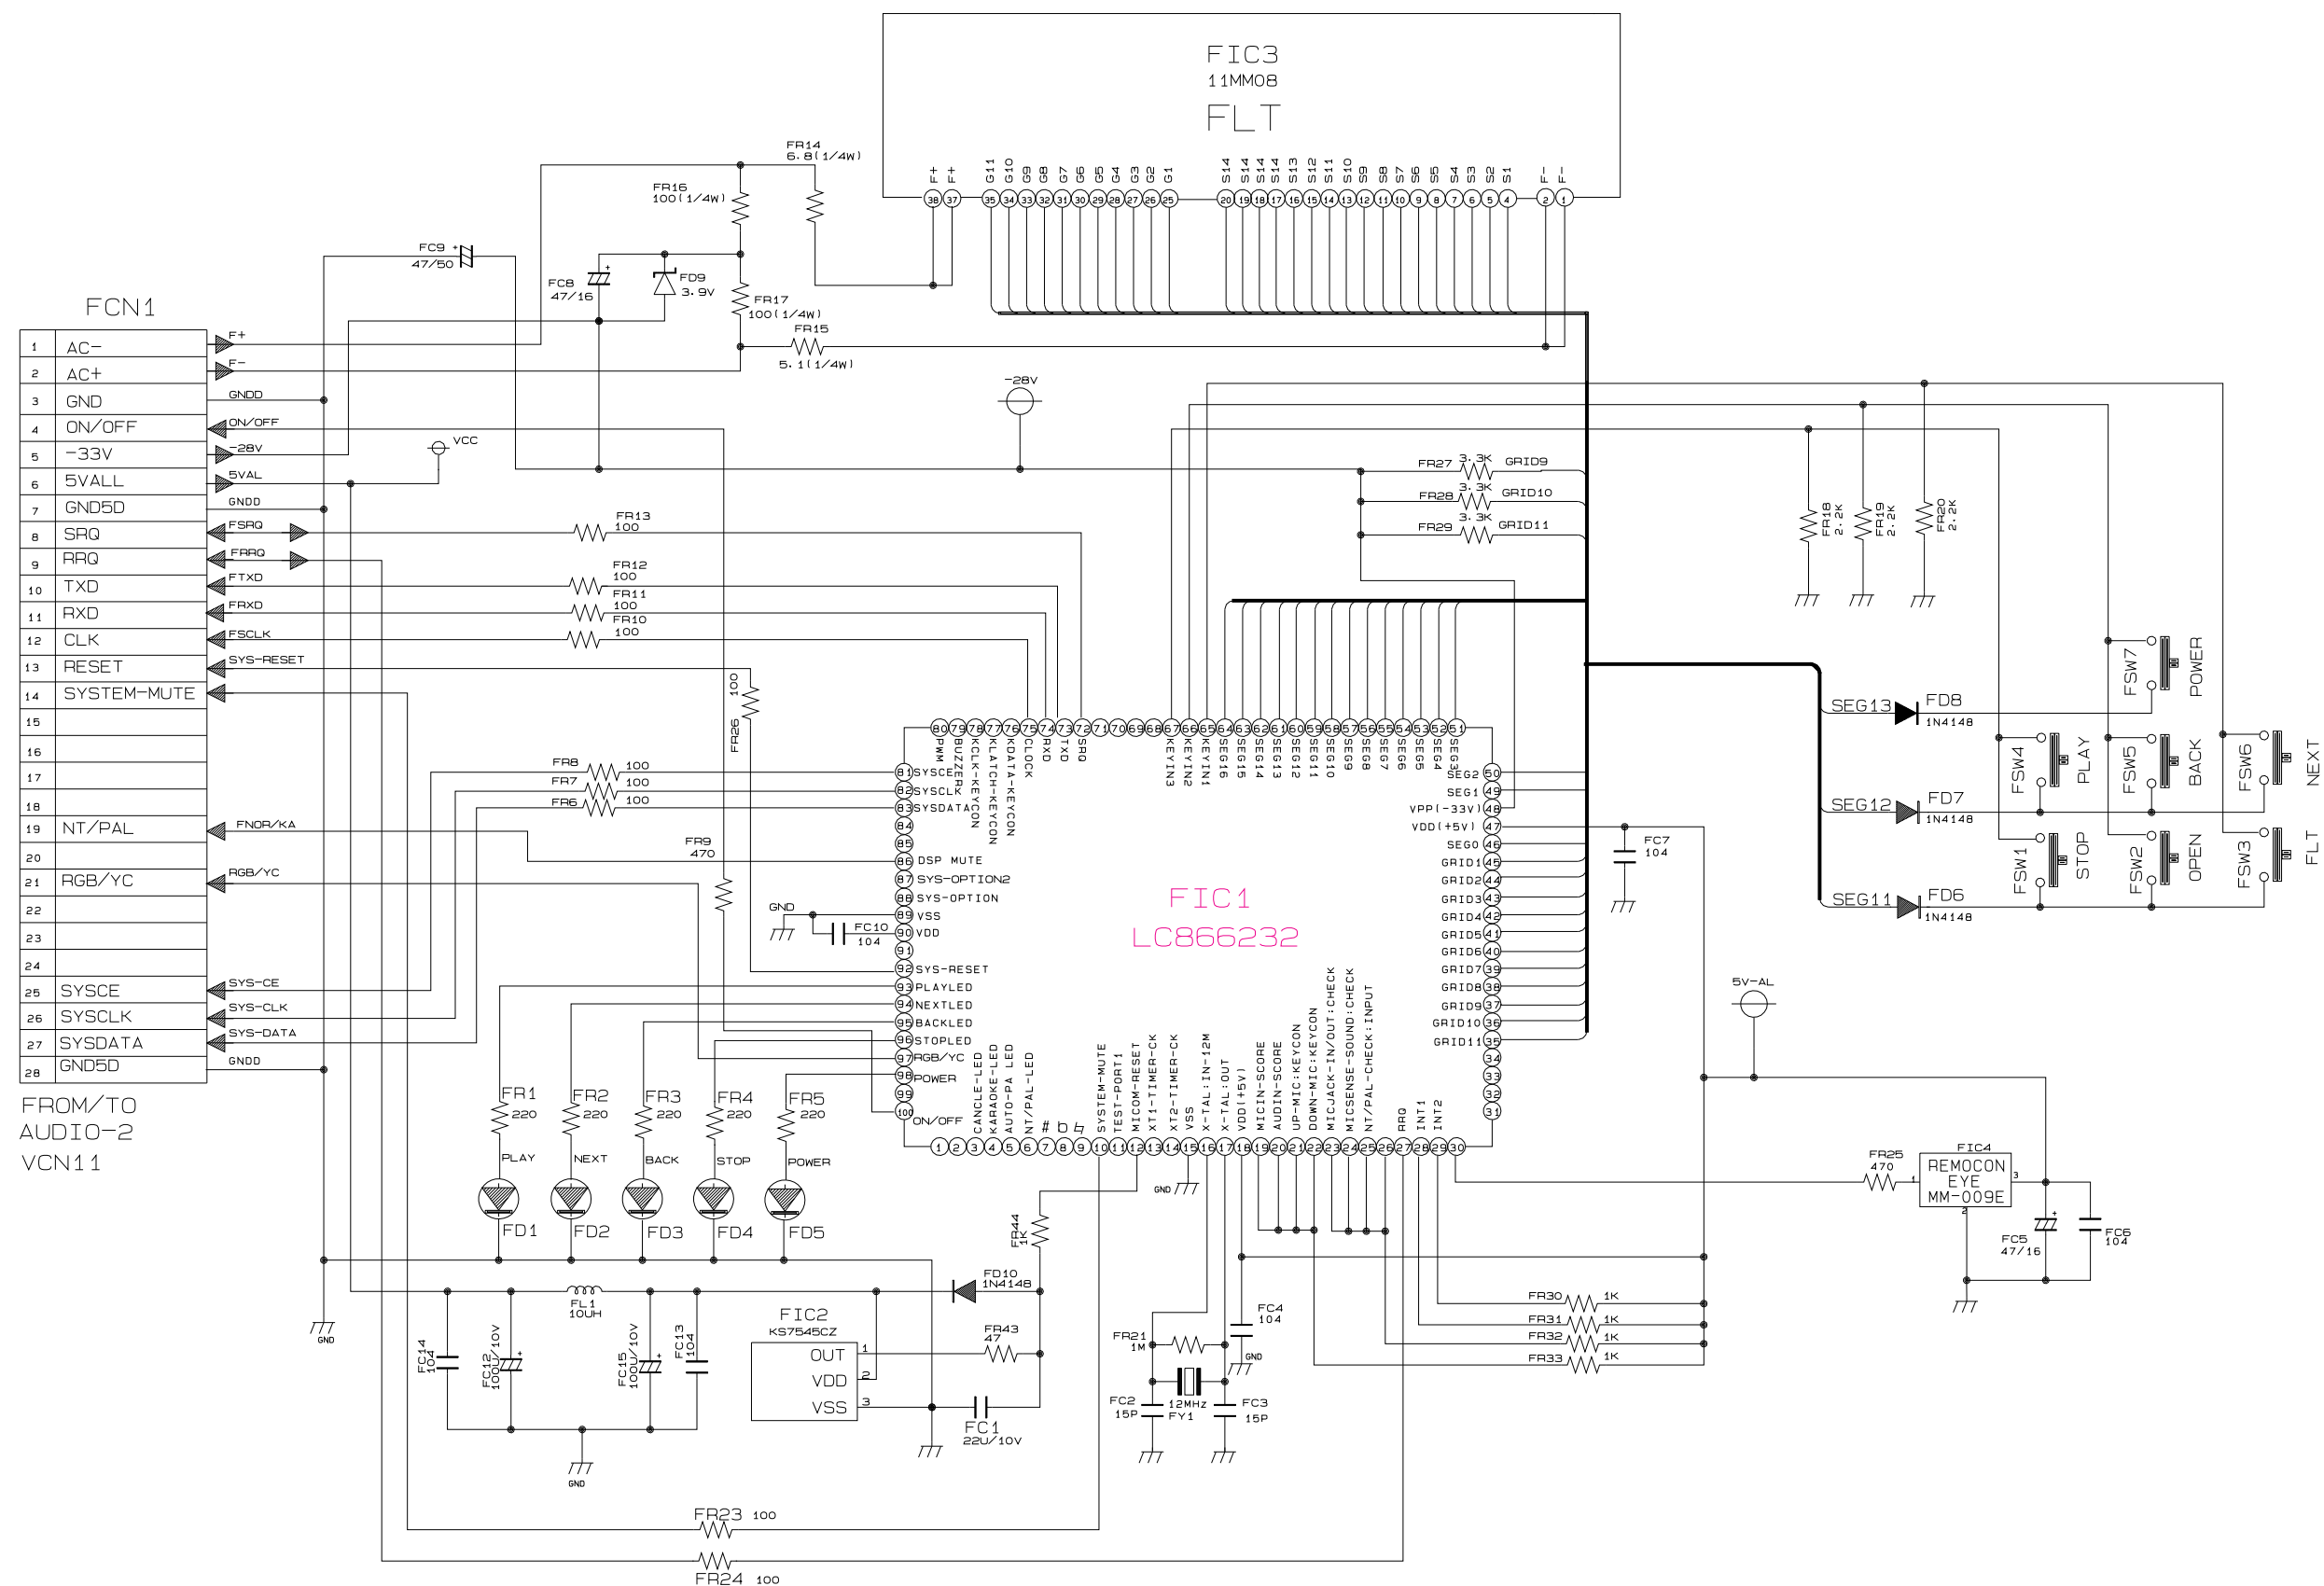




## 11-4 SERVO

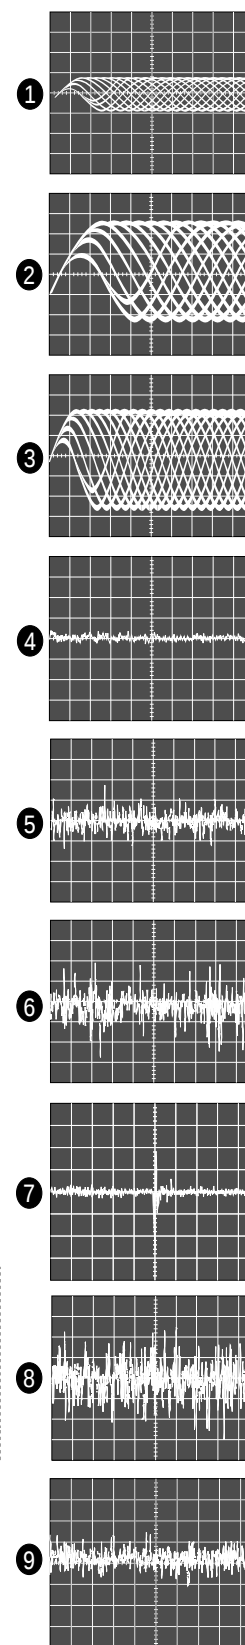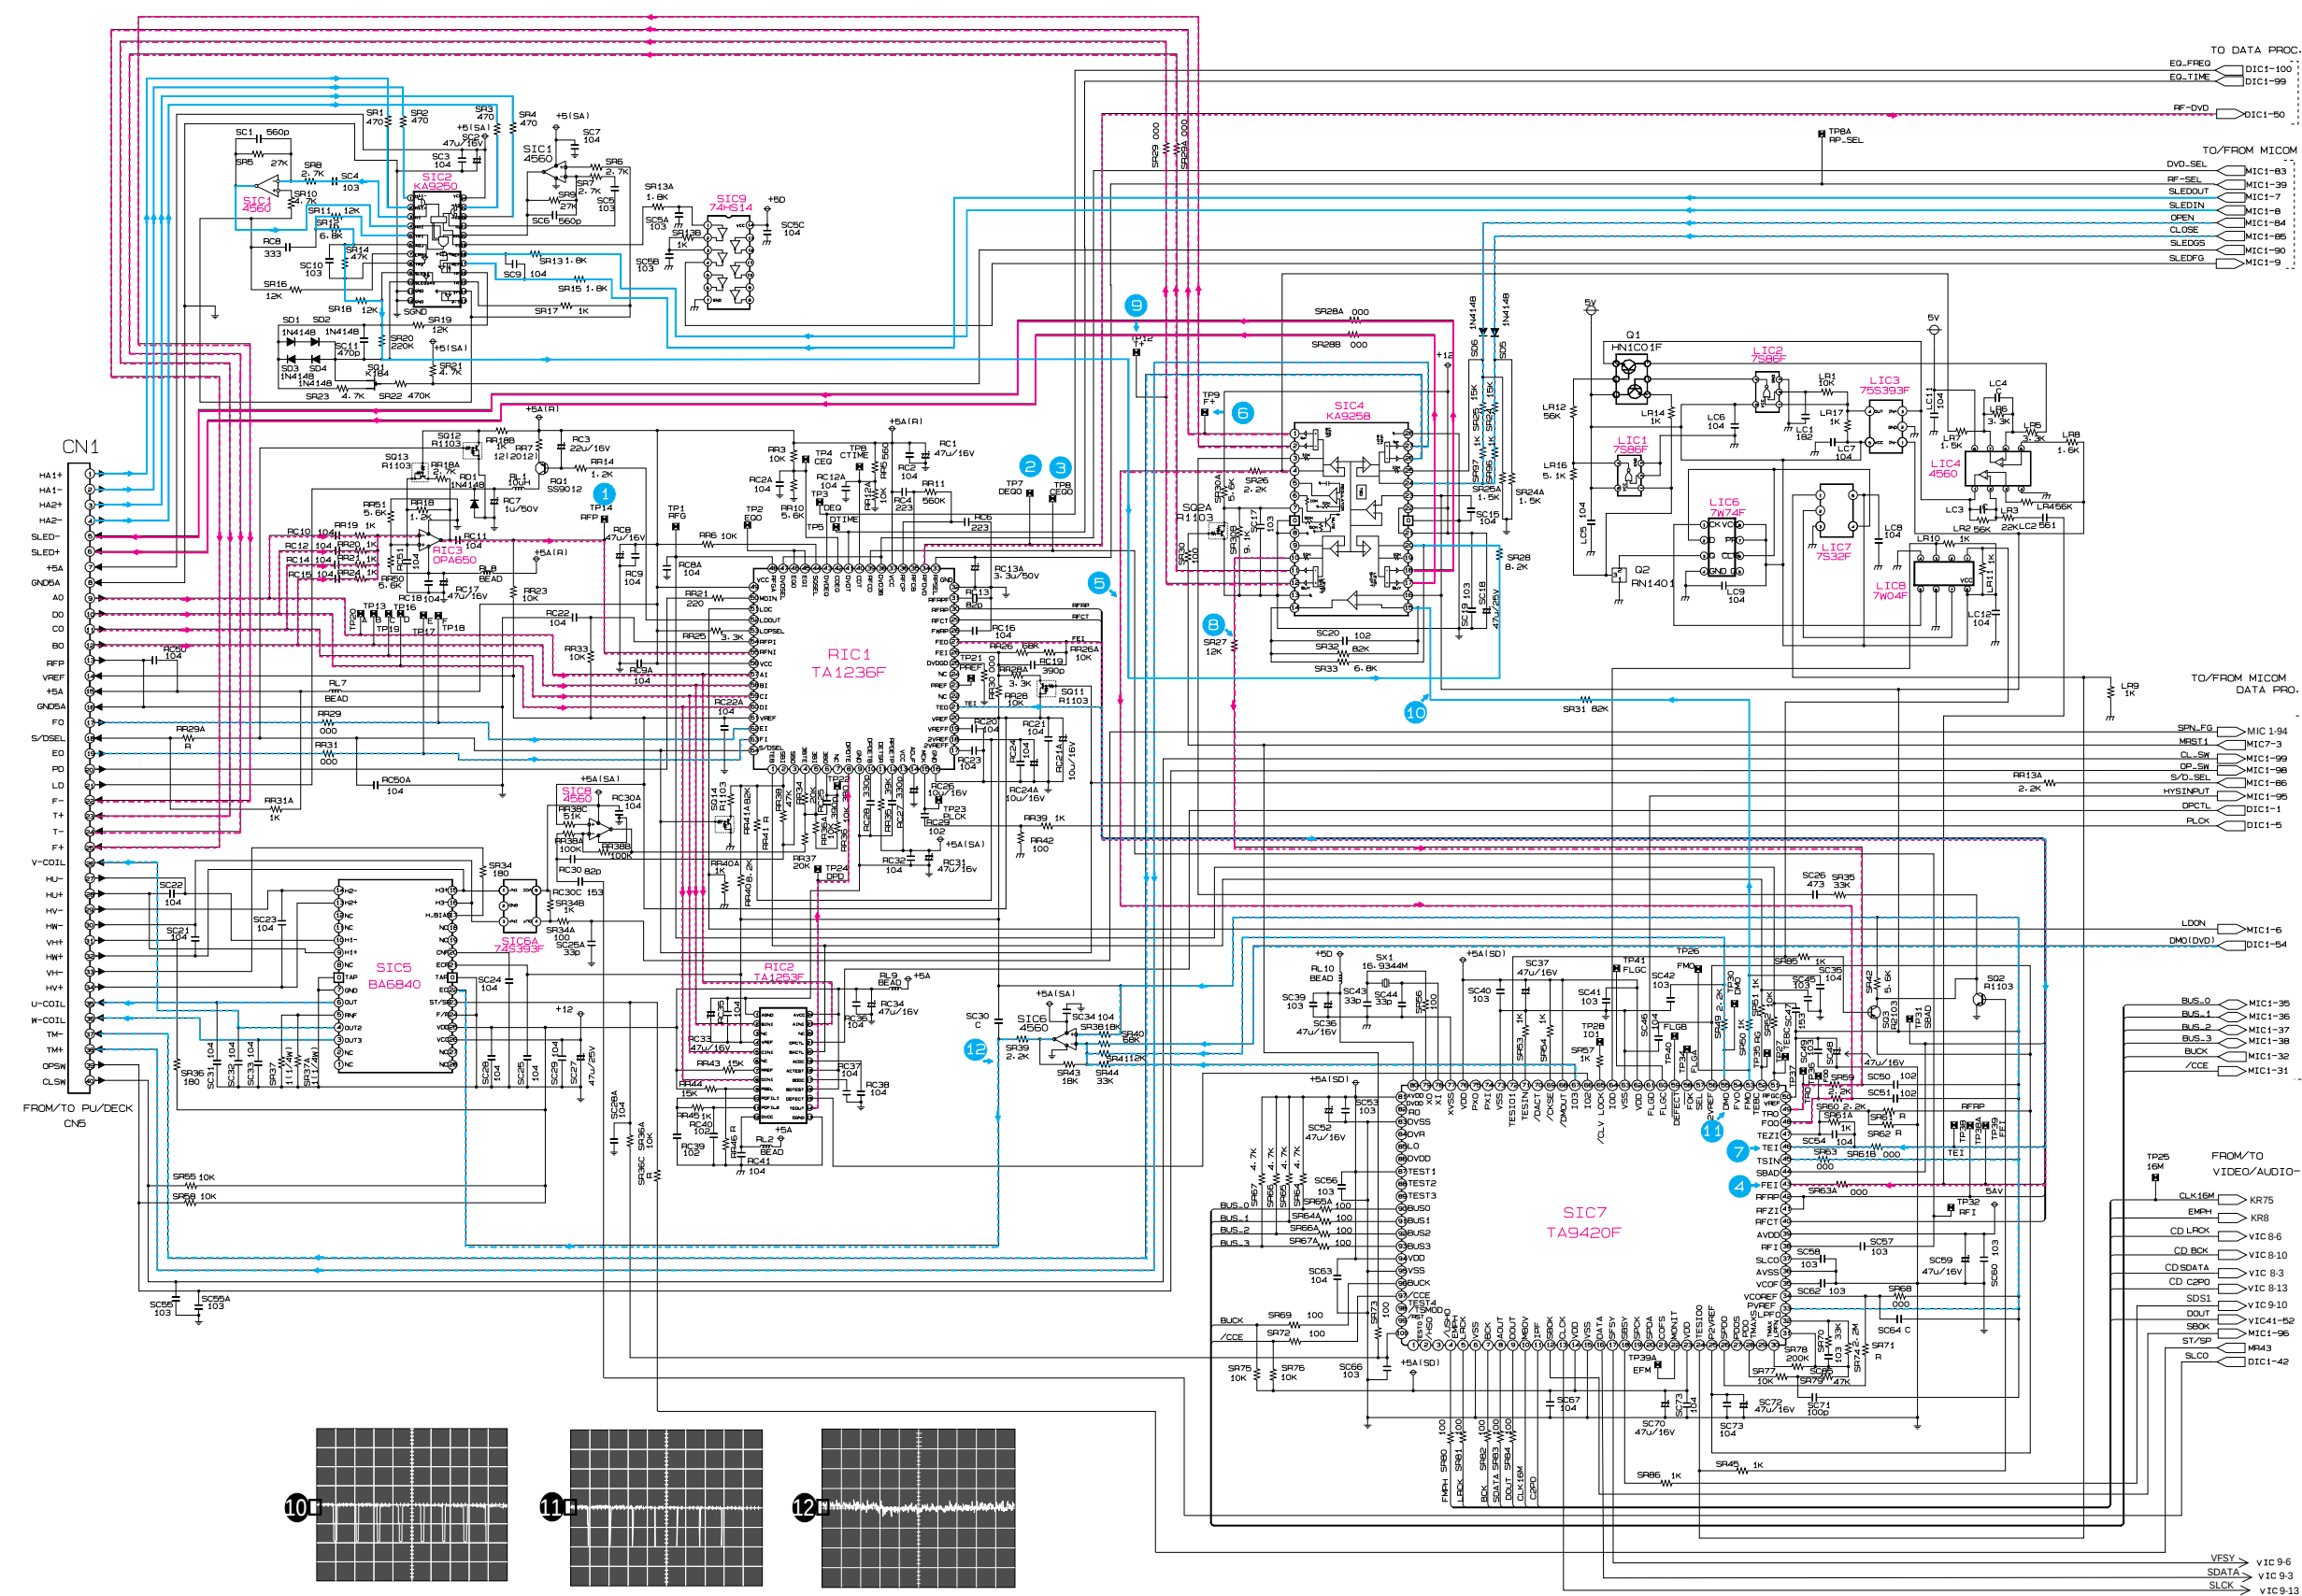




## 11-6 AUDIO - 1

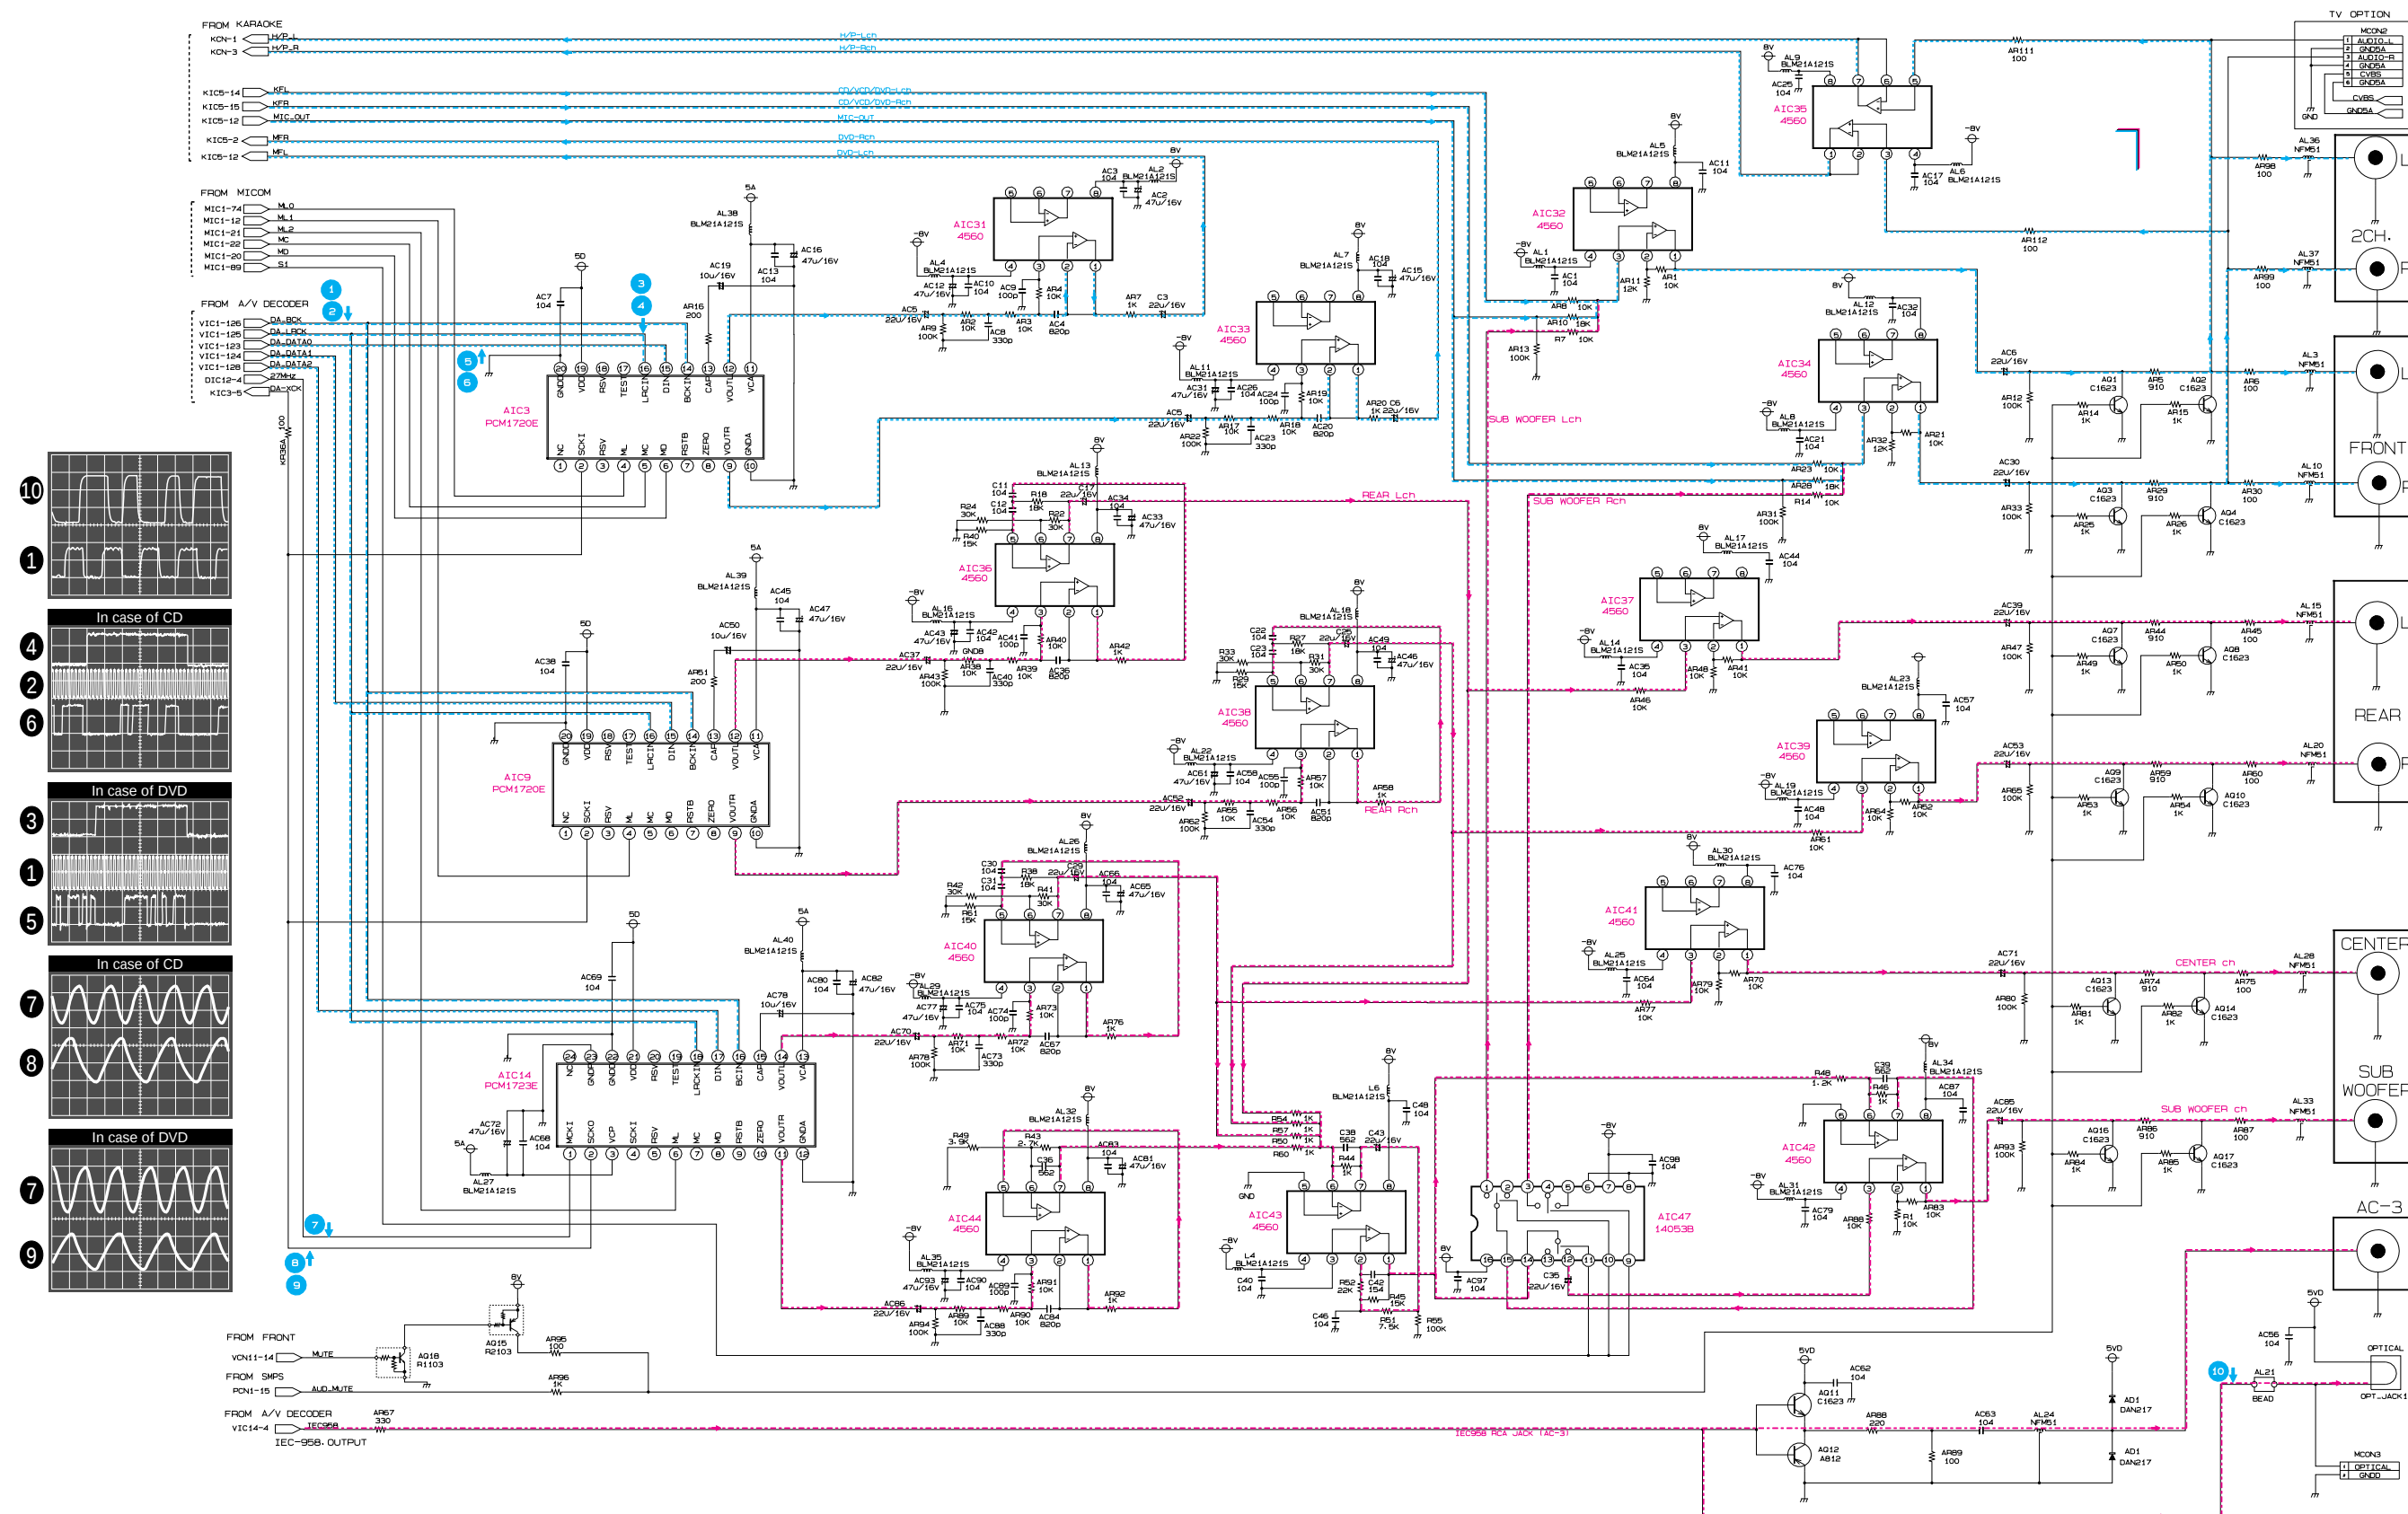



# 11-8 DATA PROCESSOR

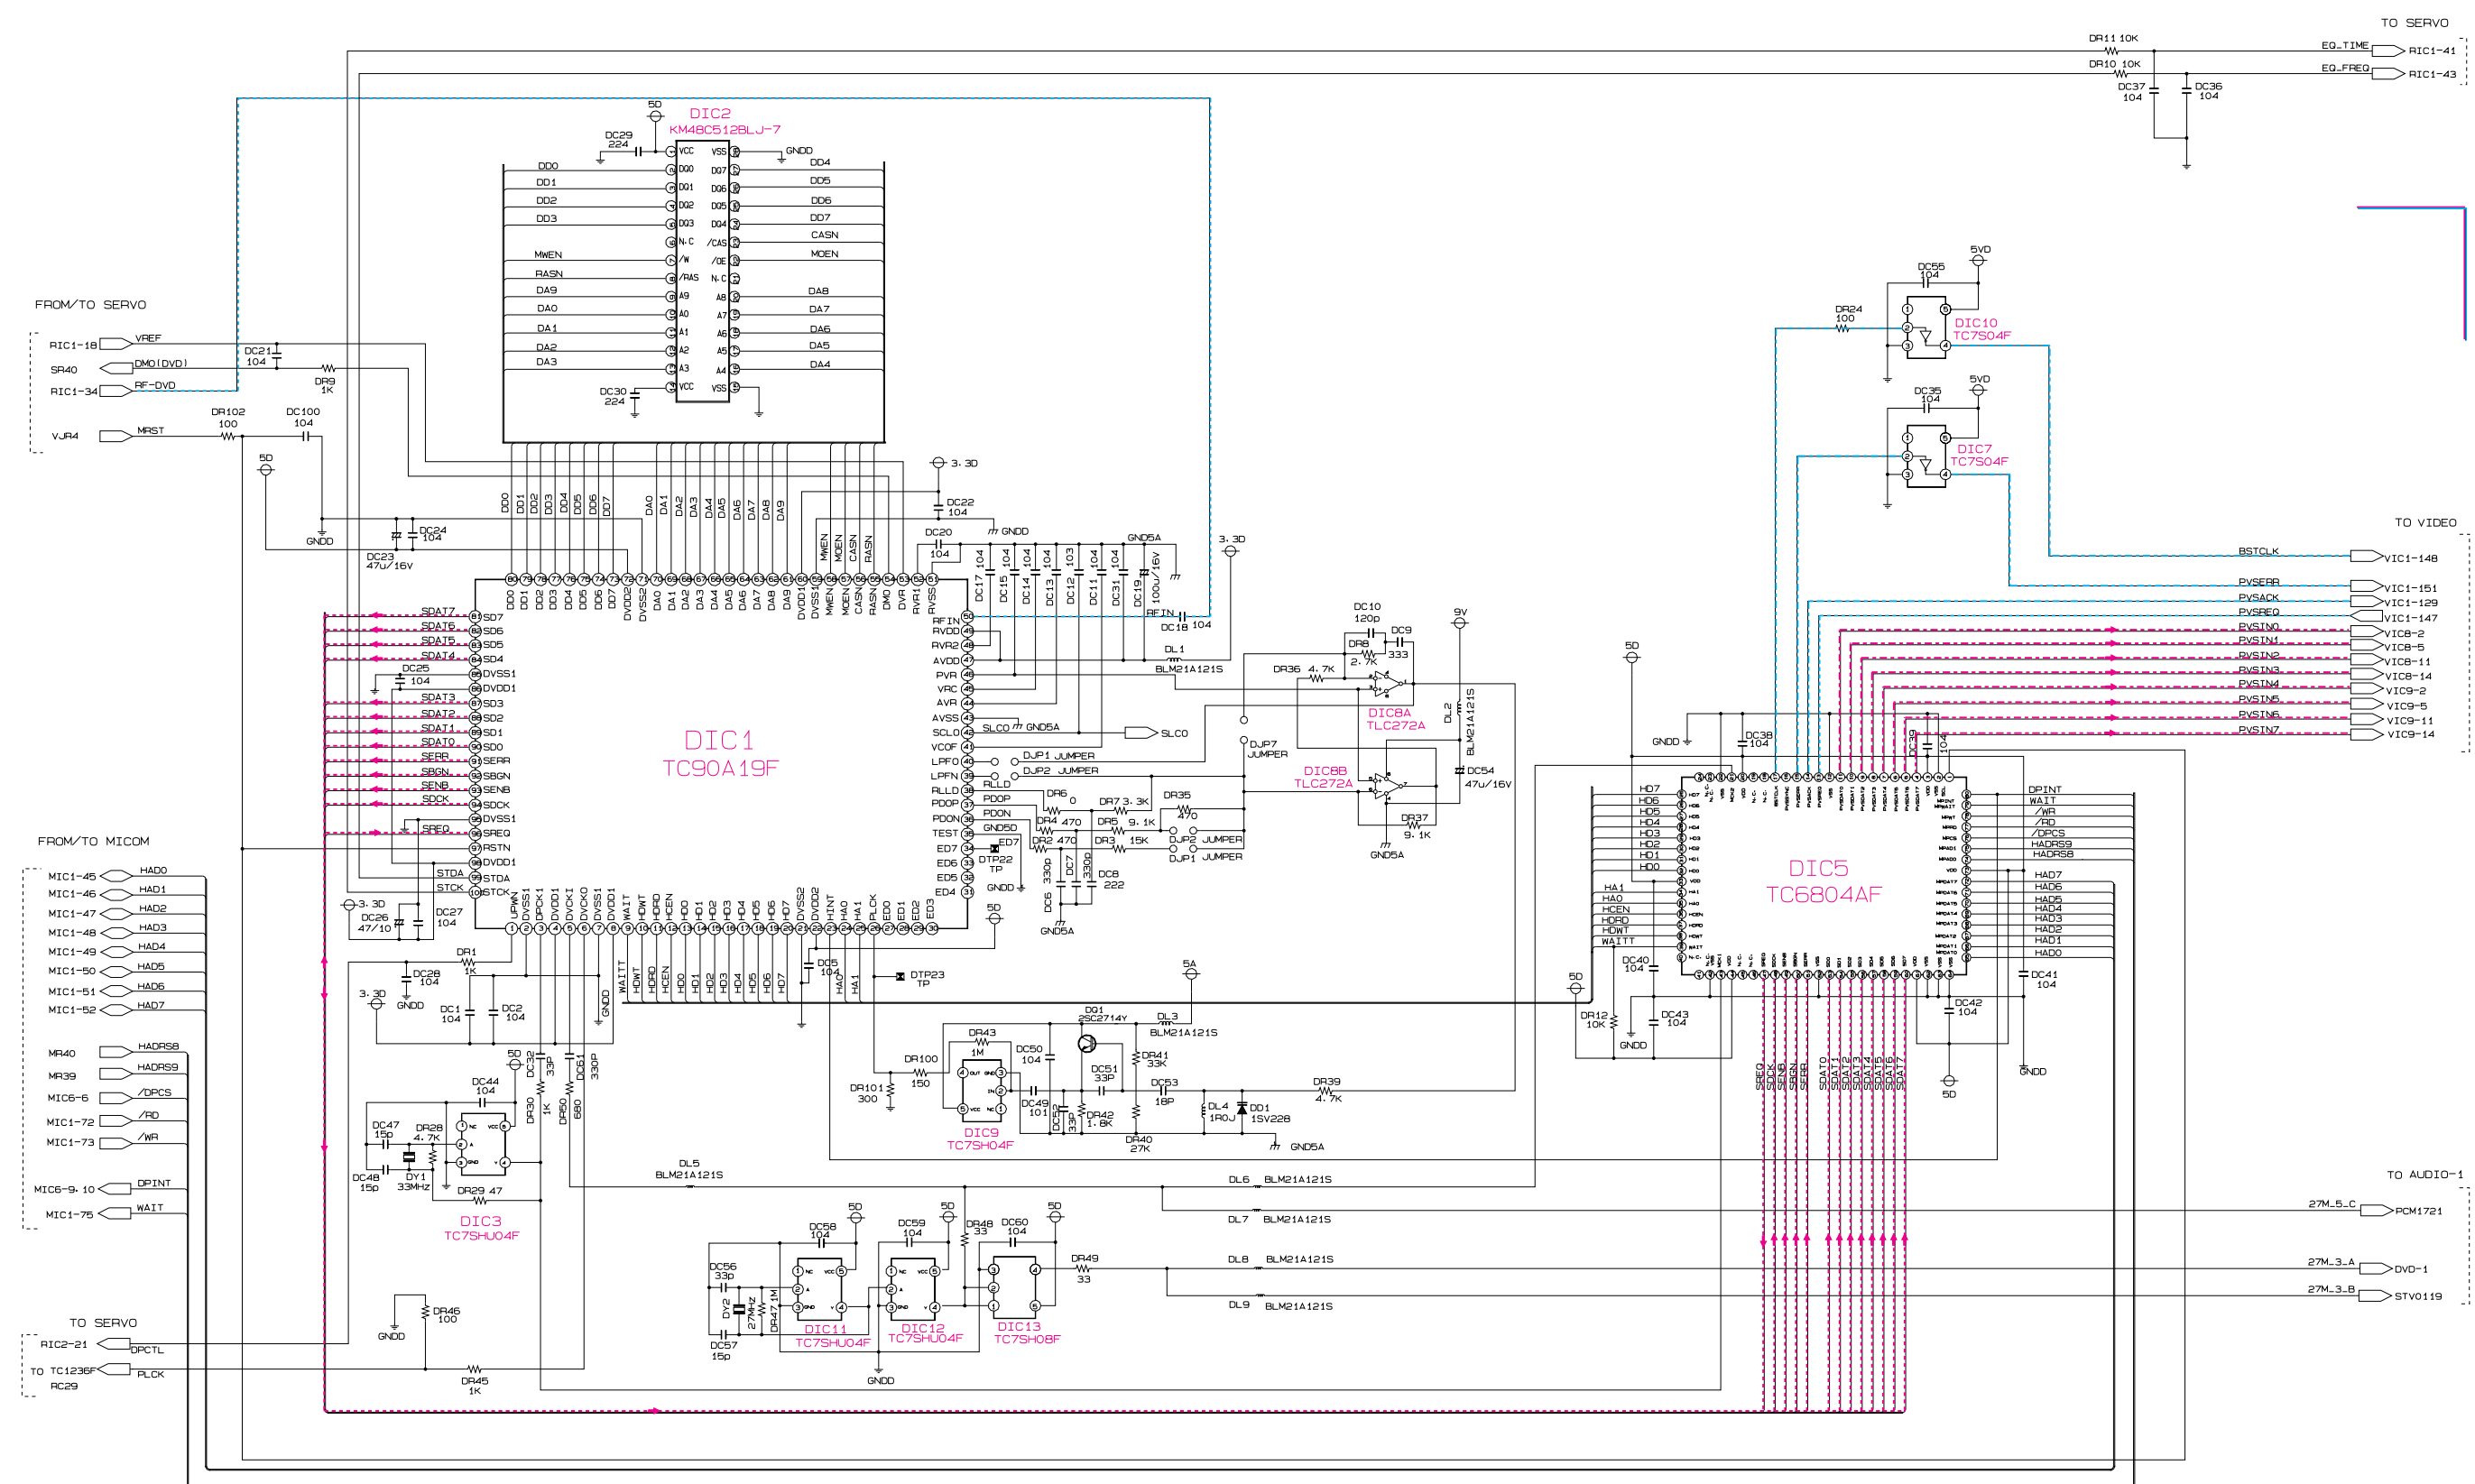

# 11-9 A/V DECORDER

