

BCX70G

NPN EPITAXIAL SILICON TRANSISTOR


T-29-19

GENERAL PURPOSE TRANSISTOR

ABSOLUTE MAXIMUM RATINGS (T_a = 25°C)

| Characteristic | Symbol | Rating | Unit |
|---------------------------|------------------|--------|------|
| Collector-Base Voltage | V _{CBO} | 45 | V |
| Collector-Emitter Voltage | V _{CEO} | 45 | V |
| Emitter-Base Voltage | V _{EBO} | 5 | V |
| Collector Current | I _C | 200 | mA |
| Collector Dissipation | P _C | 350 | mW |
| Storage Temperature | T _{stg} | 150 | °C |

• Refer to MMBT5088 for graphs

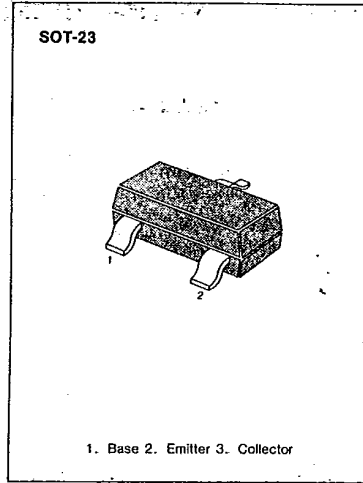

ELECTRICAL CHARACTERISTICS (T_a = 25°C)

| Characteristic | Symbol | Test Condition | Min. | Max. | Unit |
|--------------------------------------|-----------------------|--|------|------|------|
| Collector-Emitter Breakdown Voltage | BV _{CEO} | I _C = 2mA, I _B = 0 | 45 | | V |
| Emitter-Base Breakdown Voltage | BV _{EBO} | I _E = 1μA, I _C = 0 | 5 | | V |
| Collector Cutoff Current | I _{CES} | V _{CE} = 32V, V _{BE} = 0 | | 20 | nA |
| Emitter Cutoff Current | I _{EBO} | V _{EB} = 4V, I _C = 0 | | 20 | nA |
| DC Current Gain | h _{FE} | V _{CE} = 5V, I _C = 2mA | 120 | 220 | |
| | | V _{CE} = 1V, I _C = 50mA | 60 | | |
| Collector-Emitter Saturation Voltage | V _{CE} (sat) | I _C = 10mA, I _B = 0.25mA | | 0.35 | V |
| | | I _C = 50mA, I _B = 1.25mA | | 0.55 | V |
| Base-Emitter Saturation Voltage | V _{BE} (sat) | I _C = 50mA, I _B = 0.25mA | 0.6 | 0.85 | V |
| | | I _C = 50mA, I _B = 1.25mA | 0.7 | 1.05 | V |
| Base-Emitter On Voltage | V _{BE} (on) | I _C = 2mA, V _{CE} = 5V | 0.55 | 0.75 | V |
| Current Gain-Bandwidth Product | f _T | V _{CE} = 5V, I _C = 10mA | 125 | | MHz |
| | | f = 100MHz | | | |
| Output Capacitance | C _{ob} | V _{CB} = 10V, I _E = 0 | | 4.5 | pF |
| | | f = 1MHz | | | |
| Noise Figure | NF | I _C = 0.2mA, V _{CE} = 5V | | 6 | dB |
| | | f = 1KHz, R _S = 2KΩ | | | |
| Turn On Time | t _{on} | I _C = 10mA, I _{B1} = 1mA | | 150 | ns |
| Turn Off Time | t _{off} | I _{B2} = 1mA, V _{BB} = 3.6V | | 800 | ns |
| | | R _L = 990Ω, R ₁ = R ₂ = 5KΩ | | | |

Marking

