


**FREQUENCY
DEVICES™**

D68 Series

T-64-05

Linear Active Filters

Anti-Alias Filters

Description

The D68 Series of small, fixed-frequency, precision active filters provides high-performance linear, multi-pole filtering in a compact package, with a broad range of corner frequencies and a choice of transfer functions. Individual D68 filters can serve in low pass or high pass applications or be combined to create custom band-pass or band-reject filters. Each model comes factory tuned to a user-specified corner frequency between 10Hz and 100kHz. These fully self-contained units require no external components or adjustments. They operate with low total harmonic distortion over a wide dynamic input voltage range from non-critical $\pm 5V$ to $\pm 18V$ power supplies.

Features/Benefits:

- Compact size minimizes board space requirements
- Plug-in ready-to-use, reducing engineering design and manufacturing cycle time
- Factory tuned, no external clocks or adjustments needed
- Low harmonic distortion and wide signal-to-noise ratio to 16 bit resolution
- Broad range of transfer characteristics and corner frequencies to meet a wide range of applications

Applications

- Anti-alias filtering
- Data acquisition systems
- Communication systems and electronics
- Medical electronics equipment and research
- Aerospace, navigation and sonar applications
- Sound and vibration testing
- Real and compressed time data analysis
- Noise elimination
- Signal reconstruction

Available Low-Pass Models:

	Page
D68L8B 8-pole Butterworth	2
D68L8E 8-pole, 6 zero elliptic	3
D68L8L 8-pole Bessel	4
D68L8D 8-pole, 6 zero constant delay	5


Available High-Pass Models:

	Page
D68H8B 8-pole Butterworth	6
D68H8E 8-pole, 6 zero elliptic	7


General Specifications:

	Page
Pin-out/package data & ordering information	8

Low-Pass Frequency Response

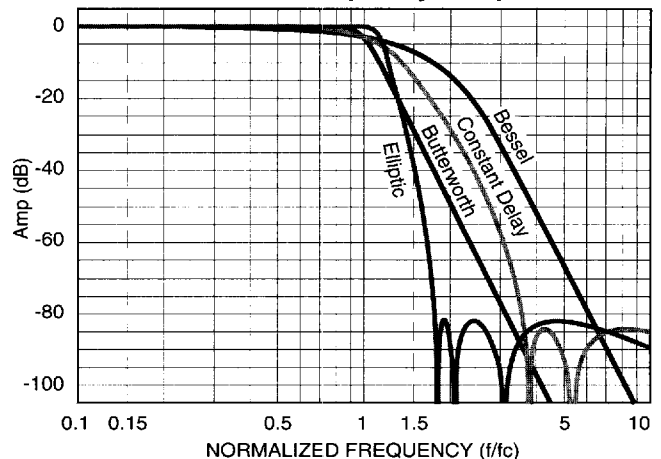

High-Pass Frequency Response

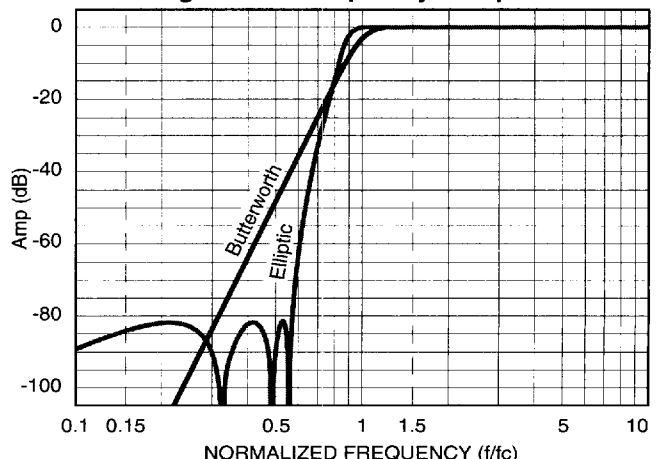

Linear Active Filters

8-Pole Butterworth Low-Pass Filter


Description

The D68L8B is an 8-pole low-pass Butterworth transfer function, is maximally flat, has no ripple in the passband, and has a monotonic roll-off at the rate of 48 dB/octave in the stopband.


Specifications

Transfer Function	8-pole Butterworth Low-Pass
Size	1.8" x 0.8" x 0.3"
Range f_c	10 Hz to 100 kHz
Passband Ripple (theoretical)	0.0 dB
Passband Gain (non-inverting)	0 ± 0.1 dB max. 0 ± 0.05 dB typ.
Stopband Attenuation Rate	48 dB/octave
Cutoff Frequency f_c	$\pm 1\%$ max.
Stability	$\pm 0.01\%$ / °C
Amplitude	-3 dB
Phase	-360°
Filter Attenuation	(theoretical)
0.12 dB	0.80 f_c
3.01 dB	1.00 f_c
60.0 dB	2.37 f_c
80.0 dB	3.16 f_c
Phase Match ²	
0 - 0.8 f_c	$\pm 2^\circ$ max. $\pm 1^\circ$ typ.
0.8 f_c - 1.0 f_c	$\pm 3^\circ$ max. $\pm 1.5^\circ$ typ.
Amplitude Accuracy	(theoretical)
0 - 0.8 f_c	± 0.2 dB max. ± 0.1 dB typ.
0.8 f_c - 1.0 f_c	± 0.3 dB max. ± 0.15 dB typ.
Total Harmonic Distortion	< -100 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	200 μV_{RMS} typ.
Narrow Band Noise (5 Hz - 100 kHz)	50 μV_{RMS} typ.


Frequency Response

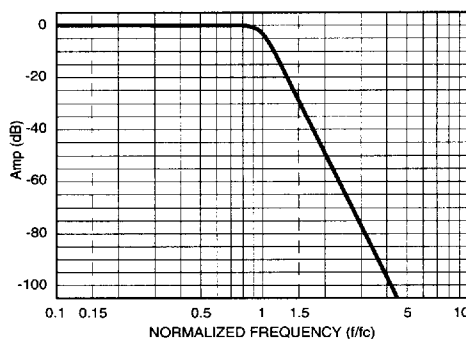

Delay (Normalized)

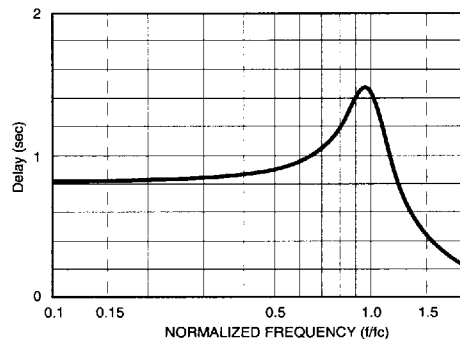

Step Response

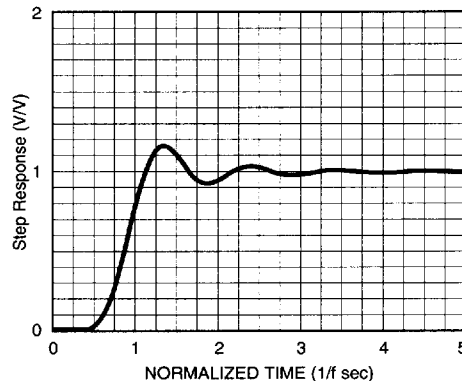

f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.816
0.10	0.00	-29.4	.819
0.20	0.00	-59.0	.828
0.30	0.00	-89.1	.843
0.40	0.00	-120	.867
0.50	0.00	-152	.903
0.60	-0.001	-185	.956
0.70	-0.014	-221	1.04
0.80	-0.121	-261	1.19
0.85	-0.311	-283	1.29
0.90	-0.738	-307	1.40
0.95	-1.58	-333	1.48
1.00	-3.01	-360	1.46
1.10	-7.48	-408	1.17
1.20	-12.9	-445	.873
1.30	-18.2	-472	.672
1.40	-23.4	-494	.540
1.50	-28.2	-511	.448
1.60	-32.7	-526	.380
1.70	-36.9	-539	.328
1.80	-40.8	-550	.287
1.90	-44.6	-560	.253
2.00	-48.2	-568	.226
2.25	-56.3	-586	.174
2.50	-63.7	-600	.139
2.75	-70.3	-611	.113
3.00	-76.3	-621	.094
3.25	-81.9	-629	.080
3.50	-87.1	-635	.069
4.00	-96.3	-646	.052
5.00	-112	-661	.033
6.00	-125	-671	.023
7.00	-135	-678	.017
8.00	-144	-683	.013
9.00	-153	-687	.010
10.0	-160	-691	.008

2. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

1. Normalized Group Delay: The above delay data is normalized to a corner frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual corner frequency (f_c).




$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency } (f_c) \text{ in Hz}}$$

**Model D68L8E**
**8-Pole, 6-Zero
Elliptic
Low-Pass Filter**
Linear Active Filters**Description**

The D68L8E is an 8-pole, 6-zero elliptic low-pass filter, with a theoretical passband ripple of ± 0.035 dB. This response is a modified Cauer-elliptic function designed by FDI to minimize section "Qs", while maintaining a 0.035 dB / 80 dB shape factor of 1.77, an 82 dB stopband floor, and a 2-pole monotonic roll-off at high frequency.

Specifications

Transfer Function	8-pole, 6-zero Elliptic Low-Pass
Size	1.8" x 0.8" x 0.3"
Range f_r	10 Hz to 100 kHz
Passband Ripple 0 - f_r	(theoretical) ± 0.035 dB
Passband Gain (non-inverting)	0 ± 0.1 dB max. 0 ± 0.05 dB typ.
Stopband Attenuation	80 dB min.
Cutoff Frequency f_r	$\pm 1\%$ max.
Stability	$\pm 0.01\%$ / $^{\circ}\text{C}$
Amplitude	-0.035 dB
Phase	-323.5°
Filter Attenuation	(theoretical)
0.035 dB	1.00 f_r
3.01 dB	1.13 f_r
60.0 dB	1.67 f_r
80.0 dB	1.77 f_r
Phase Match ² 0 - 0.8 f_r	$\pm 2^{\circ}$ max. $\pm 1^{\circ}$ typ.
0.8 f_c - 1.0 f_r	$\pm 4^{\circ}$ max. $\pm 2^{\circ}$ typ.
Amplitude Accuracy 0 - 0.8 f_r	(theoretical) ± 0.2 dB max. ± 0.1 dB typ.
0.8 f_c - 1.0 f_r	± 0.3 dB max. ± 0.15 dB typ.
Total Harmonic Distortion	< -100 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	200 μV_{RMS} typ.
Narrow Band Noise (5 Hz - 100 kHz)	50 μV_{RMS} typ.

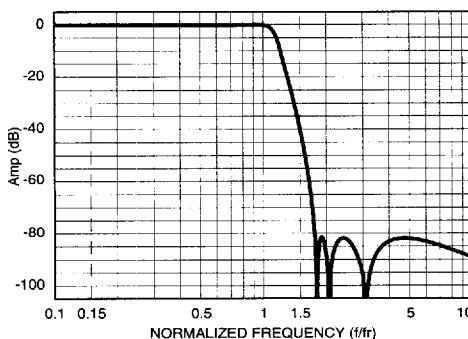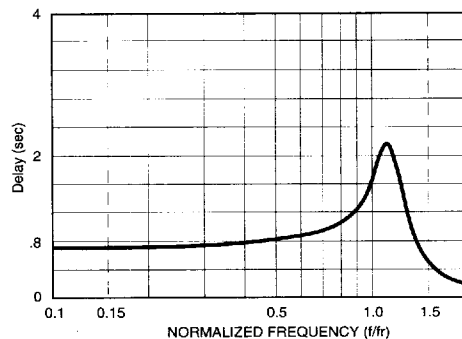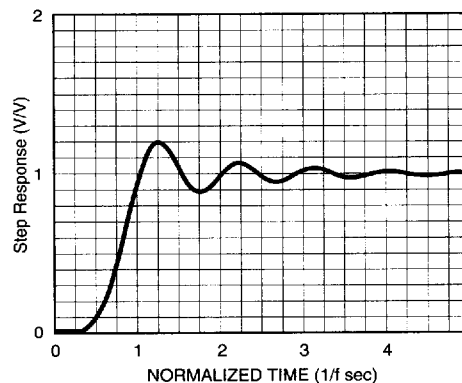Frequency Response**Delay****Step Response**

f/f_r (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	0.713
0.10	-0.004	-25.7	0.716
0.20	-0.014	-51.6	0.724
0.30	-0.024	-77.9	0.740
0.40	-0.020	-105	0.767
0.50	0.007	-133	0.811
0.55	0.022	-148	0.840
0.60	0.033	-163	0.872
0.65	0.031	-179	0.908
0.70	0.014	-196	0.946
0.75	-0.015	-213	0.989
0.80	-0.041	-232	1.04
0.85	-0.046	-251	1.12
0.90	-0.016	-272	1.23
0.95	-0.025	-296	1.40
1.00	-0.035	-323	1.65
1.10	-1.76	-392	2.14
1.20	-8.28	-467	1.86
1.30	-18.4	-522	1.19
1.40	-29.3	-558	0.753
1.50	-40.1	-578	0.517
1.60	-51.5	-594	0.381
1.70	-65.2	-606	0.296
1.75	-75.0	-611	0.265
1.80	-113.0	-616	0.239
1.85	-83.6	-440	0.217
1.90	-82.0	-444	0.198
1.95	-83.7	-447	0.182
2.00	-87.8	-450	0.168
2.20	-85.8	-280	0.126
2.40	-82.0	-289	0.099
2.60	-83.5	-295	0.081
2.80	-88.2	-301	0.067
3.00	-99.9	-305	0.057
3.50	-87.2	-134	0.040
4.00	-83.1	-140	0.030
5.00	-82.1	-148	0.018
6.00	-83.1	-154	0.013
7.00	-84.6	-157	0.009
8.00	-86.2	-160	0.007
9.00	-87.8	-163	0.005
10.0	-89.3	-164	0.004

2. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

1. Normalized Group Delay: The above delay data is normalized to a ripple frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual ripple frequency (f_r).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Ripple Frequency } (f_r) \text{ in Hz}}$$

Linear Active Filters

8-Pole Bessel Low-Pass Filter


Description

The D68L8L is an 8-pole low-pass Bessel transfer function, has a monotonic roll-off in the passband and the stopband, and its final rolloff rate is 48 dB/octave in the stopband. It exhibits a constant delay in the passband and has an overshoot free step response.


Specifications

Transfer Function	8-pole Bessel Low-Pass
Size	1.8" x 0.8" x 0.3"
Range f_c	10 Hz to 100 kHz
Passband Ripple (theoretical)	0.0 dB
Passband Gain (non-inverting)	0 ± 0.1 dB max. 0 ± 0.05 dB typ.
Stopband Attenuation Rate	48 dB/octave
Cutoff Frequency f_c	$\pm 1\%$ max.
Stability	$\pm 0.01\%$ / °C
Amplitude	-3 dB
Phase	-182°
Filter Attenuation	(theoretical)
1.91 dB	$0.80 f_c$
3.01 dB	$1.00 f_c$
60.0 dB	$4.52 f_c$
80.0 dB	$6.07 f_c$
Phase Match ² 0 - f_c	$\pm 2^\circ$ max. $\pm 1^\circ$ typ.
Amplitude Accuracy 0 - f_c	(theoretical) ± 0.2 dB max. ± 0.1 dB typ.
Total Harmonic Distortion	< -100 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	200 μV_{RMS} typ.
Narrow Band Noise (5 Hz - 100 kHz)	50 μV_{RMS} typ.


Frequency Response

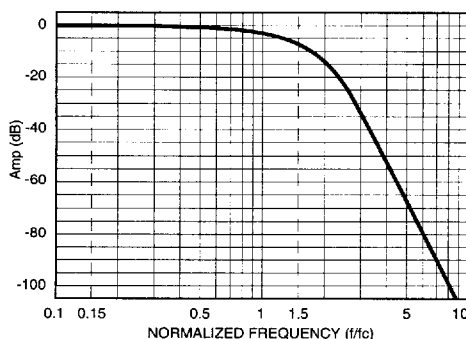

Delay (Normalized)

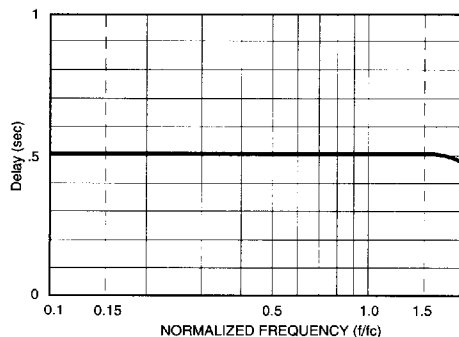

Step Response

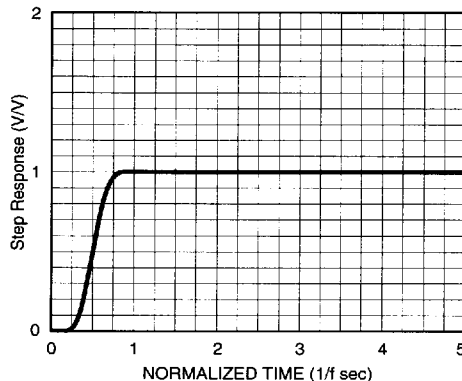

f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.506
0.10	-0.029	-18.2	.506
0.20	-0.117	-36.4	.506
0.30	-0.264	-54.7	.506
0.40	-0.470	-72.9	.506
0.50	-0.737	-91.1	.506
0.60	-1.06	-109	.506
0.70	-1.45	-128	.506
0.80	-1.91	-146	.506
0.85	-2.16	-155	.506
0.90	-2.42	-164	.506
0.95	-2.71	-173	.506
1.00	-3.01	-182	.506
1.10	-3.67	-200	.506
1.20	-4.40	-219	.506
1.30	-5.20	-237	.506
1.40	-6.10	-255	.505
1.50	-7.08	-273	.504
1.60	-8.16	-291	.502
1.70	-9.36	-309	.498
1.80	-10.7	-327	.492
1.90	-12.1	-345	.482
2.00	-13.7	-362	.468
2.25	-18.1	-402	.417
2.50	-23.1	-436	.352
2.75	-28.3	-465	.291
3.00	-33.4	-489	.241
3.25	-38.3	-509	.201
3.50	-43.1	-526	.170
4.00	-51.8	-552	.126
5.00	-66.8	-587	.077
6.00	-79.2	-610	.052
7.00	-89.8	-626	.038
8.00	-99.0	-638	.029
9.00	-107	-647	.023
10.0	-114	-655	.018

2. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

1. Normalized Group Delay: The above delay data is normalized to a corner frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual corner frequency (f_c).




$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency } (f_c) \text{ in Hz}}$$


**FREQUENCY
DEVICES™**
Model D68L8D
**8-Pole, 6-Zero
Constant Delay
Low-Pass Filter**
Linear Active Filters
Description

The D68L8D is an 8-pole, 6-zero constant delay low-pass filter which combines the pole configuration of an 8-pole Bessel low-pass filter with passband and stop-band zeros. Compared to a Bessel filter, this function exhibits a flatter response in the passband and a much higher roll-off rate in the stopband to the specified 80 dB floor. This response maintains a constant delay in the passband.

Specifications

Transfer Function	8-pole, 6-zero Constant Delay Low-Pass
Size	1.8" x 0.8" x 0.3"
Range f_c	10 Hz to 100 kHz
Passband Ripple (theoretical)	0.15 dB
Passband Gain (non-inverting)	0 ± 0.1 dB max. 0 ± 0.05 dB typ.
Stopband Attenuation	80 dB min
Cutoff Frequency f_c	$\pm 1\%$ max.
Stability	$\pm 0.01\%$ / °C
Amplitude	-3.01 dB
Phase	-306°
Filter Attenuation	(theoretical)
3.01 dB	1.00 f_c
60.0 dB	3.08 f_c
80.0 dB	3.57 f_c
Phase Match ² 0 - f_c	$\pm 2^\circ$ max. $\pm 1^\circ$ typ.
Amplitude Accuracy	(theoretical)
0 - 0.8 f_c	± 0.2 dB max. ± 0.1 dB typ.
0.8 f_c - 1.0 f_c	± 0.3 dB max. ± 0.15 dB typ.
Total Harmonic Distortion	< -100 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	200 μ V _{RMS} typ.
Narrow Band Noise (5 Hz - 100 kHz)	50 μ V _{RMS} typ.

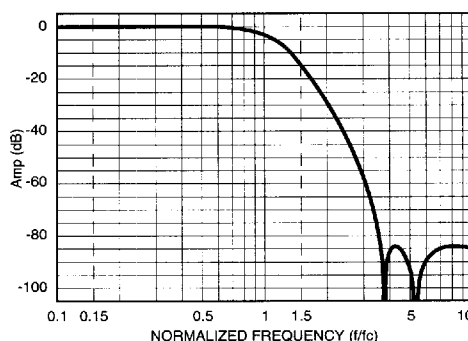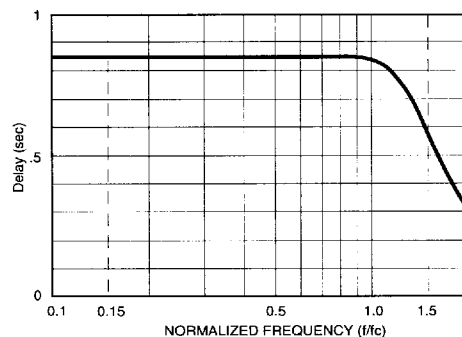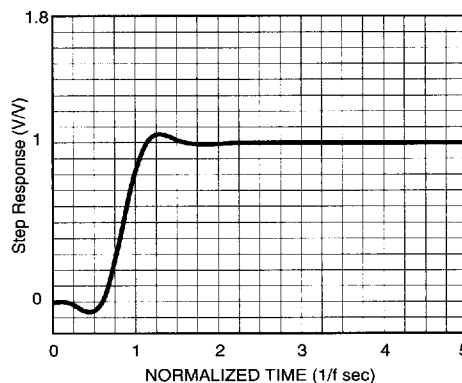Frequency Response

Delay

Step Response


f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.00	0.00	0.00	.852
0.10	0.017	-30.7	.852
0.20	0.058	-61.3	.852
0.30	0.099	-92.0	.852
0.40	0.105	-123	.852
0.50	0.034	-153	.852
0.60	-0.157	-184	.852
0.70	-0.510	-215	.852
0.80	-1.07	-245	.851
0.85	-1.44	-261	.850
0.90	-1.89	-276	.849
0.95	-2.41	-291	.846
1.00	-3.01	-306	.841
1.10	-4.50	-336	.821
1.20	-6.39	-365	.783
1.40	-11.3	-417	.656
1.60	-17.1	-459	.512
1.80	-23.2	-492	.396
2.00	-29.1	-517	.312
2.25	-36.3	-542	.239
2.50	-43.4	-561	.189
2.75	-50.3	-576	.153
3.00	-57.6	-589	.127
3.25	-62.5	-599	.107
3.50	-75.4	-608	.092
3.75	-98.3	-616	.079
4.00	-86.3	-442	.069
4.25	-84.1	-448	.061
4.50	-85.1	-454	.054
4.75	-87.9	-458	.049
5.00	-92.8	-462	.044
5.25	-104	-466	.040
5.50	-101	-289	.036
5.75	-93.3	-293	.033
6.00	-89.9	-295	.030
6.50	-86.6	-300	.026
7.00	-85.1	-305	.022
8.00	-84.1	-312	.017
9.00	-84.3	-317	.013
10.0	-84.9	-321	.011

2. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

1. Normalized Group Delay: The above delay data is normalized to a corner frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual corner frequency (f_c).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency } (f_c) \text{ in Hz}}$$


**FREQUENCY
DEVICES™**
Model D68H8B

Linear Active Filters

8-Pole Butterworth High-Pass Filter


Description

The D68H8B is an 8-pole high-pass filter, is maximally flat, has no ripple in the passband, and has a monotonic roll-up at the rate of 48 dB/octave in the stopband.

Specifications

Transfer Function	8-pole Butterworth High-Pass
Size	1.8" x 0.8" x 0.3"
Range f_c	10 Hz to 100 kHz
Passband Ripple (theoretical)	0.0 dB
Passband Gain (non-inverting)	0 ± 0.2 dB to 100 kHz 0 ± 0.5 dB to 120 kHz
Power Bandwidth	120 kHz
Small Signal Bandwidth	(-6 dB) 1 MHz
Stopband Attenuation Rate	48 dB/octave
Cutoff Frequency f_c	± 1 % max.
Stability	± 0.01 % / °C
Amplitude	-3 dB
Phase	-360°
Filter Attenuation	(theoretical) -83 dB 0.30 f_c -48 dB 0.50 f_c -3.01 dB 1.00 f_c -0.01 dB 1.50 f_c
Phase Match ² f_c - 100 kHz	± 3° max. ± 1.5° typ.
Amplitude Accuracy	(theoretical) 1.0 - 1.25 f_c ± 0.30 dB max. ± 0.15 dB typ. 1.25 f_c - 100 kHz ± 0.20 dB max. ± 0.10 dB typ.
Total Harmonic Distortion	< -100 dB typ.
Wide Band Noise (5 Hz - 2 MHz)	400 μ V _{RMS} typ.
Narrow Band Noise (5 Hz - 100 kHz)	100 μ V _{RMS} typ.

Frequency Response

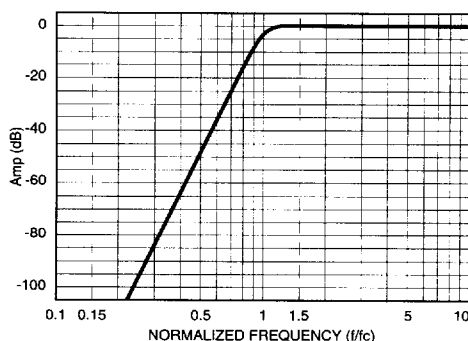

f/f_c (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.10	-160	691	0.819
0.20	-112	661	0.828
0.30	-83.7	631	0.843
0.40	-63.7	600	0.867
0.50	-48.2	568	0.903
0.60	-35.5	535	0.956
0.70	-24.8	499	1.04
0.80	-15.6	459	1.19
0.85	-11.6	437	1.29
0.90	-8.06	413	1.40
0.95	-5.15	386	1.48
1.00	-3.01	360	1.46
1.20	-0.229	275	0.873
1.40	-0.020	226	0.540
1.60	-0.002	194	0.380
1.80	0.00	170	0.287
2.00	0.00	152	0.226
2.50	0.00	120	0.139
3.00	0.00	99.2	0.094
4.00	0.00	74.0	0.052
5.00	0.00	59.0	0.033
6.00	0.00	49.0	0.023
7.00	0.00	42.1	0.017
8.00	0.00	36.8	0.013
9.00	0.00	32.7	0.010
10.0	0.00	29.4	0.008

2. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

1. Normalized Group Delay: The above delay data is normalized to a corner frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual corner frequency (f_c).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Corner Frequency } (f_c) \text{ in Hz}}$$


**FREQUENCY
DEVICES™**
Model D68H8E

8-Pole, 6-Zero Elliptic High-Pass Filter

Linear Active Filters

Description

The D68H8E is an 8-pole, 6-zero elliptic high-pass filter with a theoretical passband ripple of ± 0.035 dB. This response function is a modified Cauchy elliptic function designed by FDI to minimize section "Qs", while maintaining a .035 dB/80 dB shape factor of 1.77, an 82 dB stopband floor, and a 2-pole monotonic roll-up at low frequency.

Specifications

Transfer Function 8-pole, 6-zero
Elliptic High-Pass

Size 1.8" x 0.8" x 0.3"

Range f_r 10 Hz to 100 kHz

Passband Ripple (theoretical)
0 - f_r ± 0.035 dB

Passband Gain 0 ± 0.2 dB to 100 kHz
(non-inverting) 0 ± 0.5 dB to 120 kHz

Power Bandwidth 120 kHz

Small Signal Bandwidth (-6 dB) 1 MHz

Stopband
Attenuation Floor 80 dB

Cutoff Frequency f_r ± 1 % max.
Stability ± 0.01 % / °C
Amplitude -0.035 dB
Phase -323.5°


Filter Attenuation (theoretical)
-80.0 dB 0.56 f_r
-60.0 dB 0.60 f_r
-0.03 dB 1.00 f_r
0.00 dB 2.00 f_r

Phase Match²
0 - 0.8 f_r $\pm 4^\circ$ max.
 $\pm 2^\circ$ typ.
0.8 f_c - 100 kHz $\pm 2^\circ$ max.
 $\pm 1^\circ$ typ.

Amplitude Accuracy (theoretical)
1.00 - 1.25 f_r ± 0.3 dB max.
 ± 0.15 dB typ.
1.25 f_r - 100 kHz ± 0.2 dB max.
 ± 0.1 dB typ.

Total Harmonic Distortion < -100 dB typ.

Frequency Response

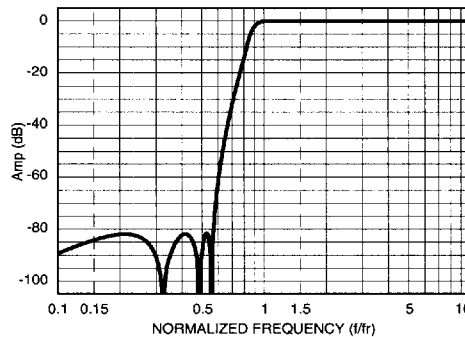

f/f_r (Hz)	Amp (dB)	Phase (deg)	Delay ¹ (sec)
0.10	-89.3	164.3	0.440
0.20	-82.1	148.1	0.459
0.30	-90.6	131.0	0.495
0.40	-82.4	292.2	0.559
0.50	-87.8	450.2	0.671
0.55	-90.0	437.4	0.761
0.60	-60.2	602.6	0.890
0.70	-32.4	563.1	1.37
0.80	-13.1	497.5	2.35
0.85	-6.28	450.8	2.77
0.90	-2.21	401.0	2.66
0.95	-0.51	357.5	2.15
1.00	-0.03	323.5	1.64
1.10	-0.01	276.6	1.04
1.20	-0.05	224.8	0.757
1.30	-0.03	220.6	0.596
1.40	0.01	201.2	0.486
1.50	0.03	185.1	0.409
1.60	0.03	171.6	0.347
1.70	0.03	160.0	0.299
1.80	0.02	150.0	0.260
1.90	0.01	141.1	0.229
2.00	0.01	133.4	0.203
2.50	-0.02	105.0	0.123
3.00	-0.02	86.9	0.083
4.00	-0.02	64.7	0.046
5.00	-0.01	51.6	0.029
6.00	-0.01	42.9	0.020
7.00	-0.01	36.8	0.015
8.00	-0.01	32.1	0.011
9.00	-0.01	28.6	0.009
10.0	0.00	25.7	0.007

2. Unit to unit match for the same transfer function, set to the same frequency and operating configuration, and from the same manufacturing lot.

1. Normalized Group Delay: The above delay data is normalized to a ripple frequency of 1.0 Hz. The actual delay is the normalized delay divided by the actual ripple frequency (f_r).

$$\text{Actual Delay} = \frac{\text{Normalized Delay}}{\text{Actual Ripple Frequency (fr) in Hz}}$$



D68 Series

Pin-Out and Package Data Ordering Information

General Specification

Analog Input Characteristics¹

Impedance	10 k Ω min.
Voltage Range	± 10 V _{peak}
Max. Safe Voltage	$\pm V_s$

Analog Output Characteristics

Impedance(Closed Loop)	1 Ω typ. 10 Ω max.
Linear Operating Range	± 10 V
Maximum Current ²	± 2 mA
Offset Voltage ³	2 mV typ. 20 mV max.

Power Supply ($\pm V_s$)

Rated Voltage	± 15 Vdc
Operating Range	± 5 to ± 20 Vdc
Maximum Safe Voltage	± 20 Vdc
Quiescent Current	
8 Pole	± 25 mA typ. ± 40 mA max.
Low Power Option Available (fc max. 5 kHz)	6 mA



Temperature

Operating	0 to + 70 °C
Storage	- 25 to + 85 °C



Notes:

1. Input and output signal voltage referenced to supply common.
2. Output is short circuit protected to common.
DO NOT CONNECT TO $\pm V_s$.
3. Adjustable to zero.

Optional Offset Adjustment



All dimensions are in inches

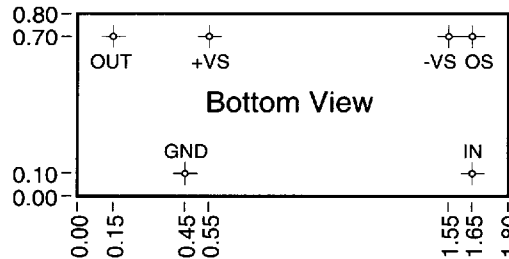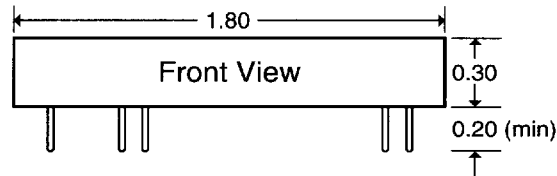

Ordering Information

Filter Type

L - Low Pass
H - High Pass

Transfer Function

B - Butterworth
L - Bessel
D - Constant Delay
E - Elliptic

D68L8B-849 Hz

No. of Poles

- 3 dB Corner Frequency⁴

e.g., 849 Hz
2.50 kHz
33.3 kHz

4. How to Specify Corner Frequencies: Corner frequencies are specified by attaching a three digit frequency designator to the basic model number. Corner frequencies can range from 10 Hz to 100 kHz.

We hope the information given here will be helpful. The information is based on data and our best knowledge, and we considered the information to be true and accurate. Please read all statements, recommendations or suggestions herein in conjunction with our conditions of sale which apply to all goods supplied by us. We assume no responsibility for the use of these statements, recommendations or suggestions, nor do we intend them as a recommendation for any use which would infringe any patent or copyright.

0293-5K.1844

25 Locust Street • Haverhill, Massachusetts 01830 • (508) 374-0761 • FAX (508) 521-1839

