



HD74LS154 ● 4-line-to-16-line Decoders/Demultiplexers

This decoder utilizes TTL circuitry to decode four binary-coded inputs into one of sixteen mutually exclusive outputs when both the strobe inputs, G1 and G2, are low. The demultiplexing function is performed by using the 4 input lines to address the output line, passing data from the one of the strobe inputs with the other strobe input low. When either strobe input is high, all outputs are high.

■ BLOCK DIAGRAM

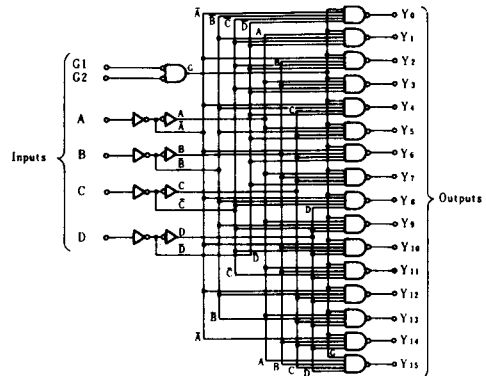

■ PIN ARRANGEMENT

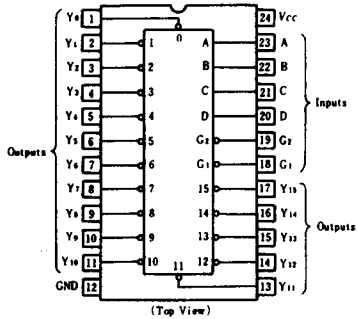

■ FUNCTION TABLE

Inputs						Outputs															
G ₁	G ₂	D	C	B	A	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
L	L	L	L	L	H	H	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H
L	L	L	L	H	L	H	H	L	H	H	H	H	H	H	H	H	H	H	H	H	H
L	L	L	L	H	H	H	H	H	L	H	H	H	H	H	H	H	H	H	H	H	H
L	L	L	H	L	L	H	H	H	H	L	H	H	H	H	H	H	H	H	H	H	H
L	L	L	H	L	H	H	H	H	H	H	L	H	H	H	H	H	H	H	H	H	H
L	L	L	H	H	L	H	H	H	H	H	H	L	H	H	H	H	H	H	H	H	H
L	L	L	H	H	H	H	H	H	H	H	H	L	H	H	H	H	H	H	H	H	H
L	L	H	L	L	L	H	H	H	H	H	H	H	H	L	H	H	H	H	H	H	H
L	L	H	L	L	H	H	H	H	H	H	H	H	H	H	L	H	H	H	H	H	H
L	L	H	L	H	L	H	H	H	H	H	H	H	H	H	H	L	H	H	H	H	H
L	L	H	L	H	H	H	H	H	H	H	H	H	H	H	H	L	H	H	H	H	H
L	L	H	H	L	L	H	H	H	H	H	H	H	H	H	H	H	L	H	H	H	H
L	L	H	H	L	H	H	H	H	H	H	H	H	H	H	H	H	H	L	H	H	H
L	L	H	H	H	L	H	H	H	H	H	H	H	H	H	H	H	H	H	L	H	H
L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L	H
L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L
H	L	×	×	×	×	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
H	H	×	×	×	×	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
H	H	×	×	×	×	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H

* H; high level, L; low level, X; irrelevant

ELECTRICAL CHARACTERISTICS ($T_a = -20 \sim +75^\circ\text{C}$)

Item	Symbol	Test Conditions	min	typ*	max	Unit
Input voltage	V_{IH}		2.0	—	—	V
	V_{IL}		—	—	0.8	V
Output voltage	V_{OH}	$V_{CC}=4.75\text{V}$, $V_{IH}=2\text{V}$, $V_{IL}=0.8\text{V}$, $I_{OH}=-400\mu\text{A}$	2.7	—	—	V
	V_{OL}	$V_{CC}=4.75\text{V}$, $V_{IH}=2\text{V}$, $I_{OL}=4\text{mA}$	—	—	0.4	V
		$V_{IL}=0.8\text{V}$, $I_{OL}=8\text{mA}$	—	—	0.5	V
Input current	I_{IH}	$V_{CC}=5.25\text{V}$, $V_i=2.7\text{V}$	—	—	20	μA
	I_{IL}	$V_{CC}=5.25\text{V}$, $V_i=0.4\text{V}$	—	—	-0.4	mA
	I_i	$V_{CC}=5.25\text{V}$, $V_i=7\text{V}$	—	—	0.1	mA
Short-circuit output current	I_{OS}	$V_{CC}=5.25\text{V}$	-20	—	-100	mA
Supply current **	I_{CC}	$V_{CC}=5.25\text{V}$	—	9	14	mA
Input clamp voltage	V_{IK}	$V_{CC}=4.75\text{V}$, $I_{IN}=-18\text{mA}$	—	—	-1.5	V

* $V_{CC}=5\text{V}$, $T_a=25^\circ\text{C}$


** I_{CC} is measured with all outputs open and all inputs grounded.

SWITCHING CHARACTERISTICS ($V_{CC}=5\text{V}$, $T_a=25^\circ\text{C}$)


Item	Symbol	Inputs	Outputs	Test Conditions	min	typ	max	Unit
Propagation delay time	t_{PLH}	A, B, C, D	$Y_0 \sim Y_{15}$	$C_L=15\text{pF}$, $R_L=2\text{k}\Omega$	—	24	36	ns
	t_{PHL}	A, B, C, D	$Y_0 \sim Y_{15}$		—	22	33	ns
	t_{PLH}	G1, G2	$Y_0 \sim Y_{15}$		—	20	30	ns
	t_{PHL}	G1, G2	$Y_0 \sim Y_{15}$		—	18	27	ns

TESTING METHOD

1) Test Circuit

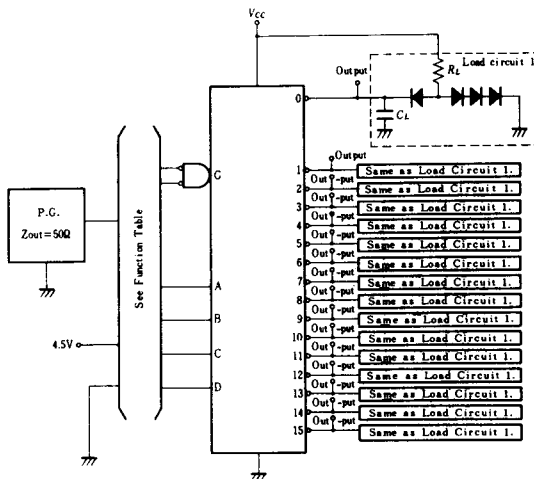

Waveform

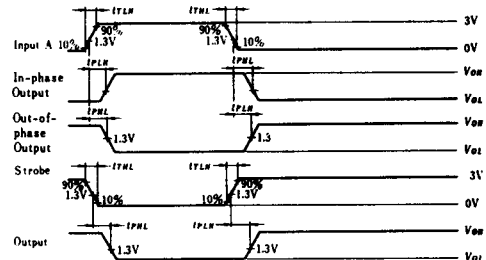

- Notes)
1. Input pulse: $t_{TLH} \leq 15\text{ns}$, $t_{THL} \leq 6\text{ns}$, $PRR=1\text{MHz}$, duty cycle=50%
 2. C_L includes probe and jig capacitance.
 3. All diodes are 1S2074 (H).

PACKAGING INFORMATION

T-90-20


Factory orders for circuits described in this databook should include a three-part type number as explained in the following example.

HD 74LS00 P


Package ; Plastic DIP ; letters P
Cerdip ; non-letters
Circuit description
Prefix : HD ; Hitachi Digital IC

■ Plastic DIP


● 14 Pin

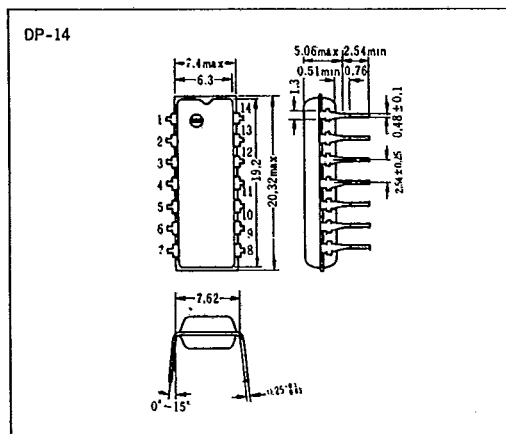


● 16 Pin

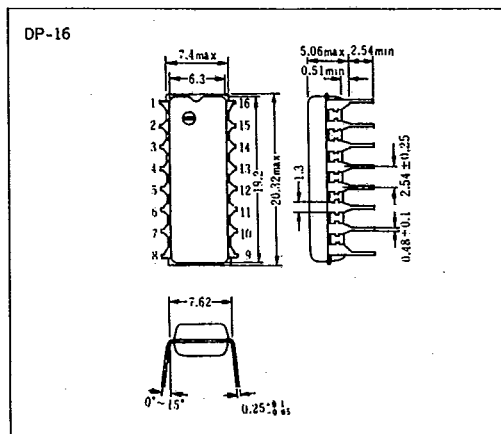

● 20 Pin

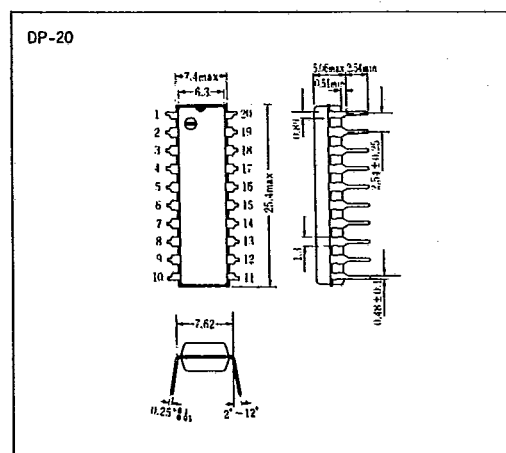

● 24 Pin

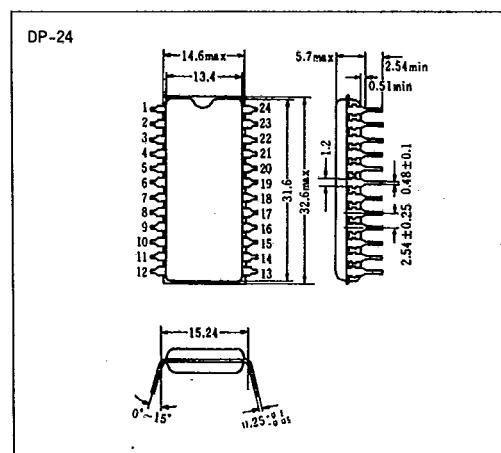


Hitachi America Ltd. • 2210 O'Toole Ave. • San Jose, CA 95131 • (408) 435-8300

T-90-20


PACKAGING INFORMATION

■Cerdip


●14 Pin

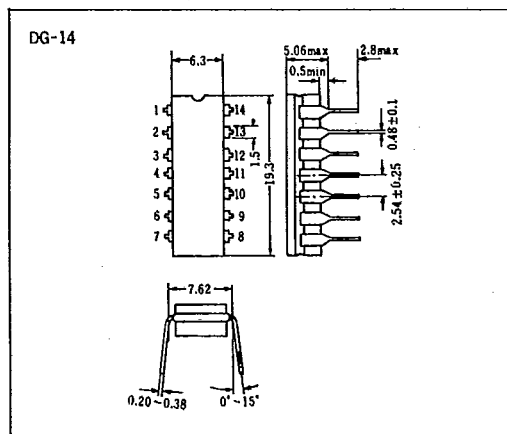

●16 Pin

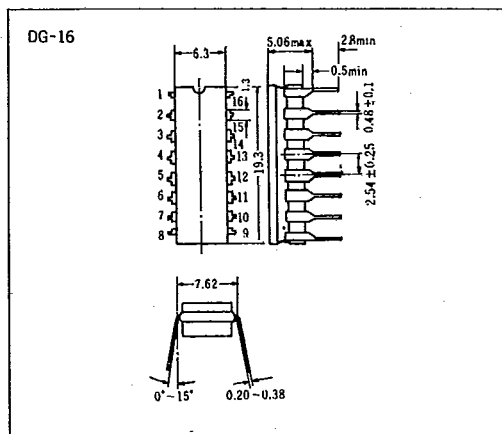

●20 Pin

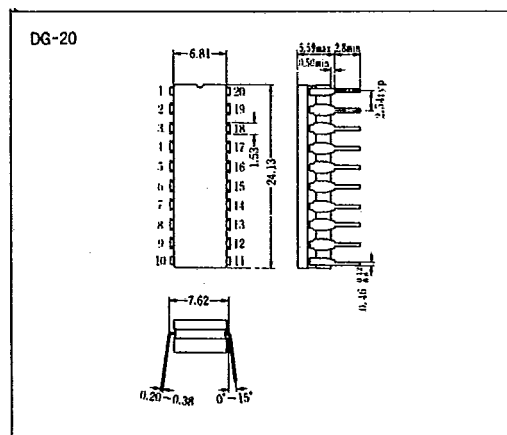

●24 Pin

