

TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic


# **TA1370FG**

**SYNC Processor, Frequency Counter IC for TV Component Signals**

TA1370FG is a sync processor for TV component signals.

TA1370FG provides sync and frequency counter processing for external input signals.

These functions are integrated in a 30 pin SSOP-type plastic package.

TA1370FG provides I<sup>2</sup>C bus interface, so various functions and controls are adjustable via the bus.


SSOP30-P-375-1.00

Weight: 0.63 g (typ.)

## **Features**

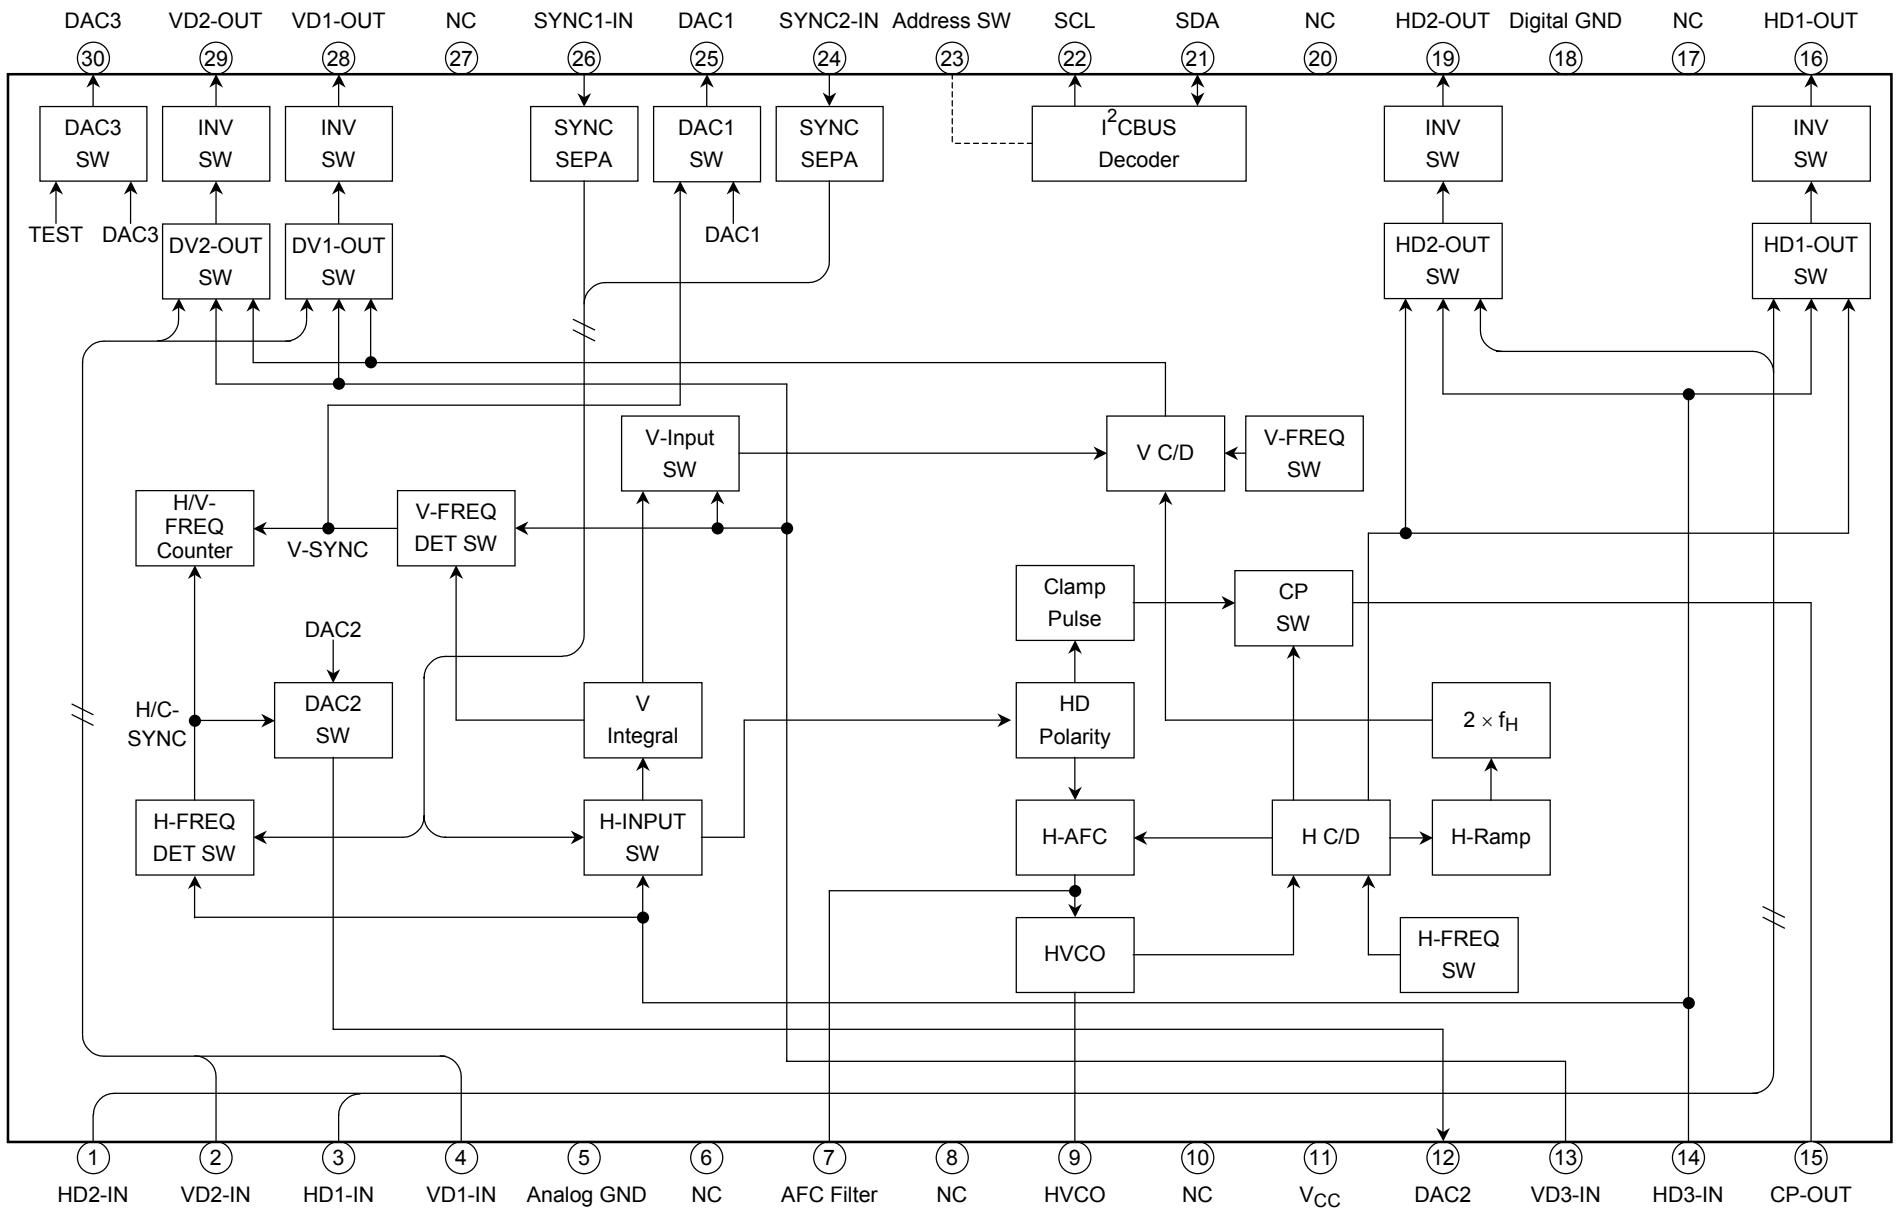- Horizontal synchronization circuit (28.125 kHz, 31.5 kHz, 33.75 kHz, 45 kHz)
- Vertical synchronization circuit (525P, 625P, 750P, 1125I, PAL 100 Hz, NTSC 120 Hz)
- Horizontal and vertical frequency counter
- Horizontal PLL
- Accepts 2-level and 3-level sync
- Accepts both negative and positive HD and VD
- Clamp pulse output
- HD, VD output (polarity inverter)
- Separated sync output
- Mask for the copy guard signal



## Block Diagram








## Pin Functions

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
1	HD2-IN	<p>Input horizontal sync signal. It accepts input of both positive and negative polarity. Input signal from this pin is not synchronized.</p>		
2	VD2-IN	<p>Input vertical sync signal. It accepts input of both positive and negative polarity. Input signal from this pin is not synchronized.</p>		

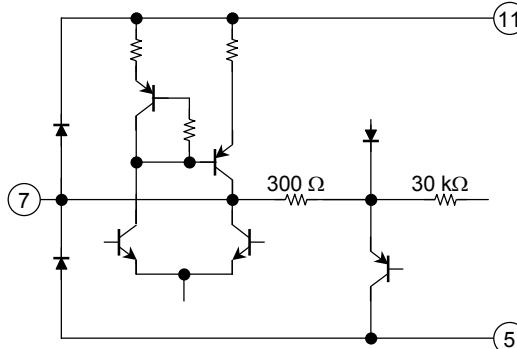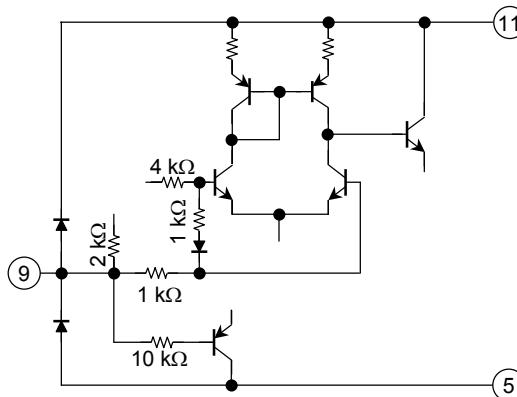Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
3	HD1-IN	<p>Input horizontal sync signal. It accepts input of both positive and negative polarity. Input signal from this pin is not synchronized.</p>		 or 
4	VD1-IN	<p>Input vertical sync signal. It accepts input of both positive and negative polarity. Input signal from this pin is not synchronized.</p>		 or 
5	Analog GND	GND pin for analog circuit blocks.	—	—
6	N.C.	Connect to GND.	—	—

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
7	AFC Filter	Connect filter for horizontal AFC. Voltage on this pin determines horizontal output frequency.		DC
8	N.C.	Connect to GND.	—	—
9	HVCO	Connect ceramic oscillator for horizontal oscillation. Use Murata CSBLA503KECF30.		—
10	N.C.	Connect to GND.	—	—
11	V <sub>CC</sub>	VCC pin. Connect 9 V (typ.).	—	—

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
12	DAC2 (H/C. SYNC output)	<p>DAC2 output pin. In Test mode, it outputs HD or composite sync signal to frequency counter.</p> <p>To improve the driving ability, it is possible to connect a resistor (minimum: 2 kΩ) between this pin and GND. However, when the resistor is added, the output DC voltage is down.</p>		<p>DC or H/C SYNC</p>
13	VD3-IN	<p>Input vertical sync signal. It accepts input of both positive and negative polarity.</p>		<p>Th: 0.7 V</p> <p>or</p> <p>Th: 0.7 V</p>
14	HD3-IN	<p>Input horizontal sync signal. It accepts input of both positive and negative polarity.</p>		<p>Th: 0.7 V</p> <p>or</p> <p>Th: 0.7 V</p>

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
15	CP-OUT	Clamp pulse (CP) output pin. It outputs CP generated by sync circuit.		
16	HD1-OUT	HD output pin. Open collector output. HD1/HD2 input signals are output from this pin without synchronization. Polarity is switched by BUS write function.		 or 
17	N.C.	Connect to GND.	—	—
18	Digital GND	GND pin for logic blocks.	—	—

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
19	HD2-OUT	<p>HD output pin. Open collector output.</p> <p>HD1/HD2 input signals are output from this pin without synchronization.</p> <p>Polarity is switched by BUS write function.</p>		
20	N.C.	Connect to GND.	—	—
21	SDA	SDA pin for I <sup>2</sup> C bus.		—

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
22	SCL	SCL pin for I <sup>2</sup> C bus.	<p>The circuit diagram shows an open-drain output stage. The output (Pin 11) is connected to ground through a diode and to V<sub>CC</sub> through a 20 kΩ resistor. The SCL signal is generated by an inverter stage. The inverter has a 100 kΩ resistor from its input to ground and a 1 kΩ resistor from its output to V<sub>CC</sub>. The output of this inverter is connected to the base of a PNP transistor, which is connected to the SCL line. The collector of this PNP transistor is connected to ground through a 20 kΩ resistor. The emitter of this PNP transistor is connected to the base of another PNP transistor, which is connected to the output (Pin 11). The collector of this second PNP transistor is connected to V<sub>CC</sub> through a 4 V<sub>F</sub> diode. The base of this second PNP transistor is connected to the output of a third inverter stage. This third inverter has a 100 kΩ resistor from its input to ground and a 15 kΩ resistor from its output to V<sub>CC</sub>.</p>	—
23	Address SW	Slave address switch pin. When this pin is connected to V <sub>CC</sub> (GND), used for DC/DD <sub>H</sub> (D8/D9 <sub>H</sub> ); when left open, DA/DB <sub>H</sub> .	<p>The circuit diagram shows a switchable voltage source for the Address SW pin. The output (Pin 11) is connected to V<sub>CC</sub> through a 100 kΩ resistor. The Address SW pin (Pin 23) is connected to ground through a 100 kΩ resistor. The output of the Address SW pin is connected to the base of a PNP transistor. The collector of this PNP transistor is connected to the output (Pin 11) through a 15 kΩ resistor. The emitter of this PNP transistor is connected to ground through a 60 kΩ resistor. The collector of this PNP transistor is also connected to the base of another PNP transistor. The collector of this second PNP transistor is connected to V<sub>CC</sub> through a 1.5 kΩ resistor. The emitter of this second PNP transistor is connected to ground through a 100 kΩ resistor. The base of this second PNP transistor is connected to the output of a third inverter stage. This third inverter has a 100 kΩ resistor from its input to ground and a 15 kΩ resistor from its output to V<sub>CC</sub>.</p>	DC/DD 9 V DC/DD 7.5 V DA/DB DA/DB 1.5 V D8/D9 1.5 V D8/D9 0 V

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
24	SYNC2-IN	<p>Input Y signal (Note 1) for sync separation circuit. Input via clamp capacitor.</p>		<p>White 100% = 1 V<sub>p-p</sub></p> <p>or</p>
25	DAC1 (V SYNC output)	<p>DAC1 output pin. In Test mode, it outputs VD or composite sync signal to frequency counter.</p> <p>To improve the driving ability, it is possible to connect a resistor (minimum: 2 kΩ) between this pin and GND. However, when the resistor is added, the output DC voltage is down.</p>		<p>DC or V SYNC</p>

Note 1: The signal format for SYNC1-IN (pin 26) and SYNC2-IN (pin 24)

525P/60 Hz, 625P/50Hz, 750P/60 Hz, 1125I/60 Hz, 1125I/50 Hz, NTSC Double Scan (525I/120 Hz), PAL/SECAM Double Scan (625I/100 Hz)

This IC doesn't have the sync-separation circuit for non-standard signals like weak strength signal, ghost signal and so on.

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
26	SYNC1-IN	<p>Input Y signal (Note 1) for sync separation circuit. Input via clamp capacitor.</p>		<p>White 100% = 1 V<sub>p-p</sub></p>
27	N.C.	Connect to GND.	—	—
28	VD1-OUT	<p>VD output pin. Open collector output. VD1/VD2 input signals are output from this pin without synchronization. Polarity is switched by BUS write function. (Note) When HD PHASE will be changed, synchronized VD width will change. Use the start phase of VD.</p>		

Note 1: The signal format for SYNC1-IN (pin 26) and SYNC2-IN (pin 24)

525P/60 Hz, 625P/50Hz, 750P/60 Hz, 1125I/60 Hz, 1125I/50 Hz, NTSC Double Scan (525I/120 Hz), PAL/SECAM Double Scan (625I/100 Hz)

This IC doesn't have the sync-separation circuit for non-standard signals like weak strength signal, ghost signal and so on.

Pin No.	Pin Name	Function	Interface Circuit	Input Signal/Output Signal
29	VD2-OUT	<p>VD output pin. Open collector output. VD1/VD2 input signals are output from this pin without synchronization. Polarity is switched by BUS write function. (Note) When HD PHASE will be changed, synchronized VD width will change. Use the start phase of VD.</p>		<p>Start phase or Start phase</p>
30	DAC3	<p>DAC3 output pin. Open collector output. In Test mode, outputs test pulse for shipping.</p>		<p>DC or test pulse for shipping</p>

## Bus Control Map

### Write Mode

#### Slave Address: D8/DA/DC<sub>H</sub>

Sub-Add	D7 MSB	D6	D5	D4	D3	D2	D1	D0 LSB	Preset MSB	LSB
00	H-FREQUENCY		HD1/VD1-OUT SW		HD2/VD2-OUT SW		SEPA LEVEL	1000	0000	
01	DAC1		DAC2		DAC3	TEST	HD1-INV	HD2-INV	1000	0000
02	V-FREQUENCY		CLP-PHS		FREQ DET SW		INPUT SW	1000	0000	
03			HD PHASE				VD1-INV	VD2-INV	1000	0000

### Read Mode

#### Slave Address: D9/DB/DD<sub>H</sub>

	D7 MSB	D6	D5	D4	D3	D2	D1	D0 LSB
0	POR				V FREQUENCY DET			
1	HD-IN				H FREQUENCY DET			

## Bus Control Functions

### Write Mode (\*: Preset)

- H-FREQUENCY (Horizontal oscillation frequency)
  - Switches horizontal frequency.  
(00): 28.125 kHz    (01): 31.5 kHz (31.25 kHz)    \*(10): 33.75 kHz    (11): 45 kHz  
Horizontal frequency become 31.25 kHz when H-FREQUENCY = (01) and V-FREQUENCY = (001)
- HD1/VD1-OUT SW (HD1/VD1 output switch)
  - Switches output from pin 16/28. When set to 00, 01, or 10, outputs HD/VD without synchronization.  
When set to 11, outputs HD/VD from the sync circuit. (Note) Synchronized VD width will change, when HD PHASE will be changed.  
\*(00): HD1/VD1    (01): HD2/VD2    (10): HD3/VD3    (11): Synchronized HD/VD
- HD2/VD2-OUT SW (HD2/VD2 output switch)
  - Switches output from pin 19/29. When set to 00, 01, or 10, outputs HD/VD without synchronization.  
When set to 11, outputs HD/VD from the sync circuit. (Note) Synchronized VD width will change, when HD PHASE will be changed.  
\*(00): HD1/VD1    (01): HD2/VD2    (10): HD3/VD3    (11): Synchronized HD/VD
- SEPA LEVEL (Sync separation level switch)
  - Switches sync separation level of pin 24/26. Set values are the levels from sync tip. Sync separation level is changed according to the ratio of H-SYNC width during 1H period. (Note) This IC doesn't have the sync-separation circuit for non-standard signals like weak strength signal, ghost signal and so on.  
\*(00): 10IRE    (01): 15IRE    (10): 20IRE    (11): 25IRE (at 1125I/60)
- DAC1 (DAC1 control)
  - Controls 2-bit DAC (pin 12).  
(00): 1 V    (01): 3 V    \*(10): 5 V    (11): 7 V
- DAC2 (DAC2 control)
  - Controls 2-bit DAC (pin 25).  
\*(00): 1 V    (01): 3 V    (10): 5 V    (11): 7 V
- DAC3 (DAC3 control)
  - Controls open collector 1-bit DAC (pin 30).  
\*(0): OPEN (HIGH)    (1): ON (LOW)
- TEST (Test mode)
  - Switches DAC1, 2, and 3 outputs. Also used to test IC for shipping.  
\*(0): DAC outputs are used as DAC.  
(1): DAC1 outputs V. SYNC to the frequency counter.  
DAC2 outputs H. SYNC or C. SYNC to the frequency counter.  
DAC3 outputs IC test pulse for shipping.

- HD1-INV (HD1 output polarity switch)
 

Switches HD1 output (pin 16) polarity. When set to 0, positive HD input is output as negative HD. When set to 0, output from the sync circuit is output as negative HD.

\*(0): Normal (1): Inverse
- HD2-INV (HD2 output polarity switch)
 

Switches HD1 output (pin 19) polarity. When set to 0, positive HD input is output as negative HD. When set to 0, output from the sync circuit is output as negative HD.

\*(0): Normal (1): Inverse
- V-FREQUENCY (Vertical frequency switch (pull-in range))
 

Sets vertical frequency pull-in range, VD-STOP, or free-running frequency.  
Free-running frequency is controlled by H-FREQUENCY.

	Pull-in Range	Format/H (V) Frequency
*(000)	48~849 H	750P/60 Hz (45 kHz)
(001)	48~725 H	625P/50 Hz (31.25 kHz)
(010)	FREE-RUN	Free-running frequency is controlled by H-FREQUENCY. (00): 562 H (01): 525 H (10): 562 H (11): 750 H
(011)	48~637 H	1125I/60 Hz (33.75 kHz), 1125I/50Hz (28.125 kHz)
(100)	48~613 H	525P/60 Hz (31.5 kHz)
(101)	48~363 H	PAL/SECAM double scan/100 Hz (31.5 kHz)
(110)	48~307 H	NTSC double scan /120 Hz (31.5 kHz)
(111)	VD STOP	VD output is HIGH

- CLP PHS (Clamp pulse phase switch)
 

Switches clamp pulse phase.  
If no signal input, 0.9 μs pulse is output from the H-C/D circuit.

\*(0): 1 μs (3.4%) delay following HD stop phase, 0.8 μs (2.7%) pulse  
(1): 0.5 μs (1.7%) delay following HD stop phase, 0.8 μs (2.7%) pulse
- FREQ DET SW (Horizontal/vertical frequency counter switch)
 

Switches input signal used for horizontal/vertical frequency counter. This switch is controlled independently from INPUT SW. The detection result is output as read BUS data.

\*(00): SYNC1 input (01): SYNC2 input (10)/(11): HD3/VD3 inputs
- INPUT SW (Input signal switch for synchronization)
 

Switches input signal used for synchronization.

\*(00): SYNC1 input (01): SYNC2 input (10)/(11): HD3/VD3 inputs
- HD PHASE (HD phase adjustment)
 

Adjusts phase of HD output from the sync circuit. The phase of the adjustment center value is the same as that of input H-SYNC or input HD. (Note) Synchronized VD width will change, when HD PHASE will be changed.

(000000): -5% (H periodically)  
\*(100000): 0%  
(111111) : 5%
- VD1-INV (VD1 output polarity switch)
 

Switches VD1 output (pin 28) polarity. When set to 0, negative VD input is output as negative VD. When set to 0, output from the sync circuit is output as negative VD.

\*(0): Normal (1): Inverse
- VD2-INV (VD2 output polarity switch)
 

Switches VD2 output (pin 29) polarity. When set to 0, negative VD input is output as negative VD. When set to 0, output from the sync circuit is output as negative VD.

\*(0): Normal (1): Inverse

### Read Mode

- POR (Power on reset)
  - (0): Status read (at second data read and subsequent)
  - (1): Power on (at first data read)
- HD-IN (Input signal self-check result)
  - Detects HD or H-SYNC input signal selected by INPUT SW.
  - (0): No signal input (1): Signal input
- V FREQ DET (Vertical frequency of SYNC or VD input selected by FREQ DET SW)
  - (0000000)~(0001100): No-VD
  - (0001101): Vicinity of 162 Hz
  - (1111111) : Vicinity of 17 Hz

How to calculate vertical frequency (X):

Convert V-FREQ DET read data into decimal and define the resulting value as Y.

Where H-FREQUENCY is 31.5 kHz, Z = 476.2  $\mu$ s

Where H-FREQUENCY is 28.125 kHz/33.75 kHz/45 kHz, Z = 474.1  $\mu$ s

$$\text{Vertical frequency (X)} = 1 \div (Y \times Z) [\text{Hz}]$$

Error of Y is +1, -0. If vertical frequency is 162 Hz or more, the frequency cannot be accurately measured. Time constant used to separate V.SYNC from integrated C.SYNC is 9  $\mu$ s (error:  $\pm 1 \mu$ s).

- H FREQ DET (Horizontal frequency of SYNC or HD input selected by FREQ DET SW)
  - (0000000): No signal input (1111111): 53 kHz or more

How to calculate horizontal frequency (X):

X, Y, and Z are defined same as for V FREQ.

$$\text{Horizontal frequency (X)} = Y \div (5 \times Z) [\text{kHz}]$$

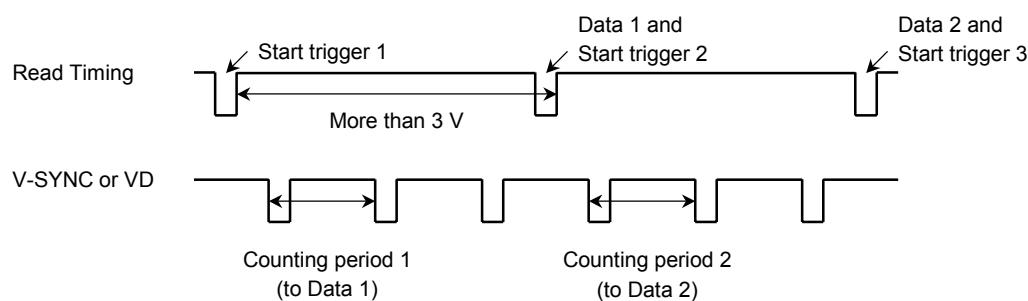
Error of Y is +1, -0. If horizontal frequency is 53 kHz or more, the frequency cannot be accurately measured. When V-SYNC or VD is not input, horizontal frequency cannot be measured, resulting in data = (0000000).

Note: The start trigger for frequency counting is the internal reset-pulse made from ACK of 2nd byte in BUS read mode. The counting period is between the first V-sync (VD) and the second V-sync (VD) after the trigger.

The counted data will have +1 or -0 error according to the read timing.

To assume stable data reading;

1. Set BUS reading interval more than 3 V.
  2. Don't use the first data because it is unsettled.
- are recommended.




Decision algorithm (detection range, detection times and so on) should be determined under consideration of Note 1, Note 2 and the other factors such as signal strength, existence of ghost signal, H-AFC stability, I<sup>2</sup>C BUS data transmission and so on via prototype TV set evaluation.

## Data Transfer Format via I<sup>2</sup>C BUS

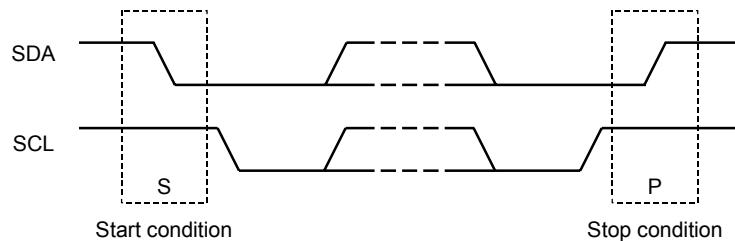
### Slave Address: D8/DA/DC<sub>H</sub>

A6	A5	A4	A3	A2	A1	A0	W/R
1	1	0	1	1	0/1	0/1	0/1


### Start and Stop Condition




### Bit Transfer

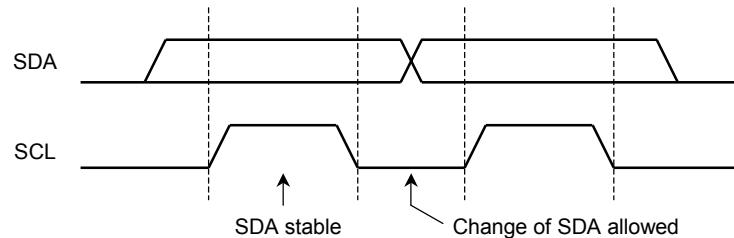


### Acknowledge

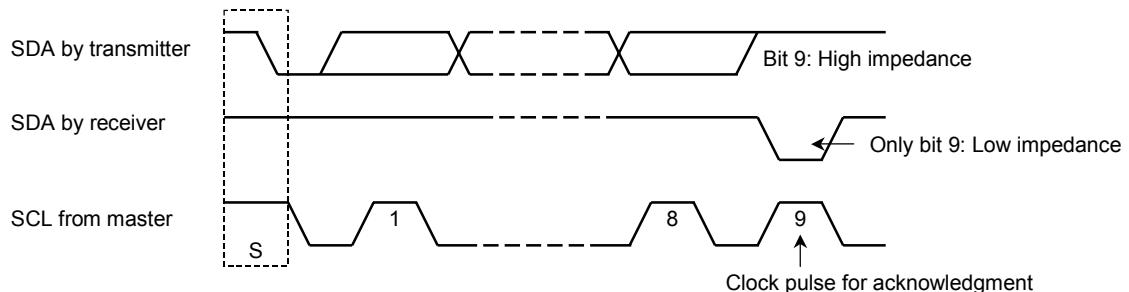


## Data Transmit Format 1

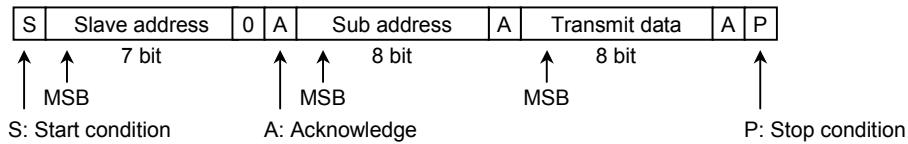

## Data Transmit Format 2

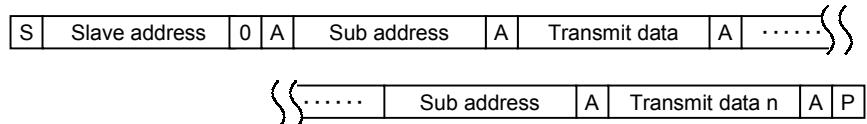

## Data Receive Format



At the moment of the first acknowledge, the master transmitter becomes a master receiver and the slave transmitter. This acknowledge is still generated by this slave.

The Stop condition is generated by the master.

(\* important) The data read from THIS IC should always be completed in whole two words, not one word, otherwise the IICBUS may cause error.

### **Optional Data Transmit Format: Automatic Increment Mode**



In this transmission method, data is set on automatically incremented sub-address from the specified sub-address.


Purchase of TOSHIBA I<sup>2</sup>C components conveys a license under the Philips I<sup>2</sup>C Patent Rights to use these components in an I<sup>2</sup>C system, provided that the system conforms to the I<sup>2</sup>C Standard Specification as defined by Philips.

**Maximum Ratings (Ta = 25°C)**

Characteristics	Symbol	Rating	Unit
Supply voltage	V <sub>CCmax</sub>	12	V
Input pin signal voltage	e <sub>inmax</sub>	9	V <sub>p-p</sub>
Power dissipation	P <sub>D</sub> (Note1)	1136	mW
Power dissipation reduction rate	1/θ <sub>ja</sub>	9.1	mW/°C
Operating temperature	T <sub>opr</sub>	-20 to 75	°C
Storage temperature	T <sub>stg</sub>	-55 to 150	°C

Note 1: Refer to the figure below.

Note 2: It is possible that this IC function faultily caused by leak problems according to a field intensity from CRT.  
Put this IC lay-out position to CRT be far more than 20 cm. If there is not enough distance, intercept it by a shield.

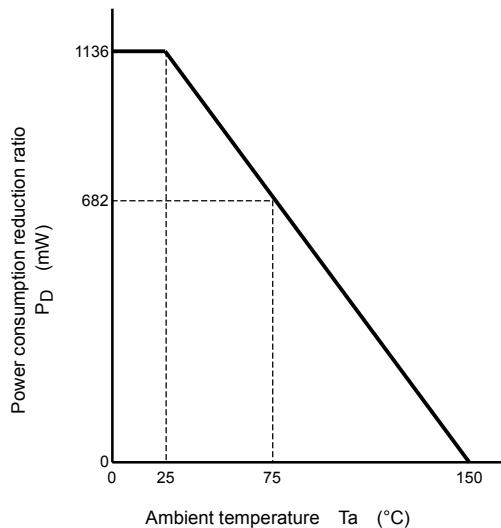

**Figure PD - Ta Curve**

## Operating Condition

Characteristics		Description		Min	Typ.	Max	Unit
Power supply voltage (V <sub>CC</sub> )		Pin 11		8.5	9.0	9.5	V
HD1, HD2, HD3 Input level		Pin 3, 1, 14		2.0	5.0	9.0	V <sub>p-p</sub>
VD1, VD2, VD3 Input level		Pin 4, 2, 13		2.0	5.0	9.0	
HD3 input width	Synchronization	Pin 14		0.02	—	0.20	H
	Frequency detection	Pin 14		0.45 μs	—	0.25H	—
VD3 input width	Synchronization	Pin 13		1 μs	—	47H	—
	Frequency detection	Pin 13		1	—	400	μs
SYNC1, SYNC2 Input level		Pin 26, 24, white 100% with negative sync		0.9	1.0	1.1	V <sub>p-p</sub>
HD1, HD2, VD1, VD2-OUT Input current		Pin 16, 19, 28, 29		—	0.9	1.5	mA
DAC3 Input current		Pin 30		—	0.5	1.0	
Address switching voltage	Pin 23	D8/D9 <sub>H</sub>		0	0	1.0	V
		DC/DD <sub>H</sub>		8.0	9.0	9.0	

**Electrical Characteristics ( $V_{CC} = 9$  V,  $T_a = 25^\circ\text{C}$ , unless otherwise specified)****Current Dissipation**

Pin Name	Symbol	Test Circuit	Min	Typ.	Max	Unit
$V_{CC}$	$I_{CC}$	—	32	38	44	mA

**AC Characteristics****Horizontal Block**

Characteristics	Symbol	Test Circuit	Test Condition			Min	Typ.	Max	Unit
Sync1/2 input horizontal sync phase	$S_{1PH}$	—	(Note HA01)	0.6	0.7	0.8	$\mu\text{s}$		
	$S_{2PH}$	—		0.6	0.7	0.8			
HD3 input horizontal sync phase	$HD_{3PH}$	—	(Note HA02)	0.6	0.7	0.8	$\mu\text{s}$		
Polarity distinction active range	$HD\text{-DUTY1}$	—	(Note HA03)	61	66	71	$\%$		
	$HD\text{-DUTY2}$	—		48	53	58			
Sync1 input threshold amplitude Sync2 input threshold amplitude	$V_{thS10}$	—	(Note HA04)	0.040	0.070	0.100	$\text{V}_{\text{p-p}}$		
	$V_{thS11}$	—		0.060	0.106	0.152			
	$V_{thS12}$	—		0.081	0.142	0.203			
	$V_{thS13}$	—		0.102	0.178	0.255			
	$V_{thS20}$	—		0.040	0.070	0.100			
	$V_{thS21}$	—		0.060	0.106	0.152			
	$V_{thS22}$	—		0.081	0.142	0.203			
	$V_{thS23}$	—		0.102	0.178	0.255			
HD3 input threshold amplitude (Synchronization block)	$V_{thHD3}$	—	(Note HA05)	0.65	0.75	0.85	$\text{V}_{\text{p-p}}$		
HD1 input threshold voltage HD2 input threshold voltage HD3 input threshold voltage (SW block)	$V_{thHD1}$	—	(Note HA06)	0.65	0.75	0.85	$\text{V}_{\text{p-p}}$		
	$V_{thHD2}$	—		0.65	0.75	0.85			
	$V_{thHD3}$	—		0.65	0.75	0.85			
HD output phase adjustment variable range	$\Delta HP0-$	—	(Note HA07)	1.60	1.78	1.96	$\mu\text{s}$		
	$\Delta HP0+$	—		1.60	1.78	1.96			
	$\Delta HP1-$	—		1.43	1.59	1.75			
	$\Delta HP1+$	—		1.43	1.59	1.75			
	$\Delta HP2-$	—		1.33	1.48	1.63			
	$\Delta HP2+$	—		1.33	1.48	1.63			
	$\Delta HP3-$	—		1.00	1.11	1.22			
	$\Delta HP3+$	—		1.00	1.11	1.22			
Clamp pulse phase/width/level	$CP_{S0}$	—	(Note HA08)	0.85	1.00	1.15	$\mu\text{s}$		
	$CP_{W0}$	—		0.65	0.80	0.95			
	$CP_{V0}$	—		4.7	5.0	5.3			
	$CP_{S1}$	—		0.35	0.50	0.65	$\mu\text{s}$		
	$CP_{W1}$	—		0.65	0.80	0.95			
	$CP_{V1}$	—		4.7	5.0	5.3			
	$CP_{S3}$	—		0	—	1	$\mu\text{s}$		
	$CP_{W3}$	—		0.50	0.90	1.30			
	$CP_{V3}$	—		4.7	5.0	5.3			

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Delayed HD pulse width	W <sub>d</sub> -HD	—	(Note HA09)	1.0	1.2	1.4	μs
HD1 output voltage	V16TH0	—	—	4.5	5.0	5.5	V
	V16TL0	—		—	0.1	0.5	
	V16TH1	—		4.5	5.0	5.5	
	V16TL1	—		—	0.1	0.5	
	V16TH2	—		4.5	5.0	5.5	
	V16TL2	—		—	0.1	0.5	
	V16TH3	—		4.5	5.0	5.5	
	V16TL3	—		—	0.1	0.5	
HD2 output voltage	V19TH0	—	—	4.5	5.0	5.5	V
	V19TL0	—		—	0.1	0.5	
	V19TH1	—		4.5	5.0	5.5	
	V19TL1	—		—	0.1	0.5	
	V19TH2	—		4.5	5.0	5.5	
	V19TL2	—		—	0.1	0.5	
	V19TH3	—		4.5	5.0	5.5	
	V19TL3	—		—	0.1	0.5	
HD1 output voltage (polarity inverse)	V16IH0	—	—	4.5	5.0	5.5	V
	V16IL0	—		—	0.1	0.5	
	V16IH1	—		4.5	5.0	5.5	
	V16IL1	—		—	0.1	0.5	
	V16IH2	—		4.5	5.0	5.5	
	V16IL2	—		—	0.1	0.5	
	V16IH3	—		4.5	5.0	5.5	
	V16IL3	—		—	0.1	0.5	
HD2 output voltage (polarity inverse)	V19IH0	—	—	4.5	5.0	5.5	V
	V19IL0	—		—	0.1	0.5	
	V19IH1	—		4.5	5.0	5.5	
	V19IL1	—		—	0.1	0.5	
	V19IH2	—		4.5	5.0	5.5	
	V19IL2	—		—	0.1	0.5	
	V19IH3	—		4.5	5.0	5.5	
	V19IL3	—		—	0.1	0.5	
AFC phase detection current	ID1	—	(Note HB01)	310	385	460	μA
	ID2	—		310	385	460	
	ID3	—		520	650	780	
	ID4	—		520	650	780	
VCO oscillation start voltage	V <sub>VCO</sub>	—	(Note HB02)	3.9	4.2	4.5	V
HD output pulse width (free-run)	TH00	—	(Note HB03)	1.4	1.8	2.2	μs
	TH01	—		1.4	1.8	2.2	
	TH10	—		1.4	1.8	2.2	
	TH11	—		1.4	1.8	2.2	

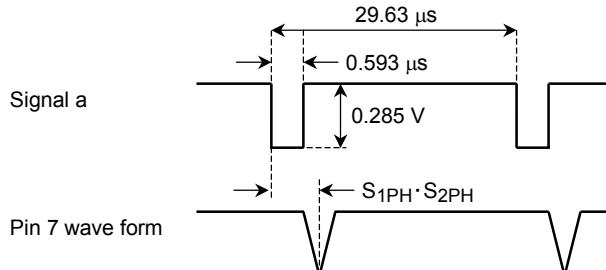
Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Horizontal free-run frequency	F00	—	(Note HB04)	27.84	28.125	28.41	kHz
	F01	—		31.19	31.5	31.82	
	F10	—		33.41	33.75	34.09	
	F11	—		44.55	45	45.45	
	F50	—		30.94	31.25	31.56	
Horizontal oscillation control sensitivity	BH00	—	(Note HB05)	43	54	65	kHz/V
	BH01	—		48	60	72	
	BH10	—		48	60	72	
	BH10	—		71	89	107	
DAC1 output voltage	VDAC10	—	—	0.5	1.0	1.5	V
	VDAC11	—		2.7	3.0	3.3	
	VDAC12	—		4.7	5.0	5.3	
	VDAC13	—		6.5	7.0	7.5	
DAC2 output voltage	VDAC20	—	—	0.5	1.0	1.5	V
	VDAC21	—		2.7	3.0	3.3	
	VDAC22	—		4.7	5.0	5.3	
	VDAC23	—		6.5	7.0	7.5	
DAC3 output voltage	VDAC30	—	—	—	0.5	0.7	V
	VDAC31	—		8.5	8.8	—	

## Vertical Block



Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
VD1 input threshold voltage VD2 input threshold voltage VD3 input threshold voltage (SW block)	V <sub>thVD1</sub>	—	(Note VA01)	0.65	0.75	0.85	Vp-p
	V <sub>thVD2</sub>	—		0.65	0.75	0.85	
	V <sub>thVD3</sub>	—		0.65	0.75	0.85	
VD3 input threshold voltage (synchronization block)	V <sub>thVD3</sub>	—	(Note VA02)	0.65	0.75	0.85	Vp-p
VD1 output voltage	V28TH0	—	—	4.5	5.0	5.5	V
	V28TL0	—		—	0.1	0.5	
	V28TH1	—		4.5	5.0	5.5	
	V28TL1	—		—	0.1	0.5	
	V28TH2	—		4.5	5.0	5.5	
	V28TL2	—		—	0.1	0.5	
	V28TH3	—		4.5	5.0	5.5	
	V28TL3	—		—	0.1	0.5	
VD2 output voltage	V29TH0	—	—	4.5	5.0	5.5	V
	V29TL0	—		—	0.1	0.5	
	V29TH1	—		4.5	5.0	5.5	
	V29TL1	—		—	0.1	0.5	
	V29TH2	—		4.5	5.0	5.5	
	V29TL2	—		—	0.1	0.5	
	V29TH3	—		4.5	5.0	5.5	
	V29TL3	—		—	0.1	0.5	
VD1 output voltage (polarity inverse)	V28IH0	—	—	4.5	5.0	5.5	V
	V28IL0	—		—	0.1	0.5	
	V28IH1	—		4.5	5.0	5.5	
	V28IL1	—		—	0.1	0.5	
	V28IH2	—		4.5	5.0	5.5	
	V28IL2	—		—	0.1	0.5	
	V28IH3	—		4.5	5.0	5.5	
	V28IL3	—		—	0.1	0.5	
VD2 output voltage (polarity inverse)	V29IH0	—	—	4.5	5.0	5.5	V
	V29IL0	—		—	0.1	0.5	
	V29IH1	—		4.5	5.0	5.5	
	V29IL1	—		—	0.1	0.5	
	V29IH2	—		4.5	5.0	5.5	
	V29IL2	—		—	0.1	0.5	
	V29IH3	—		4.5	5.0	5.5	
	V29IL3	—		—	0.1	0.5	
Vertical output pulse width	VP <sub>W0</sub>	—	(Note VA03)	140	160	180	μs
	VP <sub>W1</sub>	—		126	143	160	
	VP <sub>W2</sub>	—		117	133	150	
	VP <sub>W3</sub>	—		88	100	112	


Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Vertical free-run frequency	FV0	—	(Note VA04)	39.21	39.75	40.30	Hz
	FV1	—		45.89	46.55	47.25	
	FV3	—		52.20	52.98	53.77	
	FV4	—		54.25	55.06	55.89	
	FV5	—		91.28	92.98	94.69	
	FV6	—		107.8	109.9	112.1	
	FV20	—		47.0	50.0	53.0	
	FV21	—		57.0	60.0	63.0	
	FV22	—		57.0	60.0	63.0	
	FV23	—		57.0	60.0	63.0	
Vertical pull-in range	FVPL0	—	(Note VA05)	311	321	332	Hz
	FVPL1	—		624	643	663	
	FVPL2	—		668	689	710	
	FVPL3	—		891	918	947	
Sync input-VD output phase difference	28.125 kHz	—	—	6.2	7.4	8.6	μs
	31.50 kHz	—		5.7	6.8	7.9	
	33.75 kHz	—		5.3	6.4	7.5	
	45.00 kHz	—		4.4	5.2	6.0	

## Test Conditions and Measuring Method

Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9$ V, $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
HA01	Sync1/2 input horizontal sync phase	c	b	a ↓ b	b ↓ a	<p>(1) Set sub-address (00) 80.</p> <p>(2) SW24-a and SW26-b.</p> <p>(3) Input Signal a (horizontal 33.75 kHz) to pin 26 (SYNC1-IN).</p> <p>(4) Set sub-address (02) 00.</p> <p>(5) Measure the phase difference <math>S_{1PH}</math> between pin 26 and pin 7 (AFC filter) wave form.</p> <p>(6) SW24-b and SW26-a.</p> <p>(7) Input Signal a (33.75 kHz) to pin 24 (SYNC2-IN).</p> <p>(8) Set sub-address (02) 01.</p> <p>(9) Measure the phase difference <math>S_{2PH}</math> between pin 24 and pin 7 (AFC filter) wave form.</p> 


Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
HA02	HD3 input horizontal sync phase	c	b	—	—	<p>(1) Set sub-address (00) 40 and (02) 02.</p> <p>(2) Input signal b (horizontal 31.5 kHz) to pin 14 (HD3-IN).</p> <p>(3) Measure the phase difference <math>\text{HD}_3\text{PH}</math> between pin 14 and pin 7 (AFC filter) wave form.</p>
HA03	Polarity distinction active range	c	b	—	—	<p>(1) Set sub-address (00) 40 and (02) 02.</p> <p>(2) Input signal b ((horizontal 31.5 kHz) to pin 14 (HD3-IN).</p> <p>(3) Decreasing the duty of signal b to 0% (get negative period shorter), measure the duty of Signal b (HD-DUTY1) when the phase between pin 14 and pin 16 (HD1-OUT) change.</p> <p>(4) Increasing the duty of Signal b to 100% (get negative period longer), measure the duty of Signal b (HD-DUTY2) when the phase between pin 14 and pin 16 (HD1OUT) change.</p> <p>* duty = <math>A/(A + B) \times 100\text{ (%)}</math></p>

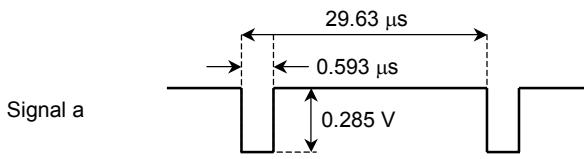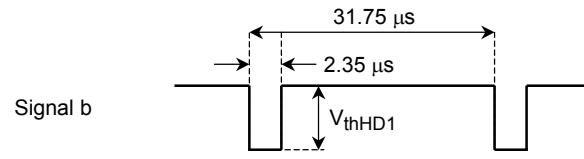Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9$ V, $T_a = 25 \pm 3$ °C, unless otherwise specified)
		S07	S23	S24	S26	
HA04	Sync1 input threshold amplitude Sync2 input threshold amplitude	c	b	a ↓ b	b ↓ a	<p>(1) Set sub-address (00) 0B and (02) 00.</p> <p>(2) Input Signal a (33.75 kHz) to pin 26 (SYNC1-IN)</p> <p>(3) Measure the sync. tip DC voltage of signal a on pin 26 (SYNC1-IN). (<math>V_{sync11}</math>)</p> <p>(4) Supply external voltage via 100 kΩ to pin 26 and increase the voltage.</p> <p>(5) Measure the sync. tip DC voltage (<math>V_{sync12}</math>) when HD-OUT desynchronizes with signal a calculate <math>V_{thS10}</math>.  <math>V_{thS10} = V_{sync12} - V_{sync11}</math></p> <p>(6) Set sub-address (00) B1, B2 and B3 and calculate <math>V_{thS11}</math>, <math>V_{thS12}</math> and <math>V_{thS13}</math> as well.</p> <p>(7) Calculate <math>V_{thS20}</math>, <math>V_{thS21}</math>, <math>V_{thS22}</math> and <math>V_{thS23}</math> against pin 24 (SYNC2-IN) in the same way as 4 to 6.</p> 
HA05	HD3 input threshold amplitude (synchronization block)	c	b	—	—	<p>(1) Set sub-address (03) 47 and (02) 02.</p> <p>(2) Input Signal b (31.5 kHz) to pin 14 (HD3-IN).</p> <p>(3) Increasing the voltage of Signal b from 0 V, measure the voltage of Signal b <math>V_{thHD1}</math> when HD1-OUT lock.</p> 

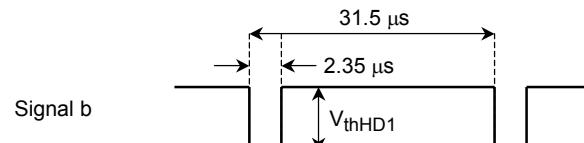
Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
HA06	HD1 input threshold voltage HD2 input threshold voltage HD3 input threshold voltage (SW block)	c	b	—	—	<p>(1) Set sub-address (00) 40 and (02) 00.</p> <p>(2) Input Signal b (31.5 kHz) to pin 3 (HD1-IN).</p> <p>(3) Increasing the voltage of Signal b from 0 V, measure the voltage of Signal b <math>V_{thHD1}</math> when HD1-OUT lock.</p> <p>(4) Measure the voltage of pin 1 <math>V_{thHD2}</math>. Measure the voltage of pin 14 <math>V_{thHD3}</math> as well.</p> 



Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9$ V, $T_a = 25 \pm 3$ °C, unless otherwise specified)
		S07	S23	S24	S26	
HA07	HD output phase adjustment variable range	c	b	—	—	<p>(1) Set sub-address (00) 70.</p> <p>(2) Input Signal b (horizontal period <math>T = 35.56</math> μs) to pin 14 (HD3-IN).</p> <p>(3) Set sub-address (02) 02.</p> <p>(4) Change form 00 to 7C sub-address (03), then measure the phase change quantity (<math>\Delta HP0-</math>) of pin 16 (HD1-OUT) wave form.</p> <p>(5) Change form 80 to FC sub-address (03), then measure the phase change quantity (<math>\Delta HP0+</math>) of pin 16 (HD1-OUT) wave form.</p> <p>(6) When horizontal period of Signal b is <math>T = 31.75</math> μs measure <math>\Delta HP1-</math> and <math>\Delta HP1+</math> as well.</p> <p>(7) When horizontal period of Signal b is <math>T = 29.63</math> μs measure <math>\Delta HP2-</math> and <math>\Delta HP2+</math> as well.</p> <p>(8) When horizontal period of Signal b is <math>T = 22.22</math> μs measure <math>\Delta HP3-</math> and <math>\Delta HP3+</math> as well.</p> <p>The diagram illustrates the timing relationships between Signal b and the Pin 16 wave forms for sub-addresses (00), (7C) (80), and (FC). Signal b is a square wave with a period T of 35.56 μs, a low level of 1.5 V, and a high level of 2.35 μs. The Pin 16 wave forms show the phase shift ΔHP*- for each sub-address relative to the signal b. For sub-address (00), the Pin 16 wave form is delayed by ΔHP*- from signal b. For sub-address (7C) (80), it is advanced by ΔHP*+. For sub-address (FC), it is advanced by ΔHP*+.</p>

Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9$ V, $T_a = 25 \pm 3$ °C, unless otherwise specified)
		S07	S23	S24	S26	
HA08	Clamp pulse phase/width/level	c	b	—	—	<p>(1) Set sub-address (00) 70.</p> <p>(2) Input Signal a (horizontal 33.75 kHz) to pin 14 (HD3-IN).</p> <p>(3) Set sub-address (02) 02.</p> <p>(4) Measure the clamp pulse phase (<math>CP_{S0}</math>), width (<math>CP_{W0}</math>), output level (<math>CP_{V0}</math>) of pin 15 (CLP-OUT) against Signal a.</p> <p>(5) Set sub-address (02) 12.</p> <p>(6) Measure the clamp pulse phase (<math>CP_{S1}</math>), width (<math>CP_{W1}</math>), output level (<math>CP_{V1}</math>) of pin 15 (SCP-OUT) against Signal a.</p> <p>(7) Input no-signal to pin 14.</p> <p>(8) Measure the clamp pulse phase (<math>CP_{S2}</math>), width (<math>CP_{W2}</math>), output level (<math>CP_{V2}</math>) of pin 15 (SCP-OUT) against pin 16 (HD-OUT).</p>

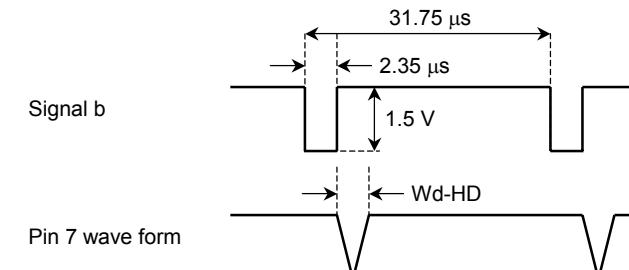Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9$ V, $T_a = 25 \pm 3$ °C, unless otherwise specified)
		S07	S23	S24	S26	
HA09	Delayed HD pulse width	c	b	—	—	<p>(1) Set sub-address (00) 70.</p> <p>(2) Input Signal b (horizontal 31.5 kHz) to pin 14 (HD3-IN).</p> <p>(3) Set sub-address (02) 02.</p> <p>(4) Measure the pulse width (WdHD) of pin 7 (AFC filter) wave form.</p> 

Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
HB01	AFC phase detection current	OPEN	b	a	b	<p>(1) BUS control data preset.</p> <p>(2) Horizontal oscillation frequency is 28.125 kHz (00).</p> <p>(3) SW7 open. Measure the Voltage of pin 7 V7 (no external supply).</p> <p>(4) Connect external supply with pin 7, and supply the voltage (V7).</p> <p>(5) Input signal (below figure) to pin 26 (SYNC1-IN). When INPUT SW is SYNC1-IN, measure V1 and V2 of pin 7 wave form.</p> <p>(6) Supply <math>V_7 - 0.1\text{ V}</math> and <math>V_7 + 0.1\text{ V}</math> to pin 7, then measure V3 and V4.</p> <p>(7) Calculate by following equations.</p> $\text{ID1 } [\mu\text{A}] = (V_1 [\text{V}] \div 1 [\text{k}\Omega]) \times 1000$ $\text{ID2 } [\mu\text{A}] = (V_2 [\text{V}] \div 1 [\text{k}\Omega]) \times 1000$ $\text{ID3 } [\mu\text{A}] = (V_3 [\text{V}] \div 1 [\text{k}\Omega]) \times 1000$ $\text{ID4 } [\mu\text{A}] = (V_4 [\text{V}] \div 1 [\text{k}\Omega]) \times 1000$
HB02	VCO oscillation start voltage	—	—	—	—	(1) Increasing the voltage of pin 11 $V_{CC}$ from 2.5V, measure the voltage $V_{VCO}$ when pin 9 appear oscillation wave form.

Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
HB03	HD output pulse width (free-run)	c	b	—	—	<p>(1) BUS control data preset.</p> <p>(2) When horizontal oscillation frequency is 28.125 kHz (00), measure the output pulse width TH00 of pin 16 (HD1-OUT) wave form.</p> <p>(3) When horizontal oscillation frequency is 31.5 kHz (01), 33.75 kHz (10), 45 kHz (11), measure the output pulse width TH01, TH02, TH03 as well.</p> 
HB04	Horizontal free-run frequency	OPEN	b	—	—	<p>(1) BUS control data preset.</p> <p>(2) SW7 open. When horizontal oscillation frequency is 28.125 kHz (00), measure the oscillation frequency F00 of pin 16 (HD1-OUT) wave form.</p> <p>(3) When horizontal oscillation frequency is 31.5 kHz (01), 33.75 kHz (10), 45 kHz (11), measure the oscillation frequency F01, F10, F11 as well.</p> <p>(4) When horizontal oscillation frequency is 31.5 kHz (01) and vertical free-run frequency is (001), measure the oscillation frequency F50 of pin 16 wave form.</p>
HB05	Horizontal oscillation control sensitivity	OPEN	b	—	—	<p>(1) BUS control data preset.</p> <p>(2) SW7 open.</p> <p>(3) Connect external voltage with pin 7. Horizontal oscillation frequency is 28.125 kHz (00). Supply <math>V_7</math> (about 6.3 V) + 0.05 V or <math>V_7</math> - 0.05 V to pin 7, then measure the frequency FA, FB of pin 16 (HD1-OUT) wave form. Calculate frequency changing ratio (BH00). <math>BH00 = (FB - FA)/0.1</math></p> <p>(4) When horizontal oscillation frequency is 31.5 kHz (01), 33.75 kHz (10), 45 kHz (11), calculate BH01, BH10, BH11 as well.</p>

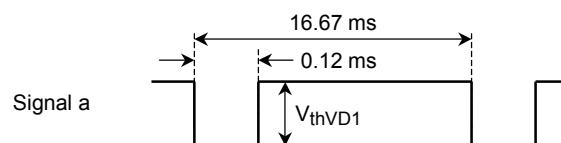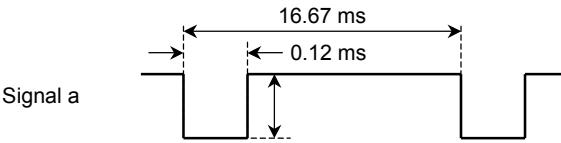
Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
VA01	VD1 input threshold voltage VD2 input threshold voltage VD3 input threshold voltage (SW block)	c	b	—	—	<p>(1) Set sub-address (00) B0.</p> <p>(2) Input Signal a (vertical 60 Hz) to pin 4 (VD1-IN).</p> <p>(3) Set sub-address (02) 00.</p> <p>(4) Increasing the voltage of Signal a from 0 V, measure the voltage of Signal b <math>V_{thVD1}</math> when VD1-OUT lock.</p> <p>(5) Measure <math>V_{thVD2}</math> and <math>V_{thVD3}</math> against pin 2 and pin 13 as well.</p> 
VA02	VD3 input threshold voltage (synchronization block)	c	b	—	—	<p>(1) Set sub-address (00) 50.</p> <p>(2) Input Signal b (vertical 60 Hz) to pin 13 (VD3-IN).</p> <p>(3) Set sub-address (02) 01.</p> <p>(4) Increasing the voltage of Signal b from 0 V, measure the voltage of Signal a <math>V_{thVD3}</math> when VD1-OUT lock.</p> 

Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
VA03	Vertical output pulse width	c	b	—	—	<p>(1) Input Signal a (horizontal 33.75 kHz) to pin 14 (HD3-IN).</p> <p>(2) Set sub-address (02) 02.</p> <p>(3) When sub-address (00) is 30, measure the pulse width VPW2 of pin 28 (VD1-OUT) wave form.</p> <p>(4) When sub-address (00) is 70, B0, F0, measure the pulse width VPW0, VPW1, VPW3 of pin 28 (VD1-OUT) wave form as well.</p>


Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9$ V, $T_a = 25 \pm 3$ °C, unless otherwise specified)
		S07	S23	S24	S26	
VA04	Vertical free-run frequency	c	b	—	—	<p>(1) Input Signal a (horizontal 33.75 kHz) to pin 14 (HD3-IN).</p> <p>(2) Set sub-address (00) B0.</p> <p>(3) When sub-address (02) is 02, 22, 62, 82, A2 or C2, measure the frequency FV0, FV1, FV3, FV4, FV5 or FV6 of pin 28 (VD1-OUT) wave form.</p> <p>(4) Input no-signal to pin 14 (HD3-IN).</p> <p>(5) Set sub-address (02) 42.</p> <p>(6) When sub-address (00) is 30, 70, B0 or F0, measure the frequency FV20, FV21, FV22 or FV23 of pin 28 (VD1-OUT) wave form.</p>

Note	Item	SW Mode				Test Conditions and Measuring Method ( $V_{CC} = 9\text{ V}$ , $T_a = 25 \pm 3^\circ\text{C}$ , unless otherwise specified)
		S07	S23	S24	S26	
VA05	Vertical pull-in range	c	b	—	—	<p>(1) Input Signal a (horizontal period <math>T = 35.56\text{ }\mu\text{s}</math>) to pin 14 (HD3-IN).</p> <p>(2) Set sub-address (02) 02.</p> <p>(3) Set sub-address (00) 30.</p> <p>(4) Input Signal C (vertical period initial <math>T = 1\text{ ms}</math>) to pin 13 (VD3-IN). Increasing vertical period of Signal C, measure the frequency FVPL0 when pin 28 (VD1-OUT) wave form synchronize with Signal C.</p> <p>(5) Input Signal a (horizontal period <math>T = 31.75\text{ }\mu\text{s}</math>) to pin 14 (HD3-IN).</p> <p>(6) Set sub-address (00) 70.</p> <p>(7) Measure FVPL1 as well.</p> <p>(8) Input Signal a (horizontal period <math>T = 29.63\text{ }\mu\text{s}</math>) to pin 14 (HD3-IN).</p> <p>(9) Set sub-address (00) B0.</p> <p>(10) Measure FVPL2 as well.</p> <p>(11) Input Signal a (horizontal period <math>T = 22.22\text{ }\mu\text{s}</math>) to pin 14 (HD3-IN).</p> <p>(12) Set sub-address (00) F0.</p> <p>(13) Measure FVPL3 as well.</p>

## Test Circuit

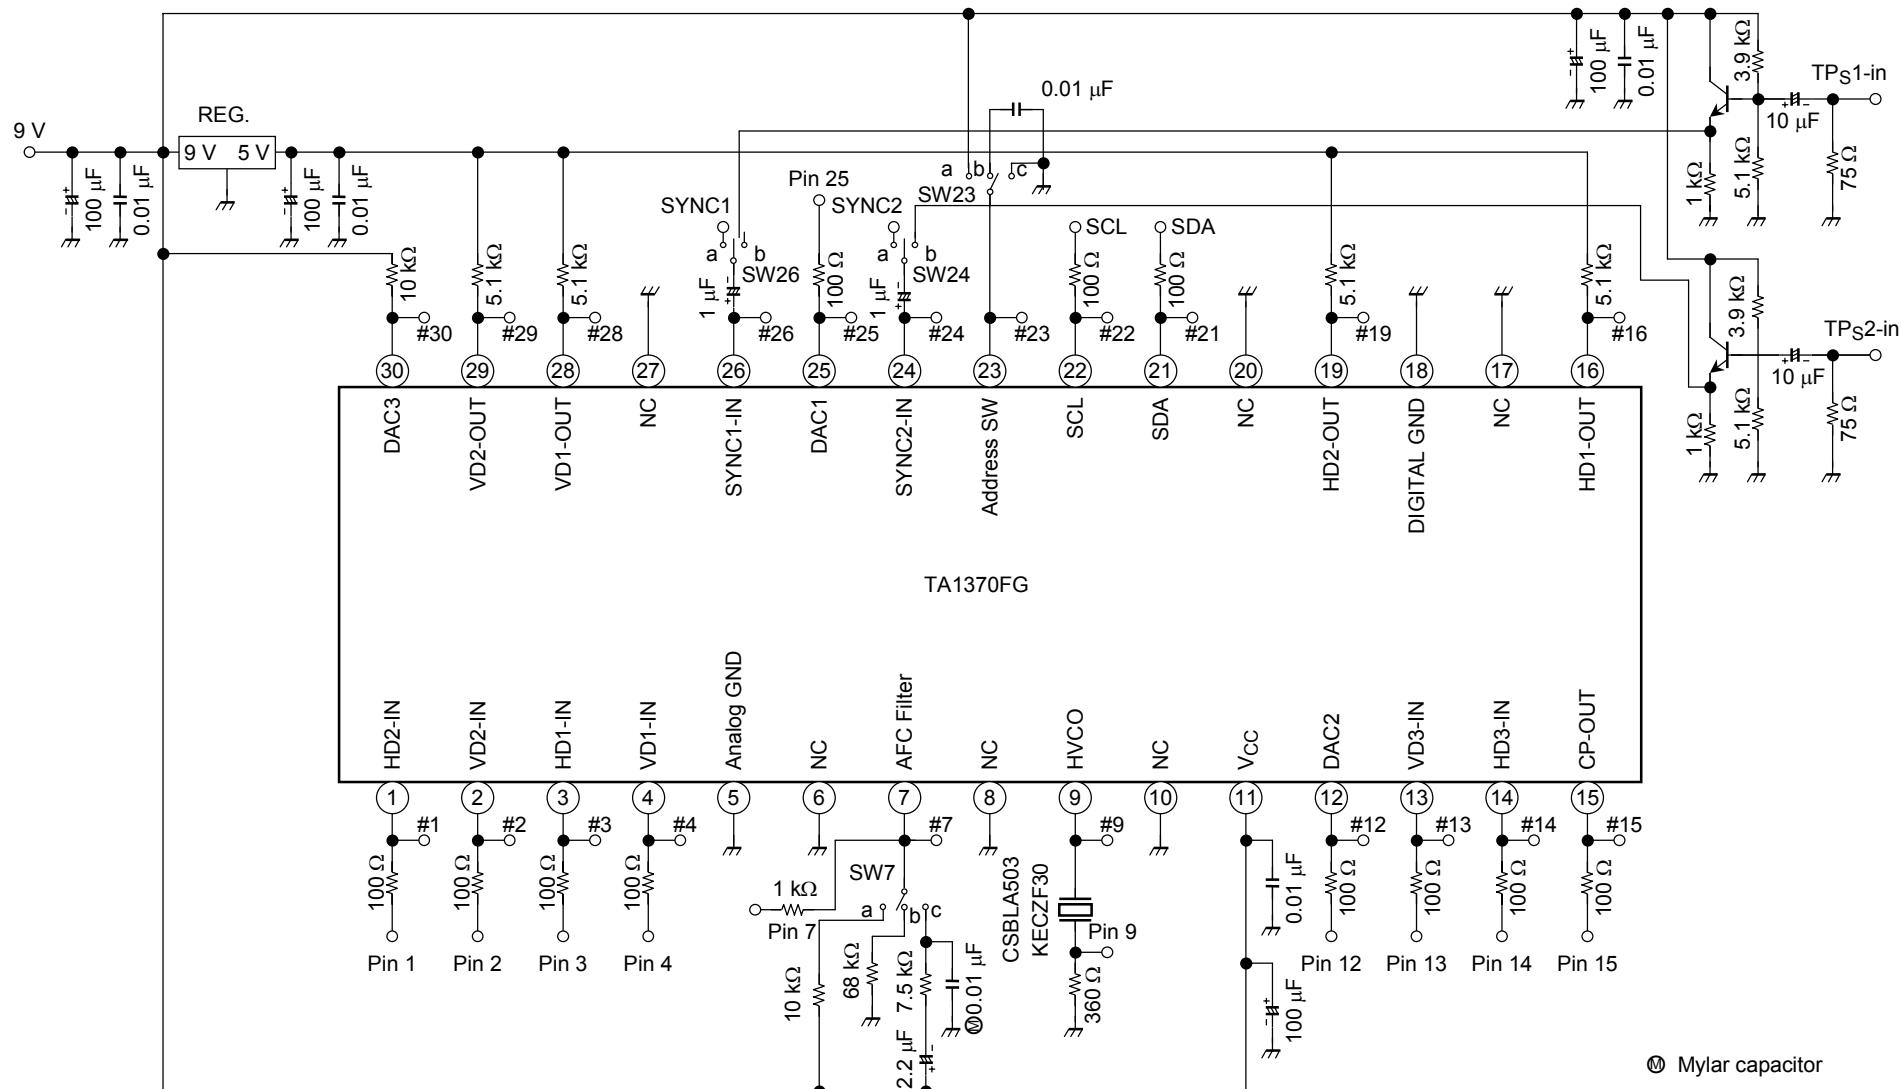


## Application Circuit 1 (Typical values)

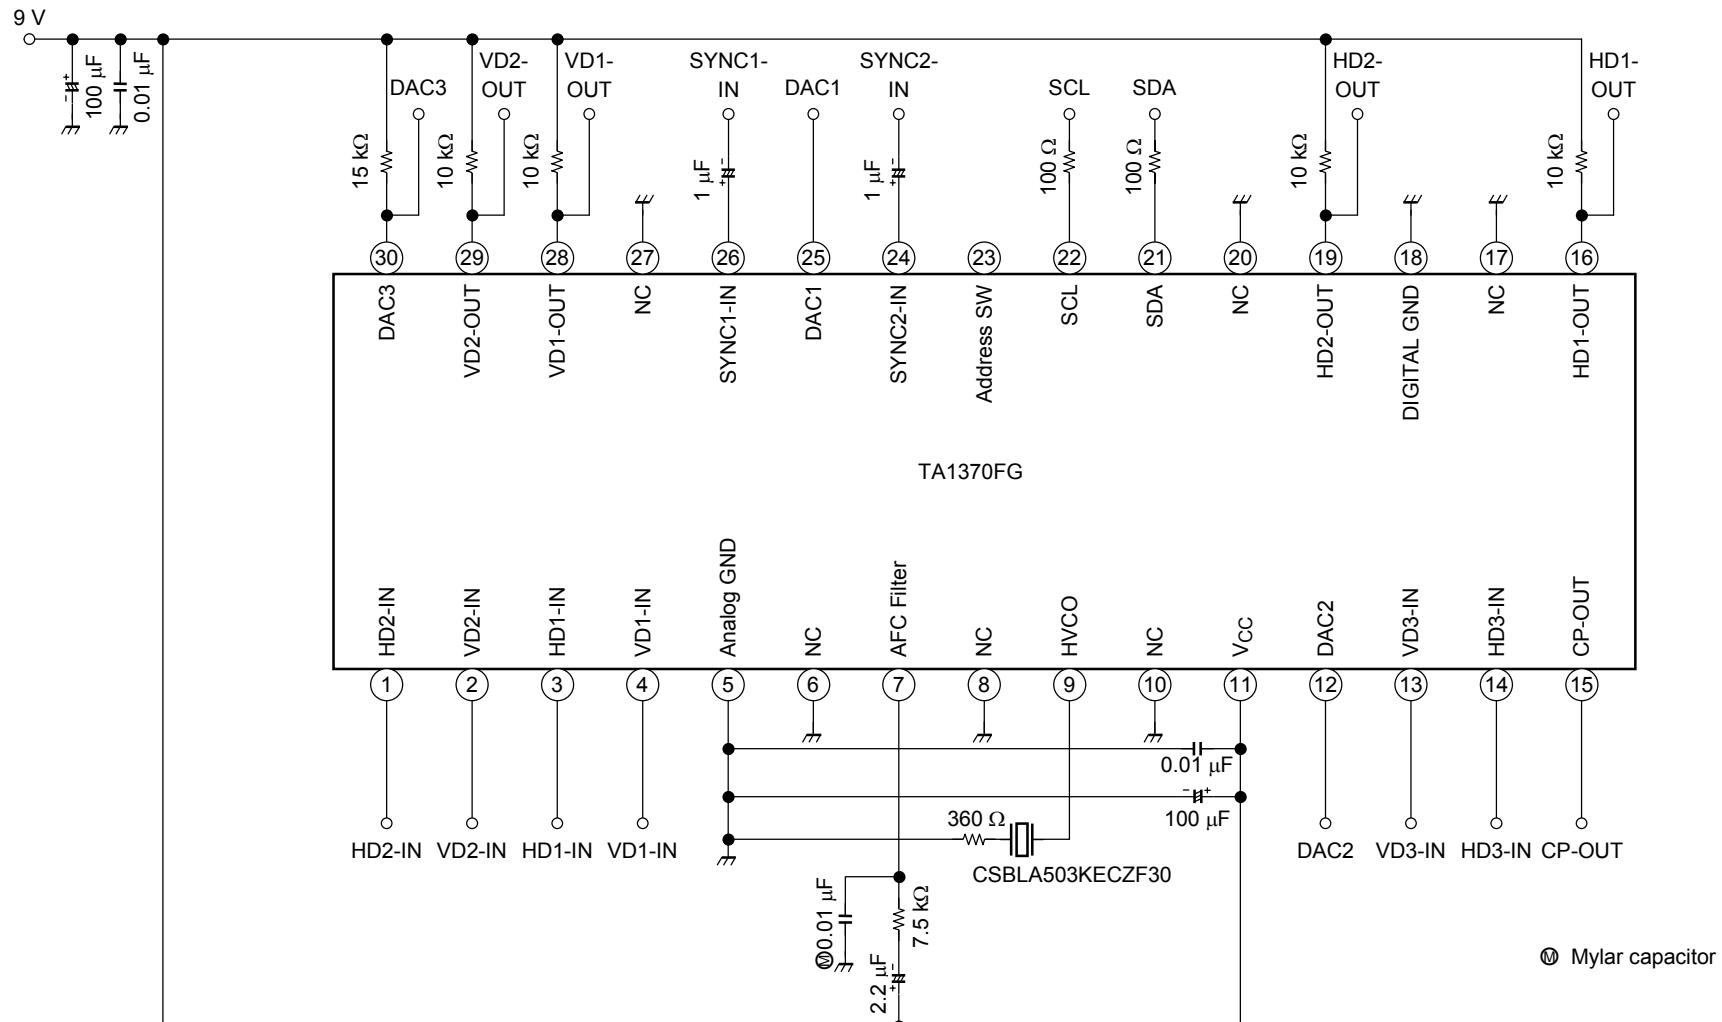

## Application Circuit 2 (How to measure H/V frequency)

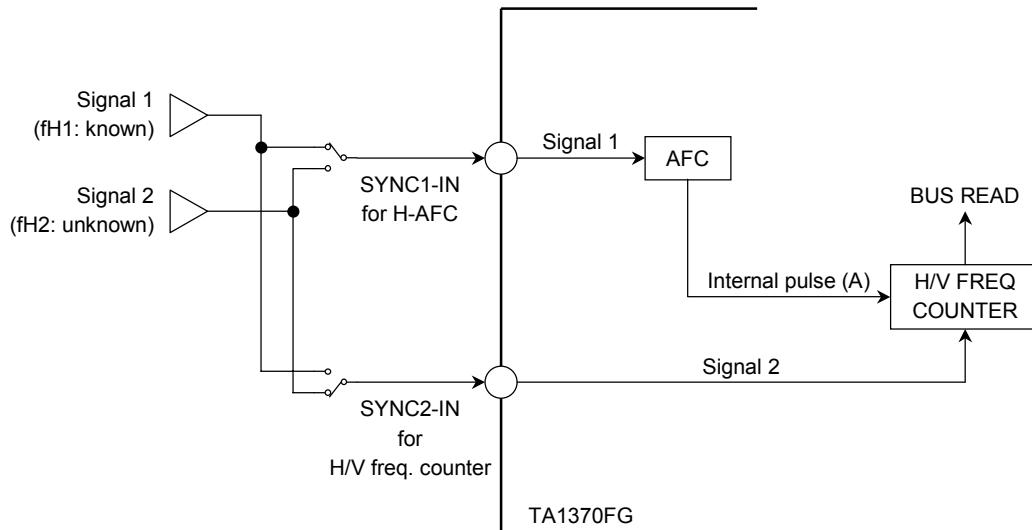To measure H/V frequency of signal 2 (fH2: unknown) correctly, use two separated input terminals as the following figure. One is for frequency measuring (SYNC2-in) and the other is for the AFC (SYNC1-IN). And measure H/V frequency of signal 2 (fH2: unknown) on condition that AFC is stable (AFC locks in signal 1 (fH1: known).) or that AFC is free-run when SYNC1-IN is no-signal.




This IC's H/V frequency counting is done by internal pulse (A) which is made in AFC circuit. So, if AFC circuit doesn't lock in the regular frequency, the frequency of pulse (A) will not be correct and the H/V frequency data will not be showed correct data.

Decision algorithm of H/V frequency detection (detection range, detection times and so on) should be determined under consideration the factors such as signal strength, existence of ghost signal, H-AFC stability, I<sup>2</sup>C BUS data transmission and so on via prototype TV set evaluation.

**Package Dimensions**

SSOP30-P-375-1.00

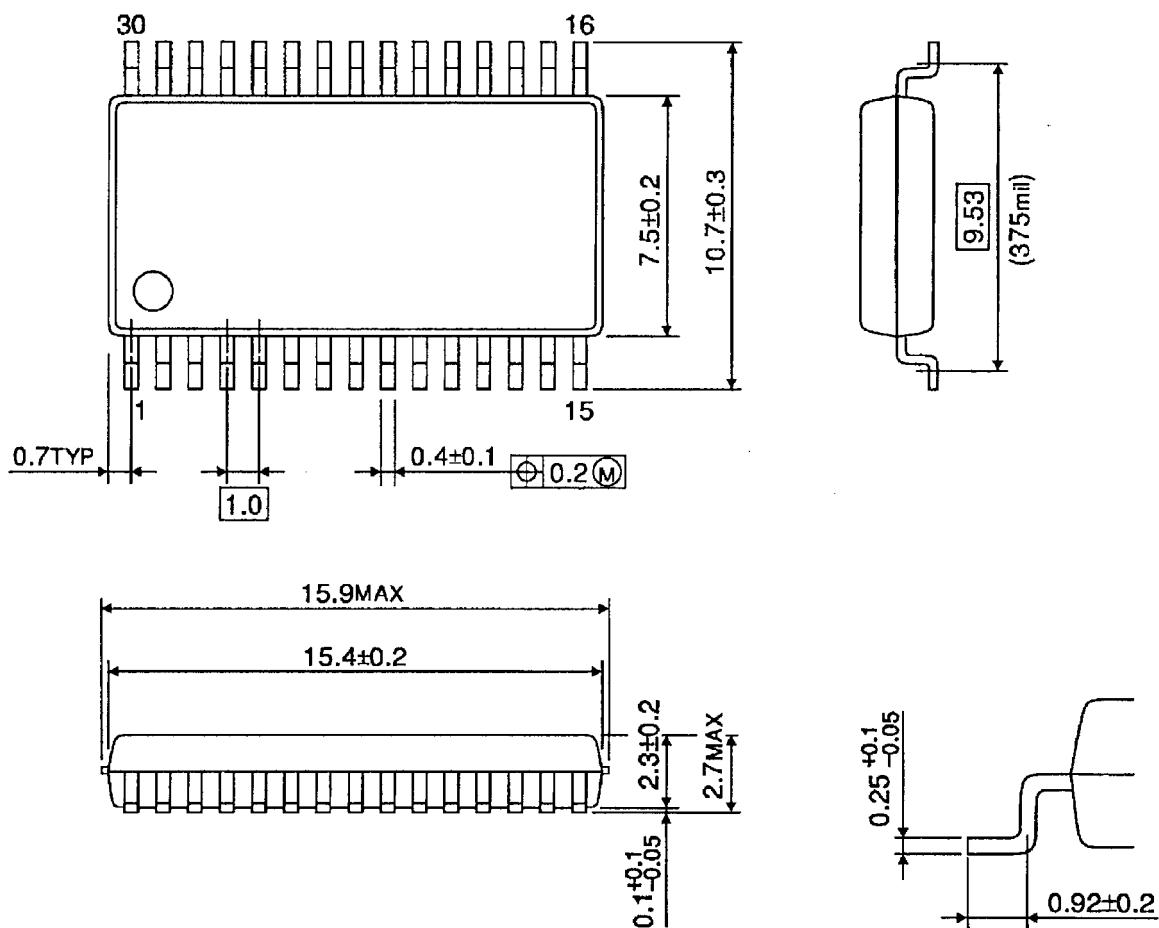Unit : mm



Weight: 0.63 g (typ.)

## RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.  
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.