


S5VB60

600V 6A

OUTLINE DIMENSIONS

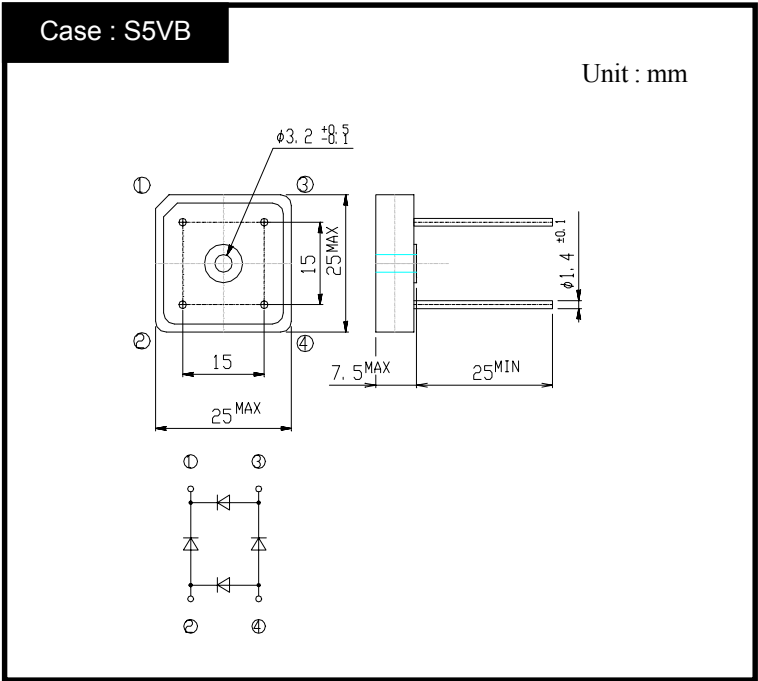

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40~150	℃
Operating Junction Temperature	Tj		150	℃
Maximum Reverse Voltage	V _{RM}		600	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Ta=40℃ With heatsink θ _{fa} =6.4℃/W	6	A
		50Hz sine wave, R-load, Ta=40℃ Without heatsink	3.5	
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, Tj=25℃	200	A
Current Squared Time	I ² t	2ms ≤ t < 10ms Tc=25℃	150	A ² s
Mounting Torque	TOR	(Recommended torque : 0.5N·m)	0.8	N·m

● Electrical Characteristics (Tl=25℃)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =3A, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ _{jl}	junction to lead	Max.3	℃/W


S5VBx

Forward Voltage

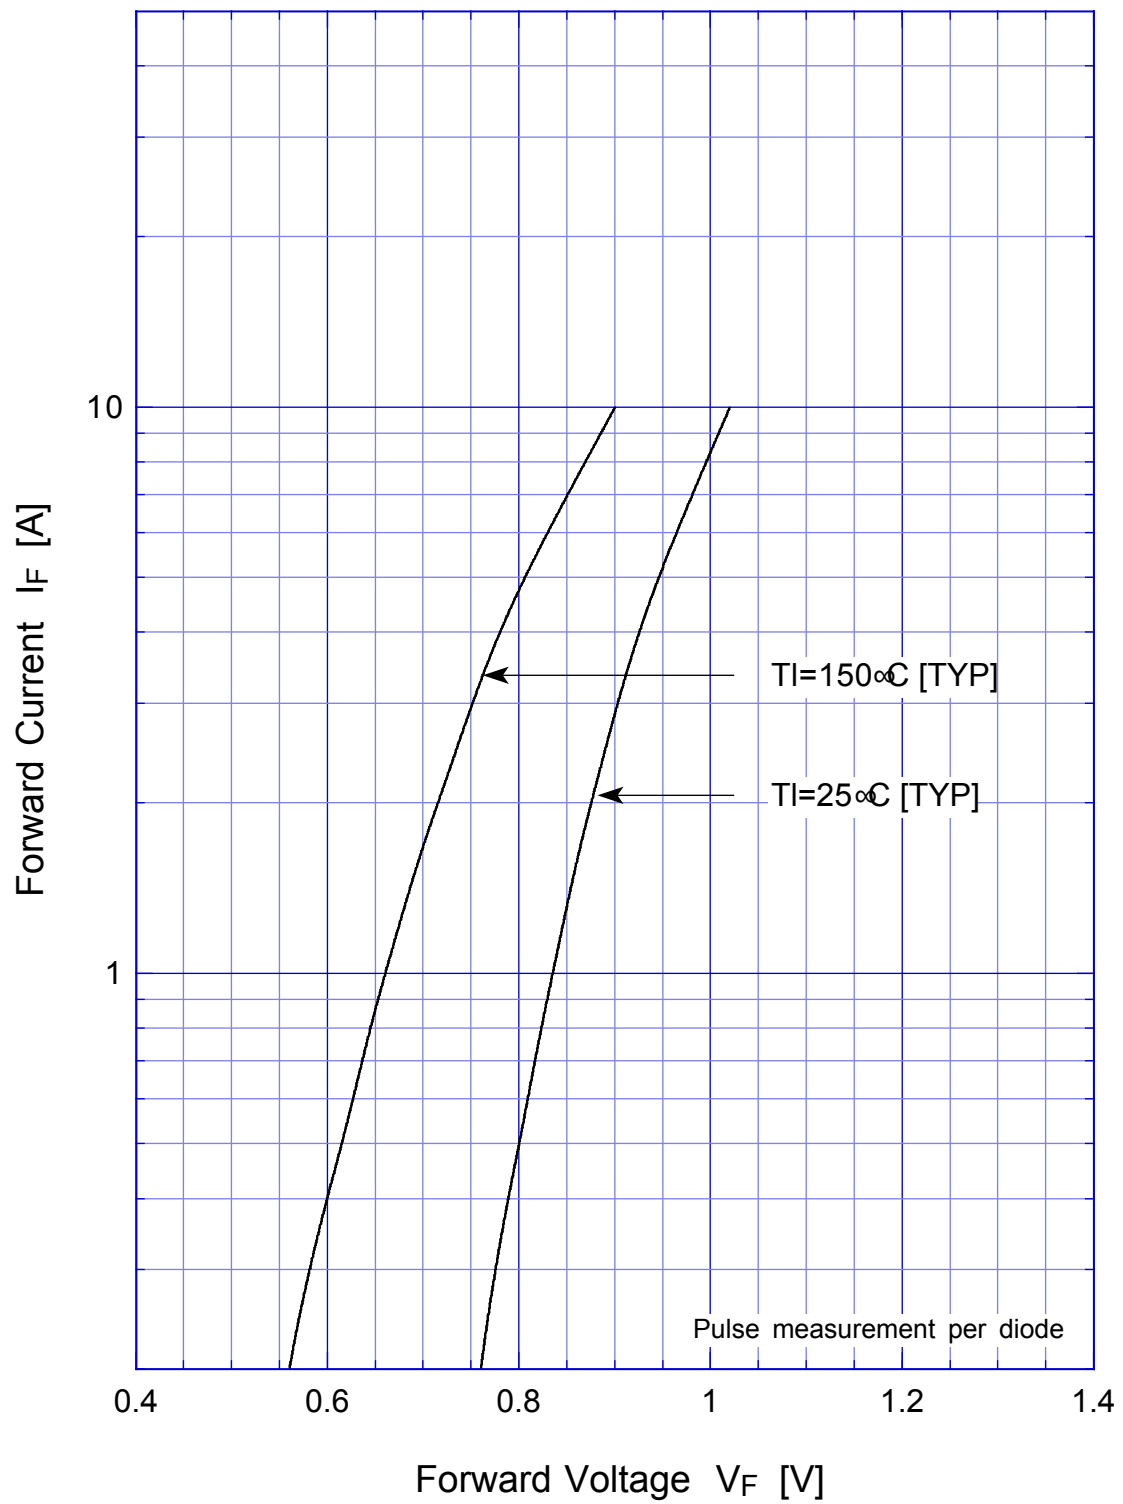

S5VBx

Forward Power Dissipation

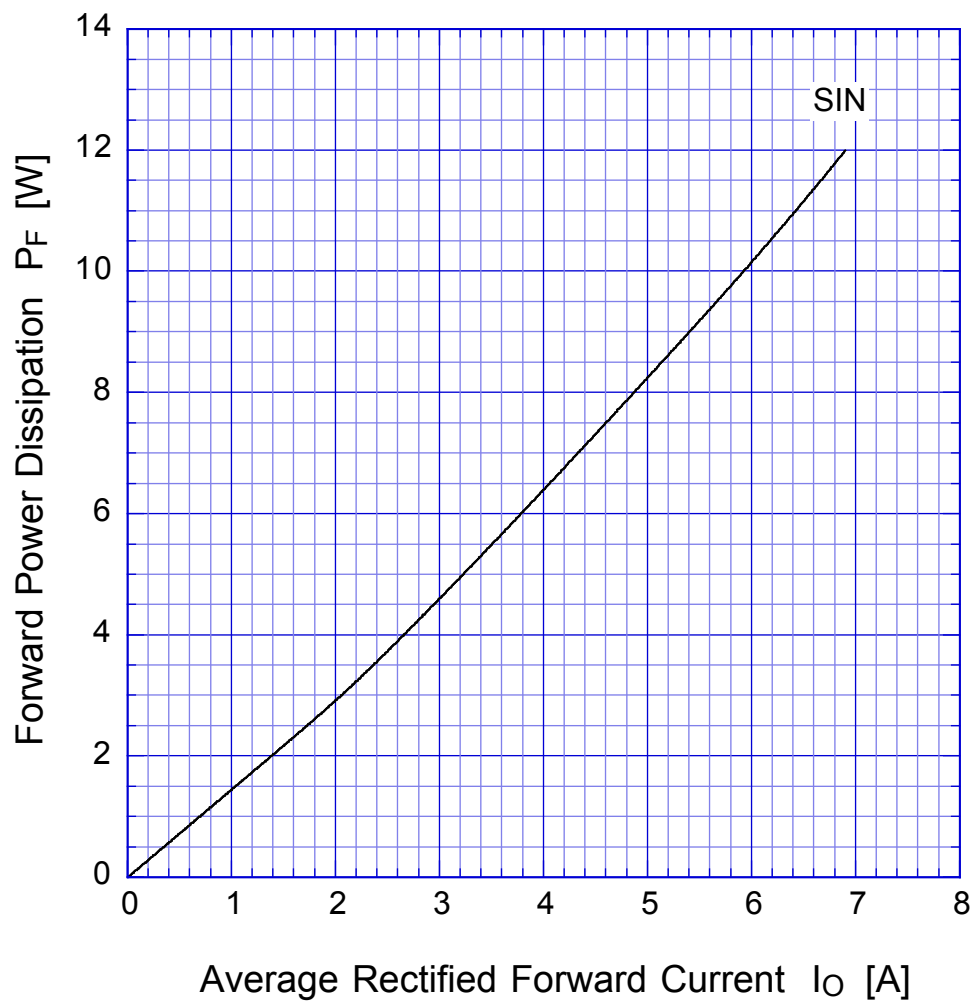


$T_j = 150^\circ\text{C}$

Sine wave

S5VBx

Derating Curve

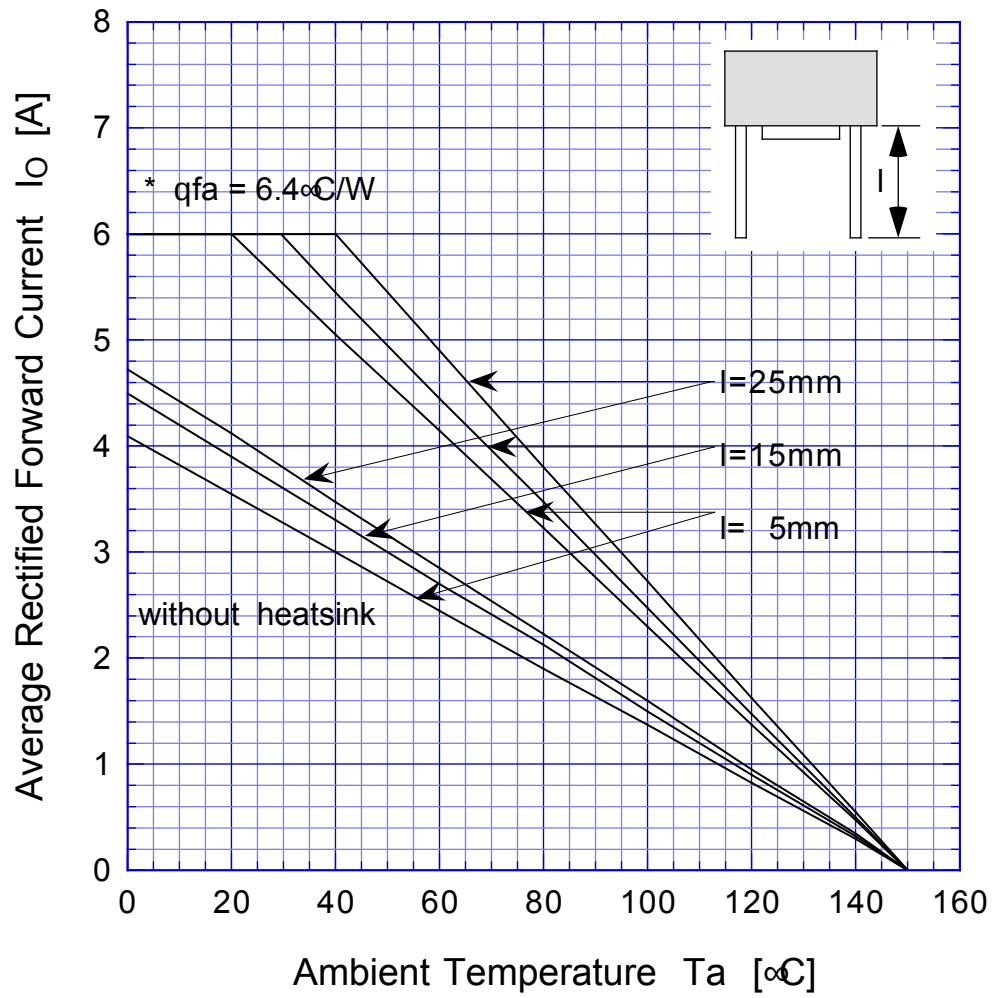

Sine wave

R-load

Free in air

* with thermal compound, TOR=5kg-cm

S5VBx

Peak Surge Forward Capability

