


- Convenient way to load loose receptacles on PC board. See page 32 for application details.
- Removable plastic carriers can be returned for reloading.
- Hi-Rel, 4-finger BeCu #30 clip rated at 3 amps. See page 208 for details.
- Uses M-M#1401 pin. See page 139 for details.

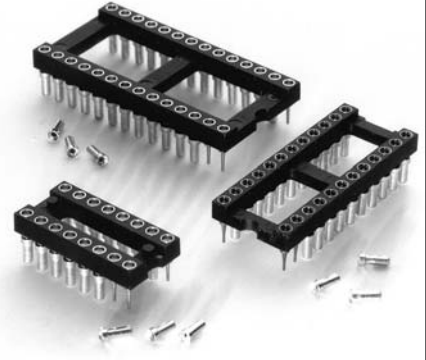

Total number of pins				Quantity per tube	Ordering Information
	A	B	C		

10	0.5	0.2	0.3	40		614-XX-210-41-001
4	0.2	0.3	0.4	102		614-XX-304-41-001
6	0.3	0.3	0.4	67		614-XX-306-41-001
8	0.4	0.3	0.4	50		614-XX-308-41-001
10	0.5	0.3	0.4	40		614-XX-310-41-001
14	0.7	0.3	0.4	28		614-XX-314-41-001
16	0.8	0.3	0.4	25		614-XX-316-41-001
18	0.9	0.3	0.4	22		614-XX-318-41-001
20	1.0	0.3	0.4	20		614-XX-320-41-001
22	1.1	0.3	0.4	18		614-XX-322-41-001
24	1.2	0.3	0.4	16		614-XX-324-41-001
28	1.4	0.3	0.4	14		614-XX-328-41-001
20	1.0	0.4	0.5	20	<div style="border: 2px solid black; border-radius: 50%; padding: 10px; display: inline-block;"> <p>XX= Plating Code See Below</p> </div>	614-XX-420-41-001
22	1.1	0.4	0.5	18		614-XX-422-41-001
24	1.2	0.4	0.5	16		614-XX-424-41-001
28	1.4	0.4	0.5	14		614-XX-428-41-001
32	1.6	0.4	0.5	12		614-XX-432-41-001
24	1.2	0.6	0.7	16		614-XX-624-41-001
28	1.4	0.6	0.7	14		614-XX-628-41-001
32	1.6	0.6	0.7	12		614-XX-632-41-001
36	1.8	0.6	0.7	11		614-XX-636-41-001
40	2.0	0.6	0.7	10		614-XX-640-41-001
42	2.1	0.6	0.7	9	614-XX-642-41-001	
48	2.4	0.6	0.7	8	614-XX-648-41-001	
50	2.5	0.6	0.7	8	614-XX-650-41-001	
52	2.6	0.6	0.7	7	614-XX-652-41-001	
50	2.5	0.9	1.0	8	614-XX-950-41-001	
52	2.6	0.9	1.0	7	614-XX-952-41-001	
64	3.2	0.9	1.0	6	614-XX-964-41-001	

XX= Plating Code
See Below

SPECIFY PLATING CODE XX=			93	99
Sleeve (Pin)			200μ" Sn/Pb	200μ" Sn/Pb
Contact (Clip)			30μ" Au	200μ" Sn/Pb