

### WEJ78L18 Three-terminal positive voltage regulator


#### FEATURES

Maximum Output current

$I_{OM}$ : 0.1 A

Output voltage

$V_o$ : 18 V

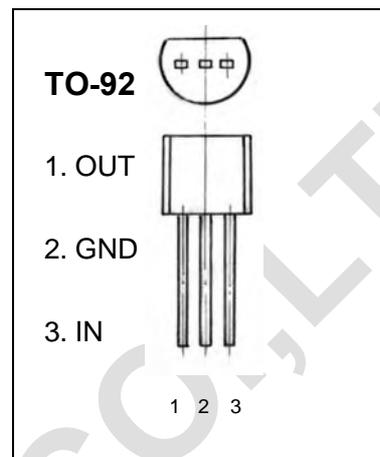

#### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)


| Parameter                            | Symbol    | Value    | Units |
|--------------------------------------|-----------|----------|-------|
| Input Voltage                        | $V_i$     | 35       | V     |
| Operating Junction Temperature Range | $T_{OPR}$ | 0~+125   | °C    |
| Storage Temperature Range            | $T_{STG}$ | -55~+150 | °C    |

#### UTC78L05 ELECTRICAL CHARACTERISTICS

( $V_i=19V, I_o=40mA, 0^\circ C < T_j < 125^\circ C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)

| Parameter                | Symbol       | Test conditions                                  | MIN  | TYP | MAX  | UNIT     |
|--------------------------|--------------|--|------|-----|------|----------|
| Output voltage           | $V_o$        | $T_j=25^\circ C$                                 | 17.3 | 18  | 18.7 | V        |
|                          |              | $21V \leq V_i \leq 33V, I_o=1mA \sim 40mA$       | 17.1 | 18  | 18.9 | V        |
|                          |              | $21V \leq V_i \leq V_{MAX}, I_o=1mA \sim 70mA$   | 17.1 | 18  | 18.9 | V (note) |
| Load Regulation          | $\Delta V_o$ | $T_j=25^\circ C, I_o=1mA \sim 100mA$             |      | 27  | 180  | mV       |
|                          |              | $T_j=25^\circ C, I_o=1mA \sim 40mA$              |      | 19  | 90   | mV       |
| Line regulation          | $\Delta V_o$ | $20.5V \leq V_i \leq 33V, T_j=25^\circ C$        |      | 70  | 360  | mV       |
|                          |              | $22V \leq V_i \leq 33V, T_j=25^\circ C$          |      | 60  | 300  | mV       |
| Quiescent Current        | $I_q$        | $25^\circ C$                                     |      | 4.7 | 6.5  | mA       |
| Quiescent Current Change | $\Delta I_q$ | $21V \leq V_i \leq 33V$                          |      |     | 1.5  | mA       |
|                          | $\Delta I_q$ | $1mA \leq I_o \leq 40mA$                         |      |     | 0.1  | mA       |
| Output Noise Voltage     | $V_N$        | $10Hz \leq f \leq 100KHz$                        |      | 89  |      | $\mu V$  |
| Ripple Rejection         | RR           | $23V \leq V_i \leq 33V, f=120Hz, T_j=25^\circ C$ | 32   | 36  |      | dB       |
| Dropout Voltage          | $V_d$        | $T_j=25^\circ C$                                 |      | 1.7 |      | V        |

#### TYPICAL APPLICATION

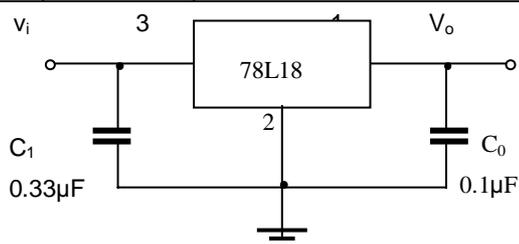

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.