

$2 \times 1\text{ W}$ portable/mains-fed stereo power amplifier**TDA7053****GENERAL DESCRIPTION**

The TDA7053 is an integrated class-B stereo power amplifier in a 16-lead dual-in-line (DIL) plastic package. The device, consisting of two BTL amplifiers, is primarily developed for portable audio applications but may also be used in mains-fed applications.

Features

- No external components
- No switch-ON/OFF clicks
- Good overall stability
- Low power consumption
- Short-circuit-proof

QUICK REFERENCE DATA

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage range		V _P	3	6	15	V
Total quiescent current	R _L = ∞	I _{tot}	—	9	16	mA
Output power	R _L = 8 Ω ; V _P = 6 V	P _O	—	1.2	—	W
Internal voltage gain		G _V	38	39	40	dB
Total harmonic distortion	P _O = 0.1 W	THD	—	0.2	1.0	%

PACKAGE OUTLINE

16-lead DIL; plastic (SOT38).

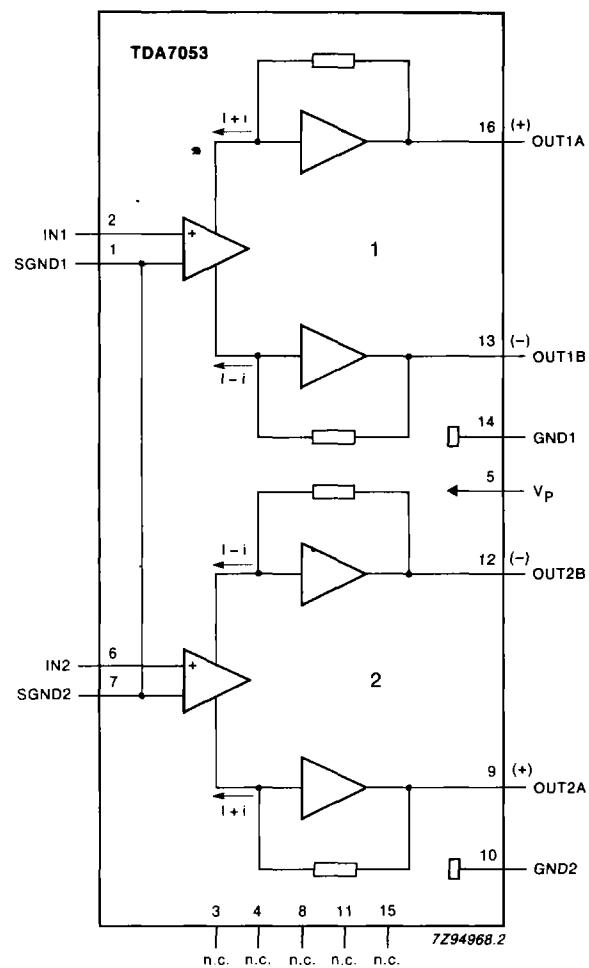
$2 \times 1\text{ W}$ portable/mains-fed stereo power amplifier**TDA7053**

Fig. 1 Block diagram.

2 × 1 W portable/mains-fed stereo power amplifier**TDA7053****PINNING**

1.	SGND1	signal ground 1	9.	OUT2A	output 2 (positive)
2.	IN1	input 1	10.	GND2	power ground 2
3.	n.c.	not connected	11.	n.c.	not connected
4.	n.c.	not connected	12.	OUT2B	output 2 (negative)
5.	V _p	supply voltage	13.	OUT1B	output 1 (negative)
6.	IN2	input 2	14.	GND1	power ground 1
7.	SGND2	signal ground 2	15.	n.c.	not connected
8.	n.c.	not connected	16.	OUT1A	output 1 (positive)

Note

The information contained within the parentheses refer to the polarity of the loudspeaker terminal to which the output must be connected.

FUNCTIONAL DESCRIPTION

The TDA7053 is a stereo output amplifier, with an internal gain of 39 dB, which is primarily for use in portable audio applications but may also be used in mains-fed applications. The current trends in portable audio application design is to reduce the number of batteries which results in a reduction of output power when using conventional output stages. The TDA7053 overcomes this problem by using the Bridge-Tied-Load (BTL) principle and is capable of delivering 1.2 W into an 8 Ω load ($V_p = 6$ V). The load can be short-circuited under all input conditions.

$2 \times 1\text{ W}$ portable/mains-fed stereo power amplifier**TDA7053****RATINGS**

Limiting values in accordance with the Absolute Maximum System (IEC 134)

parameter	conditions	symbol	min.	max.	unit
Supply voltage		V_P	—	18	V
Non-repetitive peak output current		I_{OSM}	—	1.5	A
Total power dissipation		P_{tot}	see Fig. 2		
Crystal temperature		T_c	—	+150	°C
Storage temperature range		T_{stg}	-65	+150	°C

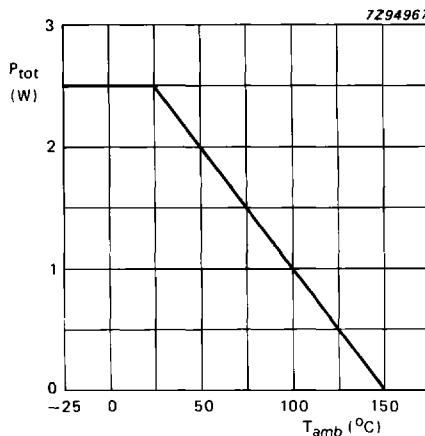
THERMAL RESISTANCEFrom junction to ambient $R_{th\ j-a}$ 50 K/W**Power dissipation**Assuming: $V_P = 6\text{ V}$ and $R_L = 8\Omega$:The maximum sinewave dissipation is 1.8 W , therefore $T_{amb(max.)} = 150 - (50 \times 1.8) = 60\text{ }^{\circ}\text{C}$.

Fig. 2 Power derating curve.

$2 \times 1\text{ W}$ portable/mains-fed stereo power amplifier**TDA7053****CHARACTERISTICS** $V_P = 6\text{ V}$; $R_L = 8\Omega$; $T_{amb} = 25^\circ\text{C}$; unless otherwise specified; measured from test circuit, Fig. 7.

parameter	conditions	symbol	min.	typ.	max.	unit
Supply voltage range		V_P	3	6	15	V
Total quiescent current	$R_L = \infty$ note 1	I_{tot}	—	9	16	mA
Input bias current		I_{bias}	—	100	300	nA
Supply voltage ripple rejection	note 2	SVRR	40	50	—	dB
Input impedance		Z_I	—	100	—	kΩ
DC output offset voltage	note 3	$\Delta V_{13.16}$	—	—	100	mV
		$\Delta V_{12.9}$	—	—	100	mV
Noise output voltage (RMS value)	note 4	$V_{no(rms)}$	—	150	300	μV
	note 5	$V_{no(rms)}$	—	60	—	μV
Output power	THD = 10%	P_O	—	1.2	—	W
Total harmonic distortion	$P_O = 0.1\text{ W}$	THD	—	0.2	1.0	%
Internal voltage gain		G_V	38	39	40	dB
Channel balance		ΔG_V	—	—	1	dB
Channel separation	note 3	α	40	—	—	dB
Frequency response		f	—	0.02 to 20	—	kHz

Notes to the characteristics

- With a practical load the total quiescent current depends on the offset voltage.
- Ripple rejection measured at the output with $R_S = 0\Omega$ and $f = 100\text{ Hz}$ to 10 kHz . The ripple voltage (200 mV) is applied to the positive supply rail.
- $R_S = 5\text{ k}\Omega$.
- The noise output voltage (RMS value) is measured with $R_S = 5\text{ k}\Omega$, unweighted and a bandwidth of 60 Hz to 15 kHz .
- The noise output voltage (RMS value) is measured with $R_S = 0\Omega$ and $f = 500\text{ kHz}$ with 5 kHz bandwidth. If $R_L = 8\Omega$ and $L_L = 200\mu\text{H}$ the noise output current is only 100 nA .

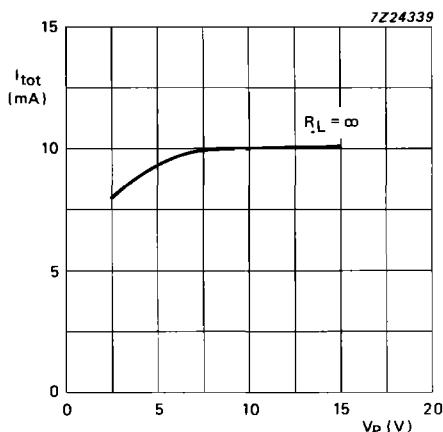
2×1 W portable/mains-fed stereo power amplifier**TDA7053****APPLICATION INFORMATION**

Fig. 3 Quiescent current as a function of voltage supply (V_p); $T_{amb} = 60$ °C.



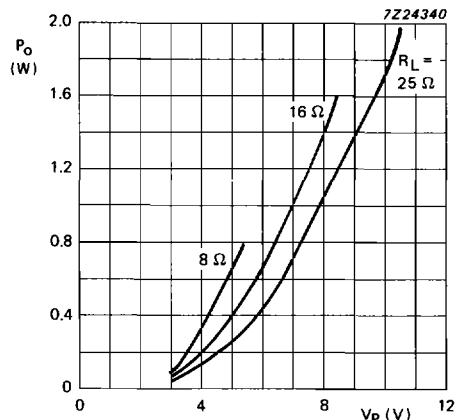


Fig. 4 Output power as a function of voltage supply (V_p); THD = 10%; $f = 1$ kHz; $T_{amb} = 60$ °C.

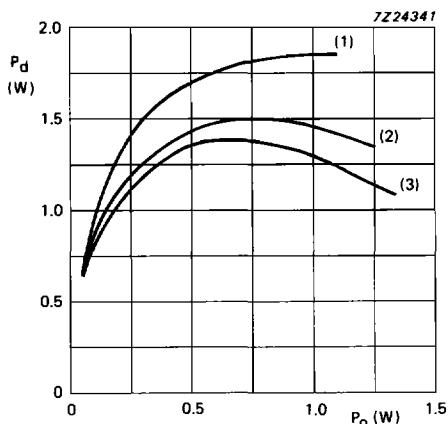

- (1) $V_p = 6.0$ V; $R_L = 8\Omega$
- (2) $V_p = 7.5$ V; $R_L = 16\Omega$
- (3) $V_p = 9.0$ V; $R_L = 25\Omega$

Fig. 5 Power dissipation as a function of output power; $f = 1$ kHz; $T_{amb} = 60$ °C.

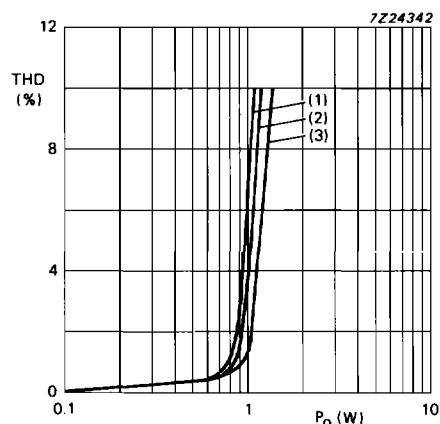

- (1) $V_p = 6.0$ V; $R_L = 8\Omega$
- (2) $V_p = 7.5$ V; $R_L = 16\Omega$
- (3) $V_p = 9.0$ V; $R_L = 25\Omega$

Fig. 6 Total harmonic distortion as a function of output power; $f = 1$ kHz; $T_{amb} = 60$ °C.




$2 \times 1\text{ W}$ portable/mains-fed stereo power amplifier**TDA7053**

Fig. 7 Test and application circuit diagram.

2 × 1 W portable/mains-fed stereo power amplifier**TDA7053****APPLICATION INFORMATION (continued)**

7Z21558.1

Fig. 8 Printed-circuit board, track side.

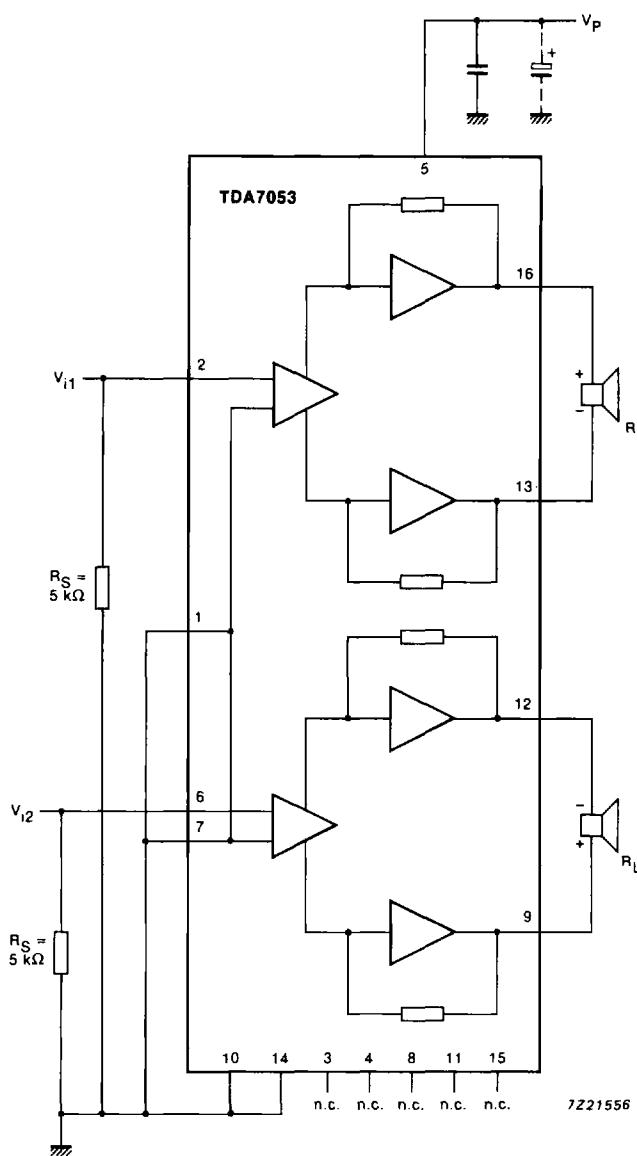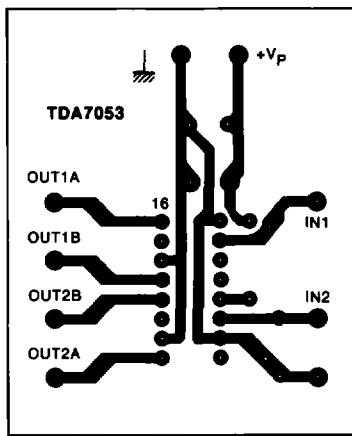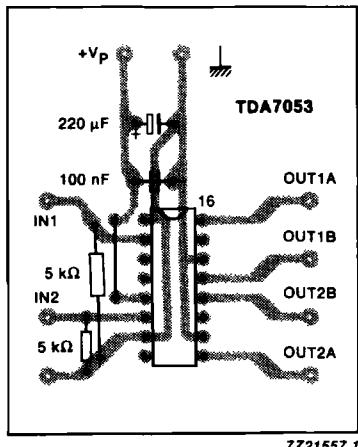

7Z21557.1

Fig. 9 Printed-circuit board, component side.