

**3 Stereo Inputs (1 differential Input) With Gain 0~+15dB
 Volume Controller -79dB~+15dB With Soft Step
 Class AB Headphone Driver, Low voltage**

FEATURES

- Operation range: 2.5V~6.5V.
- One quasi-differential input.
- Soft step volume control : -79dB ~ +15dB.
- Input Gain: 0dB ~ +15dB.
- Low power consumption.
- Good PSRR and low pop noise.
- I²C interface.
- Housed in 16 pin SOP, SSOP packages.


APPLICATIONS

- Multimedia system
- Hi-Fi audio system.
- Bluetooth.
- DAB

DESCRIPTION


The MS6283 is a class AB headphone drivers with audio volume controller. The MS6283 have 3 sets of stereo input(1 differential Input), soft step control with programmable blend times. It uses CMOS technology specially for the low voltage application with low noise, rail-to-rail output.

BLOCK DIAGRAM

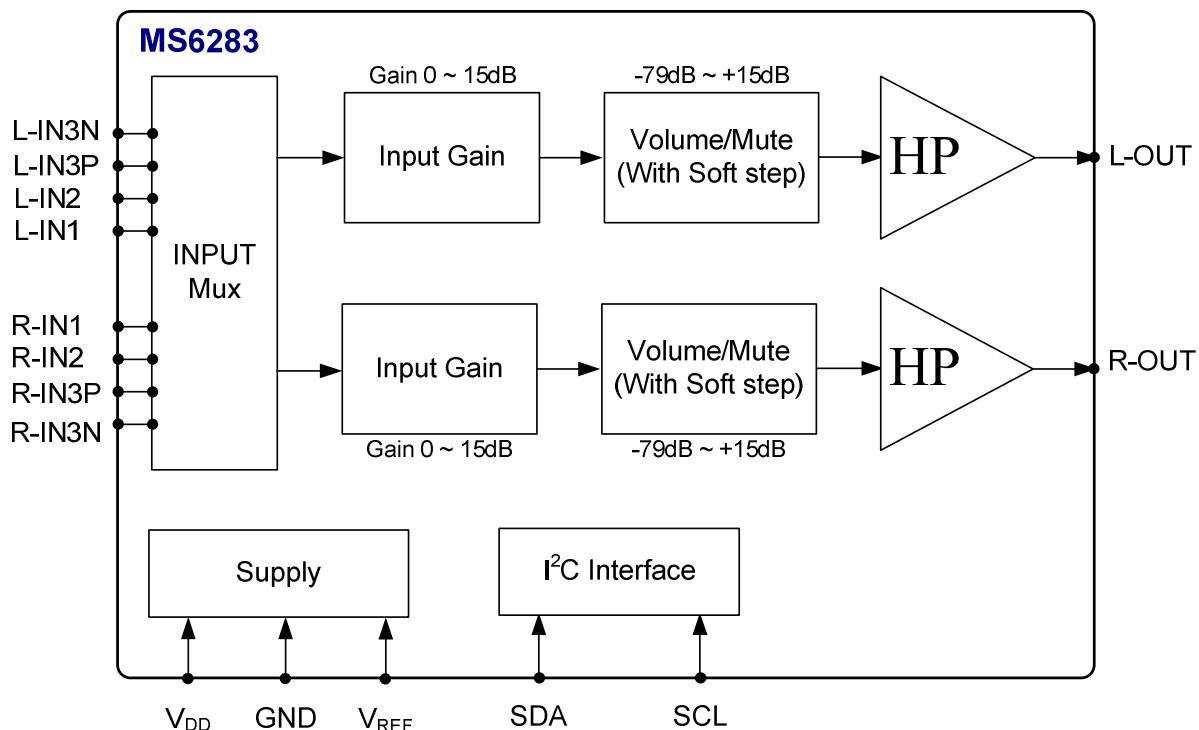

PIN CONFIGURATION

| Symbol | Pin | Description |
|------------------|------------|--|
| L-IN3N/NC | 1 | Negative Input For 3 rd Left Channel(Differential) / No Connected(Single End) |
| L-IN3P/L-IN3 | 2 | Positive Input For 3 rd Left Channel(Differential) / 3 rd Left Channel Input |
| NC | 3 | No Connected |
| L-IN2 | 4 | 2 nd Left Channel Input |
| L-IN1 | 5 | 1 st Left Channel Input |
| L-OUT | 6 | Left Channel Output |
| V _{SS} | 7 | Ground |
| SDA | 8 | I ² C Data Input |
| SCL | 9 | I ² C Clock Input |
| V _{DD} | 10 | Positive Supply Voltage |
| R-OUT | 11 | Right Channel Output |
| R-IN1 | 12 | 1 st Right Channel Input |
| R-IN2 | 13 | 2 nd Right Channel Input |
| R-IN3N/NC | 14 | Negative Input For 3 rd Right Channel(Differential) / No Connected(Single End) |
| R-IN3P/R-IN3 | 15 | Positive Input For 3 rd Right Channel(Differential) / 3 rd Right Channel Input |
| V _{REF} | 16 | Reference Voltage = 1/2V _{DD} |

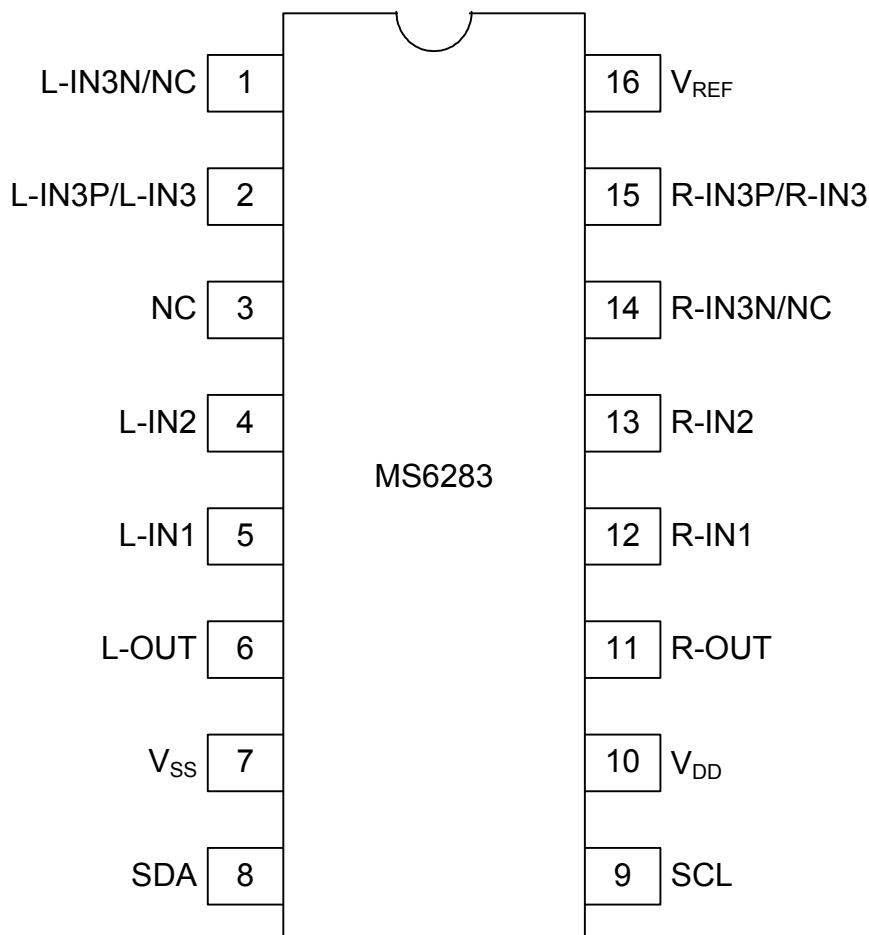

ORDERING INFORMATION

| Package | Part number | Packaging Marking | Transport Media |
|-------------------------|-------------|-------------------|--------------------------|
| 16-Pin SOP (lead free) | MS6283GTR | MS6283G | 2.5k Units Tape and Reel |
| 16-Pin SOP (lead free) | MS6283GU | MS6283G | 50 Units Tube |
| 16-Pin SSOP (lead free) | MS6283SSGTR | MS6283G | 2.5k Units Tape and Reel |
| 16-Pin SSOP (lead free) | MS6283SSGU | MS6283G | 100 Units Tube |

RoHS Compliance

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Rating | Unit |
|-------------------|--|----------------|------|
| V _{DD} | Supply Voltage | 6.5 | V |
| V _{ESD} | Electrostatic Handling | -3000 to 3000 | V |
| T _{STG} | Storage Temperature Range | -65 to 150 | °C |
| T _A | Operating Ambient Temperature Range | -40 to 85 | °C |
| T _J | Maximum Junction Temperature | 120 | °C |
| T _S | Soldering Temperature, 10 seconds | 260 | °C |
| R _{THJA} | Thermal Resistance from Junction to Ambient in Free Air SOP16 SSOP16 | 110.9 115.9 | °C/W |

OPERATING RATINGS

| Symbol | Parameter | Min | Typ | Max | Unit |
|-----------------|----------------|-----|-----|-----|------|
| V _{DD} | Supply Voltage | 2.5 | - | 6.5 | V |

5V ELECTRICAL CHARACTERISTICS(Ta=25°C; V_{DD}=5V, V_{SS}=0V; C_{REF} = 1uF ; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------|------------------------------|---------------------|------|-----|-----|------|
| Supply | | | | | | |
| I _Q | Quiescent Current | V _{IN} =0V | - | 5.6 | 6.2 | mA |
| I _{PD} | Power down current | V _{IN} =0V | - | 130 | - | uA |
| PSRR | Power Supply Rejection Ratio | f = 100Hz | 55 | 58 | - | dB |
| Input Selectors | | | | | | |
| R _{IN} | Input Resistance | Input 1,2,3 | | 100 | | kΩ |
| R _{IN-Diff} | Input Resistance | Differential | | 100 | | kΩ |
| G _{IN} | Input Gain Range | Gain | 0 | - | 15 | dB |
| G _{STEP} | Step Resolution | | - | 1 | - | dB |
| ERR _G | Gain Setting error | | -0.2 | 0 | 0.2 | dB |
| CMRR | Common mode rejection ratio | VCM = 1Vrms @ 1KHz | 40 | 55 | - | dB |
| | | VCM = 1Vrms @ 10KHz | 40 | 55 | - | dB |

| Volume control | | | | | | |
|------------------------------|--------------------------------------|--------------------------|------|-------|-----|------|
| CR _{VOL} | Volume Control Range | Attenuation & Gain | -79 | - | +15 | dB |
| RES _{VOL} | Volume Step Resolution | | - | 1 | - | dB |
| ERR _{VOL} | Volume Setting Error | Av = +15 to -40dB | -0.5 | 0 | 1 | dB |
| | | Av = -40 to -79dB | -1 | 0 | 5 | dB |
| MUTE | Mute Attenuation | V _{in} =0dBV | | -90 | | dB |
| General | | | | | | |
| V _{O_{MAX}} | Maximum Output Voltage Swing | (THD+N)/S <0.1% | - | 1.45 | - | Vrms |
| THD+N | Total Harmonic Distortion Plus Noise | V _{OUT} = 1Vrms | - | -64 | - | dB |
| | | | - | 0.063 | - | % |
| S/N | Signal-to-Noise Ratio | V _{OUT} = 1Vrms | - | 93 | - | dB |
| CS | Channel Separation | | 90 | 95 | - | dB |
| Bus Input | | | | | | |
| V _{IH} | Bus High Input Level | | 1.8 | - | - | V |
| V _{IL} | Bus Low Input Level | | - | - | 0.8 | V |

3.3V ELECTRICAL CHARACTERISTICS

(Ta=25°C; V_{DD}=3.3V, V_{SS}=0V; C_{REF} = 1uF ; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)










| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------------|--------------------------------------|------------------------------|-----|-------|-----|------|
| Supply | | | | | | |
| I _Q | Quiescent Current | V _{IN} =0V | - | 4.7 | 5.2 | mA |
| I _{PD} | Power down current | V _{IN} =0V | - | 82 | - | uA |
| PSRR | Power Supply Rejection Ratio | f = 100Hz | 65 | 70 | - | dB |
| General | | | | | | |
| V _{O_{MAX}} | Maximum Output Voltage Swing | (THD+N)/S <0.1% | - | 1 | - | Vrms |
| THD+N | Total Harmonic Distortion Plus Noise | V _{OUT} = 0.707Vrms | - | -65 | - | dB |
| | | | - | 0.056 | - | % |
| S/N | Signal-to-Noise Ratio | V _{OUT} = 0.707Vrms | - | 90 | - | dB |
| CS | Channel Separation Left/Right | | 90 | 93 | - | dB |


2.5V ELECTRICAL CHARACTERISTICS

(Ta=25°C; V_{DD}=2.5V, V_{SS}=0V; C_{REF} = 1uF ; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)


| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------------|--------------------------------------|------------------------------|-----|-------|-----|------|
| Supply | | | | | | |
| I _Q | Quiescent Current | V _{IN} =0V | - | 3.3 | 3.6 | mA |
| I _{PD} | Power down current | V _{IN} =0V | - | 60 | - | uA |
| PSRR | Power Supply Rejection Ratio | f = 100Hz | 60 | 65 | - | dB |
| General | | | | | | |
| V _{O_{MAX}} | Maximum Output Voltage Swing | (THD+N)/S <0.1% | - | 0.707 | - | Vrms |
| THD+N | Total Harmonic Distortion Plus Noise | V _{OUT} = 0.707Vrms | - | -65 | - | dB |
| | | | - | 0.056 | - | % |
| S/N | Signal-to-Noise Ratio | V _{OUT} = 0.707Vrms | - | 90 | - | dB |
| CS | Channel Separation Left/Right | | 90 | 93 | - | dB |

TYPICAL PERFORMANCE CHARACTERISTICS

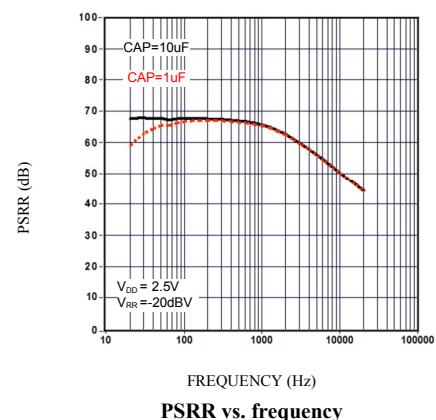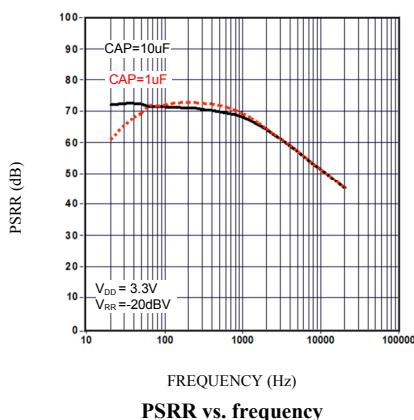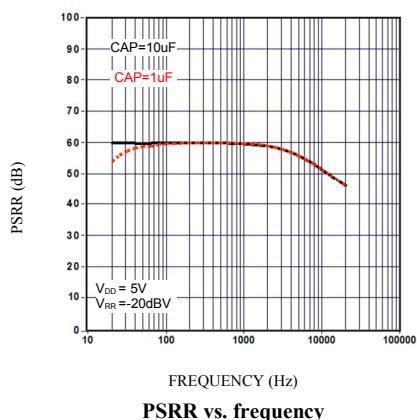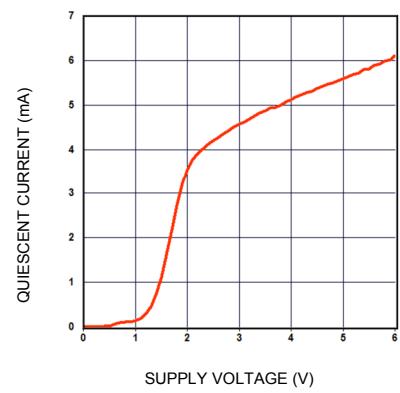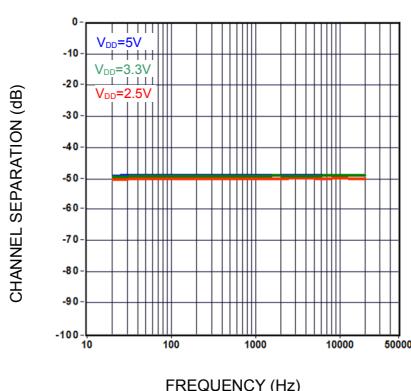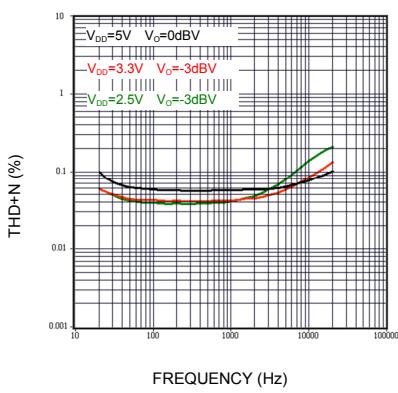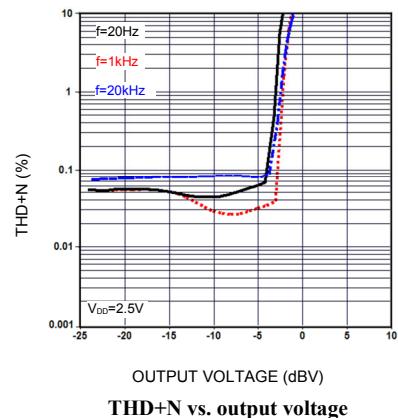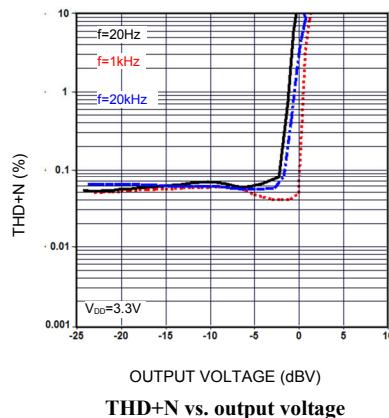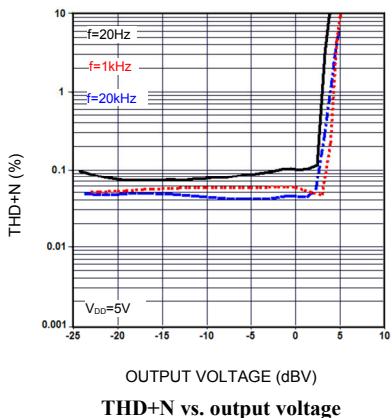(Ta=25°C; C_{REF} = 1uF, 10uF; R_L=32 Ω ; refer to the application circuit; unless otherwise specified)

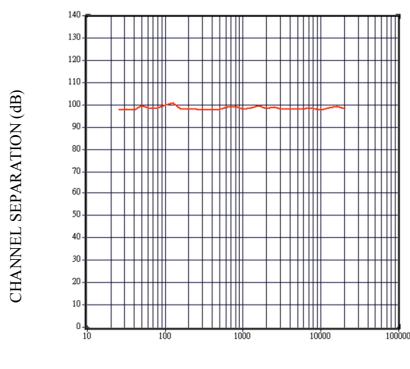

Channel separation vs. frequency

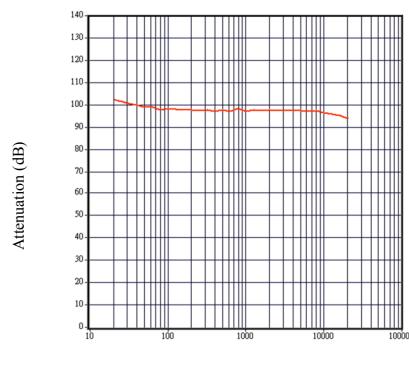


Mute vs. frequency

I²C BUS DESCRIPTION

Start and stop conditions


A start condition is activated when the SCL is set to HIGH and SDA shifts from HIGH to LOW state. The stop condition is activated when SCL is set to HIGH and SDA shifts from LOW to HIGH state. Please refer to the timing diagram below.

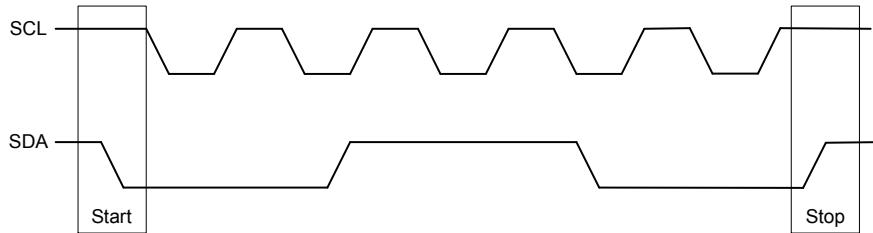

SCL : Serial Clock Line, SDA : Serial Data Line

Data validity

A data on the SDA line is considered valid and stable only when the SCL signal is in HIGH state. The HIGH and LOW states of the SDA line can only change when the SCL signal is LOW. Please refer to the figure below.

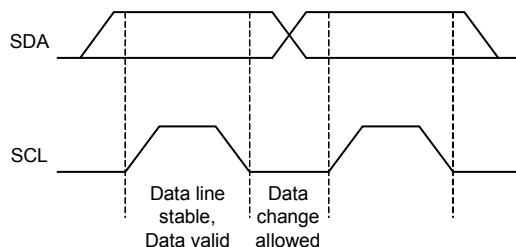


Byte format

Every byte transmitted to the SDA line consists of 8 bits. Each byte must be followed by an acknowledge bit. The MSB is transmitted first.

Acknowledge


During the Acknowledge clock pulse, the master (up) put a resistive HIGH level on the SDA line. The peripheral (audio processor) that acknowledges has to pull-down (LOW) the SDA line during the Acknowledge clock pulse so that the SDA line is in a stable LOW state during this clock pulse. Please refer to the diagram below.

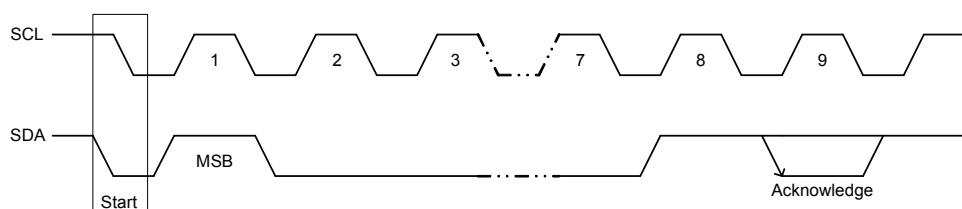

The audio processor that has been addressed has to generate an Acknowledge after receiving each byte, otherwise, the SDA line will remain at the HIGH level during the ninth (9th) clock pulse. In this case, the master transmitter can generate the STOP information in order to abort the transfer.

BUS INTERFACE

Data are transmitted to and from the MCU to the MS6283 via the SDA and SCL. The SDA and SCL make up the BUS interface. It should be noted that pull-up resistors must be connected to the positive supply voltage.

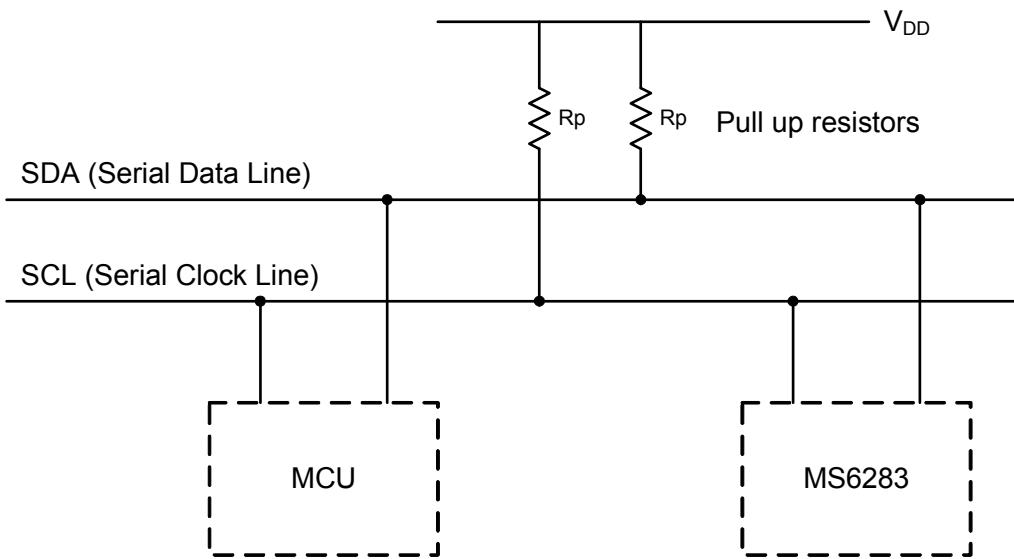

Interface protocol

The format consists of the following

- A START condition
- A chip address byte including the MS6283 address. (7bits)
- The 8th bit of the byte must be “0”.
- The MS6283 must always acknowledge the end of each transmitted byte.
- A data sequence (N-bytes + Acknowledge)
- A STOP condition

| | MSB | | | | | | | | LSB | | | | | |
|--------------------|-----|---|---|---|---|---|---|---|-----|-------------|-----|------|-----|------|
| Start | 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | ACK | Sub Address | ACK | Data | ACK | STOP |
| ← MS6283 Address → | | | | | | | | | | | | | | |

Chip Address

The chip address of the MS6283 is 88H.

| | | | | | | | |
|--------------------|---|---|---|---|---|---|---|
| 1 | 0 | 0 | 0 | 1 | 0 | 0 | 0 |
| ← MS6283 address → | | | | | | | |

SubAddress

| MSB | | | | | | | | LSB | Function | |
|------------|----|----|----|----|----|----|----|--|-----------------|--|
| A7 | A6 | A5 | A4 | A3 | A2 | A1 | A0 | | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Soft-step time / ON/OFF , SE/DIFF Selector | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | L-channel, Input selector / Input Gain Control | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | R-channel, Input selector / Input Gain Control | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 2-channel, Input selector / Input Gain Control | | |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | L-channel, Volume Control | | |
| 0 | 0 | 0 | 0 | 0 | 1 | 0 | 1 | R-channel, Volume Control | | |
| 0 | 0 | 0 | 0 | 0 | 1 | 1 | 0 | 2-channel, Volume Control | | |
| 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | Power management | | |

Soft-step time / ON / OFF , SE/DIFF Selector (0H)

| MSB | | | | | | | | LSB | Function | | | | |
|------------|----|----|----|----|----|----|----|------------|-----------------------|--|--|--|--|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | | | | | |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0.64ms | Soft-step Time | | | | |
| | | | | | 0 | 0 | 1 | 1.28ms | | | | | |
| | | | | | 0 | 1 | 0 | 2.56ms | | | | | |
| | | | | | 0 | 1 | 1 | 5.12ms | | | | | |
| | | | | | 1 | 0 | 0 | 10.24ms | | | | | |
| | | | | | 1 | 0 | 1 | 20.48ms | | | | | |
| | | | | | 1 | 1 | 0 | 40.96ms | | | | | |
| | | | | | 1 | 1 | 1 | 81.92ms | | | | | |
| | | | | | | | | 0 | Soft-step | | | | |
| | | | | | | | | 1 | On | | | | |
| | | | | | | | | | Off | | | | |
| 0 | | | | | | | | | SE/DIFF | | | | |
| 1 | | | | | | | | | Differential | | | | |
| | | | | | | | | | Single-ended | | | | |

The initial condition is Single-ended, Soft-step Off, Soft-step time 40.96ms.

Input selector & Gain Control (01H , 02H , 03H)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|-----|----------------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| | | 0 | 0 | | | | | | Input selector |
| | | 0 | 1 | | | | | | IN 1 |
| | | 1 | 0 | | | | | | IN 2 |
| | | 1 | 1 | | | | | | Grouded |
| | | | | | | | | | IN 3 / DIFF |
| | | | | 0 | 0 | 0 | 0 | | Input Gain |
| | | | | 0 | 0 | 0 | 1 | | 0dB |
| | | | | 0 | 0 | 1 | 0 | | 1dB |
| | | | | 0 | 0 | 1 | 1 | | 2dB |
| | | | | 0 | 0 | 1 | 1 | | 3dB |
| | | | | 0 | 1 | 0 | 0 | | 4dB |
| | | | | 0 | 1 | 0 | 1 | | 5dB |
| | | | | 0 | 1 | 1 | 0 | | 6dB |
| | | | | 0 | 1 | 1 | 1 | | 7dB |
| | | | | 1 | 0 | 0 | 0 | | 8dB |
| | | | | 1 | 0 | 0 | 1 | | 9dB |
| | | | | 1 | 0 | 1 | 0 | | 10dB |
| | | | | 1 | 0 | 1 | 1 | | 11dB |
| | | | | 1 | 1 | 0 | 0 | | 12dB |
| | | | | 1 | 1 | 0 | 1 | | 13dB |
| | | | | 1 | 1 | 1 | 0 | | 14dB |
| | | | | 1 | 1 | 1 | 1 | | 15dB |

The initial condition is IN3, 14dB. We suggest the gain is set as the power is up. For example, set and fix the gain +10dB, the volume range will be controlled from -69dB to +25dB.

Volume Control (04H , 05H , 06H)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--------|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| | 0 | 0 | 0 | 1 | 1 | 1 | 1 | + 15dB | |
| | 0 | 0 | 0 | 1 | 1 | 1 | 0 | + 14dB | |
| : | : | : | : | : | : | : | : | : | |
| | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0dB | |
| | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0dB | |
| | 0 | 0 | 1 | 0 | 0 | 0 | 1 | - 1dB | |
| : | : | : | : | : | : | : | : | : | |
| | 0 | 0 | 1 | 1 | 1 | 1 | 1 | - 15dB | |
| | 0 | 1 | 0 | 0 | 0 | 0 | 0 | - 16dB | |
| : | : | : | : | : | : | : | : | : | |
| | 0 | 1 | 0 | 1 | 1 | 1 | 1 | - 31dB | |
| | 0 | 1 | 1 | 0 | 0 | 0 | 0 | - 32dB | |
| : | : | : | : | : | : | : | : | : | |
| | 0 | 1 | 1 | 1 | 1 | 1 | 1 | - 47dB | |
| 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | - 48dB | |
| : | : | : | : | : | : | : | : | : | |
| 1 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | - 63dB | |
| 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | - 64dB | |
| : | : | : | : | : | : | : | : | : | |
| 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | - 79dB | |
| 1 | 1 | X | X | X | X | X | X | Mute | |

The initial condition is Mute.


Power management (07H)

| MSB | | | | | | | | LSB | Function |
|-----|----|----|----|----|----|----|----|--|----------|
| D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 | | |
| | | | | | 0 | 0 | 0 | Release of V _{REF} to GND. | |
| | | | | | X | 1 | 1 | Set the voltage of V _{REF} to V _{DD} /2. All devices Active Power down | |


The initial condition is Power down , V_{REF} = GND.

Example


Soft-step Time 10.24ms , Soft-step ON , Single-ended Mode.

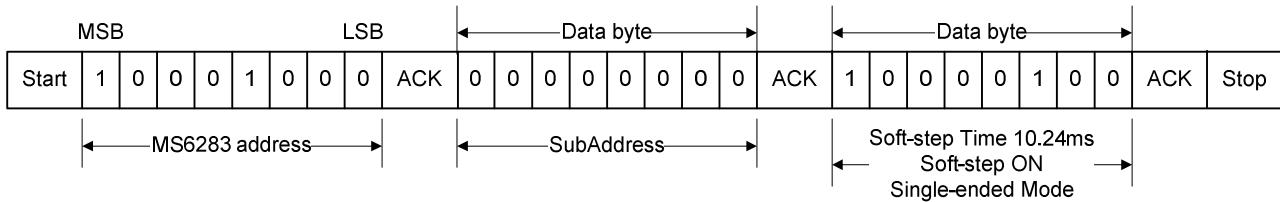


Set the $1/2V_{DD}$, All device active.

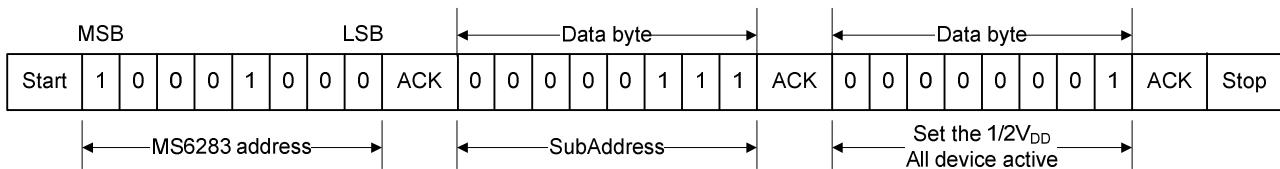

Set Input gain of both channels at +4dB , select Input as IN1.

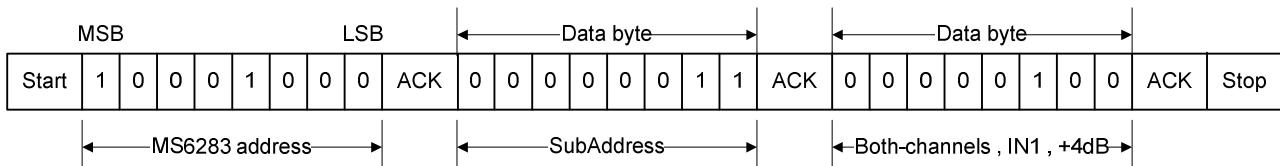

Set Volume of both-channels at -15dB

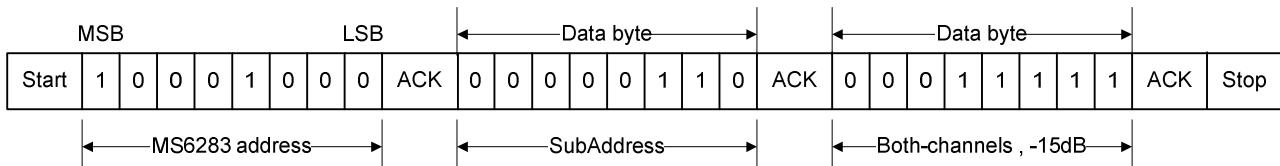

Soft-step volume


When the volume-level is changed audible clicks could appear at the output. The root cause of those clicks could be the sudden change of the envelope of the audio signal. With the Soft-step feature, this click could be reduced to a minimum. Soft-step supports N dB volume change, including mute.

Example


Soft-Step Time = 5.12ms

0dB → -16dB → 0dB

$V_{in} = 1V_{rms} @ 1KHz$

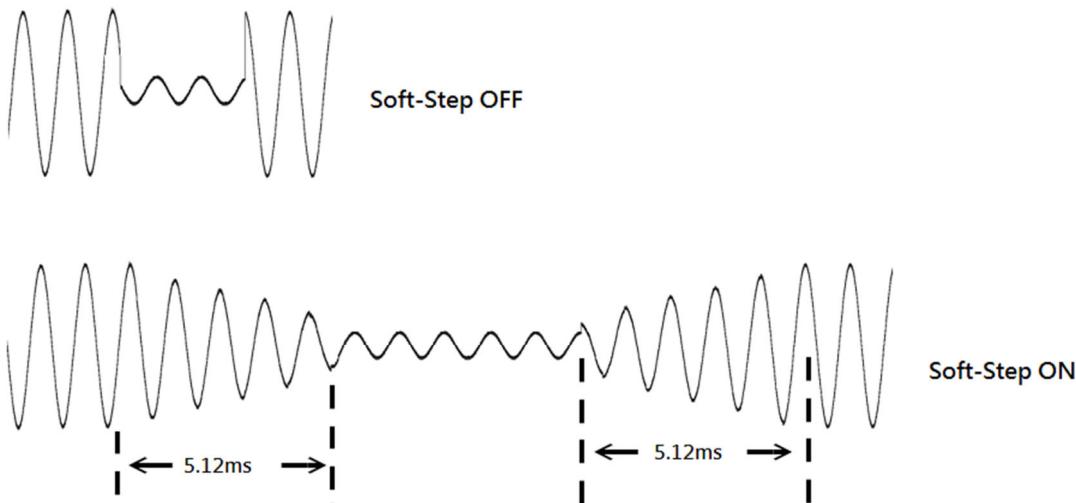


$V_{in} = 1V_{rms} @ 2KHz$

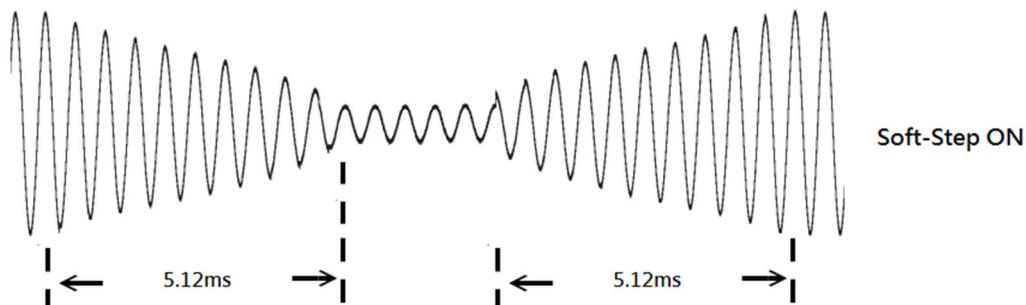


+8dB → -16dB → +8dB

Vin = 0.5Vrms @ 1KHz

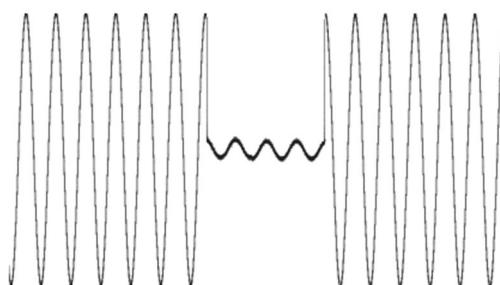


Soft-Step OFF

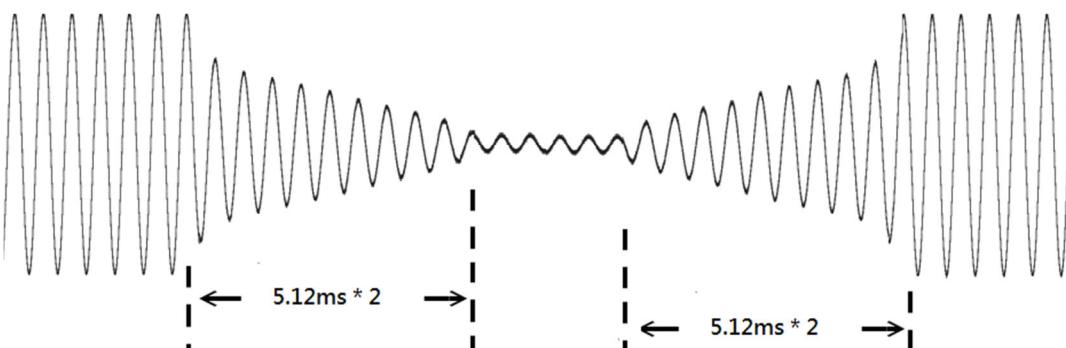


Soft-Step ON

0dB → Mute → 0dB



Vin = 1Vrms @ 1KHz

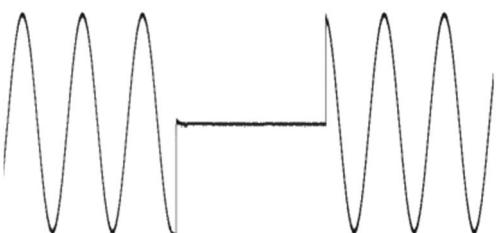


Soft-Step OFF

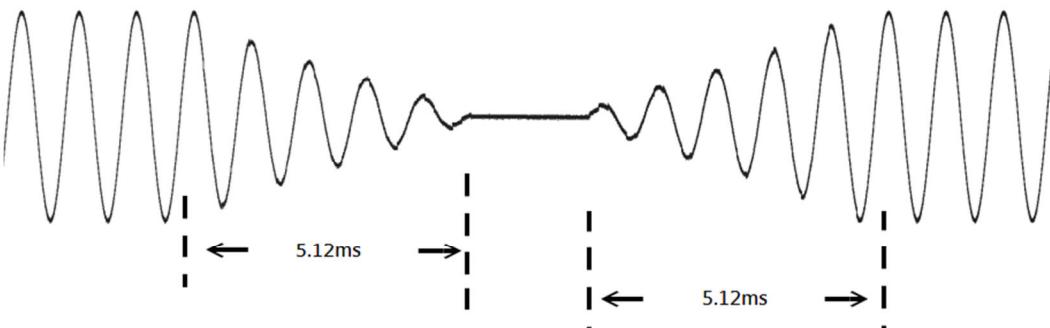

Soft-Step ON

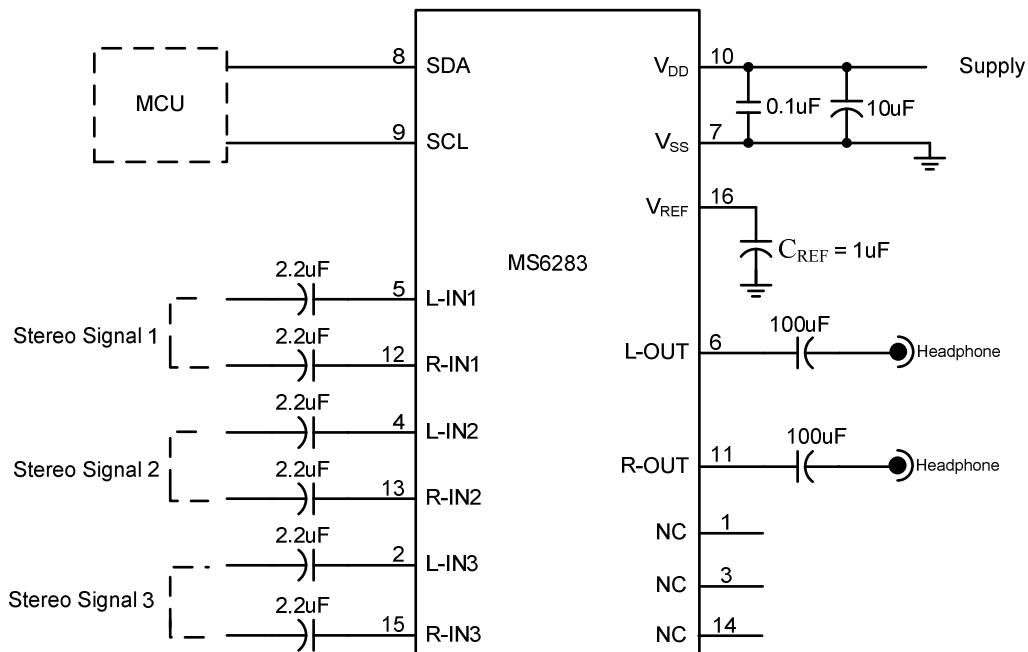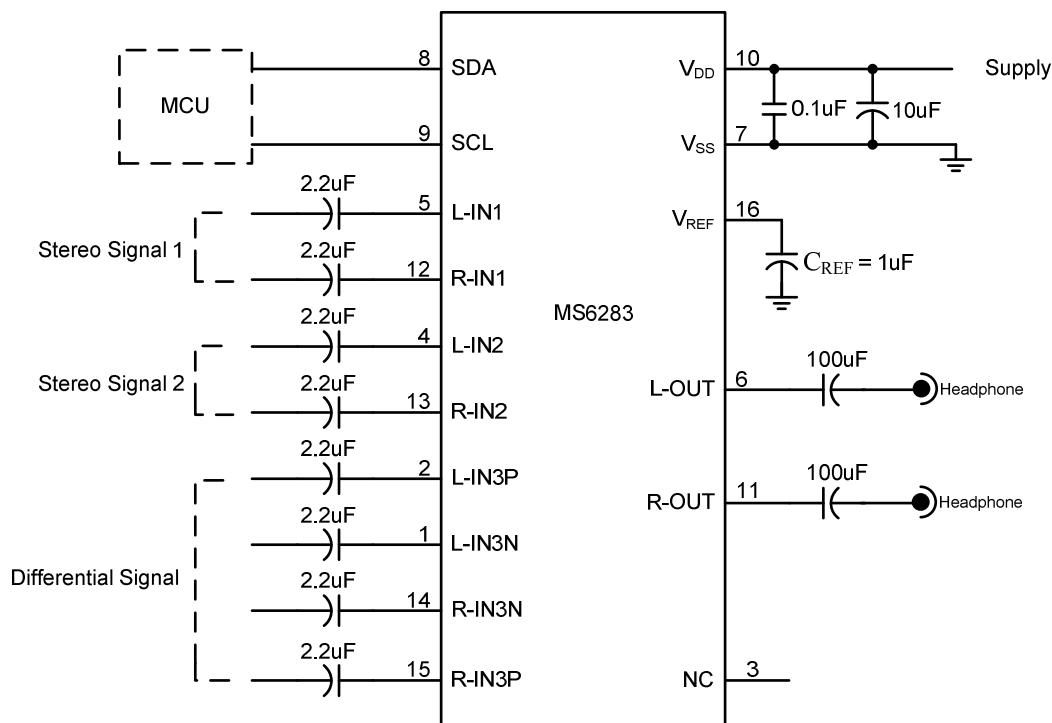
APPLICATION INFORMATION**Basic application example(Single-ended Mode)****Basic application example(Differential Mode)**

Basic application flowchart

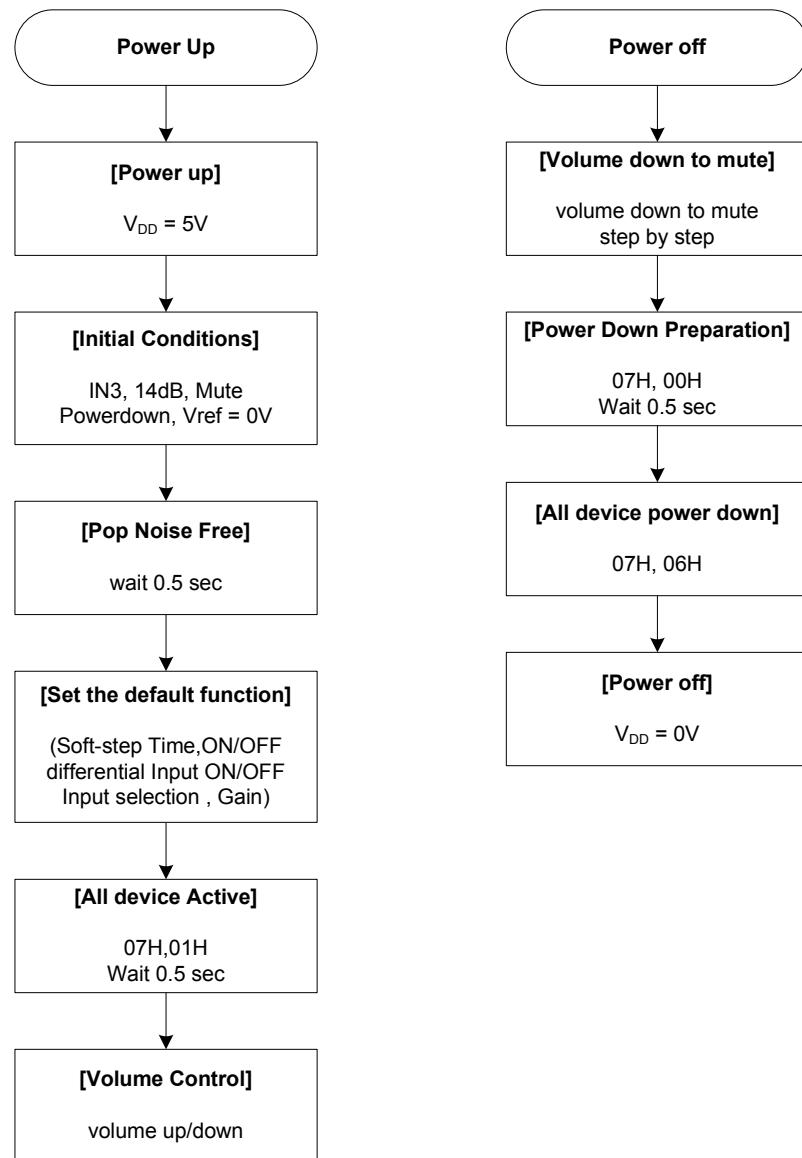


EXTERNAL DIMENSIONS

SOP16

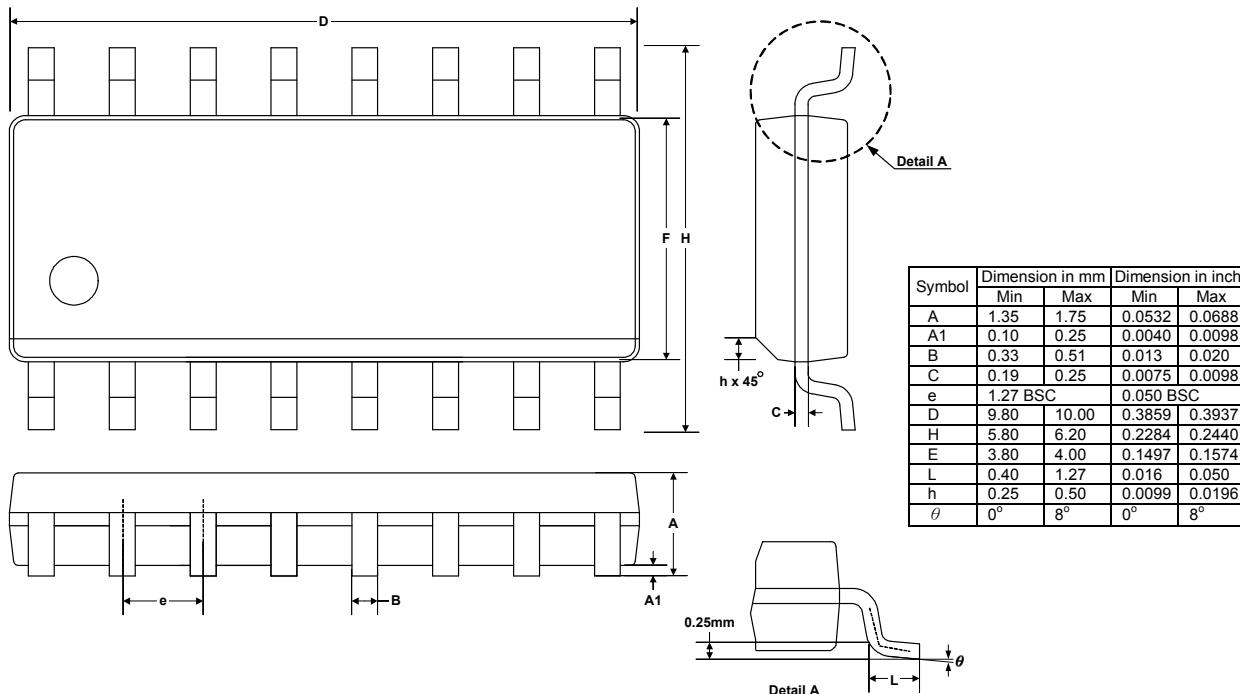


SSOP16

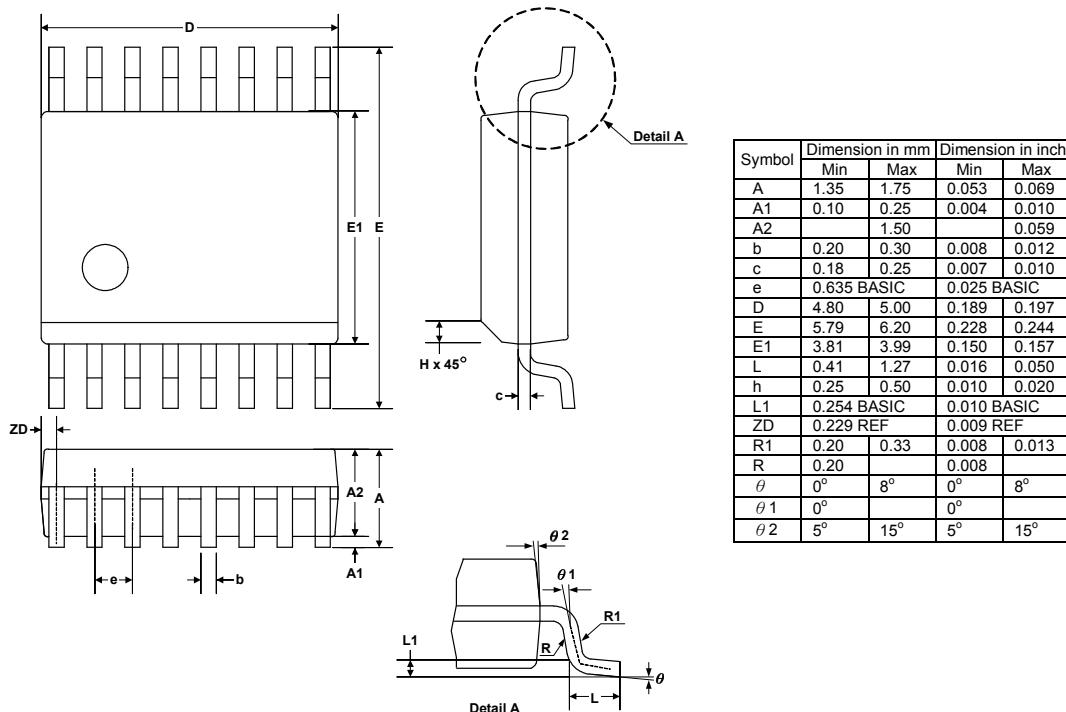

TAPE AND REEL (Unit : mm)

SOP16

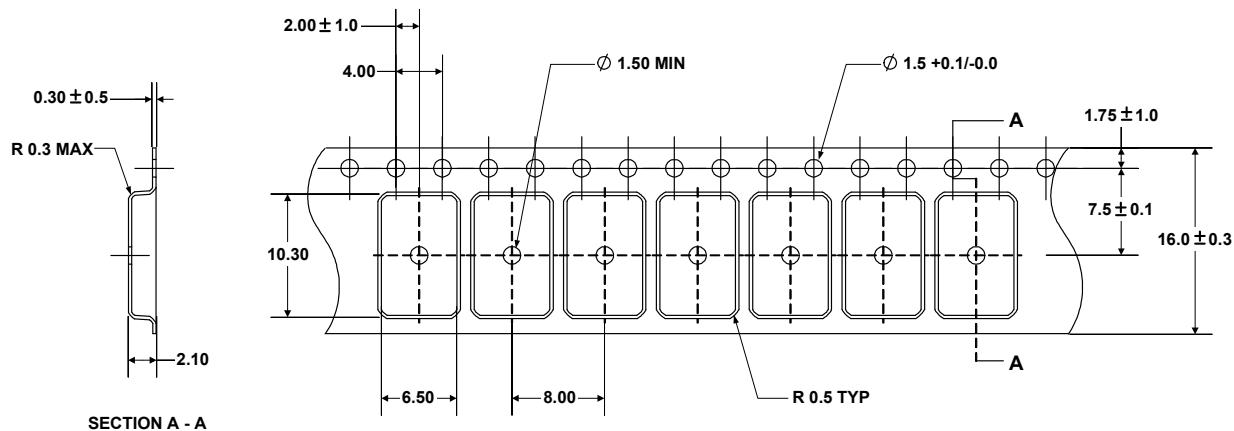

SSOP16

