

MSC1175M


RF & MICROWAVE TRANSISTORS AVIONICS APPLICATIONS

Features

- 1025 – 1150 MHz
- 50 VOLTS
- INTERNAL INPUT/OUTPUT MATCHING
- $P_{OUT} = 175$ WATTS
- $G_p = 7.7$ dB MINIMUM
- COMMON BASE CONFIGURATION


DESCRIPTION:

The MSC1175M is a NPN bipolar transistor specifically designed for high peak pulse power applications such as DME/TACAN. This device is capable of withstanding a minimum 20:1 load VSWR at any phase angle under full rated conditions. Internal impedance matching provides consistent broadband performance.



.400 x .400 2NLFL (M218)
hermetically sealed

PIN CONNECTION



1. Collector 3. Emitter
2. Base 4. Base

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
P_{DISS}	Power Dissipation	400	W
I_C	Device Current	12	A
V_{CC}	Collector-Supply Voltage*	55	V
T_J	Junction Temperature	250	°C
T_{STG}	Storage Temperature	-65 to +200	°C

Thermal Data

$R_{TH(J-C)}$	Thermal Resistance Junction-case	0.3	°C/W
---------------	----------------------------------	-----	------

ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)

STATIC

Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
BV_{CBO}	I_C = 10 mA I_E = 0 mA	65	---	---	V
BV_{EBO}	I_E = 1 mA I_C = 0 mA	3.5	---	---	V
BV_{CER}	I_C = 15 mA R_{BE} = 10 Ω	65	---	---	V
I_{CES}	V_{CE} = 50 V	---	---	12.5	mA
h_{FE}	V_{CE} = 5 V I_C = 1 A	15	---	120	---

DYNAMIC

Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
P_{OUT}	f = 1025 - 1150 MHz P_{IN} = 30 W V_{CC} = 50 V	175	190	---	W
η_C	f = 1025 - 1150 MHz P_{IN} = 30 W V_{CC} = 50 V	40	42	---	%
G_P	f = 1025 - 1150 MHz P_{IN} = 30 W V_{CC} = 50 V	7.7	8.0	---	dB
Conditions	Pulse Width = 10μS Duty Cycle = 1%				

IMPEDANCE DATA

FREQ	$Z_{IN} (\Omega)$	$Z_{CL} (\Omega)$
1025 MHz	$2.3 + j5.1$	$2.4 - j4.2$
1090 MHz	$2.0 + j4.5$	$2.0 - j3.5$
1150 MHz	$2.2 + j3.3$	$2.5 - j2.5$


$V_{CC} = 50V$

$P_{IN} = 30W$

Normalized to 50 Ω

TEST CIRCUIT

Ref.: Dwg. No. C127469

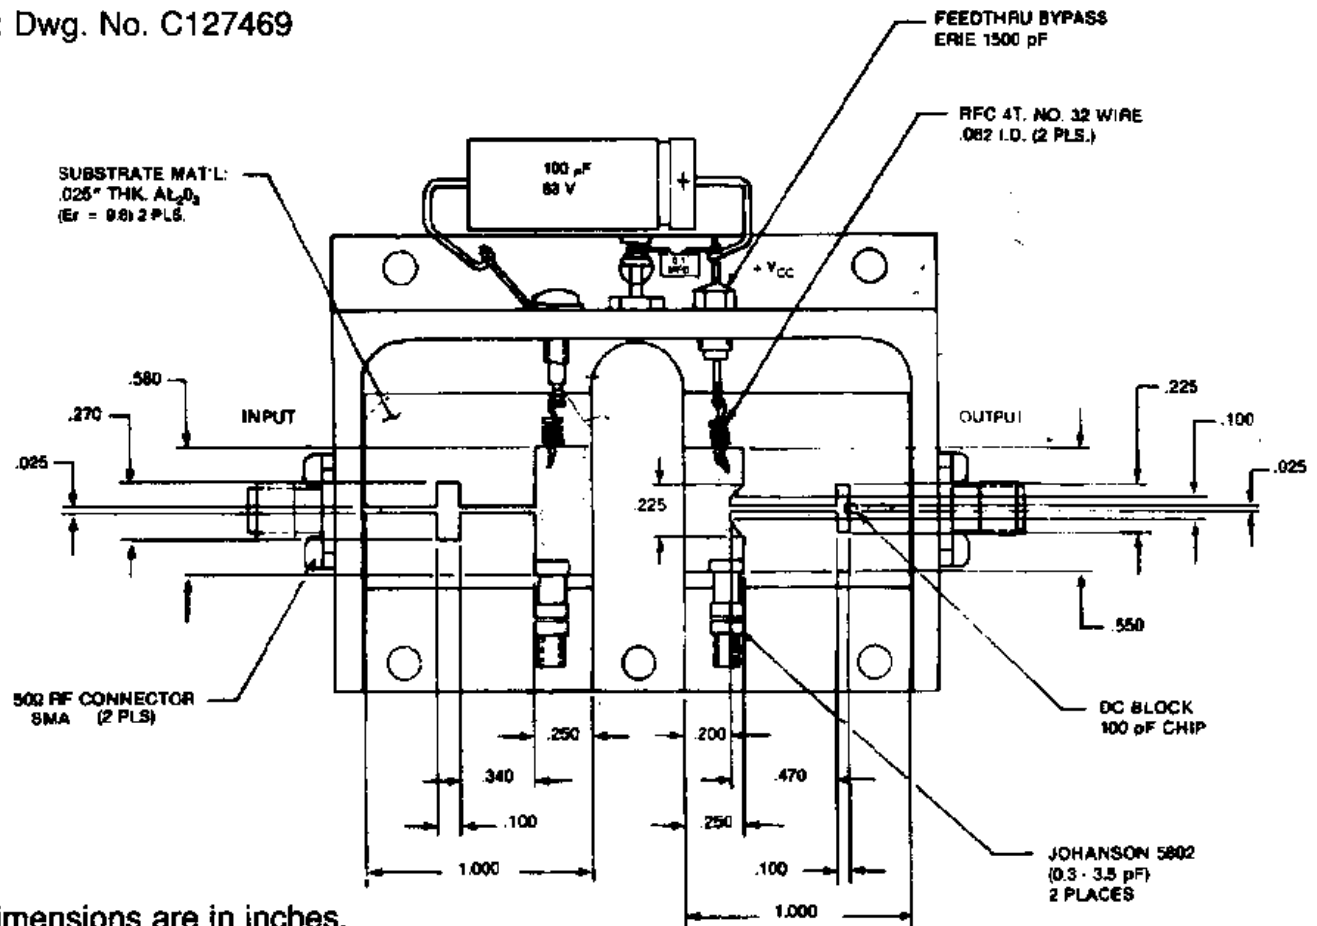

All dimensions are in inches.

PACKAGE MECHANICAL DATA

