

MX25L6465E/MX25L12865E HIGH PERFORMANCE SERIAL FLASH SPECIFICATION



Contents

FEATURES	5
GENERAL DESCRIPTION	7
Table 1. Additional Features	7
PIN CONFIGURATION	8
PIN DESCRIPTION	8
BLOCK DIAGRAM	9
DATA PROTECTION	10
Table 2. Protected Area Sizes	11
Table 3. 4K-bit Secured OTP Definition	11
Memory Organization	12
Table 4-1. Memory Organization for MX25L6465E	12
Table 4-2. Memory Organization for MX25L12865E	13
DEVICE OPERATION	14
Figure 1-1. Serial Modes Supported (for Normal Serial mode)	
Figure 1-2. Serial Modes Supported (for Double Transfer Rate serial read mode)	14
HOLD FEATURE	15
Figure 2. Hold Condition Operation	
COMMAND DESCRIPTION	16
Table 5. Command Sets	16
(1) Write Enable (WREN)	18
(2) Write Disable (WRDI)	
(3) Read Identification (RDID)	
(4) Read Status Register (RDSR)	
(5) Write Status Register (WRSR)	
Protection Modes	
(6) Read Data Bytes (READ)	
(7) Read Data Bytes at Higher Speed (FAST_READ)	
(8) Fast Double Transfer Rate Read (FASTDTRD)	
(9) 2 x I/O Read Mode (2READ)(10) 2 x I/O Double Transfer Rate Read Mode (2DTRD)	
(10) 2 x I/O Double Halister Rate Read Mode (2DTRD)(11) 4 x I/O Read Mode (4READ)	
(11) 4 x I/O Read Mode (4READ)	
(12) 4 x 1/0 Double Halister Rate Read Mode (4D1RD)	
(14) Block Erase (BE)	
(15) Block Erase (BE32K)	
(16) Chip Erase (CE)	
(17) Page Program (PP)	
(18) 4 x I/O Page Program (4PP)	
Program/Erase Flow(1) with read array data	
Program/Erase Flow(2) without read array data	
(19) Continuously program mode (CP mode)	
(20) Parallel Mode (Highly recommended for production throughputs increasing)	
(21) Deep Power-down (DP)	
(22) Release from Deep Power-down (RDP), Read Electronic Signature (RES)	29
(23) Read Electronic Manufacturer ID & Device ID (REMS), (REMS2), (REMS4), (REMS4D)	29
Table 6. ID Definitions	30



	(24) Enter Secured OTP (ENSO)	30
	(25) Exit Secured OTP (EXSO)	30
	(26) Read Security Register (RDSCUR)	30
	Security Register Definition	31
	(27) Write Security Register (WRSCUR)	31
	(28) Write Protection Selection (WPSEL)	32
	BP and SRWD if WPSEL=0	32
	The individual block lock mode is effective after setting WPSEL=1	33
	WPSEL Flow	34
	(29) Single Block Lock/Unlock Protection (SBLK/SBULK)	35
	Block Lock Flow	35
	Block Unlock Flow	36
	(30) Read Block Lock Status (RDBLOCK)	37
	(31) Gang Block Lock/Unlock (GBLK/GBULK)	37
	(32) Clear SR Fail Flags (CLSR)	37
	(33) Enable SO to Output RY/BY# (ESRY)	37
	(34) Disable SO to Output RY/BY# (DSRY)	37
	(35) Read SFDP Mode (RDSFDP)	38
	Read Serial Flash Discoverable Parameter (RDSFDP) Sequence	38
	Table a-1. Signature and Parameter Identification Data Values for MX25L6465E	39
	Table b-1. Parameter Table (0): JEDEC Flash Parameter Tables for MX25L6465E	40
	Table c-1. Parameter Table (1): Macronix Flash Parameter Tables for MX25L6465E	42
	Table a-2. Signature and Parameter Identification Data Values for MX25L12865E	43
	Table b-2. Parameter Table (0): JEDEC Flash Parameter Tables for MX25L12865E	44
	Table c-2. Parameter Table (1): Macronix Flash Parameter Tables for MX25L12865E	46
POV	VER-ON STATE	48
ELE	CTRICAL SPECIFICATIONS	49
	ABSOLUTE MAXIMUM RATINGS	49
	Figure 3. Maximum Negative Overshoot Waveform	49
	CAPACITANCE TA = 25°C, f = 1.0 MHz	49
	Figure 4. Maximum Positive Overshoot Waveform	49
	Figure 5. OUTPUT LOADING	
	Table 7-1. MX25L6465E DC CHARACTERISTICS (Temperature = -40°C to 85°C for Industrial grade, VC	
	2.7V ~ 3.6V)	
	Table 7-2. MX25L12865E DC CHARACTERISTICS (Temperature = -40°C to 85°C for Industrial grade, VC	CC =
	2.7V ~ 3.6V)	52
	Table 8-1. MX25L6465E AC CHARACTERISTICS (Temperature = -40°C to 85°C for Industrial grade, VC	C =
	2.7V ~ 3.6V)	
	Table 8-2. MX25L12865E AC CHARACTERISTICS (Temperature = -40°C to 85°C for Industrial grade, V	
	= 2.7V ~ 3.6V)	55
Timi	ng Analysis	57
	Figure 6. Serial Input Timing	57
	Figure 7. Output Timing	57
	Figure 8. Serial Input Timing for Double Transfer Rate Mode	58
	Figure 9. Serial Output Timing for Double Transfer Rate Mode	58
	Figure 10. Hold Timing	
	Figure 11. WP# Disable Setup Timing and Hold Timing during WRSR when SRWD=1	59
	Figure 12. Write Enable (WREN) Sequence (Command 06)	60
	Figure 13. Write Disable (WRDI) Sequence (Command 04)	
	Figure 14. Read Identification (RDID) Sequence (Command 9F)	60



Figure 15. Read Status Register (RDSR) Sequence (Command 05)	61
Figure 16. Write Status Register (WRSR) Sequence (Command 01)	61
Figure 17. Read Data Bytes (READ) Sequence (Command 03)	62
Figure 18. Read at Higher Speed (FAST_READ) Sequence (Command 0B)	62
Figure 19. Fast DT Read (FASTDTRD) Sequence (Command 0D)	62
Figure 20. 2 x I/O Read Mode Sequence (Command BB)	63
Figure 21. Fast Dual I/O DT Read (2DTRD) Sequence (Command BD)	
Figure 22. 4 x I/O Read Mode Sequence (Command EB)	64
Figure 23. 4 x I/O Read Enhance Performance Mode Sequence (Command EB)	
Figure 24. Fast Quad I/O DT Read (4DTRD) Sequence (Command ED)	
Figure 25. Fast Quad I/O DT Read (4DTRD) Enhance Performance Sequence (Command ED)	
Figure 26. Sector Erase (SE) Sequence (Command 20)	
Figure 27. Block Erase (BE/EB32K) Sequence (Command D8/52)	66
Figure 28. Chip Erase (CE) Sequence (Command 60 or C7)	
Figure 29. Page Program (PP) Sequence (Command 02)	
Figure 30. 4 x I/O Page Program (4PP) Sequence (Command 38)	
Figure 31. Continously Program (CP) Mode Sequence with Hardware Detection (Command AD)	
Figure 32-1. Enter Parallel Mode (ENPLM) Sequence (Command 55)	
Figure 32-2. Exit Parallel Mode (EXPLM) Sequence (Command 45)	
Figure 32-3. Parallel Mode Read Identification (Parallel RDID) Sequence (Command 9F)	
Figure 32-4. Parallel Mode Read Electronic Manufacturer & Device ID (Parallel REMS) Sequence (
90)	
Figure 32-5. Parallel Mode Release from Deep Power-down (RDP) and Read Electronic Signature ((RES)
Sequence	` '
Figure 32-6. Parallel Mode Read Array (Parallel READ) Sequence (Command 03)	71
Figure 32-7. Parallel Mode Page Program (Parallel PP) Sequence (Command 02)	
Figure 33. Deep Power-down (DP) Sequence (Command B9)	
Figure 34. Read Electronic Signature (RES) Sequence (Command AB)	72
Figure 35. Release from Deep Power-down (RDP) Sequence (Command AB)	72
Figure 36. Read Electronic Manufacturer & Device ID (REMS) Sequence (Command 90 or EF or D	F or CF)
Figure 37. Write Protection Selection (WPSEL) Sequence (Command 68)	73
Figure 38. Single Block Lock/Unlock Protection (SBLK/SBULK) Sequence (Command 36/39)	74
Figure 39. Read Block Protection Lock Status (RDBLOCK) Sequence (Command 3C)	
Figure 40. Gang Block Lock/Unlock (GBLK/GBULK) Sequence (Command 7E/98)	74
Figure 41. Power-up Timing	75
Table 9. Power-Up Timing	75
INITIAL DELIVERY STATE	75
OPERATING CONDITIONS	76
Figure 42. AC Timing at Device Power-Up	76
Figure 43. Power-Down Sequence	77
ERASE AND PROGRAMMING PERFORMANCE	78
DATA RETENTION	78
LATCH-UP CHARACTERISTICS	
ORDERING INFORMATION	
PART NAME DESCRIPTION	
PACKAGE INFORMATION	
REVISION HISTORY	
NEW HOLD I HIGH ON I	04

64/128M-BIT [x 1/x 2/x 4] CMOS MXSMIO[™] (SERIAL MULTI I/O) FLASH MEMORY

FEATURES

GENERAL

- Serial Peripheral Interface compatible -- Mode 0 and Mode 3
- 64Mb: 67,108,864 x 1 bit structure or 33,554,432 x 2 bits (two I/O mode) structure or 16,777,216 x 4 bits (four I/O mode) structure

128Mb: $134,217,728 \times 1$ bit structure or $67,108,864 \times 2$ bits (two I/O mode) structure or $33,554,432 \times 4$ bits (four I/O mode) structure

- · 4096 Equal Sectors with 4K bytes each
 - Any Sector can be erased individually
- · 512 Equal Blocks with 32K bytes each
 - Any Block can be erased individually
- · 256 Equal Blocks with 64K bytes each
 - Any Block can be erased individually
- Power Supply Operation
 - 2.7 to 3.6 volt for read, erase, and program operations
- Latch-up protected to 100mA from -1V to Vcc +1V

PERFORMANCE

· High Performance

 $VCC = 2.7 \sim 3.6 V$

- Normal read
 - 50MHz
- Fast read (Normal Serial Mode)
 - 1 I/O: 104MHz with 8 dummy cycles
 - 2 I/O: 70MHz with 4 dummy cycles
 - 4 I/O: 70MHz with 6 dummy cycles
- Fast read (Double Transfer Rate Mode)
 - 1 I/O: 50MHz with 6 dummy cycles
 - 2 I/O: 50MHz with 6 dummy cycles
 - 4 I/O: 50MHz with 8 dummy cycles
- Fast program time: 1.4ms(typ.) and 5ms(max.)/page (256-byte per page)
- Byte program time: 9us (typical)
- Continuously Program mode (automatically increase address under word program mode)
- Fast erase time: 60ms (typ.)/sector (4K-byte per sector); 0.7s(typ.) /block (64K-byte per block); 50s(typ.) /chip for 64Mb, 80s(typ.) /chip for 128Mb
- · Low Power Consumption
 - Low active read current: 19mA(max.) at 104MHz, 15mA(max.) at 66MHz and 10mA(max.) at 33MHz
 - Low active programming current: 25mA (max.)
 - Low active erase current: 25mA (max.)
 - Low standby current: 50uA (max.)/64Mb, 100uA (max.)/128Mb
 - Deep power down current: 128Mb is 40uA (max.), 64Mb is 20uA (max.)
- Typical 100,000 erase/program cycles

SOFTWARE FEATURES

- · Input Data Format
 - 1-byte Command code
- · Advanced Security Features
 - BP0-BP3 block group protect
 - Flexible individual block protect when OTP WPSEL=1
 - Additional 4K bits secured OTP for unique identifier
- · Auto Erase and Auto Program Algorithms
 - Automatically erases and verifies data at selected sector
 - Automatically programs and verifies data at selected page by an internal algorithm that automatically times the program pulse width (Any page to be programed should have page in the erased state first.)
- Status Register Feature
- Electronic Identification
 - JEDEC 1-byte Manufacturer ID and 2-byte Device ID
 - RES command for 1-byte Device ID
 - Both REMS, REMS4 and REMS4D commands for 1-byte Manufacturer ID and 1-byte Device ID
- Support Serial Flash Discoverable Parameters (SFDP) mode

HARDWARE FEATURES

- SCLK Input
 - Serial clock input
- SI/SIO0
 - Serial Data Input or Serial Data Input/Output for 2 x I/O mode and 4 x I/O mode
- SO/SIO1/PO7
 - Serial Data Output or Serial Data Input/Output for 2 x I/O mode and 4 x I/O mode or Parallel Data
- WP#/SIO2
 - Hardware write protection or serial data Input/Output for 4 x I/O mode
- HOLD#/SIO3
 - Pause the chip without diselecting the chip or serial data Input/Output for 4 x I/O mode
- PO0~PO6
 - For parallel mode data (only 128Mb provide parallel mode)
- PACKAGE
 - 16-pin SOP (300mil)
 - 8-WSON (8 x 6mm)
 - 8-pin SOP (200mil) only for MX25L6465E
 - All devices are RoHS Compliant



GENERAL DESCRIPTION

MX25L6465E is 67,108,864 bits serial Flash memory, which is configured as $8,388,608 \times 8$ internally. When it is in two or four I/O mode, the structure becomes 33,554,432 bits x 2 or 16,777,216 bits x 4. MX25L12865E is 134,217,728 bits serial Flash memory, which is configured as $16,777,216 \times 8$ internally. When it is in two or four I/O mode, the structure becomes 67,108,864 bits x 2 or 33,554,432 bits x 4. The MX25L6465E/12865E features a serial peripheral interface and software protocol allowing operation on a simple 4-wire bus. The four bus signals are a clock input (SCLK), a serial data input (SI), a serial data output (SO), and a chip select (CS#). Serial access to the device is enabled by CS# input.

MX25L6465E/12865E provides high performance read mode, which may latch address and data on both rising and falling edge of clock. By using this high performance read mode, the data throughput may be doubling. Moreover, the performance may reach direct code execution, the RAM size of the system may be reduced and further saving system cost.

MX25L6465E/12865E, MXSMIO[™] (Serial Multi I/O) flash memory, provides sequential read operation on whole chip and multi-I/O features.

When it is in dual I/O mode, the SI pin and SO pin become SIO0 pin and SIO1 pin for address/dummy bits input and data output. When it is in quad I/O mode, the SI pin, SO pin, WP# pin and HOLD# pin become SIO0 pin, SIO1 pin, SIO2 pin and SIO3 pin for address/dummy bits input and data Input/Output. Parallel mode is also provided in this device. It features 8 bit input/output for increasing throughputs. This feature is recommeded to be used for factory production purpose.

After program/erase command is issued, auto program/ erase algorithms which program/ erase and verify the specified page or sector/block locations will be executed. Program command is executed on byte basis, or page (256 bytes) basis, or word basis for Continuously Program mode, and erase command is executes on sector (4K-byte), block (32K-byte/64K-byte), or whole chip basis.

To provide user with ease of interface, a status register is included to indicate the status of the chip. The status read command can be issued to detect completion status of a program or erase operation via WIP bit.

When the device is not in operation and CS# is high, it is put in standby mode and draws less than 100uA DC current.

The MX25L6465E/12865E utilizes Macronix's proprietary memory cell, which reliably stores memory contents even after 100,000 program and erase cycles.

Table 1. Additional Features

Additional Features	Protection and Security		Read Performance						
	Flexible or Individual block (or sector) protection		1 I/O Read (104 MHz)			1 I/O DT Read (50 MHz)	2 I/O DT Read (50 MHz)	4 I/O DT Read (50 MHz)	8 I/O Parallel Mode (6 MHz)
MX25L6465E MX25L12865E	V	V	V	V	V	V	V	V	V (Note 1)


	dditional eatures	Identifier							
	\	RES	REMS	REMS2	REMS4	REMS4D	RDID		
Part		(command: AB	(command: 90	(command: EF	(command: DF	(command: CF	(command: 9F		
Name		hex)	hex)	hex)	hex)	hex)	hex)		
MX25L	.6465E	16 (hex)	C2 16 (hex)	C2 16 (hex)	C2 16 (hex)	C2 16 (hex)	C2 20 17 (hex)		
MX25L1	12865E	17 (hex)	C2 17 (hex)	C2 17 (hex)	C2 17 (hex)	C2 17 (hex)	C2 20 18 (hex)		

Note 1: Only MX25L12865E provide parallel mode.




PIN CONFIGURATION


16-PIN SOP (300mil) for MX25L6465E




16-PIN SOP (300mil) for MX25L12865E



8-PIN SOP (200mil)



8-WSON (8x6mm)




PIN DESCRIPTION

SYMBOL	DESCRIPTION				
CS#	Chip Select				
SI/SIO0	Serial Data Input (for 1xI/O)/ Serial Data				
31/3100	Input & Output (for 2xI/O or 4xI/O mode)				
SO/SIO1/	Serial Data Output (for 1xI/O)/Serial				
P07	Data Input & Output (for 2xI/O or 4xI/O				
FOI	mode) / Parallel Data Output/Input				
SCLK	Clock Input				
	Write protection: connect to GND or				
WP#/SIO2	Serial Data Input & Output (for 4xI/O				
	mode)				
HOLD#/	Hold, to pause the device without				
SIO3	deselecting the device or Serial Data				
3103	Input & Output (for 4xI/O mode)				
VCC	+ 3.3V Power Supply				
GND	Ground				
	Parallel data output/input (PO0~PO6 can				
PO0~PO6	be connected to NC in Serial Mode), NC				
	on MX25L6465E				
NC	No Connection				



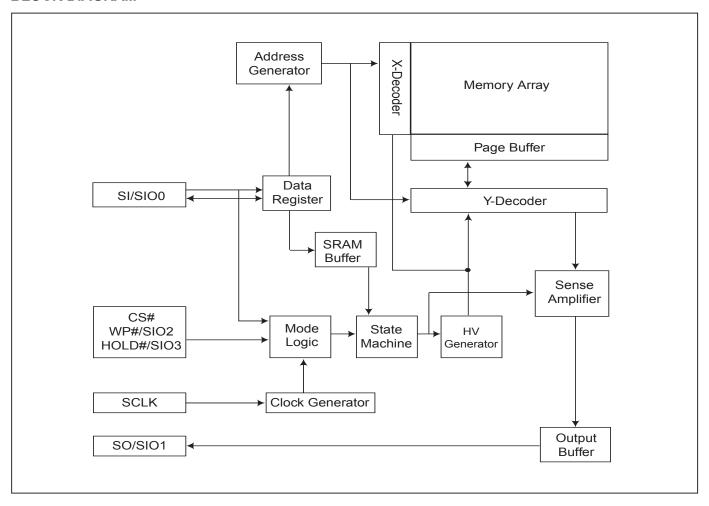BLOCK DIAGRAM





DATA PROTECTION

MX25L6465E/12865E is designed to offer protection against accidental erasure or programming caused by spurious system level signals that may exist during power transition. During power up the device automatically resets the state machine in the standby mode. In addition, with its control register architecture, alteration of the memory contents only occurs after successful completion of specific command sequences. The device also incorporates several features to prevent inadvertent write cycles resulting from VCC power-up and power-down transition or system noise.

- Valid command length checking: The command length will be checked whether it is at byte base and completed
 on byte boundary.
- Write Enable (WREN) command: WREN command is required to set the Write Enable Latch bit (WEL) before other command to change data. The WEL bit will return to reset stage under following situation:
 - Power-up
 - Write Disable (WRDI) command completion
 - Write Status Register (WRSR) command completion
 - Page Program (PP, 4PP) command completion
 - Continuously Program mode (CP) instruction completion
 - Sector Erase (SE) command completion
 - Block Erase (BE, BE32K) command completion
 - Chip Erase (CE) command completion
 - Single Block Lock/Unlock (SBLK/SBULK) instruction completion
 - Gang Block Lock/Unlock (GBLK/GBULK) instruction completion
- Deep Power Down Mode: By entering deep power down mode, the flash device also is under protected from writing all commands except Release from Deep Power Down mode command (RDP) and Read Electronic Signature command (RES).

I. Block lock protection

- The Software Protected Mode (SPM) uses (BP3, BP2, BP1, BP0) bits to allow part of memory to be protected as read only. The protected area definition is shown as table of "Protected Area Sizes", the protected areas are more flexible which may protect various area by setting value of BP0-BP3 bits. Please refer to table of "Protected Area Sizes".
- The Hardware Protected Mode (HPM) use WP#/SIO2 to protect the (BP3, BP2, BP1, BP0) bits and SRWD bit. If the system goes into four I/O mode, the feature of HPM will be disabled.
- MX25L6465E/12865E provide individual block (or sector) write protect & unprotect. User may enter the mode with WPSEL command and conduct individual block (or sector) write protect with SBLK instruction, or SBULK for individual block (or sector) unprotect. Under the mode, user may conduct whole chip (all blocks) protect with GBLK instruction and unlock the whole chip with GBULK instruction.

Table 2. Protected Area Sizes

Status bit				Protection Area				
BP3	BP2	BP1	BP0	64Mb	128Mb			
0	0	0	0	0 (none)	0 (none)			
0	0	0	1	1 (2 blocks, block 126th-127th)	1 (2 blocks, block 254th-255th)			
0	0	1	0	2 (4 blocks, block 124th-127th)	2 (4 blocks, block 252nd-255th)			
0	0	1	1	3 (8 blocks, block 120th-127th)	3 (8 blocks, block 248th-255th)			
0	1	0	0	4 (16 blocks, block 112nd-127th)	4 (16 blocks, block 240th-255th)			
0	1	0	1	5 (32 blocks, block 96th-127th)	5 (32 blocks, block 224th-255th)			
0	1	1	0	6 (64 blocks, block 64th-127th)	6 (64 blocks, block 192nd-255th)			
0	1	1	1	7 (128 blocks, all)	7 (128 blocks, block 128th-255th)			
1	0	0	0	8 (128 blocks, all)	8 (256 blocks, all)			
1	0	0	1	9 (128 blocks, all)	9 (256 blocks, all)			
1	0	1	0	10 (128 blocks, all)	10 (256 blocks, all)			
1	0	1	1	11 (128 blocks, all)	11 (256 blocks, all)			
1	1	0	0	12 (128 blocks, all)	12 (256 blocks, all)			
1	1	0	1	13 (128 blocks, all)	13 (256 blocks, all)			
1	1	1	0	14 (128 blocks, all)	14 (256 blocks, all)			
1	1	1	1	15 (128 blocks, all)	15 (256 blocks, all)			

Note: The device is ready to accept a Chip Erase instruction if, and only if, all Block Protect (BP3, BP2, BP1, BP0) are 0.

- **II.** Additional 4K-bit secured OTP for unique identifier: to provide 4K-bit One-Time Program area for setting device unique serial number Which may be set by factory or system maker. Please refer to Table 3. 4K-bit Secured OTP Definition.
 - Security register bit 0 indicates whether the chip is locked by factory or not.
 - To program the 4K-bit secured OTP by entering 4K-bit secured OTP mode (with ENSO command), and going through normal program procedure, and then exiting 4K-bit secured OTP mode by writing EXSO command.
 - Customer may lock-down the customer lockable secured OTP by writing WRSCUR(write security register) command to set customer lock-down bit1 as "1". Please refer to table of "Security Register Definition" for security register bit definition and table of "4K-bit Secured OTP Definition" for address range definition.
 - Note: Once lock-down whatever by factory or customer, it cannot be changed any more. While in 4K-bit Secured OTP mode, array access is not allowed.

Table 3. 4K-bit Secured OTP Definition

Address range Size		Standard Factory Lock	Customer Lock
xxx000~xxx00F	128-bit	ESN (electrical serial number)	Determined by austemer
xxx010~xxx1FF	3968-bit	N/A	Determined by customer



Memory Organization

Table 4-1. Memory Organization for MX25L6465E

	Block(64K-byte)	Block(32K-byte)	Sector (4K-byte)	Address	Range
	2.00(0 2)(0)	2.00(02.1.2)10)	2047	7FF000h	7FFFFFh
		255	:		
	127		2040	7F8000h	7F8FFFh
	121		2039	7F7000h	7F7FFFh
		254	:		
			2032	7F0000h	7F0FFFh
			2031	7EF000h	7EFFFFh
	126	253	:		
			2024	7E8000h	7E8FFFh
↓		252	2023	7E7000h	7E7FFFh
'			:		
individual block			2016	7E0000h	7E0FFFh
lock/unlock unit:64K-byte			2015	7DF000h	7DFFFFh
		251	:		
	125		2008	7D8000h	7D8FFFh
	120		2007	7D7000h	7D7FFFh
		250	:	·	
			2000	7D0000h	7D0FFFh

individual 16 sectors lock/unlock unit:4K-byte

individual block lock/unlock unit:64K-byte



			47	02F000h	02FFFFh
		5	:		
	2		40	028000h	028FFFh
	_		39	027000h	027FFFh
		4	:		
individual block			32	020000h	020FFFh
lock/unlock unit:64K-byte			31	01F000h	01FFFFh
*		3	:		
	1		24	018000h	018FFFh
	'	2	23	017000h	017FFFh
			:		
<u> </u>			16	010000h	010FFFh
			15	00F000h	00FFFFh
		1	:		
			8	008000h	008FFFh
	0		7	007000h	007FFFh
		0			
			0	000000h	000FFFh

individual 16 sectors lock/unlock unit:4K-byte

Table 4-2. Memory Organization for MX25L12865E

	Block(64K-byte)	Block(32K-byte)	Sector	Address	Range	
			4095	FFF000h	FFFFFFh	
		511	:			*
	255		4088	FF8000h	FF8FFFh	individual 16 sectors
	255		4087	FF7000h	FF7FFFh	lock/unlock unit:4K-byte
		510	:			A
			4080	FF0000h	FF0FFFh	
	254	509	4079	FEF000h	FEFFFFh	
			4072	FE8000h	FE8FFFh	
\		508	4071	FE7000h	FE7FFFh	
·			÷			
individual block			4064	FE0000h	FE0FFFh	
lock/unlock unit:64K-byte			4063	FDF000h	FDFFFFh	
		507	÷			
	253		4056	FD8000h	FD8FFFh	
	233		4055	FD7000h	FD7FFFh	
		506	÷			
			4048	FD0000h	FD0FFFh	

individual block lock/unlock unit:64K-byte

							_
				47	02F000h	02FFFFh	
			5	:			
		2		40	028000h	028FFFh	
				39	027000h	027FFFh	
			4	:			
	ndividual block			32	020000h	020FFFh	
IOCK/ C	ınlock unit:64K-byte			31	01F000h	01FFFFh	
	*		3	:			
		1		24	018000h	018FFFh	
		'	2	23	017000h	017FFFh	
				:			
_	! !			16	010000h	010FFFh	
				15	00F000h	00FFFFh	
			1	÷			\
		0		8	008000h	008FFFh	individual 16 sectors
				7	007000h	007FFFh	lock/unlock unit:4K-byte
			0	:			<u> </u>
				0	000000h	000FFFh	



DEVICE OPERATION

- 1. Before a command is issued, status register should be checked to ensure device is ready for the intended operation.
- 2. When incorrect command is inputted to this LSI, this LSI becomes standby mode and keeps the standby mode until next CS# falling edge. In standby mode, SO pin of this LSI should be High-Z.
- 3. When correct command is inputted to this LSI, this LSI becomes active mode and keeps the active mode until next CS# rising edge.
- 4. For standard single data rate serial mode, input data is latched on the rising edge of Serial Clock(SCLK) and data shifts out on the falling edge of SCLK. The difference of Serial mode 0 and mode 3 is shown as Figure 1-1. For high performance (Double Transfer Rate Read serial mode), data is latched on both rising and falling edge of clock and data shifts out on both rising and falling edge of clock as Figure 1-2.
- 5. For the following instructions: RDID, RDSR, RDSCUR, READ, FAST_READ, RDSFDP, 2READ, 4READ, FAST-DTRD, 2DTRD, 4DTRD, RDBLOCK, RES, REMS, REMS2, REMS4, and REMS4D the shifted-in instruction sequence is followed by a data-out sequence. After any bit of data being shifted out, the CS# can be high. For the following instructions: WREN, WRDI, WRSR, SE, BE, BE32K, HPM, CE, PP, CP, 4PP, RDP, DP, WPSEL, SBLK, SBULK, GBLK, GBULK, ENSO, EXSO, WRSCUR, ENPLM, EXPLM, ESRY, DSRY and CLSR the CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.
- 6. During the progress of Write Status Register, Program, Erase operation, to access the memory array is neglected and not affect the current operation of Write Status Register, Program, Erase.


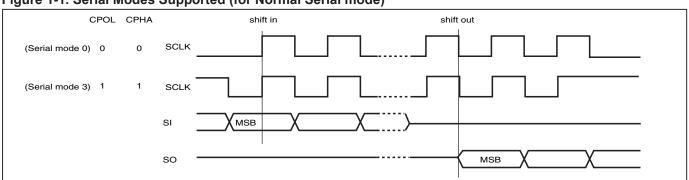


Figure 1-1. Serial Modes Supported (for Normal Serial mode)

Note:

CPOL indicates clock polarity of Serial master, CPOL=1 for SCLK high while idle, CPOL=0 for SCLK low while not transmitting. CPHA indicates clock phase. The combination of CPOL bit and CPHA bit decides which Serial mode is supported.

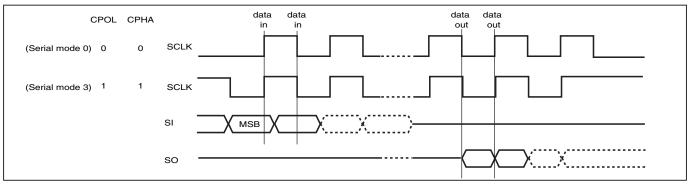Figure 1-2. Serial Modes Supported (for Double Transfer Rate serial read mode)






HOLD FEATURE

HOLD# pin signal goes low to hold any serial communications with the device. The HOLD feature will not stop the operation of write status register, programming, or erasing in progress.

The operation of HOLD requires Chip Select(CS#) keeping low and starts on falling edge of HOLD# pin signal while Serial Clock (SCLK) signal is being low (if Serial Clock signal is not being low, HOLD operation will not start until Serial Clock signal being low). The HOLD condition ends on the rising edge of HOLD# pin signal while Serial Clock(SCLK) signal is being low (if Serial Clock signal is not being low, HOLD operation will not end until Serial Clock being low), see Figure 2.

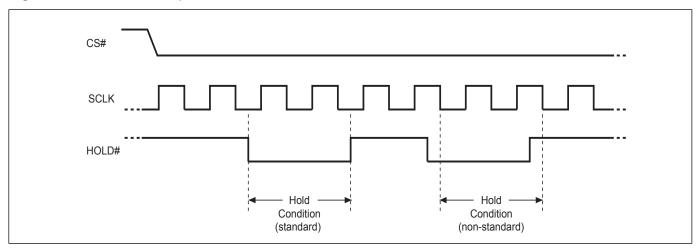Figure 2. Hold Condition Operation



The Serial Data Output (SO) is high impedance, both Serial Data Input (SI) and Serial Clock (SCLK) are don't care during the HOLD operation. If Chip Select (CS#) drives high during HOLD operation, it will reset the internal logic of the device. To re-start communication with chip, the HOLD# must be at high and CS# must be at low.

Note: The HOLD feature is disabled during Quad I/O mode.

P/N: PM1557 REV. 1.4, FEB. 10, 2012



COMMAND DESCRIPTION

Table 5. Command Sets

COMMAND (byte)	WREN (write enable)	WRDI (write disable)	RDID (read identification)	RDSR (read status register)	WRSR (write status register)	FASTDTRD (fast DT read)	2DTRD (Dual I/O DT Read)	4DTRD (Quad I/O DT Read)
Command (hex)	06	04	9F	05	01	0D	BD	ED
Input Cycles					Data(8)	ADD(12)	ADD(6)	ADD(3)
Dummy Cycles						6	6	1+7
Action	sets the (WEL) write enable latch bit	resets the (WEL) write enable latch bit	outputs JEDEC ID: 1-byte Manufacturer ID & 2-byte Device ID	to read out the values of the status register	to write new values to the status register	n bytes read out (Double Transfer Rate) until CS# goes high	n bytes read out (Double Transfer Rate) by 2xl/ O until CS# goes high	n bytes read out (Double Transfer Rate) by 4xl/ O until CS# goes high
COMMAND (byte)	READ (read data)	FAST READ (fast read data)	RDSFDP (Read SFDP)	2READ (2 x I/O read command) Note1	4READ (4 x I/O read command)	4PP (quad page program)	SE (sector erase)	BE (block erase 64KB)
Command (hex)	03	0B	5A	ВВ	EB	38	20	D8
Input Cycles	ADD(24)	ADD(24)	ADD(24)	ADD(12)	ADD(6)	ADD(6)+ Data(512)	ADD(24)	ADD(24)
Dummy Cycles		8	8	4	2+4			
Action	n bytes read out until CS# goes high	n bytes read out until CS# goes high	Read SFDP mode	n bytes read out by 2 x I/ O until CS# goes high	n bytes read out by 4 x I/ O until CS# goes high	quad input to program the selected page	to erase the selected sector	to erase the selected 64KB block
COMMAND (byte)	BE 32K (block erase 32KB)	CE (chip erase)	PP (Page program)	CP (Continuously program mode)	DP (Deep power down)	RDP (Release from deep power down)	RES (read electronic ID)	REMS (read electronic manufacturer & device ID)
Command (hex)	52	60 or C7	02	AD	В9	AB	AB	90
Input Cycles	ADD(24)		ADD(24)+ Data(2048)	ADD(24)+ Data(16)				ADD(24)
Dummy Cycles							24	
Action	to erase the selected 32KB block	to erase whole chip	to program the selected page	continously program whole chip, the address is automatically increase	enters deep power down mode	release from deep power down mode	to read out 1-byte Device ID	output the Manufacturer ID & Device ID



COMMAND (byte)	REMS2 (read ID for 2x I/O mode)	REMS4 (read ID for 4x I/O mode)	REMS4D (read ID for 4x I/O DT mode)	ENSO (enter secured OTP)	EXSO (exit secured OTP)	RDSCUR (read security register)	WRSCUR (write security register)	ESRY (enable SO to output RY/ BY#)
Command (hex)	EF	DF	CF	B1	C1	2B	2F	70
Input Cycles	ADD(24)	ADD(24)	ADD(24)					
Dummy Cycles								
Action	output the Manufacturer ID & Device ID	output the Manufacturer ID & device ID	output the Manufacturer ID & Device ID		to exit the 4K- bit Secured OTP mode	to read value of security register	to set the lock-down bit as "1" (once lock-down, cannot be updated)	to enable SO to output RY/ BY# during CP mode

COMMAND (byte)	DSRY (disable SO to output RY/BY#)	ENPLM (Enter Parallel Mode)	EXPLM (EXIT Parallel Mode)	CLSR (Clear SR Fail Flags)	HPM (High Perform- ance Enable Mode)	WPSEL (write protection selection)	SBLK (single block lock) *Note 2	SBULK (single block unlock)
Command (hex)	80	55	45	30	A3	68	36	39
Input Cycles							ADD(24)	ADD(24)
Dummy Cycles								
Action	to disable SO to output RY/BY# during CP mode	8xI/O parallel programming mode	l	clear security register bit 6 and bit 5	Quad I/O high Performance mode	to enter and enable individal block protect mode	individual block (64K- byte) or sector (4K- byte) write protect	individual block (64K- byte) or sector (4K-byte) unprotect

COMMAND (byte)	RDBLOCK (block protect read)	GBLK (gang block lock)	GBULK (gang block unlock)
Command (hex)	3C	7E	98
Input Cycles	ADD(24)		
Dummy Cycles			
Action	read individual block or sector write protect status	whole chip write protect	whole chip unprotect

Note 1: It is not recommended to adopt any other code not in the command definition table, which will potentially enter the hidden mode.

Note 2: In individual block write protection mode, all blocks/sectors is locked as defualt.



(1) Write Enable (WREN)

The Write Enable (WREN) instruction is for setting Write Enable Latch (WEL) bit. For those instructions like PP, 4PP, CP, SE, BE, BE32K, CE, WRSR, SBLK, SBULK, GBLK and GBULK, which are intended to change the device content, should be set every time after the WREN instruction setting the WEL bit.

The sequence of issuing WREN instruction is: CS# goes low→ sending WREN instruction code→ CS# goes high. (Please refer to Figure 12)

(2) Write Disable (WRDI)

The Write Disable (WRDI) instruction is for resetting Write Enable Latch (WEL) bit.

The sequence of issuing WRDI instruction is: CS# goes low→ sending WRDI instruction code→ CS# goes high. (Please refer to Figure 13)

The WEL bit is reset by following situations:

- Power-up
- Write Disable (WRDI) instruction completion
- Write Status Register (WRSR) instruction completion
- Page Program (PP, 4PP) instruction completion
- Sector Erase (SE) instruction completion
- Block Erase (BE, BE32K) instruction completion
- Chip Erase (CE) instruction completion
- Continuously Program mode (CP) instruction completion
- Single Block Lock/Unlock (SBLK/SBULK) instruction completion
- Gang Block Lock/Unlock (GBLK/GBULK) instruction completion

(3) Read Identification (RDID)

The RDID instruction is for reading the Manufacturer ID of 1-byte and followed by Device ID of 2-byte. The MXIC Manufacturer ID is C2(hex), the memory type ID is 20(hex) as the first-byte Device ID, and the individual Device ID of second-byte ID are listed as table of "ID Definitions". (Please refer to Table 8)

The sequence of issuing RDID instruction is: CS# goes low \rightarrow sending RDID instruction code \rightarrow 24-bits ID data out on SO \rightarrow to end RDID operation can use CS# to high at any time during data out. (Please refer to Figure 14)

While Program/Erase operation is in progress, it will not decode the RDID instruction, so there's no effect on the cycle of program/erase operation which is currently in progress. When CS# goes high, the device is at standby stage.

(4) Read Status Register (RDSR)

The RDSR instruction is for reading Status Register. The Read Status Register can be read at any time (even in program/erase/write status register condition) and continuously. It is recommended to check the Write in Progress (WIP) bit before sending a new instruction when a program, erase, or write status register operation is in progress.

The sequence of issuing RDSR instruction is: CS# goes low→ sending RDSR instruction code→ Status Register data out on SO (Please refer to Figure 15).

The definition of the status register bits is as below:

WIP bit. The Write in Progress (WIP) bit, a volatile bit, indicates whether the device is busy in program/erase/write status register progress. When WIP bit sets to 1, which means the device is busy in program/erase/write status register progress. When WIP bit sets to 0, which means the device is not in progress of program/erase/write status register cycle.

WEL bit. The Write Enable Latch (WEL) bit, a volatile bit, indicates whether the device is set to internal write enable latch. When WEL bit sets to "1", which means the internal write enable latch is set, the device can accept program/ erase/write status register instruction. When WEL bit sets to 0, which means no internal write enable latch; the device will not accept program/erase/write status register instruction. The program/erase command will be ignored and will reset WEL bit if it is applied to a protected memory area.

BP3, BP2, BP1, BP0 bits. The Block Protect (BP3, BP2, BP1, BP0) bits, non-volatile bits, indicate the protected area (as defined in Table 2) of the device to against the program/erase instruction without hardware protection mode being set. To write the Block Protect (BP3, BP2, BP1, BP0) bits requires the Write Status Register (WRSR) instruction to be executed. Those bits define the protected area of the memory to against Page Program (PP), Sector Erase (SE), Block Erase (BE) and Chip Erase (CE) instructions (only if all Block Protect bits set to 0, the CE instruction can be executed).

QE bit. The Quad Enable (QE) bit, non-volatile bit, while it is "0" (factory default), it performs non-Quad and WP# is enable. While QE is "1", it performs Quad I/O mode, WP# and HOLD# are disabled. In the other word, if the system goes into four I/O mode (QE=1), the feature of HPM and HOLD will be disabled.

SRWD bit. The Status Register Write Disable (SRWD) bit, non-volatile bit, default value is "0". SRWD bit is operated together with Write Protection (WP#/SIO2) pin for providing hardware protection mode. The hardware protection mode requires SRWD sets to 1 and WP#/SIO2 pin signal is low stage. In the hardware protection mode, the Write Status Register (WRSR) instruction is no longer accepted for execution and the SRWD bit and Block Protect bits (BP3, BP2, BP1, BP0) are read only.

Status Register

bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
SRWD (status register write protect)	QE (Quad Enable)	BP3 (level of protected block)	BP2 (level of protected block)	BP1 (level of protected block)	BP0 (level of protected block)	WEL (write enable latch)	WIP (write in progress bit)
1=status register write disable	1= Quad Enable 0=not Quad Enable	(note 1)	(note 1)	(note 1)	(note 1)	1=write enable 0=not write enable	1=write operation 0=not in write operation
Non-volatile bit	Non-volatile bit	Non-volatile bit	Non-volatile bit	Non-volatile bit	Non-volatile bit	volatile bit	volatile bit

Note 1: see the Table 2 "Protected Area Size" in page 11.



(6) Read Data Bytes (READ)

The read instruction is for reading data out. The address is latched on rising edge of SCLK, and data shifts out on the falling edge of SCLK at a maximum frequency fR. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing READ instruction is: CS# goes low \rightarrow sending READ instruction code \rightarrow 3-byte address on SI \rightarrow data out on SO \rightarrow to end READ operation can use CS# to high at any time during data out. (Please refer to Figure 17)

(7) Read Data Bytes at Higher Speed (FAST READ)

The FAST_READ instruction is for quickly reading data out. The address is latched on rising edge of SCLK, and data of each bit shifts out on the falling edge of SCLK at a maximum frequency fC. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FAST_READ instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing FAST_READ instruction is: CS# goes low \rightarrow sending FAST_READ instruction code \rightarrow 3-byte address on SI \rightarrow 1-dummy byte (default) address on SI \rightarrow data out on SO \rightarrow to end FAST_READ operation can use CS# to high at any time during data out. (Please refer to Figure 18)

While Program/Erase/Write Status Register cycle is in progress, FAST_READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

(8) Fast Double Transfer Rate Read (FASTDTRD)

The FASTDTRD instruction is for doubling reading data out, signals are triggered on both rising and falling edge of clock. The address is latched on both rising and falling edge of SCLK, and data of each bit shifts out on both rising and falling edge of SCLK at a maximum frequency fC2. The 2-bit address can be latched-in at one clock, and 2-bit data can be read out at one clock, which means one bit at rising edge of clock, the other bit at falling edge of clock. The first address byte can be at any location.

The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single FASTDTRD instruction. The address counter rolls over to 0 when the highest address has been reached.

The sequence of issuing FASTDTRD instruction is: CS# goes low \rightarrow sending FASTDTRD instruction code (1bit per clock) \rightarrow 3-byte address on SI (2-bit per clock) \rightarrow 6-dummy clocks (default) on SI \rightarrow data out on SO (2-bit per clock) \rightarrow to end FASTDTRD operation can use CS# to high at any time during data out. (Please refer to Figure 19)

While Program/Erase/Write Status Register cycle is in progress, FASTDTRD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

(9) 2 x I/O Read Mode (2READ)

The 2READ instruction enables Double Transfer Rate of Serial Flash in read mode. The address is latched on rising edge of SCLK, and data of every two bits (interleave on 2 I/O pins) shift out on the falling edge of SCLK at a maxi-



mum frequency fT. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 2READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 2READ instruction, the following address/dummy/data out will perform as 2-bit instead of previous 1-bit.

The sequence of issuing 2READ instruction is: CS# goes low \rightarrow sending 2READ instruction \rightarrow 24-bit address interleave on SIO1 & SIO0 \rightarrow 4-bit dummy cycle on SIO1 & SIO0 \rightarrow data out interleave on SIO1 & SIO0 \rightarrow to end 2READ operation can use CS# to high at any time during data out (Please refer to Figure 20 for 2 x I/O Read Mode Timing Waveform).

While Program/Erase/Write Status Register cycle is in progress, 2READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

(10) 2 x I/O Double Transfer Rate Read Mode (2DTRD)

The 2DTRD instruction enables Double Transfer Rate throughput on dual I/O of Serial Flash in read mode. The address (interleave on dual I/O pins) is latched on both rising and falling edge of SCLK, and data (interleave on dual I/O pins) shift out on both rising and falling edge of SCLK at a maximum frequency fT2. The 4-bit address can be latched-in at one clock, and 4-bit data can be read out at one clock, which means two bits at rising edge of clock, the other two bits at falling edge of clock. The first address byte can be at any location.

The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 2DTRD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 2DTRD instruction, the following address/dummy/ data out will perform as 4-bit instead of previous 1-bit.

The sequence of issuing 2DTRD instruction is: CS# goes low \rightarrow sending 2DTRD instruction (1-bit per clock) \rightarrow 24-bit address interleave on SIO1 & SIO0 (4-bit per clock) \rightarrow 6-bit dummy clocks on SIO1 & SIO0 \rightarrow data out interleave on SIO1 & SIO0 (4-bit per clock) \rightarrow to end 2DTRD operation can use CS# to high at any time during data out (Please refer to Figure 21 for 2 x I/O Double Transfer Rate Read Mode Timing Waveform).

While Program/Erase/Write Status Register cycle is in progress, 2DTRD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

(11) 4 x I/O Read Mode (4READ)

The 4READ instruction enables quad throughput of Serial Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4READ instruction. The address is latched on rising edge of SCLK, and data of every four bits (interleave on 4 I/O pins) shift out on the falling edge of SCLK at a maximum frequency fQ. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4READ instruction, the following address/dummy/data out will perform as 4-bit instead of previous 1-bit.

The sequence of issuing 4READ instruction is: CS# goes low \rightarrow sending 4READ instruction \rightarrow 24-bit address interleave on SIO3, SIO2, SIO1 & SIO0 \rightarrow 6 dummy cycles \rightarrow data out interleave on SIO3, SIO2, SIO1 & SIO0 \rightarrow to end 4READ operation can use CS# to high at any time during data out (Please refer to Figure 22 for 4 x I/O Read Mode Timing Waveform).

Another sequence of issuing 4 READ instruction especially useful in random access is : CS# goes low→ sending 4 READ instruction→ 3-bytes address interleave on SIO3, SIO2, SIO1 & SIO0 → performance enhance toggling bit



 $P[7:0] \rightarrow 4$ dummy cycles \rightarrow data out still CS# goes high \rightarrow CS# goes low (reduce 4 Read instruction) \rightarrow 24-bit random access address (Please refer to Figure 23 for 4x I/O Read Enhance Performance Mode timing waveform).

In the performance-enhancing mode (Note of Figure. 23), P[7:4] must be toggling with P[3:0]; likewise P[7:0]=A5h,5Ah,F0h or 0Fh can make this mode continue and reduce the next 4READ instruction. Once P[7:4] is no longer toggling with P[3:0]; likewise P[7:0]=FFh,00h,AAh or 55h. These commands will reset the performance enhance mode. And afterwards CS# is raised and then lowered, the system then will return to normal operation.

While Program/Erase/Write Status Register cycle is in progress, 4READ instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

(12) 4 x I/O Double Transfer Rate Read Mode (4DTRD)

The 4DTRD instruction enables Double Transfer Rate throughput on quad I/O of Serial Flash in read mode. A Quad Enable (QE) bit of status Register must be set to "1" before sending the 4DTRD instruction. The address (interleave on 4 I/O pins) is latched on both rising and falling edge of SCLK, and data (interleave on 4 I/O pins) shift out on both rising and falling edge of SCLK at a maximum frequency fQ2. The 8-bit address can be latched-in at one clock, and 8-bit data can be read out at one clock, which means four bits at rising edge of clock, the other four bits at falling edge of clock. The first address byte can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single 4DTRD instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing 4DTRD instruction, the following address/dummy/data out will perform as 8-bit instead of previous 1-bit.

The sequence of issuing 4DTRD instruction is: CS# goes low \rightarrow sending 4DTRD instruction (1-bit per clock) \rightarrow 24-bit address interleave on SIO3, SIO2, SIO1 & SIO0 (8-bit per clock) \rightarrow 8 dummy clocks \rightarrow data out interleave on SIO3, SIO2, SIO1 & SIO0 (8-bit per clock) \rightarrow to end 4DTRD operation can use CS# to high at any time during data out (Please refer to Figure 24 for 4 x I/O Read Mode Double Transfer Rate Timing Waveform).

Another sequence of issuing enhanced mode of 4DTRD instruction especially useful in random access is: CS# goes low \rightarrow sending 4DTRD instruction (1-bit per clock) \rightarrow 3-bytes address interleave on SIO3, SIO2, SIO1 & SIO0 (8-bit per clock) \rightarrow performance enhance toggling bit P[7:0] \rightarrow 7 dummy clocks \rightarrow data out(8-bit per clock) still CS# goes high \rightarrow CS# goes low (eliminate 4 Read instruction) \rightarrow 24-bit random access address (Please refer to Figure 25 for 4x I/O Double Transfer Rate read enhance performance mode timing waveform).

While Program/Erase/Write Status Register cycle is in progress, 4DTRD instruction is rejected without any impact on the Program/Erase/Write Status Register current cycle.

(13) Sector Erase (SE)

The Sector Erase (SE) instruction is for erasing the data of the chosen sector to be "1". The instruction is used for any 4K-byte sector. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Sector Erase (SE). Any address of the sector (see Table 6) is a valid address for Sector Erase (SE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing SE instruction is: CS# goes low \rightarrow sending SE instruction code \rightarrow 3-byte address on SI \rightarrow CS# goes high. (Please refer to Figure 26)

The self-timed Sector Erase Cycle time (tSE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Sector Erase cycle is in progress. The WIP sets 1 during the tSE timing, and sets 0 when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the



sector is protected by BP3~0 (WPSEL=0) or by individual lock (WPSEL=1), the array data will be protected (no change) and the WEL bit still be reset.

(14) Block Erase (BE)

The Block Erase (BE) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 64K-byte block erase operation. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE). Any address of the block (see table 6) is a valid address for Block Erase (BE) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE instruction is: CS# goes low \rightarrow sending BE instruction code \rightarrow 3-byte address on SI \rightarrow CS# goes high. (Please refer to Figure 27)

The self-timed Block Erase Cycle time (tBE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Sector Erase cycle is in progress. The WIP sets 1 during the tBE timing, and sets 0 when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the block is protected by BP3~0 (WPSEL=0) or by individual lock (WPSEL=1), the array data will be protected (no change) and the WEL bit still be reset.

(15) Block Erase (BE32K)

The Block Erase (BE32) instruction is for erasing the data of the chosen block to be "1". The instruction is used for 32K-byte block erase operation. A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Block Erase (BE32). Any address of the block (see table 6) is a valid address for Block Erase (BE32) instruction. The CS# must go high exactly at the byte boundary (the latest eighth of address byte been latched-in); otherwise, the instruction will be rejected and not executed.

The sequence of issuing BE32 instruction is: CS# goes low \rightarrow sending BE32 instruction code \rightarrow 3-byte address on SI \rightarrow CS# goes high. (Please refer to Figure 27)

The self-timed Block Erase Cycle time (tBE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Sector Erase cycle is in progress. The WIP sets 1 during the tBE timing, and sets 0 when Sector Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the block is protected by BP3~0 (WPSEL=0) or by individual lock (WPSEL=1), the array data will be protected (no change) and the WEL bit still be reset.

(16) Chip Erase (CE)

The Chip Erase (CE) instruction is for erasing the data of the whole chip to be "1". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Chip Erase (CE). The CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.

The sequence of issuing CE instruction is: CS# goes low \rightarrow sending CE instruction code \rightarrow CS# goes high. (Please refer to Figure 28)

The self-timed Chip Erase Cycle time (tCE) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Chip Erase cycle is in progress. The WIP sets 1 during the tCE timing, and sets 0 when Chip Erase Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the chip is



protected the Chip Erase (CE) instruction will not be executed, but WEL will be reset.

(17) Page Program (PP)

The Page Program (PP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Page Program (PP). The device programs only the last 256 data bytes sent to the device. If the entire 256 data bytes are going to be programmed, A7-A0 (The eight least significant address bits) should be set to 0. If the eight least significant address bits (A7-A0) are not all 0, all transmitted data going beyond the end of the current page are programmed from the start address of the same page (from the address A7-A0 are all 0). If more than 256 bytes are sent to the device, the data of the last 256-byte is programmed at the request page and previous data will be disregarded. If less than 256 bytes are sent to the device, the data is programmed at the requested address of the page without effect on other address of the same page.

The sequence of issuing PP instruction is: CS# goes low \rightarrow sending PP instruction code \rightarrow 3-byte address on SI \rightarrow at least 1-byte on data on SI \rightarrow CS# goes high. (Please refer to Figure 29)

The CS# must be kept to low during the whole Page Program cycle; The CS# must go high exactly at the byte boundary(the latest eighth bit of data being latched in), otherwise, the instruction will be rejected and will not be executed.

The self-timed Page Program Cycle time (tPP) is initiated as soon as Chip Select (CS#) goes high. The Write in Progress (WIP) bit still can be check out during the Page Program cycle is in progress. The WIP sets 1 during the tPP timing, and sets 0 when Page Program Cycle is completed, and the Write Enable Latch (WEL) bit is reset. If the page is protected by BP3~0 (WPSEL=0) or by individual lock (WPSEL=1), the array data will be protected (no change) and the WEL bit will still be reset.

(18) 4 x I/O Page Program (4PP)

The Quad Page Program (4PP) instruction is for programming the memory to be "0". A Write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit and Quad Enable (QE) bit must be set to "1" before sending the Quad Page Program (4PP). The Quad Page Programming takes four pins: SIO0, SIO1, SIO2, and SIO3, which can raise programer performance and and the effectiveness of application of lower clock less than 20MHz. For system with faster clock, the Quad page program cannot provide more actual favors, because the required internal page program time is far more than the time data flows in. Therefore, we suggest that while executing this command (especially during sending data), user can slow the clock speed down to 20MHz below. The other function descriptions are as same as standard page program.

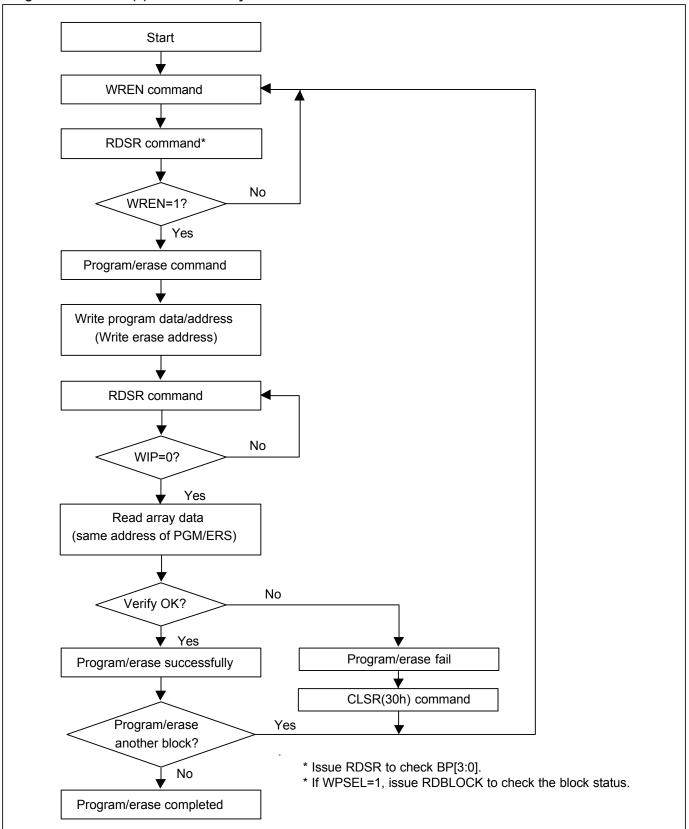
The sequence of issuing 4PP instruction is: CS# goes low \rightarrow sending 4PP instruction code \rightarrow 3-byte address on SIO[3:0] \rightarrow at least 1-byte on data on SIO[3:0] \rightarrow CS# goes high. (Please refer to Figure 30)

If the page is protected by BP3~0 (WPSEL=0) or by individual lock (WPSEL=1), the array data will be protected (no change) and the WEL bit will still be reset.




The Program/Erase function instruction function flow is as follows:

Program/Erase Flow(1) with read array data





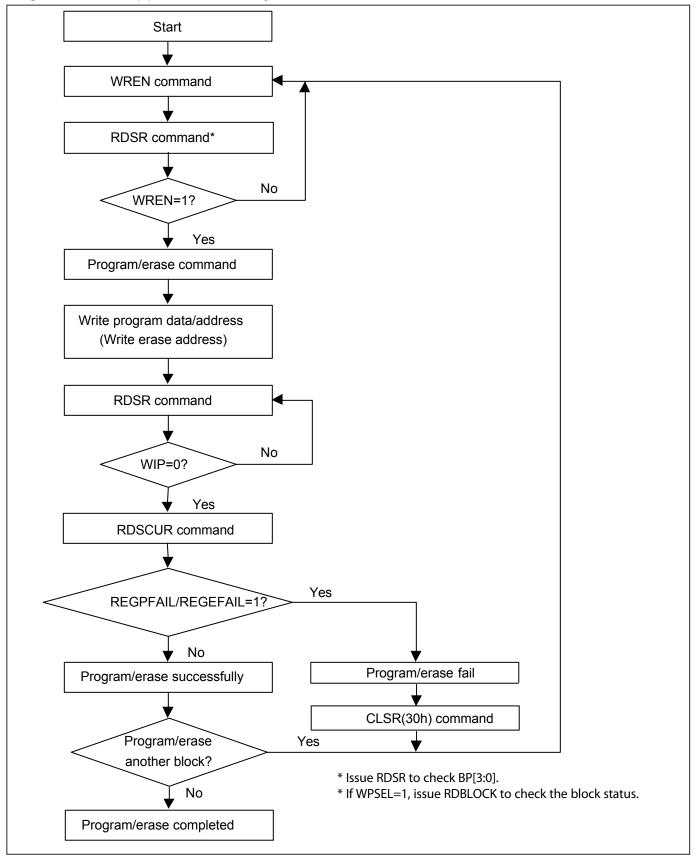Program/Erase Flow(2) without read array data





(19) Continuously program mode (CP mode)

The CP mode may enhance program performance by automatically increasing address to the next higher address after each byte data has been programmed.

The Continuously program (CP) instruction is for multiple byte program to Flash. A write Enable (WREN) instruction must execute to set the Write Enable Latch (WEL) bit before sending the Continuously program (CP) instruction. CS# requires to go high before CP instruction is executing. After CP instruction and address input, two bytes of data is input sequentially from MSB(bit7) to LSB(bit0). The first byte data will be programmed to the initial address range with A0=0 and second byte data with A0=1. If only one byte data is input, the CP mode will not process. If more than two bytes data are input, the additional data will be ignored and only two byte data are valid. Any byte to be programmed should be in the erase state (FF) first. It will not roll over during the CP mode, once the last unprotected address has been reached, the chip will exit CP mode and reset write Enable Latch bit (WEL) as "0" and CP mode bit as "0". Please check the WIP bit status if it is not in write progress before entering next valid instruction. During CP mode, the valid commands are CP command (AD hex), WRDI command (04 hex), RDSR command (05 hex), and RDSCUR command (2B hex). And the WRDI command is valid after completion of a CP programming cycle, which means the WIP bit=0.

The sequence of issuing CP instruction is : CS# goes low \rightarrow sending CP instruction code \rightarrow 3-byte address on SI pin \rightarrow two data bytes on SI \rightarrow CS# goes high to low \rightarrow sending CP instruction and then continue two data bytes are programmed \rightarrow CS# goes high to low \rightarrow sending WRDI (Write Disable) instruction to end CP mode \rightarrow send RDSR instruction to verify if CP mode word program ends, or send RDSCUR to check bit4 to verify if CP mode ends. (Please refer to Figure 31 of CP mode timing waveform)

Three methods to detect the completion of a program cycle during CP mode:

- 1) Software method-I: by checking WIP bit of Status Register to detect the completion of CP mode.
- 2) Software method-II: by waiting for a tBP time out to determine if it may load next valid command or not.
- 3) Hardware method: by writing ESRY (enable SO to output RY/BY#) instruction to detect the completion of a program cycle during CP mode. The ESRY instruction must be executed before CP mode execution. Once it is enable in CP mode, the CS# goes low will drive out the RY/BY# status on SO, "0" indicates busy stage, "1" indicates ready stage, SO pin outputs tri-state if CS# goes high. DSRY (disable SO to output RY/BY#) instruction to disable the SO to output RY/BY# and return to status register data output during CP mode. Please note that the ESRY/DSRY command are not accepted unless the completion of CP mode.

If the page is protected by BP3~0 (WPSEL=0) or by individual lock (WPSEL=1), the array data will be protected (no change) and the WEL bit will still be reset.

(20) Parallel Mode (Highly recommended for production throughputs increasing)

The parallel mode provides 8 bit inputs/outputs for increasing throughputs of factory production purpose. The parallel mode requires 55h command code, after writing the parallel mode command and then CS# going high, after that, the Memory can be available to accept RDID/RES & REMS/READ/PP command as the normal writing command procedure. To exit parallel mode, it requires 45h command code, or power-off/on sequence. The sequence of issuing Parallel Mode instruction is : CS# goes low→sending Parallel Mode Code→CS# goes high (Please refer to Figure 32-1, and refer to Figure 32-2~32-7 for other parallel mode).

- a. For normal write command (by SI), No effect
- b. Under parallel mode, the fastest access clock freq. will be changed to 6MHz (SCLK pin clock freq.)
- c. For parallel mode, the tV will be changed to 70ns.



(21) Deep Power-down (DP)

The Deep Power-down (DP) instruction is for setting the device on the minimizing the power consumption (to entering the Deep Power-down mode), the standby current is reduced from ISB1 to ISB2). The Deep Power-down mode requires the Deep Power-down (DP) instruction to enter, during the Deep Power-down mode, the device is not active and all Write/Program/Erase instruction are ignored. When CS# goes high, it's only in standby mode not deep power-down mode. It's different from Standby mode.

The sequence of issuing DP instruction is: CS# goes low→ sending DP instruction code→ CS# goes high. (Please refer to Figure 33)

Once the DP instruction is set, all instruction will be ignored except the Release from Deep Power-down mode (RDP) and Read Electronic Signature (RES) instruction. (those instructions allow the ID being reading out). When Power-down, the deep power-down mode automatically stops, and when power-up, the device automatically is in standby mode. For RDP instruction the CS# must go high exactly at the byte boundary (the latest eighth bit of instruction code been latched-in); otherwise, the instruction will not executed. As soon as Chip Select (CS#) goes high, a delay of tDP is required before entering the Deep Power-down mode and reducing the current to ISB2.

(22) Release from Deep Power-down (RDP), Read Electronic Signature (RES)

The Release from Deep Power-down (RDP) instruction is terminated by driving Chip Select (CS#) High. When Chip Select (CS#) is driven High, the device is put in the standby Power mode. If the device was not previously in the Deep Power-down mode, the transition to the standby Power mode is immediate. If the device was previously in the Deep Power-down mode, though, the transition to the standby Power mode is delayed by tRES2, and Chip Select (CS#) must remain High for at least tRES2(max), as specified in Table 10. Once in the standby mode, the device waits to be selected, so that it can receive, decode and execute instructions.

RES instruction is for reading out the old style of 8-bit Electronic Signature, whose values are shown as table of ID Definitions. This is not the same as RDID instruction. It is not recommended to use for new design. For new design, please use RDID instruction. Even in Deep power-down mode, the RDP and RES are also allowed to be executed, only except the device is in progress of program/erase/write cycles; there's no effect on the current program/erase/write cycles in progress. The sequence is shown as Figure 34,35.

The RES instruction is ended by CS# goes high after the ID been read out at least once. The ID outputs repeatedly if continuously send the additional clock cycles on SCLK while CS# is at low. If the device was not previously in Deep Power-down mode, the device transition to standby mode is immediate. If the device was previously in Deep Power-down mode, there's a delay of tRES2 to transit to standby mode, and CS# must remain to high at least tRES2(max). Once in the standby mode, the device waits to be selected, so it can be receive, decode, and execute instruction.

The RDP instruction is for releasing from Deep Power-down Mode.

(23) Read Electronic Manufacturer ID & Device ID (REMS), (REMS2), (REMS4), (REMS4D)

The REMS, REMS2, REMS4 and REMS4D instruction provides both the JEDEC assigned Manufacturer ID and the specific Device ID.

The instruction is initiated by driving the CS# pin low and shift the instruction code "90h", "CFh", "DFh" or "EFh" followed by two dummy bytes and one bytes address (A7~A0). After which, the Manufacturer ID for MXIC (C2h) and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first as shown in Figure 36. The Device ID values are listed in table of ID Definitions. If the one-byte address is initially set to 01h, then the Device ID will be read first and then followed by the Manufacturer ID. The Manufacturer and Device IDs can be read continuously, alternating from one to the other. The instruction is completed by driving CS# high.



Table 6. ID Definitions

Command Type	MX25L6465E			MX25L12865E			
RDID	manufacturer ID	memory type	memory density	manufacturer ID	memory type	memory density	
סוטא	C2	20	17	C2	20	18	
RES	electronic ID			electronic ID			
RES	16			17			
REMS/REMS2/	manufacturer ID	device ID		manufacturer ID	device ID		
REMS4/REMS4D	C2	16		C2	17		

(24) Enter Secured OTP (ENSO)

The ENSO instruction is for entering the additional 4K-bit Secured OTP mode. The additional 4K-bit Secured OTP is independent from main array, which may use to store unique serial number for system identifier. After entering the Secured OTP mode, and then follow standard read or program, procedure to read out the data or update data. The Secured OTP data cannot be updated again once it is lock-down.

The sequence of issuing ENSO instruction is: CS# goes low \rightarrow sending ENSO instruction to enter Secured OTP mode \rightarrow CS# goes high.

Please note that WRSR/WRSCUR/WPSEL/SBLK/GBLK/SBULK/GBULK/CE/BE/SE/BE32K commands are not acceptable during the access of secure OTP region, once Security OTP is lock down, only read related commands are valid.

(25) Exit Secured OTP (EXSO)

The EXSO instruction is for exiting the additional 4K-bit Secured OTP mode.

The sequence of issuing EXSO instruction is: CS# goes low \rightarrow sending EXSO instruction to exit Secured OTP mode \rightarrow CS# goes high.

(26) Read Security Register (RDSCUR)

The RDSCUR instruction is for reading the value of Security Register. The Read Security Register can be read at any time (even in program/erase/write status register/write security register condition) and continuously.

The sequence of issuing RDSCUR instruction is : CS# goes low \rightarrow sending RDSCUR instruction \rightarrow Security Register data out on SO \rightarrow CS# goes high.

The definition of the Security Register is as below:

Secured OTP Indicator bit. The Secured OTP indicator bit shows the chip is locked by factory before ex- factory or not. When it is "0", it indicates non-factory lock; "1" indicates factory- lock.

Lock-down Secured OTP (LDSO) bit. By writing WRSCUR instruction, the LDSO bit may be set to "1" for customer lock-down purpose. However, once the bit is set to "1" (lock-down), the LDSO bit and the 4K-bit Secured OTP area cannot be update any more. While it is in 4K-bit Secured OTP mode, array access is not allowed.



Continuously Program Mode(CP mode) bit. The Continuously Program Mode bit indicates the status of CP mode, "0" indicates not in CP mode; "1" indicates in CP mode.

Program Fail Flag bit. While a program failure happened, the Program Fail Flag bit would be set. This bit will also be set when the user attempts to program a protected main memory region or a locked OTP region. This bit can indicate whether one or more of program operations fail, and can be reset by command CLSR (30h)

Erase Fail Flag bit. While a erase failure happened, the Erase Fail Flag bit would be set. This bit will also be set when the user attempts to erase a protected main memory region or a locked OTP region. This bit can indicate whether one or more of erase operations fail, and can be reset by command CLSR (30h)

Write Protection Select bit. The Write Protection Select bit indicates that WPSEL has been executed successfully. Once this bit has been set (WPSEL=1), all the blocks or sectors will be write-protected after the power-on every time. Once WPSEL has been set, it cannot be changed again, which means it's only for individual WP mode.

Under the individual block protection mode (WPSEL=1), hardware protection is performed by driving WP#=0. Once WP#=0 all array blocks/sectors are protected regardless of the contents of SRAM lock bits.

Security Register Definition

bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
WPSEL	E_FAIL	P_FAIL	Continuously Program mode (CP mode)	x	x	LDSO (lock-down 4K-bit Se- cured OTP)	4K-bit Secured OTP
0=normal WP mode 1=individual WP mode (default=0)	0=normal Erase succeed 1=indicate Erase failed (default=0)	0=normal Program succeed 1=indicate Program failed (default=0)	0=normal Program mode 1=CP mode (default=0)	reserved	reserved	0 = not lockdown 1 = lock- down (cannot program/ erase OTP)	0 = nonfactory lock 1 = factory lock
non-volatile bit	volatile bit	volatile bit	volatile bit	volatile bit	volatile bit	non-volatile bit	non-volatile bit
ОТР	Read Only	Read Only	Read Only	Read Only	Read Only	ОТР	Read Only

(27) Write Security Register (WRSCUR)

The WRSCUR instruction is for changing the values of Security Register Bits. Unlike write status register, the WREN instruction is not required before sending WRSCUR instruction. The WRSCUR instruction may change the values of bit1 (LDSO bit) for customer to lock-down the 4K-bit Secured OTP area. Once the LDSO bit is set to "1", the Secured OTP area cannot be updated any more.

The sequence of issuing WRSCUR instruction is :CS# goes low \rightarrow sending WRSCUR instruction \rightarrow CS# goes high.

The CS# must go high exactly at the boundary; otherwise, the instruction will be rejected and not executed.



(28) Write Protection Selection (WPSEL)

There are two write protection methods, (1) BP protection mode (2) individual block protection mode. If WPSEL=0, flash is under BP protection mode . If WPSEL=1, flash is under individual block protection mode. The default value of WPSEL is "0". WPSEL command can be used to set WPSEL=1. Please note that WPSEL is an OTP bit. Once WPSEL is set to 1, there is no chance to recovery WPSEL back to "0". If the flash is put on BP mode, the individual block protection mode is disabled. Contrarily, if flash is on the individual block protection mode, the BP mode is disabled.

Every time after the system is powered-on, and the Security Register bit 7 is checked to be WPSEL=1, all the blocks or sectors will be write protected by default. User may only unlock the blocks or sectors via SBULK and GBULK instruction. Program or erase functions can only be operated after the Unlock instruction is conducted.

BP protection mode, WPSEL=0:

ARRAY is protected by BP3~BP0 and BP3~BP0 bits are protected by "SRWD=1 and WP#=0", where SRWD is bit 7 of status register that can be set by WRSR command.

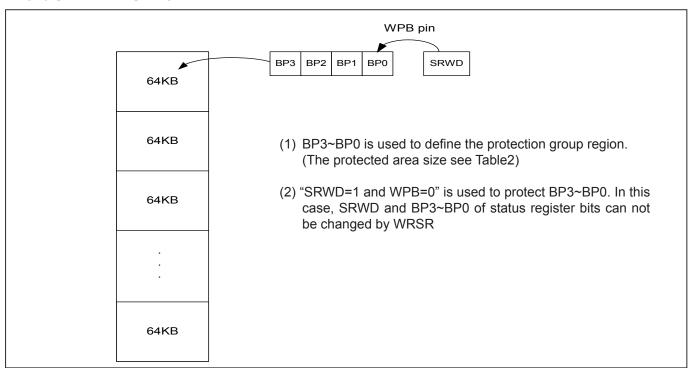
<u>Individual block protection mode, WPSEL=1:</u>

Blocks are individually protected by their own SRAM lock bits which are set to "1" after power up. SBULK and SBLK command can set SRAM lock bit to "0" and "1". When the system accepts and executes WPSEL instruction, the bit 7 in security register will be set. It will activate SBLK, SBULK, RDBLOCK, GBLK, GBULK etc instructions to conduct block lock protection and replace the original Software Protect Mode (SPM) use (BP3~BP0) indicated block methods. Under the individual block protection mode (WPSEL=1), hardware protection is performed by driving WP#=0. Once WP#=0 all array blocks/sectors are protected regardless of the contents of SRAM lock bits.

The sequence of issuing WPSEL instruction is: CS# goes low \rightarrow sending WPSEL instruction to enter the individual block protect mode \rightarrow CS# goes high.


WPSEL instruction function flow is as follows:

BP and SRWD if WPSEL=0





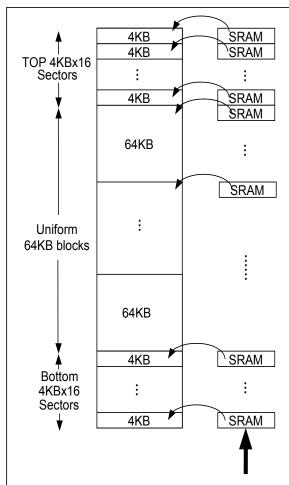The individual block lock mode is effective after setting WPSEL=1




- Power-Up: All SRAM bits=1 (all blocks are default protected).
 All array cannot be programmed/erased
- SBLK/SBULK(36h/39h):
 - SBLK(36h): Set SRAM bit=1 (protect): array can not be programmed/erased
 - SBULK(39h): Set SRAM bit=0 (unprotect): array can be programmed/erased
 - All top 4KBx16 sectors and bottom 4KBx16 sectors and other 64KB uniform blocks can be protected and unprotected SRAM bits individually by SBLK/SBULK command set.
- GBLK/ GBULK(7Eh/98h):
 - GBLK(7Eh): Set all SRAM bits=1,whole chip are protected and cannot be programmed/erased.
 - GBULK(98h): Set all SRAM bits=0,whole chip are unprotected and can be programmed/erased.
 - All sectors and blocks SRAM bits of whole chip can be protected and unprotected at one time by GBLK/GBULK command set.
- RDBLOCK(3Ch):
 - use RDBLOCK mode to check the SRAM bits status after SBULK/SBLK/GBULK/GBLK command set.

SBULK / SBLK / GBULK / GBLK / RDBLOCK



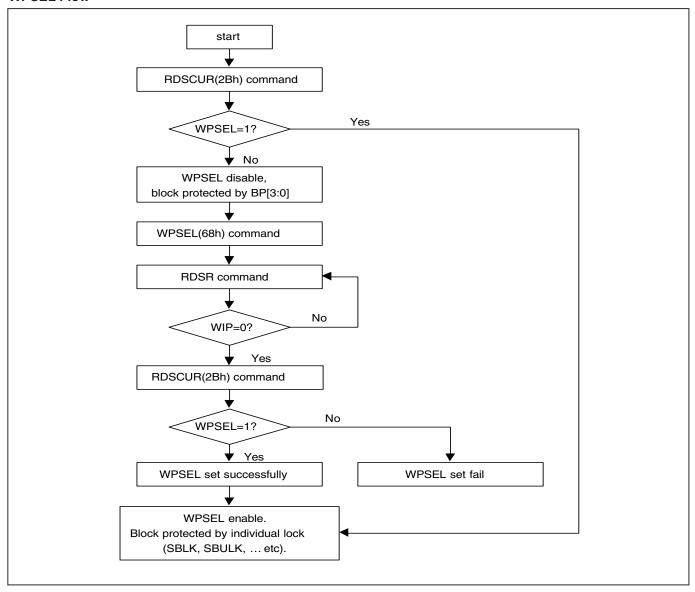WPSEL Flow





(29) Single Block Lock/Unlock Protection (SBLK/SBULK)

These instructions are only effective after WPSEL was executed. The SBLK instruction is for write protection a specified block(or sector) of memory, using A23-A16 or (A23-A12) address bits to assign a 64Kbyte block (or 4K bytes sector) to be protected as read only. The SBULK instruction will cancel the block (or sector) write protection state. This feature allows user to stop protecting the entire block (or sector) through the chip unprotect command (GBULK).

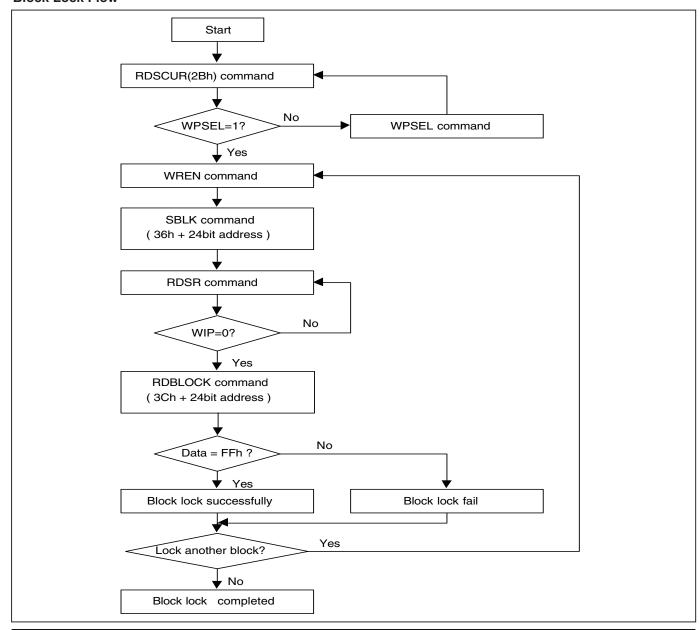
The WREN (Write Enable) instruction is required before issuing SBLK/SBULK instruction.

The sequence of issuing SBLK/SBULK instruction is: CS# goes low \rightarrow send SBLK/SBULK (36h/39h) instruction \rightarrow send 3 address bytes assign one block (or sector) to be protected on SI pin \rightarrow CS# goes high. (Please refer to Figure 38)

The CS# must go high exactly at the byte boundary, otherwise the instruction will be rejected and not be executed.


SBLK/SBULK instruction function flow is as follows:

Block Lock Flow





Block Unlock Flow

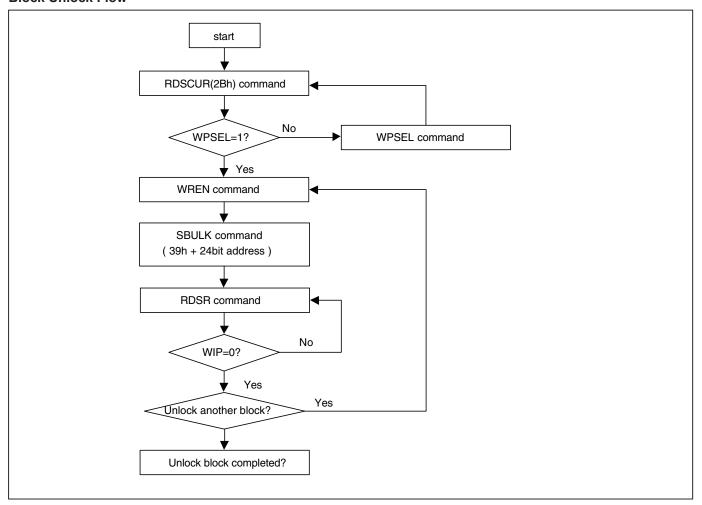



(30) Read Block Lock Status (RDBLOCK)

This instruction is only effective after WPSEL was executed. The RDBLOCK instruction is for reading the status of protection lock of a specified block(or sector), using A23-A16 (or A23-A12) address bits to assign a 64K bytes block (4K bytes sector) and read protection lock status bit which the first byte of Read-out cycle. The status bit is "1" to indicate that this block has be protected, that user can read only but cannot write/program /erase this block. The status bit is "0" to indicate that this block hasn't be protected, and user can read and write this block.

The sequence of issuing RDBLOCK instruction is: CS# goes low \rightarrow send RDBLOCK (3Ch) instruction \rightarrow send 3 address bytes to assign one block on SI pin \rightarrow read block's protection lock status bit on SO pin \rightarrow CS# goes high. (Please refer to Figure 39)

(31) Gang Block Lock/Unlock (GBLK/GBULK)

These instructions are only effective after WPSEL was executed. The GBLK/GBULK instruction is for enable/disable the lock protection block of the whole chip.

The WREN (Write Enable) instruction is required before issuing GBLK/GBULK instruction.

The sequence of issuing GBLK/GBULK instruction is: CS# goes low \rightarrow send GBLK/GBULK (7Eh/98h) instruction \rightarrow CS# goes high. (Please refer to Figure 40)

The CS# must go high exactly at the byte boundary, otherwise, the instruction will be rejected and not be executed.

(32) Clear SR Fail Flags (CLSR)

The CLSR instruction is for resetting the Program/Erase Fail Flag bit of Security Register. It should be executed before program/erase another block during programming/erasing flow without read array data.

The sequence of issuing CLSR instruction is: CS# goes low \rightarrow send CLSR instruction code \rightarrow CS# goes high.

The CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.

(33) Enable SO to Output RY/BY# (ESRY)

The ESRY instruction is for outputting the ready/busy status to SO during CP mode.

The sequence of issuing ESRY instruction is: CS# goes low \rightarrow sending ESRY instruction code \rightarrow CS# goes high.

The CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.

(34) Disable SO to Output RY/BY# (DSRY)

The DSRY instruction is for resetting ESRY during CP mode. The ready/busy status will not output to SO after DSRY issued.

The sequence of issuing DSRY instruction is: CS# goes low \rightarrow send DSRY instruction code \rightarrow CS# goes high.

The CS# must go high exactly at the byte boundary; otherwise, the instruction will be rejected and not executed.



(35) Read SFDP Mode (RDSFDP)

The Serial Flash Discoverable Parameter (SFDP) standard provides a consistent method of describing the functional and feature capabilities of serial flash devices in a standard set of internal parameter tables. These parameter tables can be interrogated by host system software to enable adjustments needed to accommodate divergent features from multiple vendors. The concept is similar to the one found in the Introduction of JEDEC Standard, JESD68 on CFI.

The sequence of issuing RDSFDP instruction is CS# goes low→send RDSFDP instruction (5Ah)→send 3 address bytes on SI pin→send 1 dummy byte on SI pin→read SFDP code on SO→to end RDSFDP operation can use CS# to high at any time during data out.

SFDP is a standard of JEDEC, JESD216, v1.0.

Read Serial Flash Discoverable Parameter (RDSFDP) Sequence








Table a-1. Signature and Parameter Identification Data Values for MX25L6465E

Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)
		00h	07:00	53h	53h
CEDD Cignotius	Fixed: 50444652b	01h	15:08	46h	46h
SFDP Signature	Fixed: 50444653h	02h	23:16	44h	44h
		03h	31:24	50h	50h
SFDP Minor Revision Number	Start from 00h	04h	07:00	00h	00h
SFDP Major Revision Number	Start from 01h	05h	15:08	01h	01h
Number of Parameter Headers	Start from 01h	06h	23:16	01h	01h
Unused		07h	31:24	FFh	FFh
ID number (JEDEC)	00h: it indicates a JEDEC specified header.	08h	07:00	00h	00h
Parameter Table Minor Revision Number	Start from 00h	09h	15:08	00h	00h
Parameter Table Major Revision Number	Start from 01h	0Ah	23:16	01h	01h
Parameter Table Length (in double word)	How many DWORDs in the Parameter table	0Bh	31:24	09h	09h
		0Ch	07:00	30h	30h
Parameter Table Pointer (PTP)	First address of JEDEC Flash Parameter table	0Dh	15:08	00h	00h
		0Eh	23:16	00h	00h
Unused		0Fh	31:24	FFh	FFh
ID number (Macronix manufacturer ID)	it indicates Macronix manufacturer ID	10h	07:00	C2h	C2h
Parameter Table Minor Revision Number	Start from 00h	11h	15:08	00h	00h
Parameter Table Major Revision Number	Start from 01h	12h	23:16	01h	01h
Parameter Table Length (in double word)	How many DWORDs in the Parameter table	13h	31:24	04h	04h
		14h	07:00	60h	60h
Parameter Table Pointer (PTP)	First address of Macronix Flash Parameter table	15h	15:08	00h	00h
	arameter table	16h	23:16	00h	00h
Unused		17h	31:24	FFh	FFh

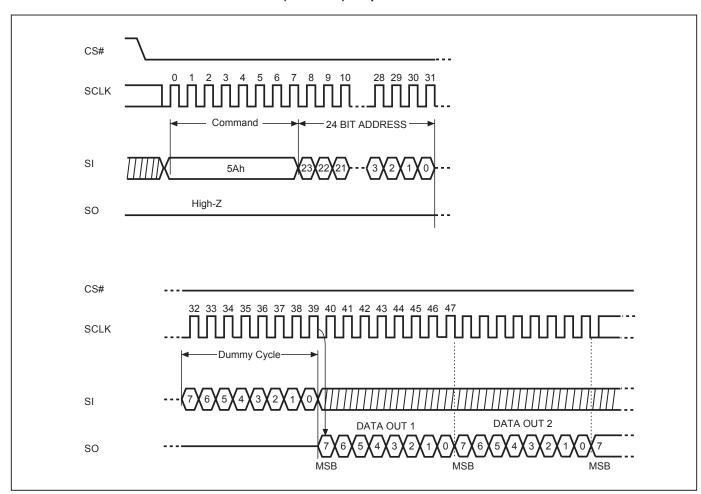

Table b-1. Parameter Table (0): JEDEC Flash Parameter Tables for MX25L6465E

Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)
Block/Sector Erase sizes	00: Reserved, 01: 4KB erase, 10: Reserved, 11: not suport 4KB erase		01:00	01b	
Write Granularity	0: 1Byte, 1: 64Byte or larger		02	1b	
Write Enable Instruction Requested for Writing to Volatile Status Registers	0: Nonvolatitle status bit 1: Volatitle status bit (BP status register bit)	30h	03	0b	E5h
Write Enable Opcode Select for Writing to Volatile Status Registers	0: use 50h opcode, 1: use 06h opcode Note: If target flash status register is nonvolatile, then bits 3 and 4 must be set to 00b.	04		0b	
Unused	Contains 111b and can never be changed		07:05	111b	
4KB Erase Opcode		31h	15:08	20h	20h
(1-1-2) Fast Read (Note2)	0=not support 1=support		16	0b	
Address Bytes Number used in addressing flash array	00: 3Byte only, 01: 3 or 4Byte, 10: 4Byte only, 11: Reserved		18:17	00b	B8h
Double Transfer Rate (DTR) Clocking	0=not support 1=support		19	1b	
(1-2-2) Fast Read	0=not support 1=support	32h	20	1b	
(1-4-4) Fast Read	0=not support 1=support		21	1b	
(1-1-4) Fast Read	0=not support 1=support]	22	0b	
Unused			23	1b	
Unused		33h	31:24	FFh	FFh
Flash Memory Density		37h:34h	31:00	03FFFF	FFh
(1-4-4) Fast Read Number of Wait states (Note3)	0 0000b: Wait states (Dummy Clocks) not support	38h	04:00	0 0100b	44h
(1-4-4) Fast Read Number of Mode Bits (Note4)	000b: Mode Bits not support	3011	07:05	010b	4411
(1-4-4) Fast Read Opcode		39h	15:08	EBh	EBh
states	0 0000b: Wait states (Dummy Clocks) not support	3Ah	20:16	0 0000b	00h
(1-1-4) Fast Read Number of Mode Bits	000b: Mode Bits not support	0/311	23:21	000b	
(1-1-4) Fast Read Opcode		3Bh	31:24	FFh	FFh



Table c-1. Parameter Table (1): Macronix Flash Parameter Tables for MX25L6465E

Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)
Vcc Supply Maximum Voltage	2000h=2.000V 2700h=2.700V 3600h=3.600V	61h:60h	07:00 15:08	00h 36h	00h 36h
Vcc Supply Minimum Voltage	1650h=1.650V 2250h=2.250V 2350h=2.350V 2700h=2.700V	63h:62h	23:16 31:24	00h 27h	00h 27h
HW Reset# pin	0=not support 1=support		00	0b	
HW Hold# pin	0=not support 1=support		01	1b	
Deep Power Down Mode	0=not support 1=support		02	1b	
SW Reset	0=not support 1=support		03	0b	
SW Reset Opcode	Reset Enable (66h) should be issued before Reset command	65h:64h	11:04	1111 1111b (FFh)	4FF6h
Program Suspend/Resume	0=not support 1=support		12	0b	
Erase Suspend/Resume	0=not support 1=support		13	0b	
Unused			14	1b	
Wrap-Around Read mode	0=not support 1=support		15	0b	
Wrap-Around Read mode Opcode		66h	23:16	FFh	FFh
Wrap-Around Read data length	08h:support 8B wrap-around read 16h:8B&16B 32h:8B&16B&32B 64h:8B&16B&32B&64B	67h	31:24	FFh	FFh
Individual block lock	0=not support 1=support		00	1b	
Individual block lock bit (Volatile/Nonvolatile)	0=Volatile 1=Nonvolatile		01	0b	
Individual block lock Opcode			09:02	0011 0110b (36h)	
Individual block lock Volatile protect bit default protect status	0=protect 1=unprotect		10	0b	C8D9h
Secured OTP	0=not support 1=support	6Bh:68h	11	1b	
Read Lock	0=not support 1=support		12	0b	
Permanent Lock	0=not support 1=support		13	0b	
Unused			15:14	11b	
Unused			31:16	0xFFh	0xFFh
Unused		6Fh:6Ch	31:00	0xFFh	0xFFh



Table a-2. Signature and Parameter Identification Data Values for MX25L12865E

Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)
		00h	07:00	53h	53h
SFDP Signature	Fixed: 50444653h	01h	15:08	46h	46h
SFDF Signature	Fixed: 5044465511	02h	23:16	44h	44h
		03h	31:24	50h	50h
SFDP Minor Revision Number	Start from 00h	04h	07:00	00h	00h
SFDP Major Revision Number	Start from 01h	05h	15:08	01h	01h
Number of Parameter Headers	Start from 01h	06h	23:16	01h	01h
Unused		07h	31:24	FFh	FFh
ID number (JEDEC)	00h: it indicates a JEDEC specified header.	08h	07:00	00h	00h
Parameter Table Minor Revision Number	Start from 00h	09h	15:08	00h	00h
Parameter Table Major Revision Number	Start from 01h	0Ah	23:16	01h	01h
Parameter Table Length (in double word)	How many DWORDs in the Parameter table	0Bh	31:24	09h	09h
		0Ch	07:00	30h	30h
Parameter Table Pointer (PTP)	First address of JEDEC Flash Parameter table	0Dh	15:08	00h	00h
		0Eh	23:16	00h	00h
Unused		0Fh	31:24	FFh	FFh
ID number (Macronix manufacturer ID)	it indicates Macronix manufacturer ID	10h	07:00	C2h	C2h
Parameter Table Minor Revision Number	Start from 00h	11h	15:08	00h	00h
Parameter Table Major Revision Number	Start from 01h	12h	23:16	01h	01h
Parameter Table Length (in double word)	How many DWORDs in the Parameter table	13h	31:24	04h	04h
		14h	07:00	60h	60h
Parameter Table Pointer (PTP)	First address of Macronix Flash Parameter table	15h	15:08	00h	00h
	arameter table	16h	23:16	00h	00h
Unused		17h	31:24	FFh	FFh



Table b-2. Parameter Table (0): JEDEC Flash Parameter Tables for MX25L12865E

Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)
Block/Sector Erase sizes	00: Reserved, 01: 4KB erase, 10: Reserved, 11: not suport 4KB erase		01:00		
Write Granularity	0: 1Byte, 1: 64Byte or larger		02	1b	
Write Enable Instruction Requested for Writing to Volatile Status Registers	0: Nonvolatitle status bit 1: Volatitle status bit (BP status register bit)	30h	03	0b	E5h
Write Enable Opcode Select for Writing to Volatile Status Registers	0: use 50h opcode, 1: use 06h opcode Note: If target flash status register is nonvolatile, then bits 3 and 4 must be set to 00b.	ris 04		0b	
Unused	Contains 111b and can never be changed		07:05	111b	
4KB Erase Opcode		31h	15:08	20h	20h
(1-1-2) Fast Read (Note2)	0=not support 1=support		16	0b	
Address Bytes Number used in addressing flash array	00: 3Byte only, 01: 3 or 4Byte, 10: 4Byte only, 11: Reserved		18:17	00b	
Double Transfer Rate (DTR) Clocking	0=not support 1=support		19	1b	
(1-2-2) Fast Read	0=not support 1=support	32h	20	1b	B8h
(1-4-4) Fast Read	0=not support 1=support		21	1b	
(1-1-4) Fast Read	0=not support 1=support		22	0b	
Unused			23	1b	
Unused		33h	31:24	FFh	FFh
Flash Memory Density		37h:34h	31:00	07FFFF	FFh
(1-4-4) Fast Read Number of Wait states (Note3)	0 0000b: Wait states (Dummy Clocks) not support	38h	04:00	0 0100b	44h
(1-4-4) Fast Read Number of Mode Bits (Note4)	000b: Mode Bits not support	3011	07:05	010b	4411
(1-4-4) Fast Read Opcode		39h	15:08	EBh	EBh
states	0 0000b: Wait states (Dummy Clocks) not support	3Ah	20:16	0 0000b	00h
(1-1-4) Fast Read Number of Mode Bits	000b: Mode Bits not support	V/-\(\(\)11	23:21	000b	
(1-1-4) Fast Read Opcode		3Bh	31:24	FFh	FFh



Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)	
(1-1-2) Fast Read Number of Wait states	0 0000b: Wait states (Dummy Clocks) not support	3Ch	04:00	0 0000b	00h	
(1-1-2) Fast Read Number of Mode Bits	000b: Mode Bits not support	3011	07:05	000b	OOH	
(1-1-2) Fast Read Opcode		3Dh	15:08	0xFFh	0xFFh	
(1-2-2) Fast Read Number of Wait states	0 0000b: Wait states (Dummy Clocks) not support	3Eh	20:16	0 0100b	04h	
(1-2-2) Fast Read Number of Mode Bits	000b: Mode Bits not support	JEII	23:21	000b	0411	
(1-2-2) Fast Read Opcode		3Fh	31:24	BBh	BBh	
(2-2-2) Fast Read	0=not support 1=support		00	0b		
Unused		40h	03:01	111b		
(4-4-4) Fast Read	0=not support 1=support	40h	04	0b	EEh	
Unused			07:05	111b		
Unused		43h:41h	31:08	0xFFh	0xFFh	
Unused		45h:44h	15:00	0xFFh	0xFFh	
(2-2-2) Fast Read Number of Wait states	0 0000b: Wait states (Dummy Clocks) not support	46h	20:16	0 000b	00h	
(2-2-2) Fast Read Number of Mode Bits	000b: Mode Bits not support	4011	23:21	000b		
(2-2-2) Fast Read Opcode		47h	31:24	FFh	FFh	
Unused		49h:48h	15:00	0xFFh	0xFFh	
(4-4-4) Fast Read Number of Wait states	0 0000b: Wait states (Dummy Clocks) not support	4Ah	20:16	0 0000b	00h	
(4-4-4) Fast Read Number of Mode Bits	000b: Mode Bits not support	4411	23:21	000b	0011	
(4-4-4) Fast Read Opcode		4Bh	31:24	FFh	FFh	
Sector Type 1 Size	Sector/block size = 2 ^N bytes (Note5) 0x00b: this sector type doesn't exist	4Ch	07:00	0Ch	0Ch	
Sector Type 1 erase Opcode		4Dh	15:08	20h	20h	
Sector Type 2 Size	Sector/block size = 2^N bytes 0x00b: this sector type doesn't exist	4Eh	23:16	0Fh	0Fh	
Sector Type 2 erase Opcode		4Fh	31:24	52h	52h	
Sector Type 3 Size	Sector/block size = 2^N bytes 0x00b: this sector type doesn't exist	50h	07:00	10h	10h	
Sector Type 3 erase Opcode		51h	15:08	D8h	D8h	
Sector Type 4 Size	Sector/block size = 2^N bytes 0x00b: this sector type doesn't exist	52h	23:16	00h	00h	
Sector Type 4 erase Opcode		53h	31:24	FFh	FFh	





Table c-2. Parameter Table (1): Macronix Flash Parameter Tables for MX25L12865E

Description	Comment	Add (h) (Byte)	DW Add (Bit)	Data (h/b) (Note1)	Data (h)
Vcc Supply Maximum Voltage	2000h=2.000V 2700h=2.700V 3600h=3.600V	61h:60h	07:00 15:08	00h 36h	00h 36h
Vcc Supply Minimum Voltage	1650h=1.650V 2250h=2.250V 2350h=2.350V 2700h=2.700V	63h:62h	23:16 31:24	00h 27h	00h 27h
HW Reset# pin	0=not support 1=support		00	0b	
HW Hold# pin	0=not support 1=support		01	1b	
Deep Power Down Mode	0=not support 1=support		02	1b	
SW Reset	0=not support 1=support		03	0b	
SW Reset Opcode	Reset Enable (66h) should be issued before Reset command	65h:64h	11:04	1111 1111b (FFh)	4FF6h
Program Suspend/Resume	0=not support 1=support		12	0b	
Erase Suspend/Resume	0=not support 1=support		13	0b	
Unused			14	1b	
Wrap-Around Read mode	0=not support 1=support		15	0b	
Wrap-Around Read mode Opcode		66h	23:16	FFh	FFh
Wrap-Around Read data length	08h:support 8B wrap-around read 16h:8B&16B 32h:8B&16B&32B 64h:8B&16B&32B&64B	67h	31:24	FFh	FFh
Individual block lock	0=not support 1=support		00	1b	
Individual block lock bit (Volatile/Nonvolatile)	0=Volatile 1=Nonvolatile		01	0b	
Individual block lock Opcode			09:02	0011 0110b (36h)	
Individual block lock Volatile protect bit default protect status	0=protect 1=unprotect		10	0b	C8D9h
Secured OTP	0=not support 1=support	6Bh:68h	11	1b	
Read Lock	0=not support 1=support		12	0b	
Permanent Lock	0=not support 1=support		13	0b	
Unused			15:14	11b	
Unused			31:16	0xFFh	0xFFh
Unused		6Fh:6Ch	31:00	0xFFh	0xFFh



- Note 1: h/b is hexadecimal or binary.
- Note 2: **(x-y-z)** means I/O mode nomenclature used to indicate the number of active pins used for the opcode (x), address (y), and data (z). At the present time, the only valid Read SFDP instruction modes are: (1-1-1), (2-2-2), and (4-4-4)
- Note 3: Wait States is required dummy clock cycles after the address bits or optional mode bits.
- Note 4: **Mode Bits** is optional control bits that follow the address bits. These bits are driven by the system controller if they are specified. (eg,read performance enhance toggling bits)
- Note 5: 4KB=2^0Ch,32KB=2^0Fh,64KB=2^10h
- Note 6: 0xFFh means all data is blank ("1b").



POWER-ON STATE

The device is at below states when power-up:

- Standby mode (please note it is not Deep Power-down mode)
- Write Enable Latch (WEL) bit is reset

The device must not be selected during power-up and power-down stage unless the VCC achieves below correct level:

- VCC minimum at power-up stage and then after a delay of tVSL
- GND at power-down

Please note that a pull-up resistor on CS# may ensure a safe and proper power-up/down level.

An internal Power-on Reset (POR) circuit may protect the device from data corruption and inadvertent data change during power up state.

For further protection on the device, if the VCC does not reach the VCC minimum level, the correct operation is not guaranteed. The read, write, erase, and program command should be sent after the time delay:

- tVSL after VCC reached VCC minimum level

The device can accept read command after VCC reached VCC minimum and a time delay of tVSL.

Please refer to the figure of "Power-up Timing".

Note:

- To stabilize the VCC level, the VCC rail decoupled by a suitable capacitor close to package pins is recommended. (generally around 0.1uF)



ELECTRICAL SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS

RATING		VALUE
Ambient Operating Temperature	Industrial grade	-40°C to 85°C
Storage Temperature	-65°C to 150°C	
Applied Input Voltage		-0.5V to 4.6V
Applied Output Voltage		-0.5V to 4.6V
VCC to Ground Potential		-0.5V to 4.6V

NOTICE:

- 1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and functional operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended period may affect reliability.
- 2. Specifications contained within the following tables are subject to change.
- 3. During voltage transitions, all pins may overshoot Vss to -2.0V and Vcc to +2.0V for periods up to 20ns, see Figure 2, 3.

Figure 3. Maximum Negative Overshoot Waveform





Figure 4. Maximum Positive Overshoot Waveform



CAPACITANCE TA = 25°C, f = 1.0 MHz

Symbol	Parameter	Min.	Тур.	Max.	Unit	Conditions
CIN	Input Capacitance			6	pF	VIN = 0V
COUT	Output Capacitance			8	pF	VOUT = 0V



Figure 5. OUTPUT LOADING

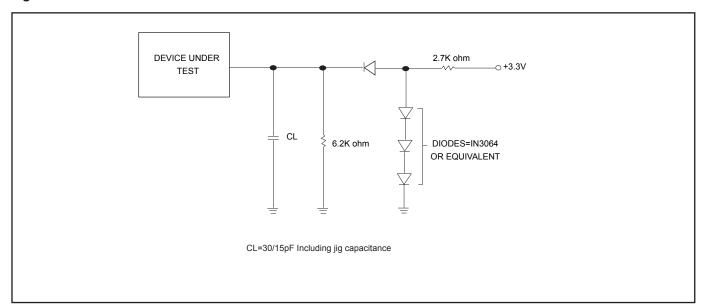




Table 7-1. MX25L6465E DC CHARACTERISTICS (Temperature = -40 $^{\circ}$ C to 85 $^{\circ}$ C for Industrial grade, VCC = 2.7V $^{\sim}$ 3.6V)

Symbol	Parameter	Notes	Min.	Max.	Units	Test Conditions
ILI	Input Load Current	1		± 2	uA	VCC = VCC Max, VIN = VCC or GND
ILO	Output Leakage Current	1		± 2	uA	VCC = VCC Max, VOUT = VCC or GND
ISB1	VCC Standby Current	1		50	uA	VIN = VCC or GND, CS# = VCC
ISB2	Deep Power-down Current			20	uA	VIN = VCC or GND, CS# = VCC
				22	mA	fQ=70MHz (4 x I/O read) SCLK=0.1VCC/0.9VCC, SO=Open
				19	mA	f=104MHz SCLK=0.1VCC/0.9VCC, SO=Open
ICC1	VCC Read	1		17	mA	fT=70MHz (2 x I/O read) SCLK=0.1VCC/0.9VCC, SO=Open
				15	mA	fT=66MHz SCLK=0.1VCC/0.9VCC, SO=Open
				10	mA	f=33MHz, SCLK=0.1VCC/0.9VCC, SO=Open
ICC2	VCC Program Current (PP)	1		25	mA	Program in Progress, CS# = VCC
ICC3	VCC Write Status Register (WRSR) Current			20	mA	Program status register in progress, CS#=VCC
ICC4	VCC Sector Erase Current (SE)	1		25	mA	Erase in Progress, CS#=VCC
ICC5	VCC Chip Erase Current (CE)	1		20	mA	Erase in Progress, CS#=VCC
VIL	Input Low Voltage		-0.5	0.8	V	
VIH	Input High Voltage		0.7VCC	VCC+0.4	V	
VOL	Output Low Voltage			0.4	V	IOL = 1.6mA
VOH	Output High Voltage		VCC-0.2		V	IOH = -100uA

Notes:

- 1. Typical values at VCC = 3.3V, T = 25°C. These currents are valid for all product versions (package and speeds).
- 2. Typical value is calculated by simulation.



Table 7-2. MX25L12865E DC CHARACTERISTICS (Temperature = -40 $^{\circ}$ C to 85 $^{\circ}$ C for Industrial grade, VCC = 2.7V \sim 3.6V)

Symbol	Parameter	Notes	Min.	Max.	Units	Test Conditions
ILI	Input Load Current	1		± 2	uA	VCC = VCC Max, VIN = VCC or GND
ILO	Output Leakage Current	1		± 2	uA	VCC = VCC Max, VOUT = VCC or GND
ISB1	VCC Standby Current	1		100	uA	VIN = VCC or GND, CS# = VCC
ISB2	Deep Power-down Current			40	uA	VIN = VCC or GND, CS# = VCC
				22	mA	fQ=70MHz (4 x I/O read) SCLK=0.1VCC/0.9VCC, SO=Open
				19	mA	f=104MHz SCLK=0.1VCC/0.9VCC, SO=Open
ICC1	VCC Read	1		17	mA	fT=70MHz (2 x I/O read) SCLK=0.1VCC/0.9VCC, SO=Open
				15	mA	fT=66MHz SCLK=0.1VCC/0.9VCC, SO=Open
				10	mA	f=33MHz, SCLK=0.1VCC/0.9VCC, SO=Open
ICC2	VCC Program Current (PP)	1		25	mA	Program in Progress, CS# = VCC
ICC3	VCC Write Status Register (WRSR) Current			20	mA	Program status register in progress, CS#=VCC
ICC4	VCC Sector Erase Current (SE)	1		25	mA	Erase in Progress, CS#=VCC
ICC5	VCC Chip Erase Current (CE)	1		20	mA	Erase in Progress, CS#=VCC
VIL	Input Low Voltage		-0.5	0.8	V	
VIH	Input High Voltage		0.7VCC	VCC+0.4	V	
VOL	Output Low Voltage			0.4	V	IOL = 1.6mA; IOL = 140uA for parallel mode
VOH	Output High Voltage		VCC-0.2		V	IOH = -100uA; IOH = 65uA for parallel mode

Notes:

- 1. Typical values at VCC = 3.3V, T = 25°C. These currents are valid for all product versions (package and speeds).
- 2. Typical value is calculated by simulation.



Table 8-1. MX25L6465E AC CHARACTERISTICS (Temperature = -40°C to 85°C for Industrial grade, VCC = $2.7V \sim 3.6V$)

Symbol	Alt.	Parameter		Min.	Тур.	Max.	Unit
		Clock Frequency for the following instructions:					
fSCLK fC	fC	FAST_READ, RDSFDP, PP, SE, BE, CE, DP, RES, RDP,				104	MHz
		WREN, WRDI, RDID, RDSR, WRSR					
fRSCLK	fR	Clock Frequency for READ instructions				50	MHz
	fT	Clock Frequency for 2READ instructions				70	MHz
	fQ Clock Frequency for 4READ instructions				70	MHz	
fTSCLK fC2 fT2		Clock Frequency for FASTDDRRD instructions				50	MHz
		Clock Frequency for 2DDRRD instructions				50	MHz
	fQ2	Clock Frequency for 4DDRRD instructions				50	MHz
f4PP		Clock Frequency for 4PP (Quad page prog				20	MHz
tCH(1)	tCLH	Clock High Time	Fast_Read	4.5			ns
(1)	(02	Olock Flight Tillio	Read	9			ns
tCL(1)	tCLL	Clock Low Time	Fast_Read	4.5			ns
			Read	9			ns
tCLCH(2)		Clock Rise Time (3) (peak to peak)		0.1			V/ns
tCHCL(2)		Clock Fall Time (3) (peak to peak)		0.1			V/ns
tSLCH	tCSS	CS# Active Setup Time (relative to SCLK)		5			ns
tCHSL		CS# Not Active Hold Time (relative to SCLI	K)	5			ns
tDVCH		Data In Setup Time		2			ns
tCHDX	tDH	Data In Hold Time		5			ns
tCHSH		CS# Active Hold Time (relative to SCLK)		5			ns
tSHCH		CS# Not Active Setup Time (relative to SCI	, ' 	5			ns
		Read		15			ns
tSHSL(3)	tCSH	CS# Deselect Time	Write/Erase/	50			ns
		Program				4.0	
tSHQZ(2)	tDIS	Output Disable Time				10	ns
			3.0V-3.6V			8	ns
	tV	VCC=2.7V~3.6V Loading: 30pF 2	1 I/O			9	ns
tCLQV			2 I/O & 4 I/O			9.5	ns
			2 I/O & 4 I/O			12	ns
tCLQV2	tV2	Clock Low to Output Valid (DTR mode)	1 I/O, 2 I/O & 4			9.5	ns
		VCC=2.7V~3.6V, Loading: 15pF	I/O			<u> </u>	113
tCLQX	tHO	Output Hold Time		2			ns
tHLCH		HOLD# Setup Time (relative to SCLK)		8			ns
tCHHH		HOLD# Hold Time (relative to SCLK)		5			ns
tHHCH		HOLD Setup Time (relative to SCLK)		8			ns
tCHHL		HOLD Hold Time (relative to SCLK)		5			ns
tHHQX(2)	tLZ	HOLD to Output Low-Z				12	ns
tHLQZ(2)	tHZ	HOLD# to Output High-Z				12	ns
tWHSL(4)		Write Protect Setup Time		20			ns
tSHWL(4)		Write Protect Hold Time		100			ns
tDP(2)		CS# High to Deep Power-down Mode				10	us
tRES1(2)		CS# High to Standby Mode without Electronic Signature Read				100	us
tRES2(2)		CS# High to Standby Mode with Electronic Signature Read				100	us



Symbol	Alt.	Parameter	Min.	Тур.	Max.	Unit
tW		Write Status Register Cycle Time		40	100	ms
tBP		Byte-Program		9	300	us
tPP		Page Program Cycle Time		1.4	5	ms
tSE		Sector Erase Cycle Time (4KB)		60	300	ms
tBE		Block Erase Cycle Time (32KB)		0.5	2	s
tBE		Block Erase Cycle Time (64KB)		0.7	2	s
tCE		Chip Erase Cycle Time		50	80	s
tWPS		Write Protection Selection Time			1	ms
tWSR		Write Security Register Time	·		1	ms

Notes:

- 1. tCH + tCL must be greater than or equal to 1/ f (fC or fR).
- 2. Value guaranteed by characterization, not 100% tested in production.
- 3. Only applicable as a constraint for a WRSR instruction when SRWD is set at 1.



Table 8-2. MX25L12865E AC CHARACTERISTICS (Temperature = -40°C to 85°C for Industrial grade, VCC = $2.7V \sim 3.6V$)

Symbol	Alt.	Parameter		Min.	Max.	Unit	
fSCLK	fC	Clock Frequency for the following instructions: FAST_READ, RDSFDP, PP, SE, BE, CE, DP, RES, RDP, WREN, WRDI, RDID, RDSR, WRSR		Serial	D.C.	104	MHz
				Parallel		6	MHz
fRSCLK	fR	Clock Frequency for REAL) instructions			50	MHz
	fT	Clock Frequency for 2REA	AD instructions			70	MHz
fTSCLK	fQ	Clock Frequency for 4READ instructions				70	MHz
	fC2	Clock Frequency for FAST	DTRD instructions	3		50	MHz
	fT2	Clock Frequency for 2DTRD instructions				50	MHz
	fQ2	Clock Frequency for 4DTF		50	MHz		
f4PP		Clock Frequency for 4PP (Quad page progra	ım)		20	MHz
				Serial	4.5		ns
tCH(1)	tCI H	Clock High Time		(Fast_Read)		113	
(CI I(I)	ICLII	Clock High Time		Serial	9 (Read)		ns
				Parallel	30		ns
		Clock Low Time	Serial	4.5		ns	
tCL(1)	tCLL			(Fast_Read)		113	
(CL(1)		Clock Low Time		Serial	9 (Read)		ns
				Parallel	30		ns
tCLCH(2)		Clock Rise Time (3) (peak to peak)	Serial	0.1		V/ns	
102011(2)			Parallel	0.25		V/ns	
tCHCL(2)		Clock Fall Time (3) (peak to peak) Serial Parallel			0.1		V/ns
` ′				0.25		V/ns	
tSLCH	tCSS	· · · · · · · · · · · · · · · · · · ·	ctive Setup Time (relative to SCLK)		5		ns
tCHSL		CS# Not Active Hold Time	e Hold Time (relative to SCLK)		5		ns
tDVCH	tDSU	Data In Setup Time		Serial	2		ns
IDVOIT			Parallel	10		ns	
tCHDX	tDH	Data In Hold Time		Serial	5		ns
toribx				Parallel	10		ns
tCHSH		CS# Active Hold Time (relative to SCLK)		Serial	5		ns
loriori	CS# Active Hold Time (relative to SCLK)			Parallel	30		ns
tSHCH		CS# Not Active Setup Time (relative to SCLK)		()	5		ns
tSHSL(3)	tCSH			Read	15		ns
		CS# Deselect Time	Write/Erase/ Program	50		ns	
tSHQZ(2)	tDIS	Output Disable Time		2.7V-3.6V Serial		10	ns
				3.0V-3.6V Serial		8	ns
				Parallel		20	ns
		Loading: 15pF		1 I/O		9	ns
tCLQV	tV	Clock Low to Output Valid VCC=2.7V~3.6V Loading: 30pF	2 1/0 & 4 1/0		9.5	ns	
10241			2 1/0 & 4 1/0		12	ns	
			Parallel		70	ns	



Symbol	Alt.	Parameter	Min.	Тур.	Max.	Unit
tCLQV2	tV2	Clock Low to Output Valid (DTR mode) 1 I/O, 2 I/O VCC=2.7V~3.6V, Loading: 15pF & 4 I/O			9.5	ns
tCLQX	tHO	Output Hold Time	2			ns
tHLCH		HOLD# Setup Time (relative to SCLK)				ns
tCHHH		HOLD# Hold Time (relative to SCLK)				ns
tHHCH		HOLD Setup Time (relative to SCLK)	8			ns
tCHHL		HOLD Hold Time (relative to SCLK)	5			ns
tHHQX(2)	tLZ	HOLD to Output Low-Z			12	ns
tHLQZ(2)	tHZ	HOLD# to Output High-Z			12	ns
tWHSL(4)		Write Protect Setup Time	20			ns
tSHWL(4)		Write Protect Hold Time	100			ns
tDP(2)		CS# High to Deep Power-down Mode			10	us
tRES1(2)		CS# High to Standby Mode without Electronic Signature Read			100	us
tRES2(2)		CS# High to Standby Mode with Electronic Signature Read			100	us
tW		Write Status Register Cycle Time		40	100	ms
tBP		Byte-Program		9	300	us
tPP		Page Program Cycle Time		1.4	5	ms
tSE		Sector Erase Cycle Time (4KB)		60	300	ms
tBE		Block Erase Cycle Time (32KB)		0.5	2	S
tBE		Block Erase Cycle Time (64KB)		0.7	2	s
tCE		Chip Erase Cycle Time		80	200	S
tWPS		Write Protection Selection Time			1	ms
tWSR		Write Security Register Time			1	ms

Notes:

- 1. tCH + tCL must be greater than or equal to 1/ f (fC or fR).
- Value guaranteed by characterization, not 100% tested in production.
 Only applicable as a constraint for a WRSR instruction when SRWD is set at 1.



Timing Analysis

Figure 6. Serial Input Timing

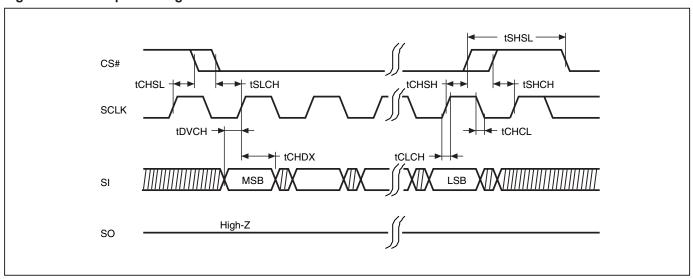


Figure 7. Output Timing






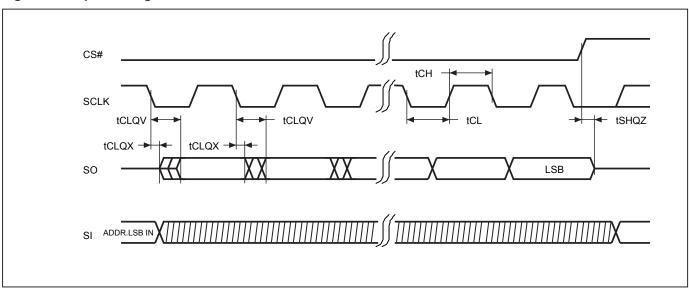Figure 8. Serial Input Timing for Double Transfer Rate Mode

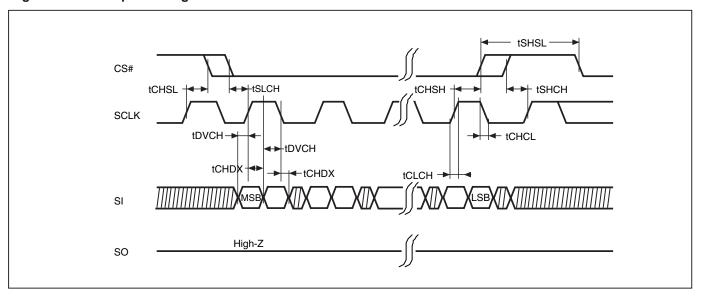


Figure 9. Serial Output Timing for Double Transfer Rate Mode


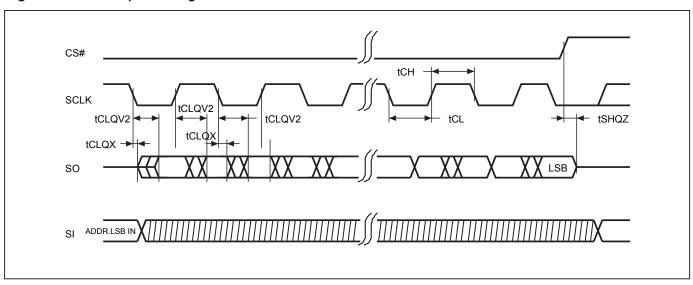




Figure 10. Hold Timing

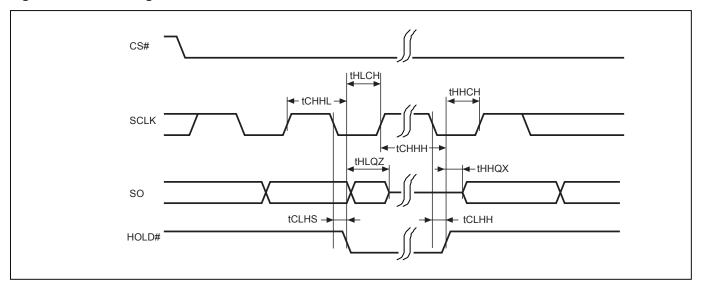

^{*} SI is "don't care" during HOLD operation.

Figure 11. WP# Disable Setup Timing and Hold Timing during WRSR when SRWD=1






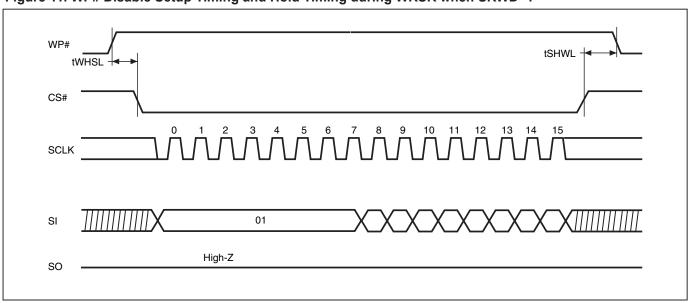Figure 12. Write Enable (WREN) Sequence (Command 06)

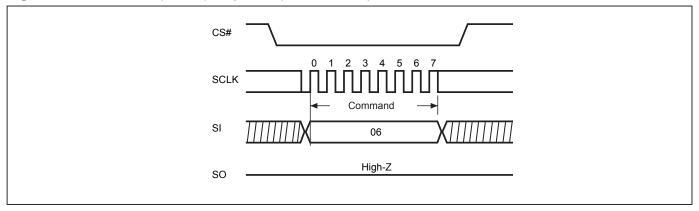


Figure 13. Write Disable (WRDI) Sequence (Command 04)

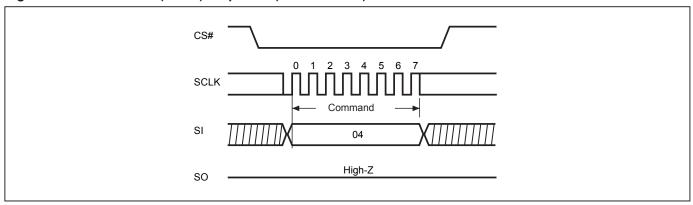


Figure 14. Read Identification (RDID) Sequence (Command 9F)






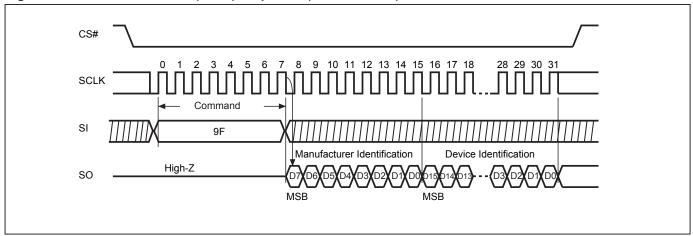Figure 15. Read Status Register (RDSR) Sequence (Command 05)

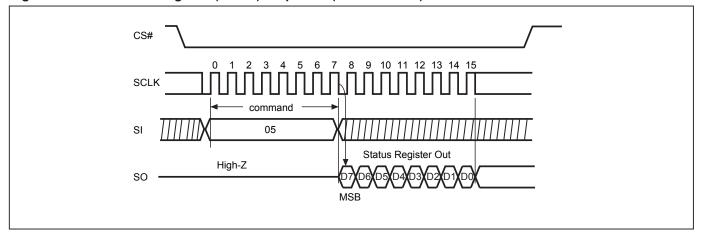


Figure 16. Write Status Register (WRSR) Sequence (Command 01)






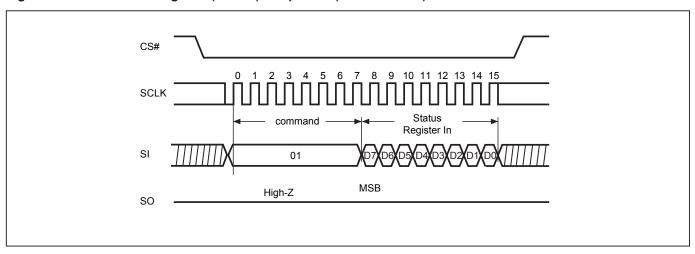Figure 17. Read Data Bytes (READ) Sequence (Command 03)

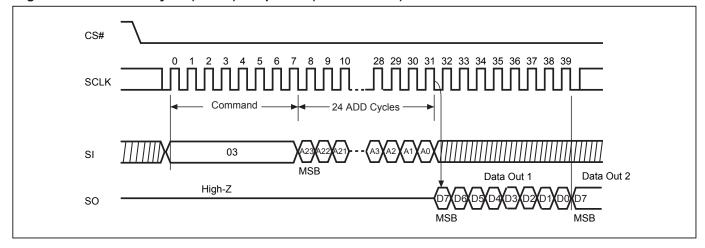


Figure 18. Read at Higher Speed (FAST_READ) Sequence (Command 0B)

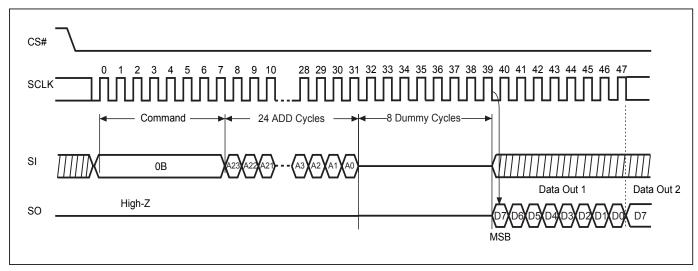


Figure 19. Fast DT Read (FASTDTRD) Sequence (Command 0D)

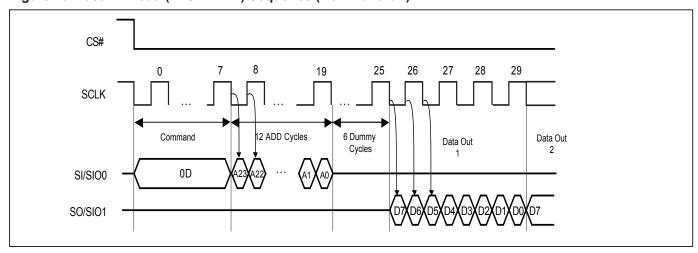
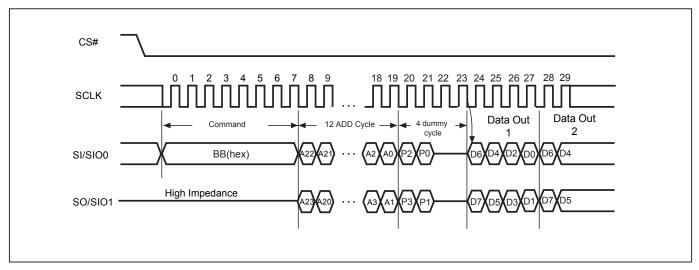


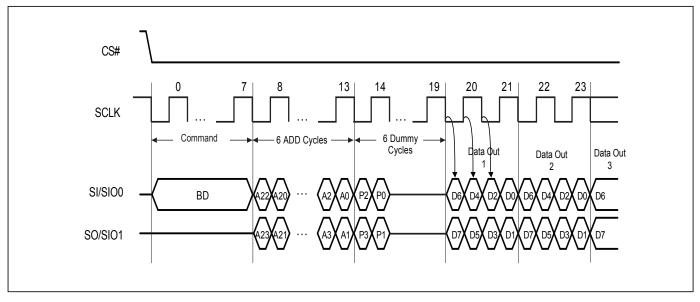


Figure 20. 2 x I/O Read Mode Sequence (Command BB)



1. SI/SIO0 or SO/SIO1 should be kept "0h" or "Fh" in the first two dummy cycles. In other words, P2=P0 or P3=P1 is necessary.


Figure 21. Fast Dual I/O DT Read (2DTRD) Sequence (Command BD)



Note


1. SI/SIO0 or SO/SIO1 should be kept "0h" or "Fh" in the first two dummy cycles. In other words, P2=P0 or P3=P1 is necessary.

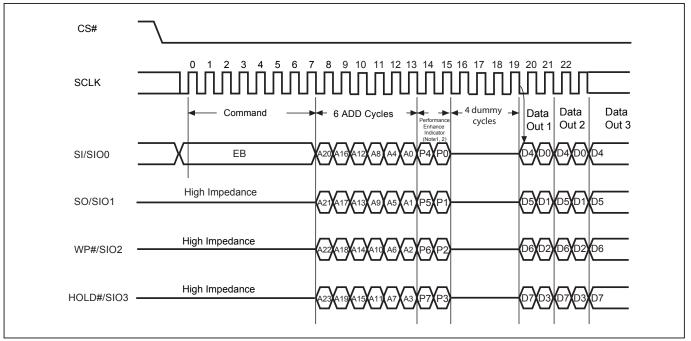Figure 22. 4 x I/O Read Mode Sequence (Command EB)



- 1. Hi-impedance is inhibited for the two clock cycles.
- 2. P7≠P3, P6≠P2, P5≠P1 & P4≠P0 (Toggling) will result in entering the performance enhance mode.

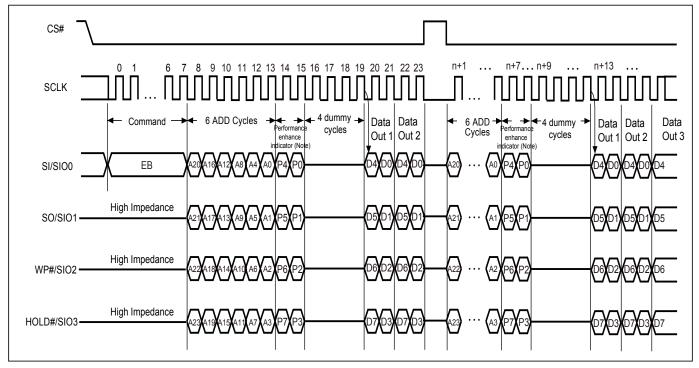Figure 23. 4 x I/O Read Enhance Performance Mode Sequence (Command EB)




Note:

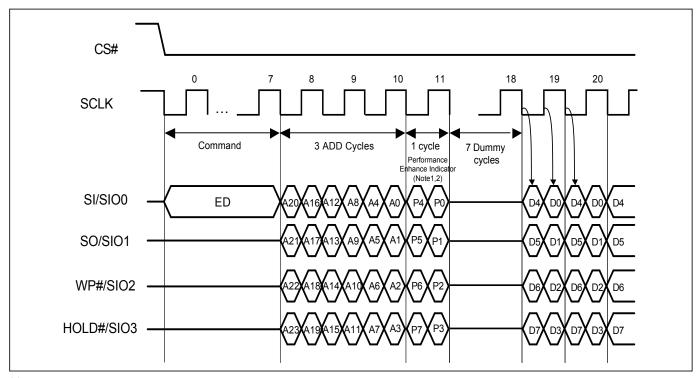- 1. Performance enhance mode, if P7≠P3 & P6≠P2 & P5≠P1 & P4≠P0 (Toggling), ex: A5, 5A, 0F
- 2. Reset the performance enhance mode, if P7=P3 or P6=P2 or P5=P1 or P4=P0, ex: AA, 00, FF

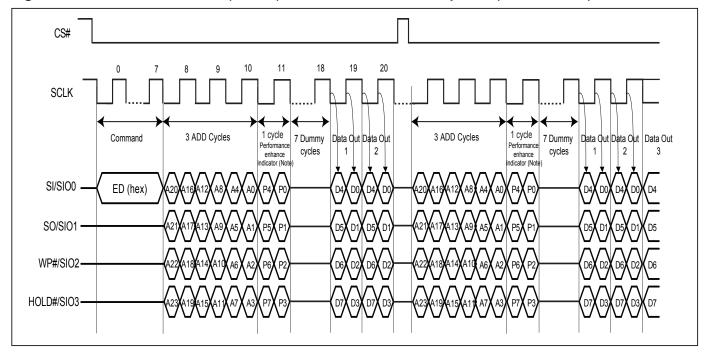


Figure 24. Fast Quad I/O DT Read (4DTRD) Sequence (Command ED)



- 1. Hi-impedance is inhibited for this clock cycle.
- 2. P7≠P3, P6≠P2, P5≠P1 & P4≠P0 (Toggling) will result in entering the performance enhance mode.

Figure 25. Fast Quad I/O DT Read (4DTRD) Enhance Performance Sequence (Command ED)



Note: Performance enhance, if P7≠P3 & P6≠P2 & P5≠P1 & P4≠P0 (Toggle).



Figure 26. Sector Erase (SE) Sequence (Command 20)

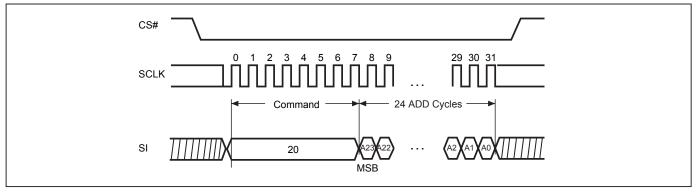


Figure 27. Block Erase (BE/EB32K) Sequence (Command D8/52)

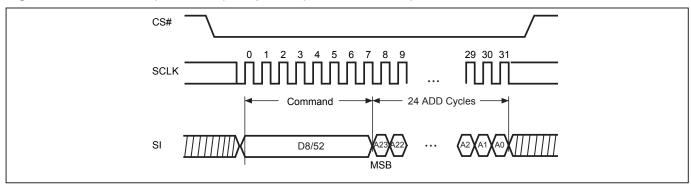


Figure 28. Chip Erase (CE) Sequence (Command 60 or C7)






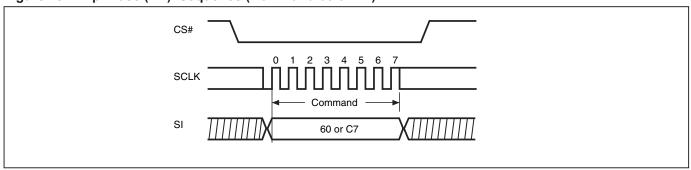Figure 29. Page Program (PP) Sequence (Command 02)

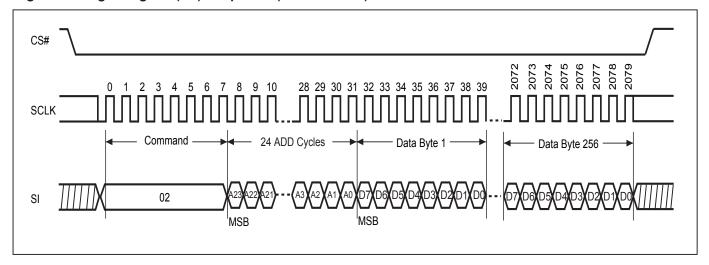


Figure 30. 4 x I/O Page Program (4PP) Sequence (Command 38)


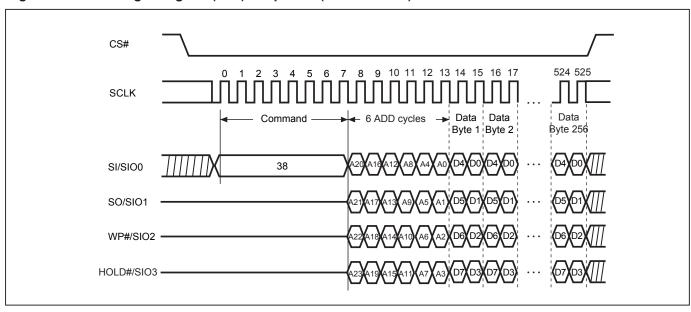


Figure 31. Continously Program (CP) Mode Sequence with Hardware Detection (Command AD)

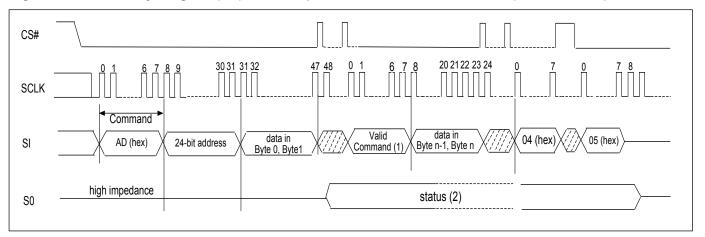

- (1) During CP mode, the valid commands are CP command (AD hex), WRDI command (04 hex), RDSR command (05 hex), and RDSCUR command (2B hex).
- (2) Once an internal programming operation begins, CS# goes low will drive the status on the SO pin and CS# goes high will return the SO pin to tri-state.
- (3) To end the CP mode, either reaching the highest unprotected address or sending Write Disable (WRDI) command (04 hex) may achieve it and then it is recommended to send RDSR command (05 hex) to verify if CP mode is ended.



Figure 32-1. Enter Parallel Mode (ENPLM) Sequence (Command 55)

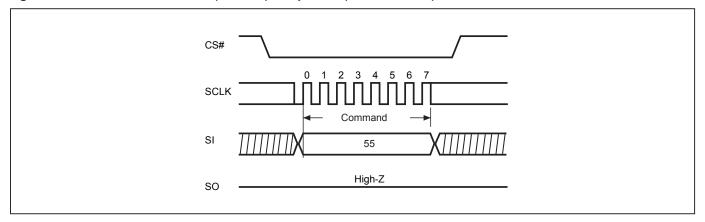


Figure 32-2. Exit Parallel Mode (EXPLM) Sequence (Command 45)


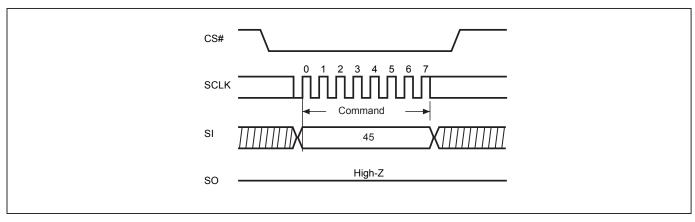



Figure 32-3. Parallel Mode Read Identification (Parallel RDID) Sequence (Command 9F)

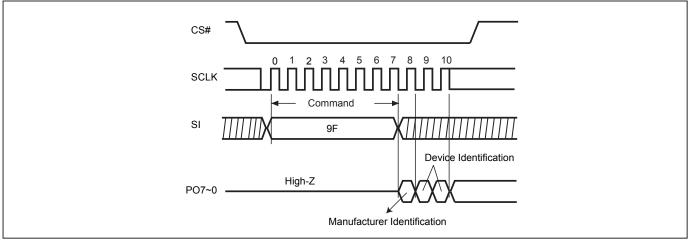

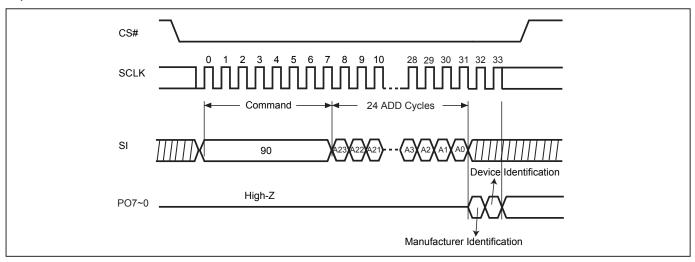1. There are 3 data bytes which would be output sequentially for Manufacturer and Device ID 1'st byte (Memory Type) and Device ID 2'nd byte (Memory Density).

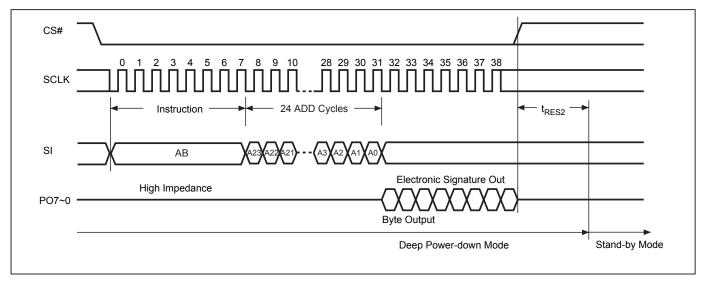


Figure 32-4. Parallel Mode Read Electronic Manufacturer & Device ID (Parallel REMS) Sequence (Command 90)



1. A0=0 will output the Manufacturer ID first and A0=1 will output Device ID first. A1~A23 don't care.

Figure 32-5. Parallel Mode Release from Deep Power-down (RDP) and Read Electronic Signature (RES) Sequence



Notes:

Under parallel mode, the fastest access clock freg. will be changed to 6MHz(SCLK pin clock freg.)
 To release from Deep Power-down mode and read ID in parallel mode, which requires a parallel mode command (55h) before the read status register command.

To exit parallel mode, it requires a (45h) command or power-off/on sequence.



Figure 32-6. Parallel Mode Read Array (Parallel READ) Sequence (Command 03)

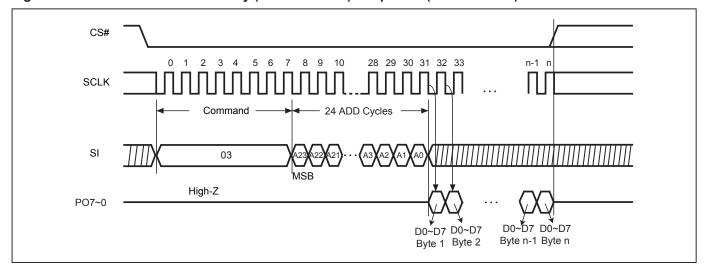


Figure 32-7. Parallel Mode Page Program (Parallel PP) Sequence (Command 02)

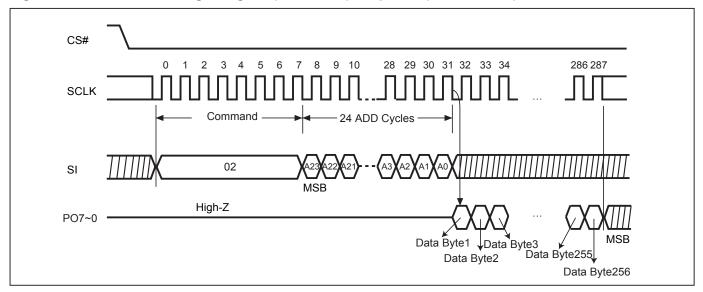


Figure 33. Deep Power-down (DP) Sequence (Command B9)






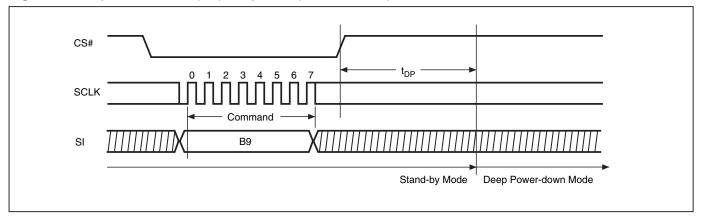Figure 34. Read Electronic Signature (RES) Sequence (Command AB)

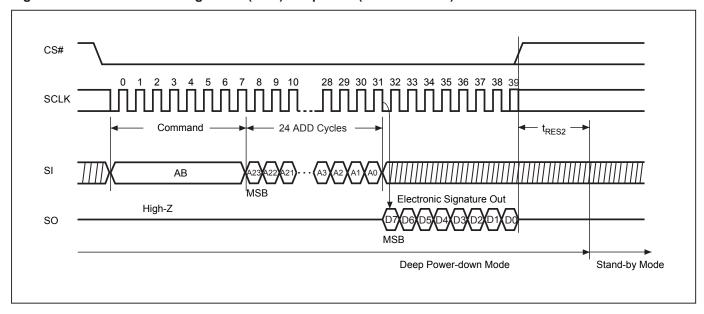


Figure 35. Release from Deep Power-down (RDP) Sequence (Command AB)


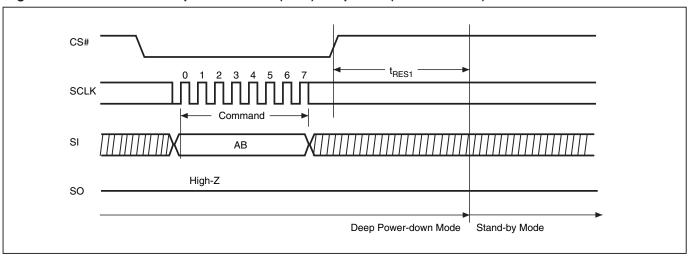




Figure 36. Read Electronic Manufacturer & Device ID (REMS) Sequence (Command 90 or EF or DF or CF)

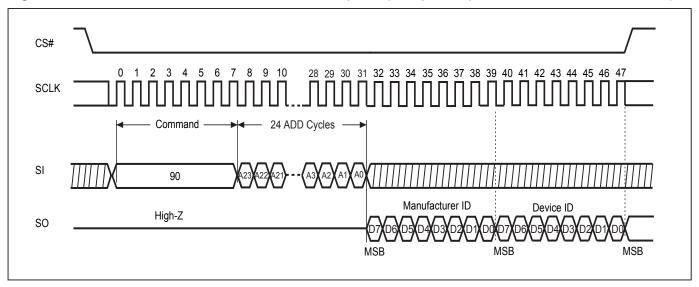

Notes:

- 1. A0=0 will output the Manufacturer ID first and A0=1 will output Device ID first. A1~A23 is don't care.
- 2. Instruction is either 90(hex) or EF(hex) or DF(hex) or CF(hex).

Figure 37. Write Protection Selection (WPSEL) Sequence (Command 68)






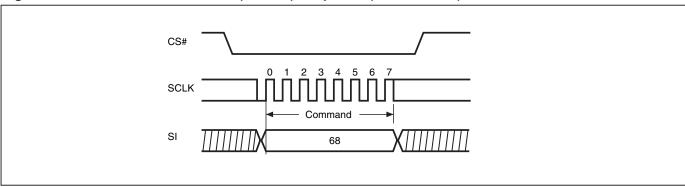Figure 38. Single Block Lock/Unlock Protection (SBLK/SBULK) Sequence (Command 36/39)

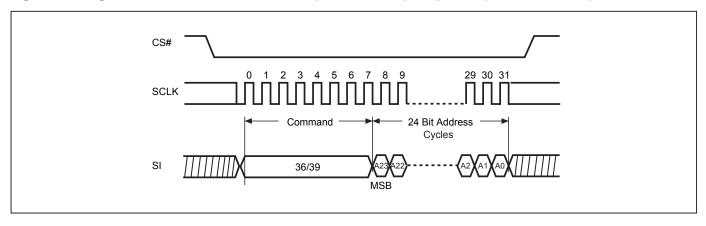


Figure 39. Read Block Protection Lock Status (RDBLOCK) Sequence (Command 3C)

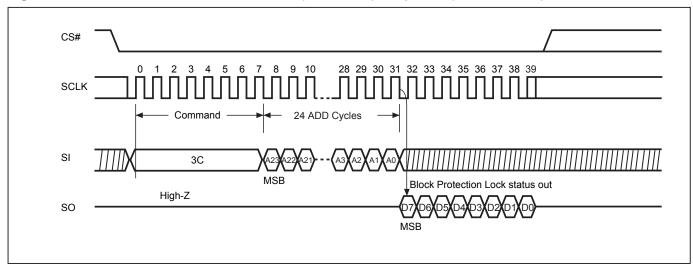


Figure 40. Gang Block Lock/Unlock (GBLK/GBULK) Sequence (Command 7E/98)


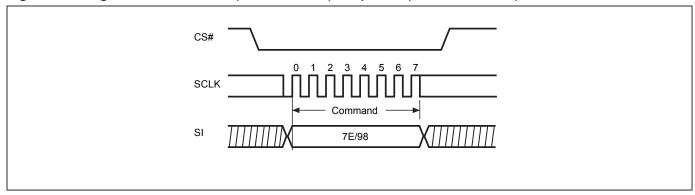




Figure 41. Power-up Timing

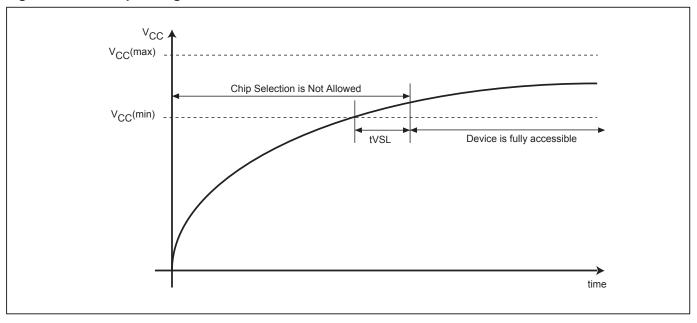

Note: VCC (max.) is 3.6V and VCC (min.) is 2.7V.

Table 9. Power-Up Timing

Symbol	Parameter	Min.	Max.	Unit
tVSL(1)	VCC(min) to CS# low	300		us

Note: 1. The parameter is characterized only.

INITIAL DELIVERY STATE

The device is delivered with the memory array erased: all bits are set to 1 (each byte contains FFh). The Status Register contains 00h (all Status Register bits are 0).




OPERATING CONDITIONS

At Device Power-Up and Power-Down

AC timing illustrated in Figure 42 and Figure 43 are for the supply voltages and the control signals at device power-up and power-down. If the timing in the figures is ignored, the device will not operate correctly.

During power-up and power-down, CS# needs to follow the voltage applied on VCC to keep the device not to be selected. The CS# can be driven low when VCC reach Vcc(min.) and wait a period of tVSL.

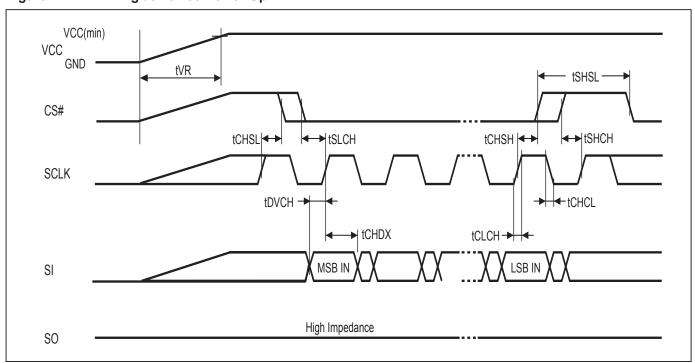Figure 42. AC Timing at Device Power-Up



Symbol	Parameter	Notes	Min.	Max.	Unit
tVR	VCC Rise Time	1	20	500000	us/V


Notes:

- 1. Sampled, not 100% tested.
- 2. For AC spec tCHSL, tSLCH, tDVCH, tCHDX, tSHSL, tCHSH, tSHCH, tCHCL, tCLCH in the figure, please refer to "AC CHARACTERISTICS" table.

P/N: PM1557 REV. 1.4, FEB. 10, 2012

Figure 43. Power-Down Sequence

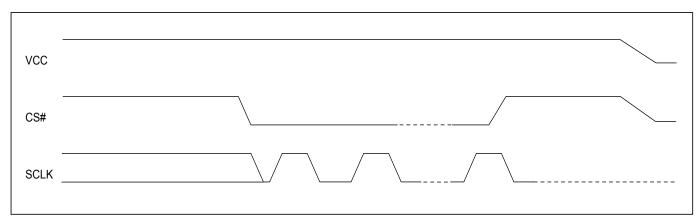During power-down, CS# needs to follow the voltage drop on VCC to avoid mis-operation.



ERASE AND PROGRAMMING PERFORMANCE

Parameter		Typ. (1)	Max. (2)	Unit
Write Status Register Cycle Time		40	100	ms
Sector Erase Time (4KB)		60	300	ms
Block Erase Time (64KB)		0.7	2	S
Block Erase Time (32KB)		0.5	2	s
Chin France Time	64Mb	50	80	S
Chip Erase Time	128Mb	80	200	S
Byte Program Time (via page program command)		9	300	us
Page Program Time		1.4	5	ms
Erase/Program Cycle		100,000		cycles

Note:

- 1. Typical program and erase time assumes the following conditions: 25°C, 3.3V, and checker board pattern.
- 2. Under worst conditions of 85°C and 2.7V.
- 3. System-level overhead is the time required to execute the first-bus-cycle sequence for the programming command.

DATA RETENTION

Parameter	Condition	Min.	Max.	Unit
Data retention	55°C	20		years

LATCH-UP CHARACTERISTICS

	Min.	Max.
Input Voltage with respect to GND on all power pins, SI, CS#	-1.0V	2 VCCmax
Input Voltage with respect to GND on SO	-1.0V	VCC + 1.0V
Current	-100mA	+100mA
Includes all pins except VCC. Test conditions: VCC = 3.0V, one pin at a time.		



ORDERING INFORMATION

64Mb


PART NO.	CLOCK (MHz)	OPERATING CURRENT MAX. (mA)	STANDBY CURRENT MAX. (uA)	TEMPERATURE	PACKAGE	Remark
MX25L6465EMI-10G	104	19	50	-40°C~85°C	16-SOP (300mil)	RoHS Compliant
MX25L6465EM2I-10G	104	19	50	-40°C~85°C	8-SOP (200mil)	RoHS Compliant
MX25L6465EZNI-10G	104	19	50	-40°C~85°C	8-WSON (8x6mm)	RoHS Compliant

128Mb

PART NO.	CLOCK (MHz)	OPERATING CURRENT MAX. (mA)	STANDBY CURRENT MAX. (uA)	TEMPERATURE	PACKAGE	Remark
MX25L12865EMI-10G	104	19	100	-40°C~85°C	16-SOP (300mil)	RoHS Compliant
MX25L12865EZNI-10G	104	19	100	-40°C~85°C	8-WSON (8x6mm)	RoHS Compliant



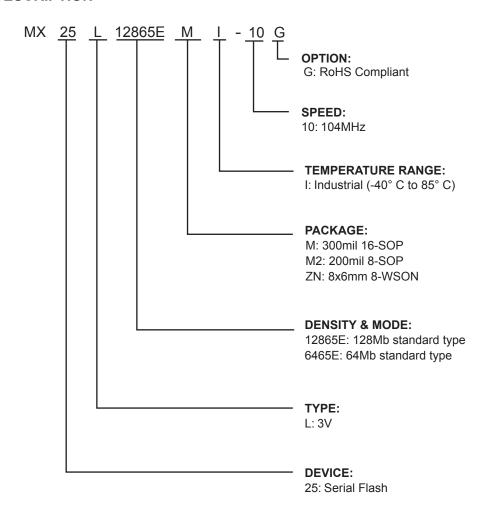PART NAME DESCRIPTION





REVISION HISTORY

Revision No.	Description	Page	Date
1.0	Removed "Advanced Information"	P5	DEC/23/2009
	2. Modified DMC table	P38,40	
1.1	MX25L6465EMI-10G is released for production	P8,71	APR/21/2010
	2. Changed storage temperature from -55°C~125°C to -65°C~150°C	P42	
	3. Added power down sequence	P69,70	
	4. Modified tSLCH, tSHCH from 8ns to 5ns	P46,48	
	5. Separated power consumption by I/O number	P5,44,45,7	72
	6. Corrected wrong secure OTP address range (Table 3.)	P11	
	7. Renamed DMC mode as SFDP mode.	P11,14,17	
		P38	
	8. Modified Figure 7 & Figure 9	P50,51	
1.2	Removed SFDP sequence description & content table	P6,14,	JUN/25/2010
		17,38	
1.3	1. Removed advanced information from MX25L6465EZNI-10G,	P6,8,69	DEC/14/2010
	MX25L12865EMI-10G and MX25L12865EZNI-10G		
	2. Modified description for RoHS compliance	P6,69,70	
1.4	1. Added Read SFDP (RDSFDP) Mode	P6,14,16,	FEB/10/2012
	· · · ·	P38~47,53	3,55

P/N: PM1557 REV. 1.4, FEB. 10, 2012



Except for customized products which has been expressly identified in the applicable agreement, Macronix's products are designed, developed, and/or manufactured for ordinary business, industrial, personal, and/or household applications only, and not for use in any applications which may, directly or indirectly, cause death, personal injury, or severe property damages. In the event Macronix products are used in contradicted to their target usage above, the buyer shall take any and all actions to ensure said Macronix's product qualified for its actual use in accordance with the applicable laws and regulations; and Macronix as well as it's suppliers and/or distributors shall be released from any and all liability arisen therefrom.

Copyright© Macronix International Co., Ltd. 2009~2012. All rights reserved, including the trademarks and tradename thereof, such as Macronix, MXIC, MXIC Logo, MX Logo, Integrated Solutions Provider, NBit, Nbit, NBiit, Macronix NBit, eLiteFlash, XtraROM, Phines, KH Logo, BE-SONOS, KSMC, Kingtech, MXSMIO, Macronix vEE, Macronix MAP, Rich Audio, Rich Book, Rich TV, and FitCAM. The names and brands of other companies are for identification purposes only and may be claimed as the property of the respective companies.

For the contact and order information, please visit Macronix's Web site at: http://www.macronix.com