


## CTS 212 Rotary Switch

- Hill and valley detent
- Balanced double bump detent spring
- Excellent feel
- 30°, 60° or 90° indexing
- Spring return styles available
- Adjustable stop available
- Solder lug and printed circuit terminals available
- Molded stator prevents solder from flowing into the circuit
- Custom switching patterns available
- Index or wafers are available separately

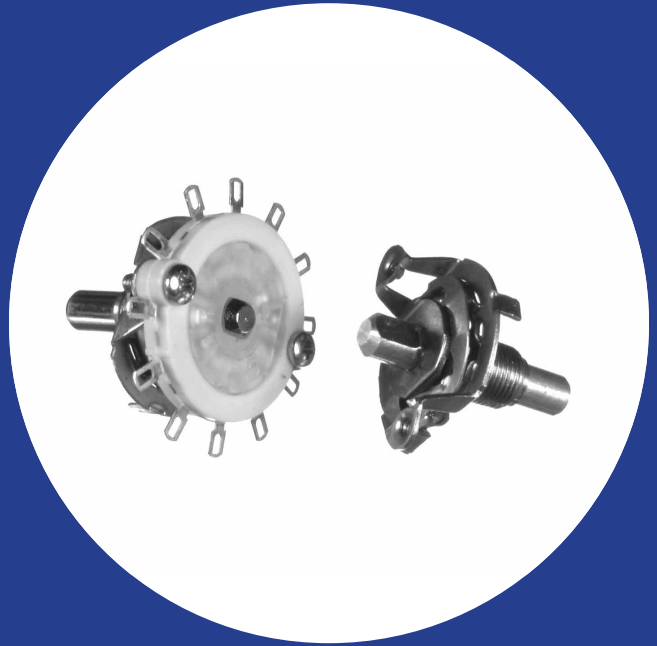

## Electrical and Mechanical Specifications

### Indexing

Double bump spring hill and valley detent with 30° indexing for 2 through 12 positions or 60° indexing from 2 to 6 positions. 90° indexing -consult CTS

### Voltage and Current Rating

UL Rating:  $\frac{3}{4}$  amp at 125 VAC (shorting type only)  
Special Rating:  $\frac{1}{4}$  amp at 28 VDC (shorting or non shorting)  
1 amp at 28 VDC Shorting

### Contact Resistance

0.008 to 0.010 ohm when measured from adjacent terminals

### Stop Strength

15" lbs (17.3Kg-cm).

### Torque

Up to 48" oz. (3.5Kg-cm).

### Detent Rotational Life

Standard: 25,000 cycles through 12 positions and return at 10 cycles per minute.

### Materials

Shaft: Aluminum or unplated brass at CTS option  
Bushing: Standard — Brass

### Materials (continued)

Detent Spring: Spring brass or nickel silver depending on torque requirements

Front Plate: Zinc plated or nickel steel at CTS option  
Rotor Contacts, Stator Contacts and Terminals: Silver plated brass standard

Stator Insulator: Glass reinforced thermoset material

### Bushing Lengths

Standard:  $\frac{3}{8}$ "-32 UNEF-2A Thread,  $\frac{1}{4}$ " (6.35mm) or  $\frac{3}{8}$ " (9.53mm) long.

Special Lengths: Available as required — Brass

### Locating Lugs

Standard: Left side .531" (13.5mm) radius

Special: Right side .531" (13.5mm) radius or no lug

### Shaft Trim

Standard: Plain round

Special: Flat, slot, knurl, or mixed (flat with slot)

### Frames

Machine screw, bolt & nut, or rivet construction

### Lubrication

Special lubrication is used sufficient for the life of the index assembly under normal hand operation.

