
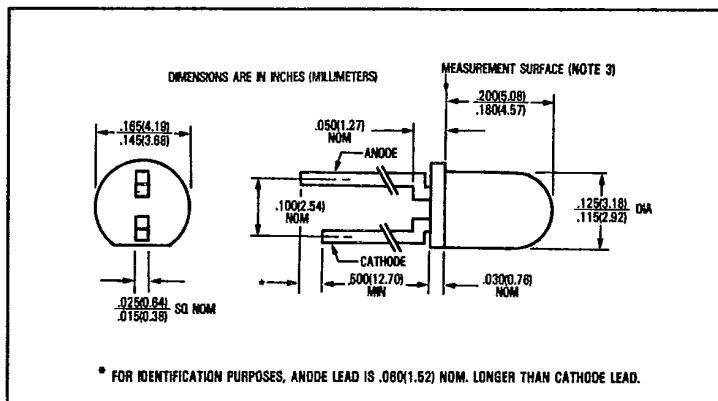


T-41-11

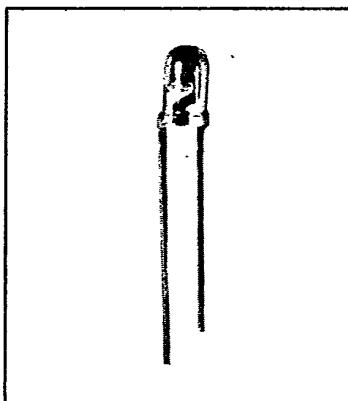

GaAs Plastic Infrared Emitting Diodes

Types OP161SL, OP161SLD, OP161SLC, OP161SLB, OP161SLA

**Features**

- 0.100 inch (2.54 mm) lead spacing for standard socket mounting
- Low cost, plastic miniature end-looking T-1 package
- Mechanically and spectrally matched to the OP501 phototransistor series

Description

The OP161SL series devices are gallium arsenide infrared emitting diodes molded in clear plastic, mini-axial packages. The lensing effect of the package allows a radiation half angle of 8° measured from the optical axis to the half power point. Lead spacing is 0.100" (2.54 mm) to allow mounting in standard sockets. These devices are mechanically and spectrally matched to the OP501 and OP501SL series of phototransistors. For additional information on spectral emission characteristics, please refer to the OP501 data sheet.

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Continuous Forward Current	50 mA
Peak Forward Current (Pulse Width = 1 μsec , 300 pps)	3.0 A
Reverse Voltage	2.0 V
Storage and Operating Temperature Range	-40°C to +100°C
Lead Soldering Temperature Range (1/16 Inch [1.6 mm] from Case for 5 sec. with soldering iron) ⁽¹⁾	240°C
Power Dissipation	100 mW ⁽²⁾

Notes:


(1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.

(2) Derate linearly 1.33 mW/°C above 25°C.


(3) $E_{\text{g(APT)}}$ is a measurement of the average apertured radiant incidence upon a sensing area 0.081" (2.08 mm) in diameter perpendicular to and centered on the mechanical axis of the lens, and 0.590" (14.99 mm) from the measurement surface. $E_{\text{g(APT)}}$ is not necessarily uniform within the measured area.

Typical Performance Curves

Percent Changes in Radiant Intensity
vs Time



Coupling Characteristics
of OP161SL and OP501SL





Types OP161SL, OP161SLD, OP161SLC, OP161SLB, OP161SLA

T-41-11




Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
P_0	Radiant Power Output	OP161	0.50		mW	$I_F = 20 \text{ mA}$
$E_{\text{ap}}(\text{APT})^{(3)}$	Aperture Radiant Incidence	OP161SL OP161SLD OP161SLC OP161SLB OP161SLA	0.05 0.28 0.85 1.40 1.95	0.95 1.60 2.2	mW/cm^2	$I_F = 20 \text{ mA}$ $I_F = 20 \text{ mA}$ $I_F = 20 \text{ mA}$ $I_F = 20 \text{ mA}$ $I_F = 20 \text{ mA}$
V_F	Forward Voltage			1.60	V	$I_F = 20 \text{ mA}$
I_R	Reverse Current			100	μA	$V_R = 2.0 \text{ V}$

C

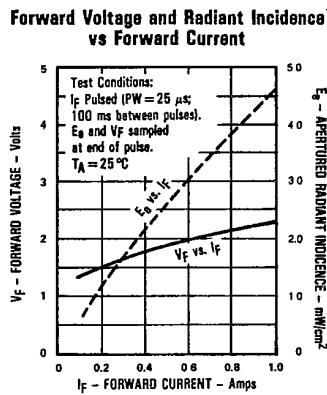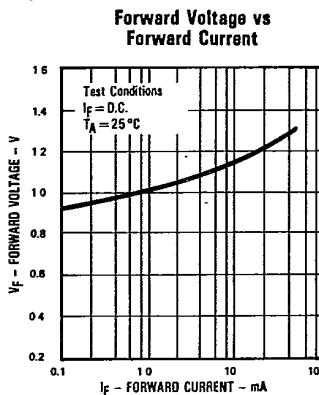Typical Performance Curves**Forward Voltage vs Ambient Temperature**

T_A (°C)	V_F (V)
-60	1.8
0	1.6
40	1.4
80	1.2
120	1.1
160	1.0

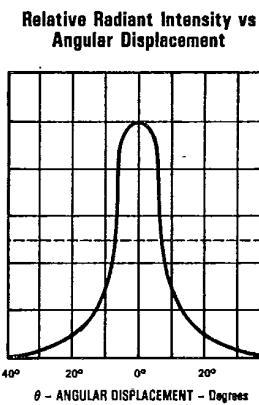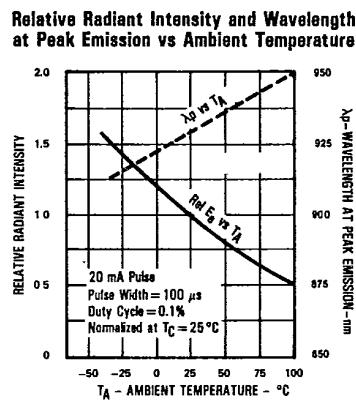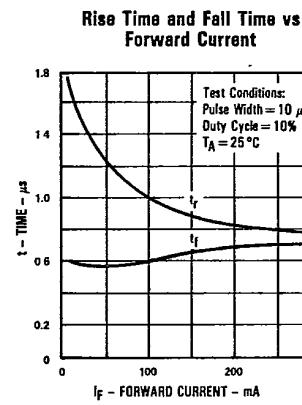

TRW reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optoelectronics Division, TRW Electronic Components Group, 1215 W. Crosby Rd., Carrollton, TX 75006 (214) 323-2200, TLX 6716032 or 215649
© TRW Inc. 1985. TRW is the name and mark of TRW Inc.

Printed in U.S.A.