


TOSHIBA BIPOLAR LINEAR INTEGRATED CIRCUIT SILICON MONOLITHIC

TA7508P, TA7508F**QUAD OPERATIONAL AMPLIFIER**


The TA7508P and TA7508F are quad low-noise operational amplifier.

FEATURES

- Equivalent Input Noise Voltage : $2.5\mu\text{V}_{\text{rms}}$ (Typ.)
- Slew Rate : $1\text{V}/\mu\text{s}$ (Typ.)
- Wide Power Supply Range : $\pm 4 \sim \pm 18\text{V}$
- Internal Frequency Compensation
- Output Short Circuit Protection

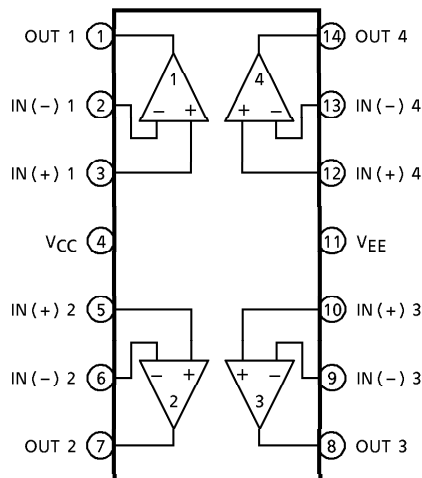
PIN CONNECTION (TOP VIEW)

TA7508P

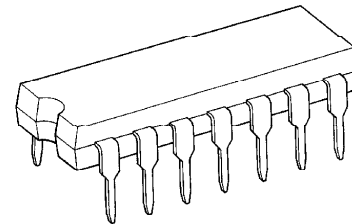

DIP14-P-300-2.54

TA7508F

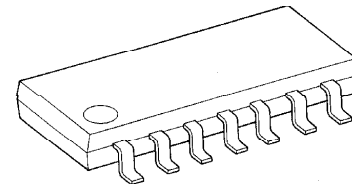

SOP14-P-225-1.27


Weight

DIP14-P-300-2.54 : 1.0g (Typ.)
SOP14-P-225-1.27 : 0.2g (Typ.)

961001EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

EQUIVALENT CIRCUIT

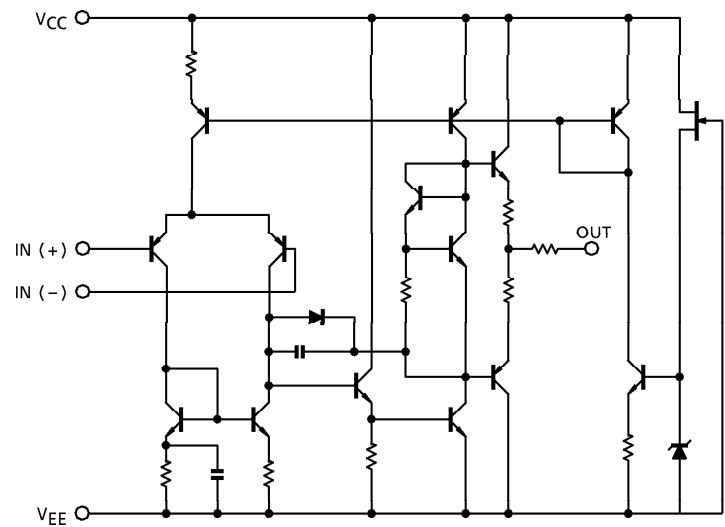


MAXIMUM RATINGS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TA7508P	TA7508F	UNIT
Supply Voltage	VCC	18	18	V
	VEE	- 18	- 18	
Differential Input Voltage	DVIN	± 36	± 36	V
Input Voltage	VIN	VCC~VEE	VCC~VEE	V
Power Dissipation	PD	625	280	mW
Operating Temperature	Topr	- 40~85	- 40~85	°C
Ambient Temperature	Tstg	- 55~125	- 55~125	°C

ELECTRICAL CHARACTERISTICS ($V_{CC} = 15V$, $V_{EE} = -15V$, $T_a = 25^\circ C$)



CHARACTERISTIC	SYMBOL	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V_{IO}	1	$R_g \leq 10k\Omega$	—	0.5	6	mV
Input Offset Current	I_{IO}	2	—	—	5	200	nA
Input Bias Current	I_I	2	—	—	60	500	nA
Common Mode Input Voltage	CMV_{IN}	3	—	± 12	± 14	—	V
Maximum Output Voltage	V_{OM}	6	$R_L = 10k\Omega$	± 12	± 14	—	V
	V_{OMR}		$R_L = 2k\Omega$	± 10	± 13	—	
Source Current	I_{source}	8	—	—	40	—	mA
Sink Current	I_{sink}	7	—	—	40	—	mA
Voltage Gain (Open Loop)	G_V	5	$V_{OUT} = \pm 10V$, $R_L = 2k\Omega$	86	100	—	dB
Common Mode Input Signal Rejection Ratio	CMRR	3	$R_g \leq 10k\Omega$	70	90	—	dB
Supply Voltage Rejection Ratio	SVRR	1	$R_g \leq 10k\Omega$	—	30	150	$\mu V/V$
Slew Rate	SR	9	$G_V = 1$, $R_L = 2k\Omega$	—	1.0	—	$V/\mu s$
Unity Gain Cross Frequency	f_T	5	Open Loop	—	3.0	—	MHz
Supply Current	I_{CC} , I_{EE}	4	—	—	7.0	11.3	mA
Equivalent Input Noise Voltage	V_{NI}	—	$R_S = 1k\Omega$, $f = 30Hz \sim 30kHz$	—	2.5	—	μV_{rms}

TEST CIRCUIT


(1) V_{IO} , $SVRR$ 

- $V_{IO} = V_{OUT} / 100$
- $SVRR = 20 \log E \text{ (dB)}$

$$E = \left| \frac{V_{OUT1} - V_{OUT2}}{(V_{CC1} - V_{EE1}) - (V_{CC2} - V_{EE2})} \right| \times \frac{1}{100}$$


 V_{OUT1} : V_{OUT} (V_{CC} , $V_{EE} = \pm 8V$) V_{OUT2} : V_{OUT} (V_{CC} , $V_{EE} = \pm 18V$) V_{CC1} : $V_{CC} = -8V$ V_{EE1} : $V_{EE} = -8V$ V_{CC2} : $V_{CC} = +18V$ V_{EE2} : $V_{EE} = -18V$ (2) I_I , I_{IO} 

$$I_{IO} = |I_I (-) - I_I (+)|$$

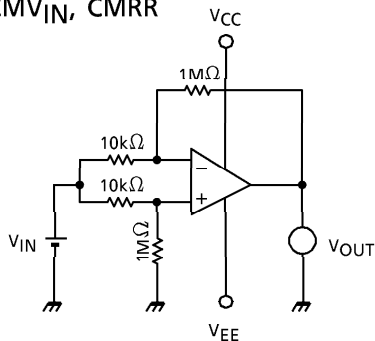(3) CMV_{IN} , $CMRR$ 


- $CMRR = 20 \log G_D / G_C \text{ (dB)}$
 G_D : DIFFERENTIAL VOLTAGE GAIN
 G_C : COMMON MODE VOLTAGE GAIN
- CMV_{IN} : $V_{IN} = -12V, 12V$ SUPPLIES

(4) I_{CC}




- I_{CC} : V_{CC} , $V_{EE} = \pm 15V$

(5) G_V , f_T

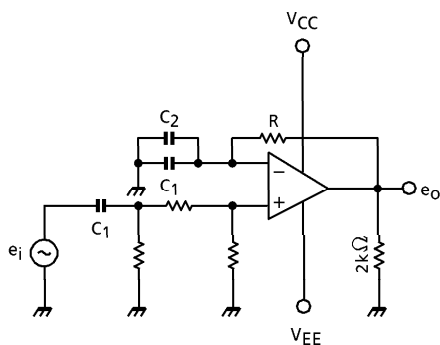


- $G_V = 20 \log e_o / e_i$ (dB)
 $R \gg 1 / \omega C_1$
 C_1 : COUPLING CONDENSER
 C_2 : HIGH FREQUENCY BYPASS CONDENSER
- f_T : INPUT FREQUENCY AT $e_i = e_o$

(6) V_{OM} , V_{OMR}

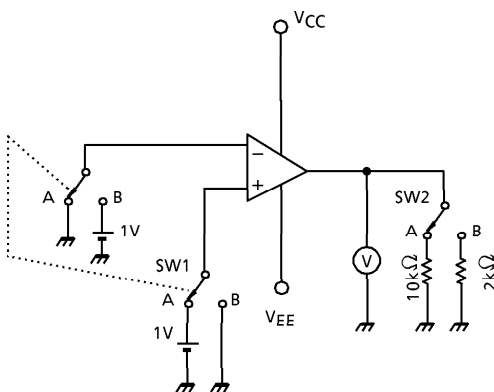


- V_{OM} : (+) : SW1 IS SIDE A, SW2 IS SIDE A
 (-) : SW1 IS SIDE B, SW2 IS SIDE A
- V_{OMR} : (+) : SW1 IS SIDE A, SW2 IS SIDE B
 (-) : SW1 IS SIDE B, SW2 IS SIDE B



(7) I_{sink}









(8) I_{source}




(9) SR

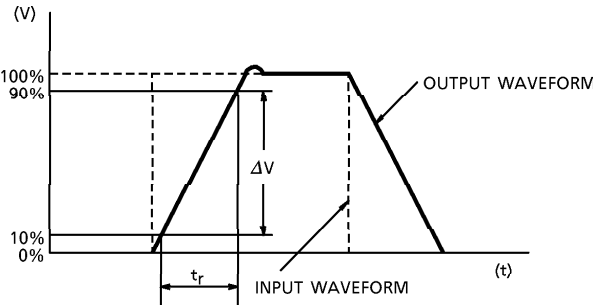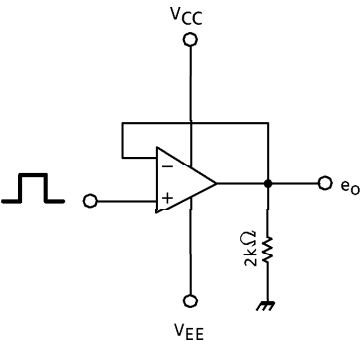


CHARACTERISTIC

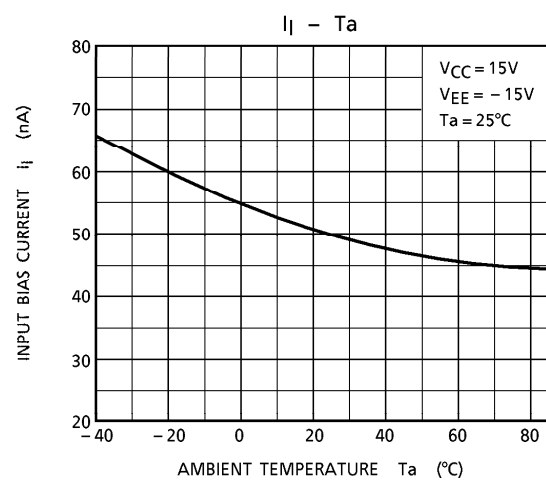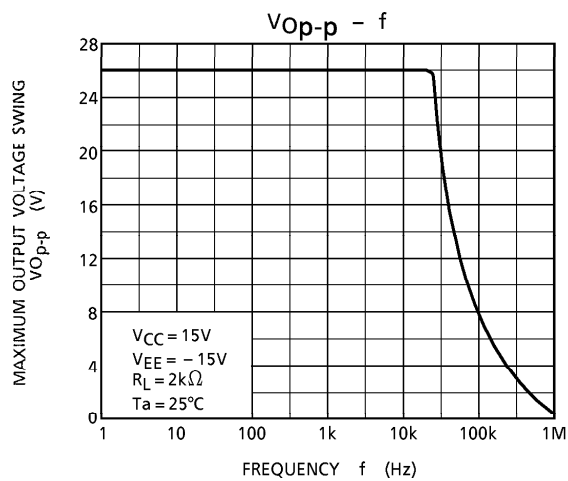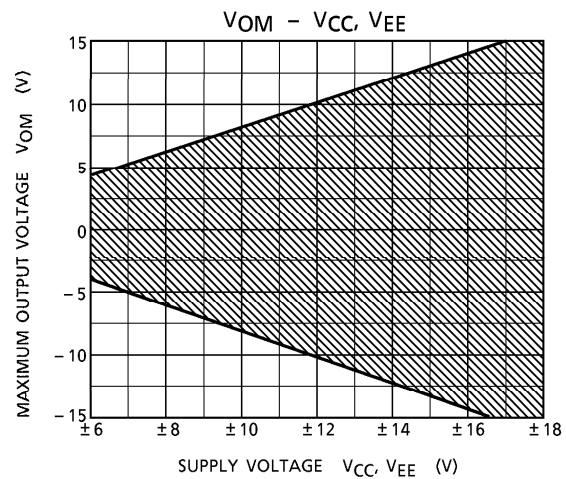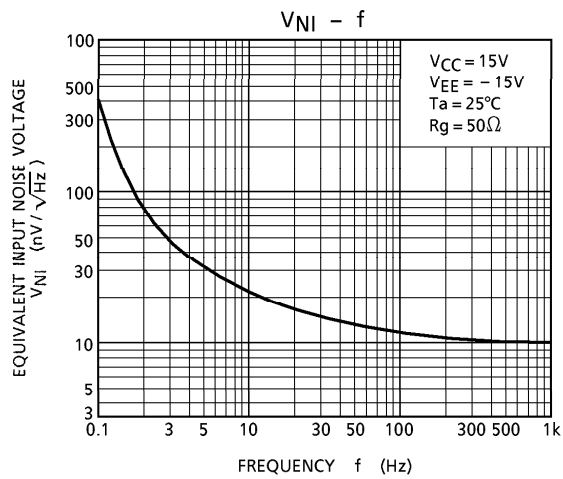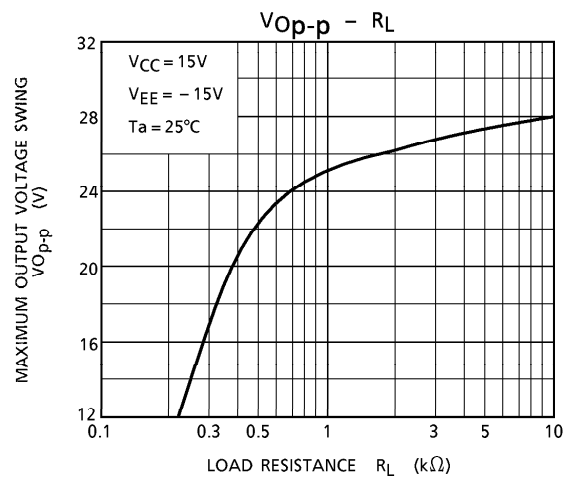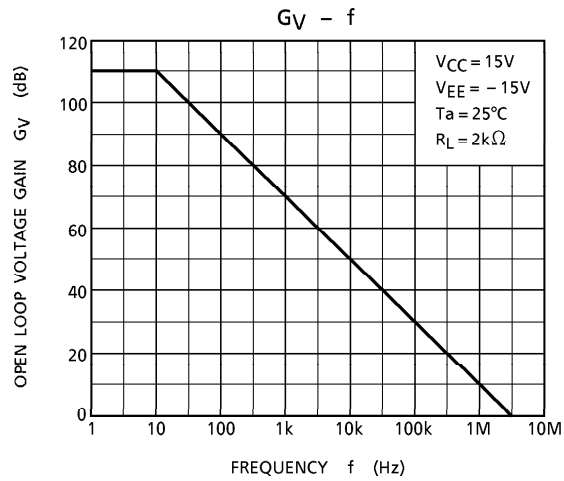

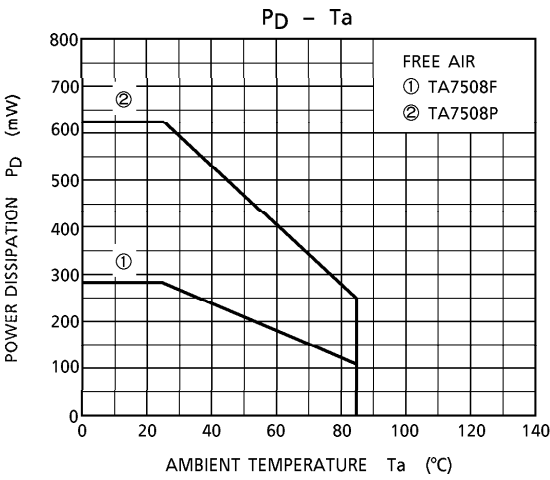

OUTLINE DRAWING
DIP14-P-300-2.54


Unit : mm

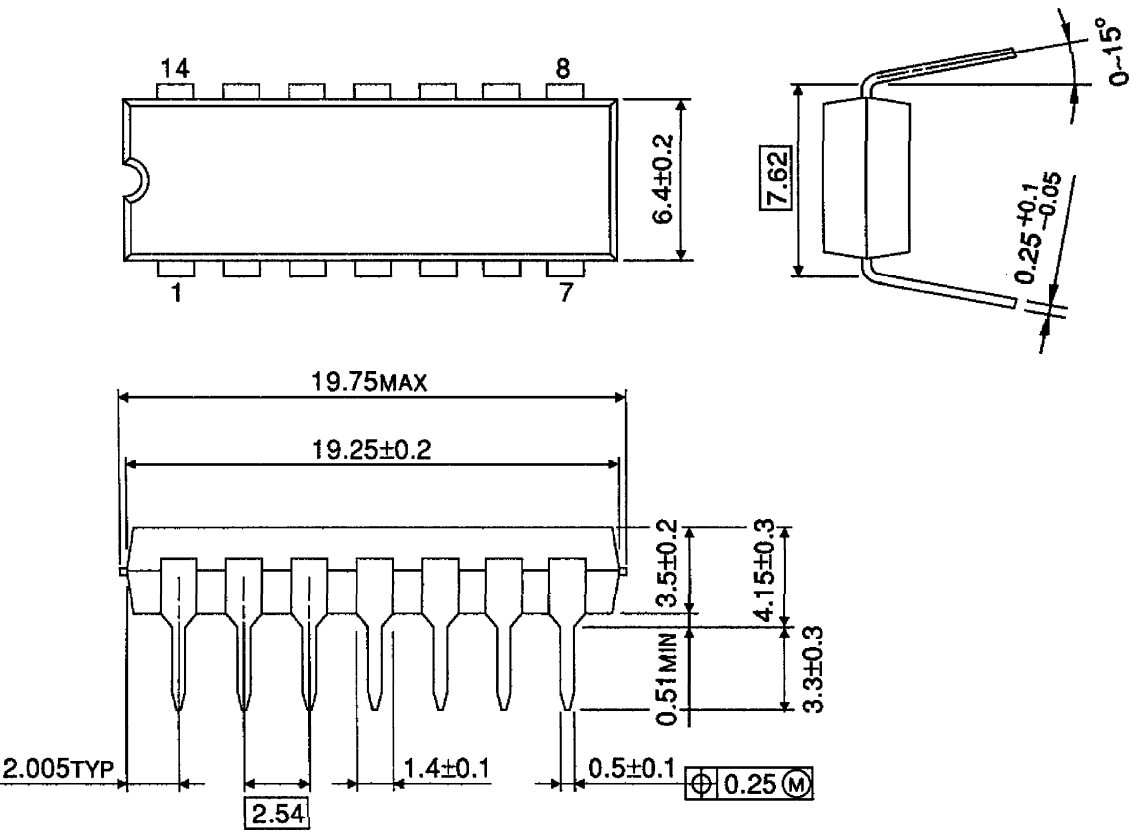

Weight : 1.0g (Typ.)

OUTLINE DRAWING
SOP14-P-225-1.27

Unit : mm

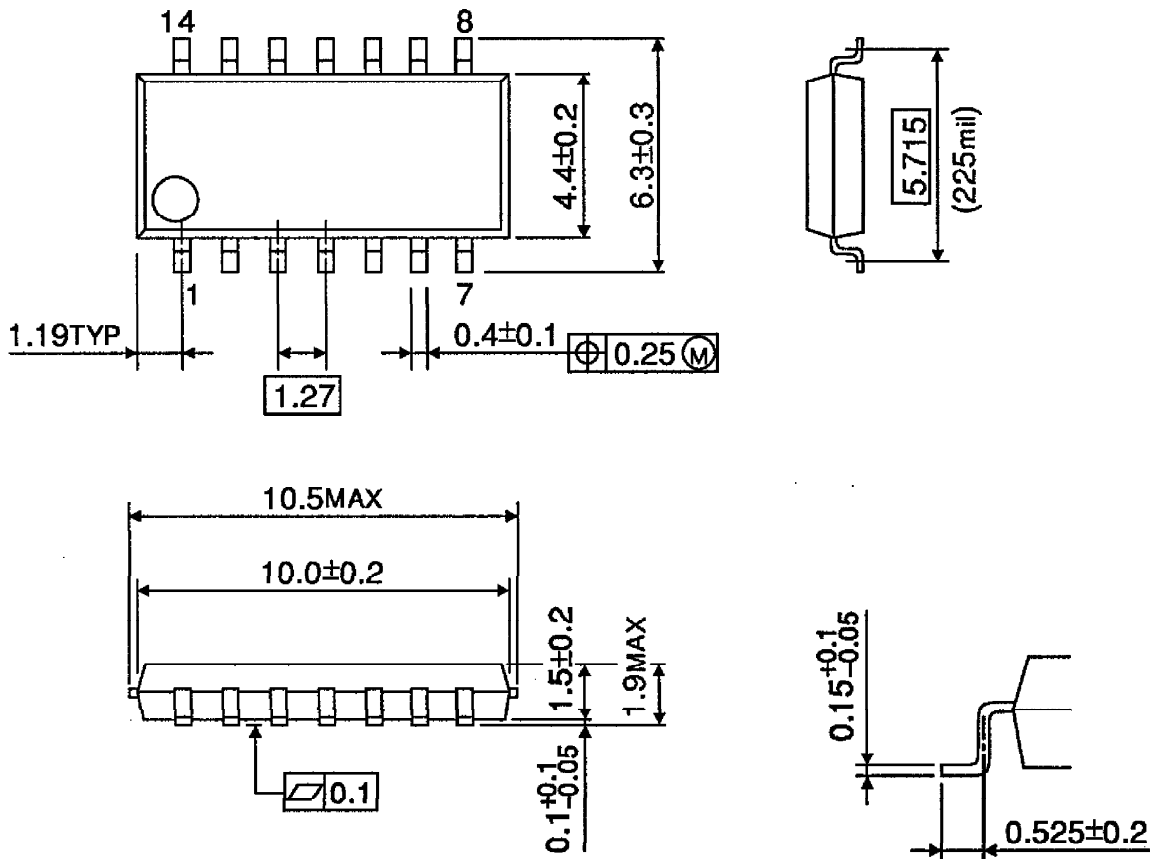

Weight : 0.2g (Typ.)

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com