

2SA1534, 2SA1534A

Silicon PNP epitaxial planer type

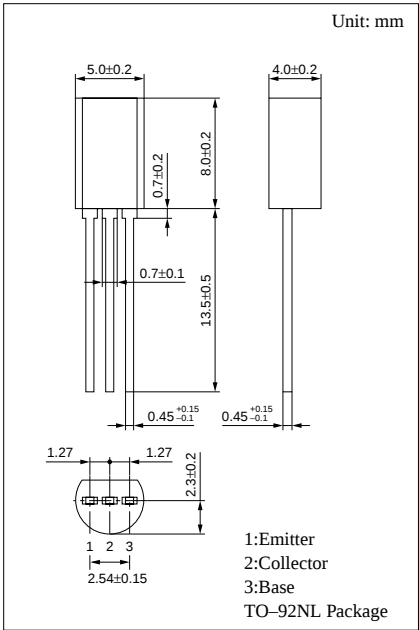
For low-frequency power amplification and driver amplification
Complementary to 2SC3940 and 2SC3940A

Features

- Complementary pair with 2SC3940 and 2SC3940A.
- Allowing supply with the radial taping and automatic insertion possible.

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Ratings	Unit
Collector to base voltage	2SA1534 2SA1534A	V _{CBO}	−30	V
			−60	
Collector to emitter voltage	2SA1534 2SA1534A	V _{CEO}	−25	V
			−50	
Emitter to base voltage		V _{EBO}	−5	V
Peak collector current		I _{CP}	−1.5	A
Collector current		I _C	−1	A
Collector power dissipation		P _C	1	W
Junction temperature		T _j	150	°C
Storage temperature		T _{stg}	−55 ~ +150	°C












Electrical Characteristics (Ta=25°C)


Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I _{CBO}	V _{CB} = -20V, I _E = 0			- 0.1	μA
Collector to base voltage	V _{CBO}	I _C = -10μA, I _E = 0	2SA1534 -30			V
2SA1534A -60						
Collector to emitter voltage	V _{CEO}	I _C = -2mA, I _B = 0	2SA1534 -25			V
2SA1534A -50						
Emitter to base voltage	V _{EBO}	I _E = -10μA, I _C = 0	-5			V
Forward current transfer ratio	h _{FE1} *	V _{CE} = -10V, I _C = -500mA	85		340	
	h _{FE2}	V _{CE} = -5V, I _C = -1A	50			
Collector to emitter saturation voltage	V _{CE(sat)}	I _C = -500mA, I _B = -50mA		- 0.2	- 0.4	V
Base to emitter saturation voltage	V _{BE(sat)}	I _C = -500mA, I _B = -50mA		- 0.85	-1.2	V
Transition frequency	f _T	V _{CB} = -10V, I _E = 50mA, f = 200MHz		200		MHz
Collector output capacitance	C _{ob}	V _{CB} = -10V, I _E = 0, f = 1MHz		20	30	pF

*h_{FE1} Rank classification

Rank	Q	R	S
h _{FE1}	85 ~ 170	120 ~ 240	170 ~ 340

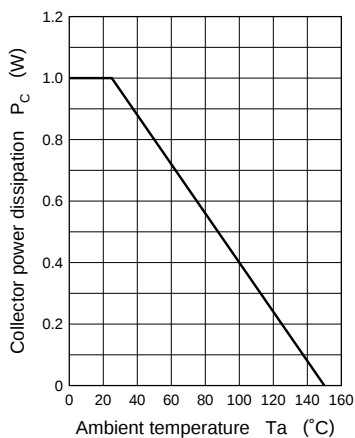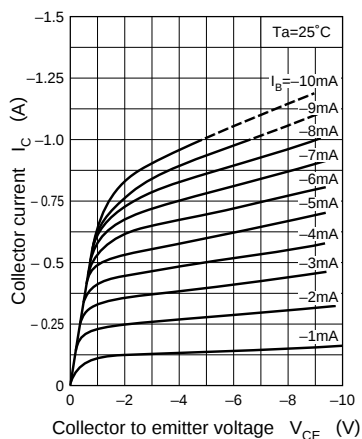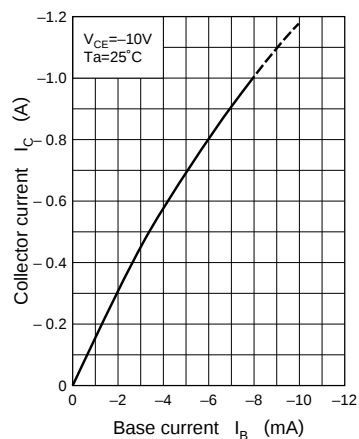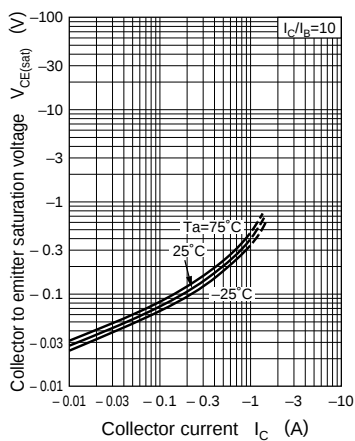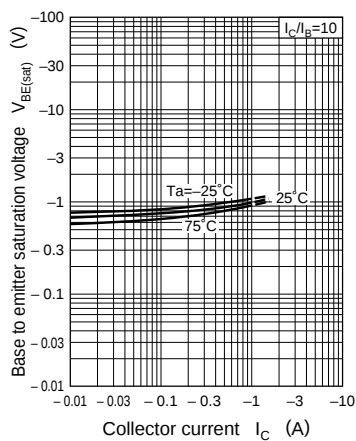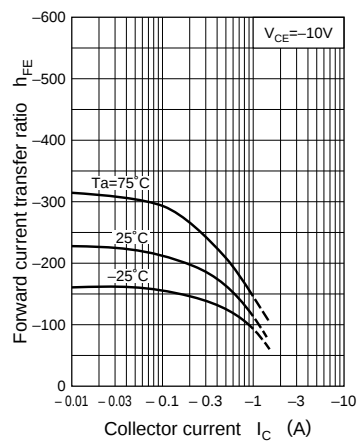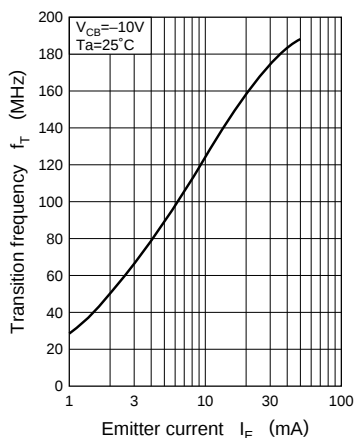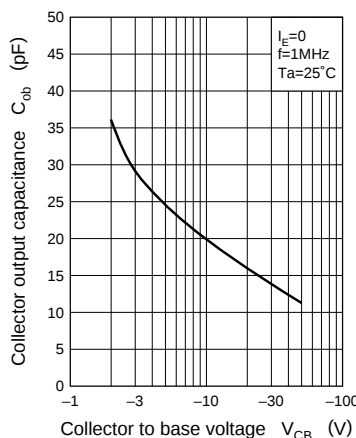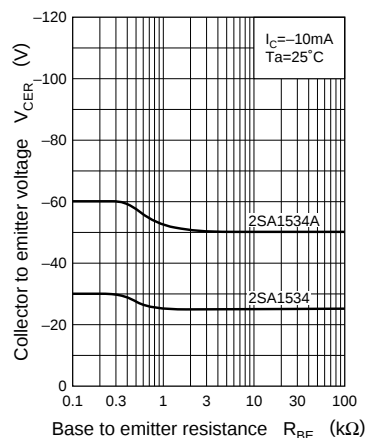$P_C - T_a$  $I_C - V_{CE}$  $I_C - I_B$  $V_{CE(sat)} - I_C$  $V_{BE(sat)} - I_C$  $h_{FE} - I_C$  $f_T - I_E$  $C_{ob} - V_{CB}$  $V_{CER} - R_{BE}$ 

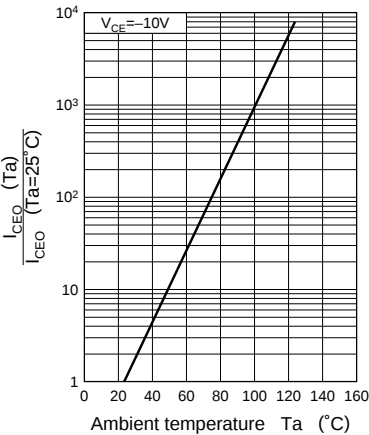$I_{CEO} - T_a$



Area of safe operation (ASO)

