



SRS (●)

SRS 3D SURROUND AUDIO PROCESSOR


■ GENERAL DESCRIPTION

The NJM2178 is a SRS 3D surround audio processor regenerating the 3D surround sound by two speakers.


It regenerates 3D surround sound from both of monaural and stereo input.

The features of wide operating voltage range, wide dynamic range, low output noise are suitable for any audio applications.

■ PACKAGE OUTLINE



NJM2178M



NJM2178L


■ FEATURES

- Operating Voltage (4.7~13V)
- Low Supply Current (3D-STEREO MODE 11mA typ.)
- Wide Dynamic Range (>110dB)
- Low Output Noise (-90dBu typ.)
- BYPASS Gain (-3dB typ.)
- BYPASS FUNCTION(Through)
- SPACE and CENTER control system
- Internal Mode Control Switch(2bit)
- Bipolar Technology
- Package Outline SDIP30, SDMP30

■ PIN CONFIGURATION

90° Phase Filter	1	C1	Rin	30	Rch Input
90° Phase Filter	2	C2	Lin	29	Lch Input
90° Phase Filter	3	C3	PNout	28	External Filter Output
90° Phase Filter	4	C4	PNin	27	External Filter Input
90° Phase Filter	5	C5	Sout	26	SPACE Control Output
90° Phase Filter	6	C6	Sin	25	SPACE Control Input
3D Filter	7	CF1	Cout	24	CENTER Control Output
3D Filter	8	CF2	Cin	23	CENTER Control Input
3D Filter	9	CF3	Vref	22	V _{ref}
3D-MONO Filter	10	MOC5	Rout	21	Rch Output
3D-MONO Filter	11	MOC6	Lout	20	Lch Output
3D-MONO Filter	12	MOC3	MODE1	19	SRS/3D-MONO Mode Select
3D-MONO Filter	13	MOC4	MODE2	18	ON/PASS Mode Select
3D-MONO Filter	14	MOC1	GND	17	Ground
3D-MONO Filter	15	MOC2	V+	16	4.7 TO 13.0V Supply

■ BLOCK DIAGRAM

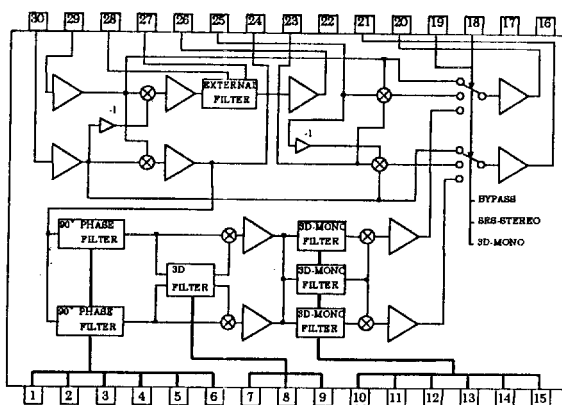

■ ABSOLUTE MAXIMUM RATING ($T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	15	V
Power Dissipation	P_o	(SDIP30) 700 (SDMP30) 1170	mW
Operating Temperature Range	T_{opr}	-20 to +75	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-40 to +125	$^{\circ}\text{C}$

■ ELECTRICAL CHARACTERISTICS ($V^+=12\text{V}$, $T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V^+		4.7	12.0	13.0	V
Operating Current	I_{cc}	No Signal BYPASS	—	9.0	14.0	mA
		No Signal 3D-STEREO	—	11.0	17.0	
		No Signal 3D-MONAURO	—	14.0	21.0	
Reference Voltage	V_{REF}	$V^+/2$	5.5	$V^+/2$	6.5	V
Maximum Input voltage	V_{INMAX}	$V_{in}=Lch$ $f=1\text{kHz}$ $V_{out}=Lch$ at THD=3% BYPASS	8.0	10.0	—	dBu
		$V_{in}=Lch$ $f=125\text{Hz}$ $V_{out}=Rch$ at THD=3% SPACE VR Max CENTER VR Min 3D-STEREO	2.8	4.8	—	
		$V_{in}=L, Rch$ $f=300\text{Hz}$ $V_{out}=Lch$ at THD=3% 3D-MONAURO	5.0	7.0	—	
Channel Balance	CH_{BAL}	$V_{in}=0\text{dBu}$ $f=1\text{kHz}$ SPACE VR Min CENTER VR Min $Lch \rightarrow Rch$ $Rch \rightarrow Lch$ 3D-STEREO	-1.0	0.0	1.0	dB
Output Noise	V_{NOISE}	$V_{in}=GND$ DIN-AUDIO 3D-STEREO	—	22.0	60.0	μV
		$V_{in}=GND$ DIN-AUDIO 3D-MONAURO	—	35.0	60.0	
Total Harmonic Distortion	THD	$V_{in}=-10\text{dBu}$ Lch $f=1\text{kHz}$ SPACE VR Max CENTER VR Min 3D-STEREO	—	0.10	—	%
		$V_{in}=-10\text{dBu}$ L, Rch $f=1\text{kHz}$ 3D-MONAURO		0.05	—	
Bypass Gain	G_{BYPASS}	$V_{in}=0\text{dBu}$ $f=1\text{kHz}$ BYPASS	-5.0	-3.0	-1.0	dB
Feed Through Gain	$G_{THROUGH}$	$V_{in}=0\text{dBu}$ $f=1\text{kHz}$ SPACE VR Min CENTER VR Min $L, Rch \rightarrow L$ or Rch 3D-STEREO	-15.3	-13.3	-11.3	dB

PARAMETER	SYMBOL	TEST CONDITION		MIN.	TYP.	MAX.	UNIT
L+R Gain	G_{L+R}	Vin=0dBu f=1kHz SPACE VR Min CENTER VR Max Lch→Rch	3D-STEREO	-10.5	-8.5	-6.5	dB
L-R Gain	G_{L-R}	Vin=0dBu f=125Hz SPACE VR Max CENTER VR Min Lch→Rch	3D-STEREO	7.0	9.0	11.0	dB
3D-MONO Gain at Lch out	$G_{MONO@L}$	Vin=0dBu f=125Hz L, Rch→Lch	3D-MONAUURAL	2.4	4.4	6.4	dB
3D-MONO Gain at Rch out	$G_{MONO@R}$	Vin=0dBu f=125Hz L, Rch→Rch	3D-MONAUURAL	2.2	4.2	6.2	dB
MODE Select Control Voltage	V_{MODE}	Vin=HIGH LEVEL		2.0	—	V^+	V
		Vin=LOW LEVEL		0.0	—	0.7	


■ MODE Select Function

MODE	MODE1	MODE2
BYPASS	—	L
3D-STEREO	H	H
3D-MONAUURAL	L	H




■ PIN FUNCTION


29, 30 PIN: INPUT

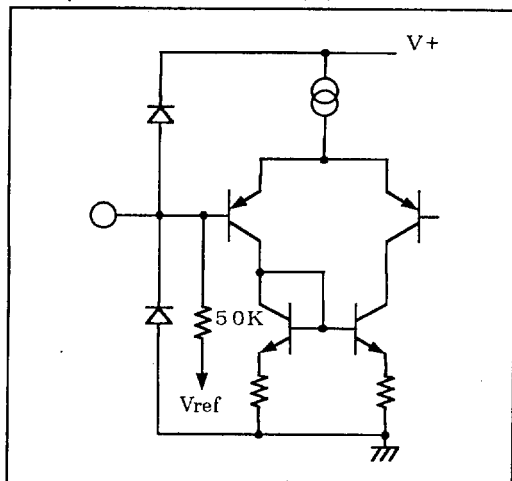


20, 21, 22 PIN: OUTPUT

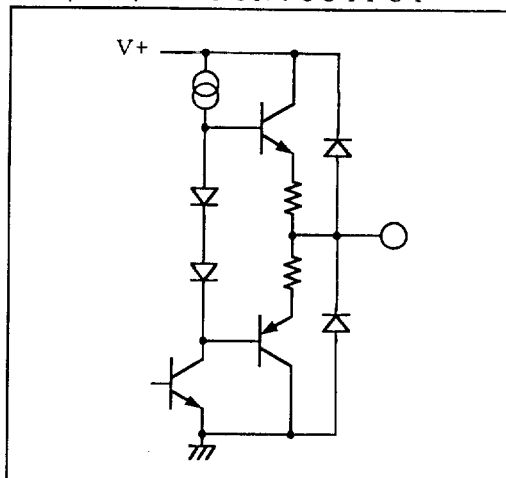

18 PIN: MODE SW

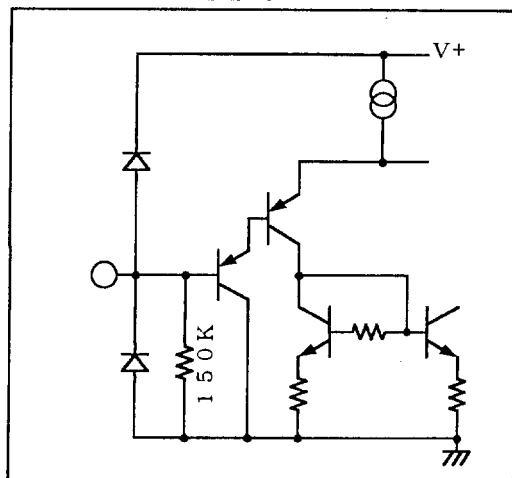


19 PIN: MODE SW

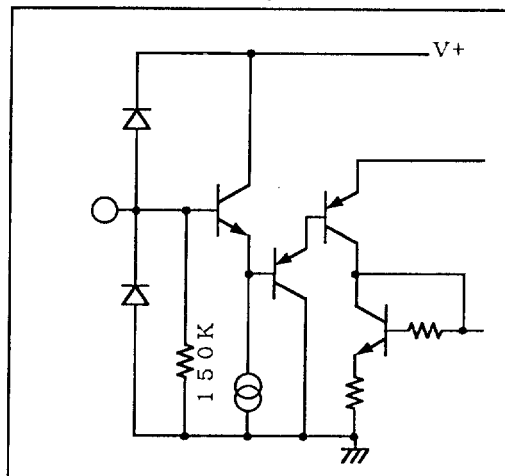




■ PIN FUNCTION


23 PIN: INPUT

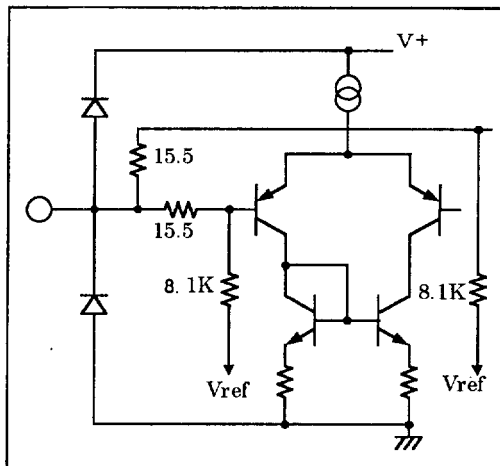


24, 26 PIN: OUTPUT

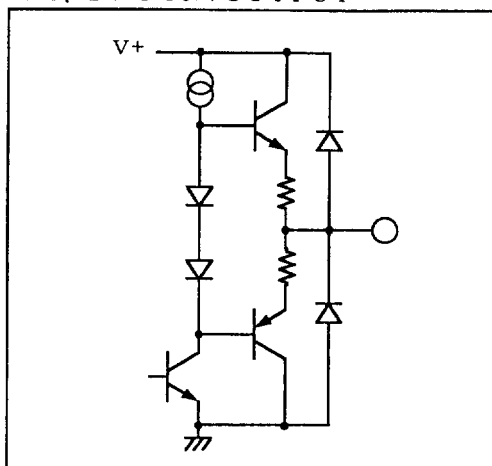

25 PIN: INPUT

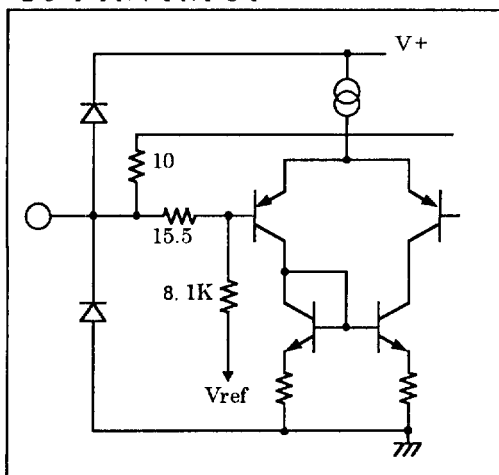

■APPLICATION CIRCUIT(only SRS 3D-STEREO MODE)

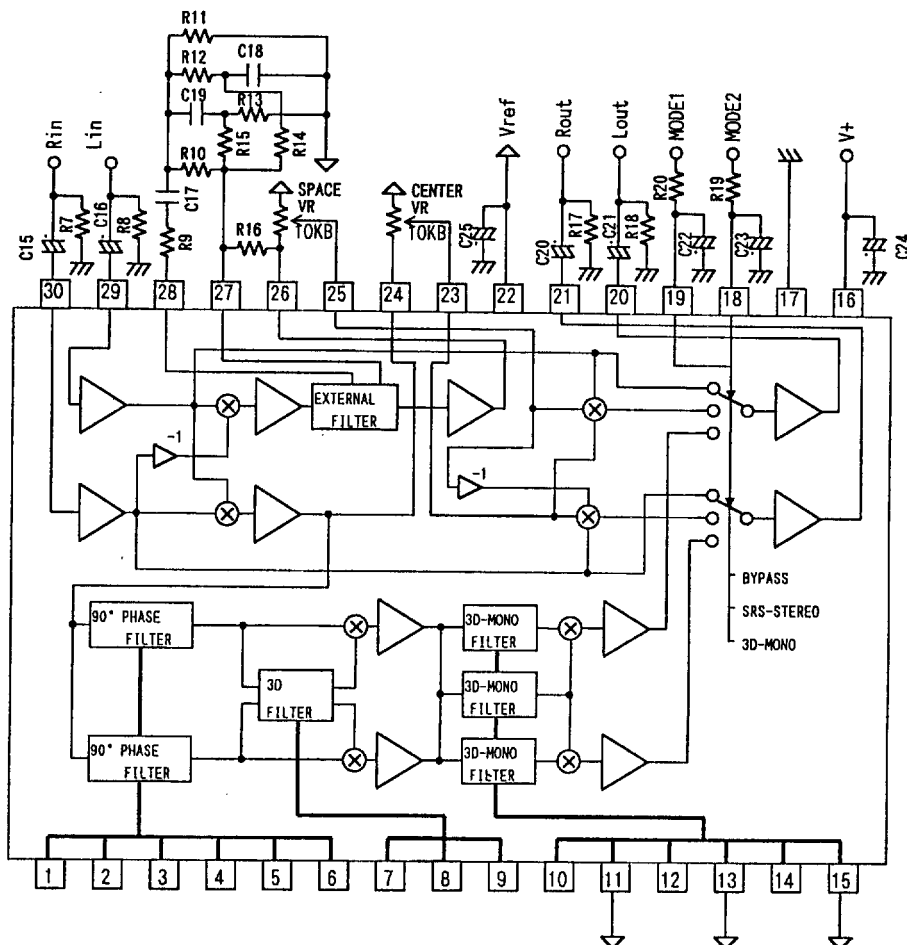


■PARTS LIST


Parts No.	Value	Tolerance	Parts No.	Value	Tolerance
C17, C18	0.47 μ F		R10	110k Ω	$\pm 5\%$
C19	4700pF		R11	4.3k Ω	$\pm 5\%$
C15, C16, C20, C21	10 μ F	$\pm 5\%$	R12	1.5k Ω	$\pm 5\%$
C23, C25	10 μ F	$\pm 5\%$	R13	3.9k Ω	$\pm 5\%$
C24	100 μ F	$\pm 5\%$	R14	33k Ω	$\pm 5\%$
R17	10k Ω	$\pm 5\%$	R7, R8, R15	47k Ω	$\pm 5\%$
R18, R19, R20	10k Ω	$\pm 5\%$	R16	62k Ω	$\pm 5\%$
R9	1k Ω	$\pm 5\%$			

■ TYPICAL CHARACTERISTICS

3D-STEREO GAIN STRUCTURE

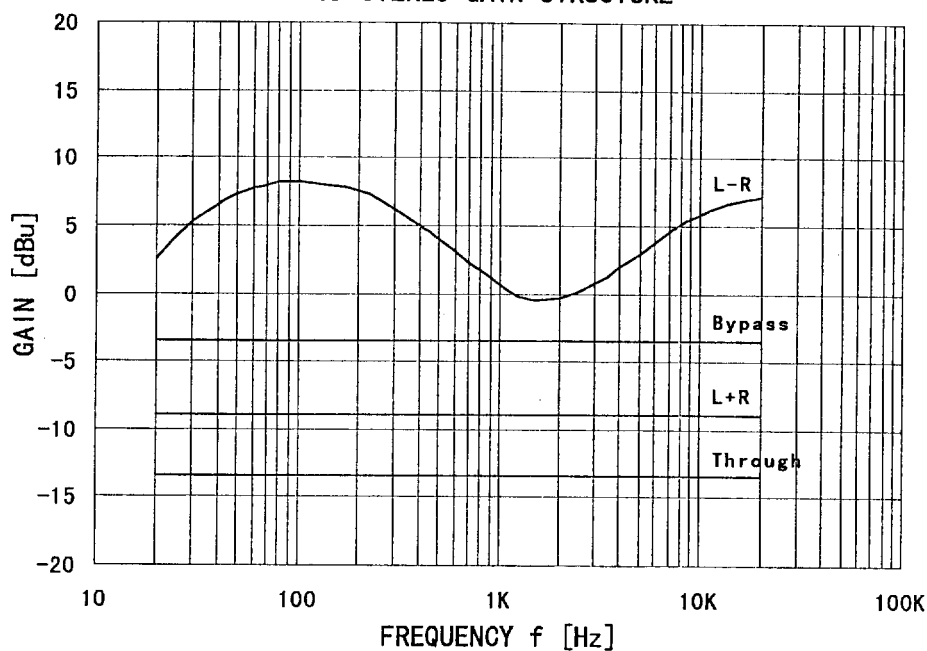

3D-MONO GAIN STRUCTURE

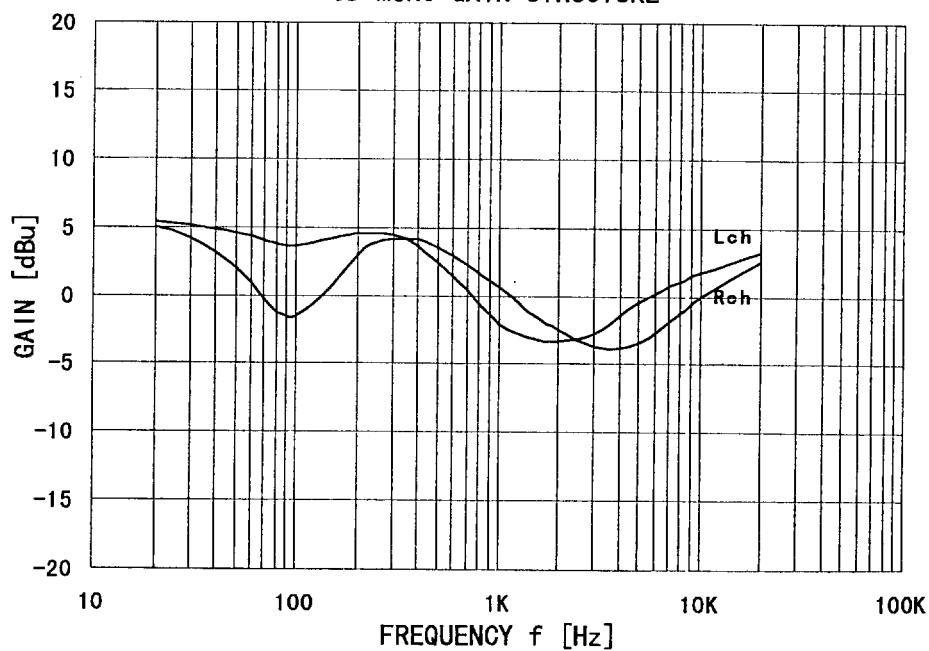

**■NOTE**

The Sound Retrieval System (SRS) technology incorporated in the NJM2178 is owned by SRS Labs, a US Corporation. The SRS technology is protected under U. S. Patent No. 4,866,722; 4,748,669; and 4,841,572 with numerous additional issued and pending foreign patents. The trademarks "SRS", "the SRS symbol" and "Sound Retrieval System" are registered in the U. S. and selected foreign countries.

In order to purchase and implement the NJM2178, all customers must enter into a license agreement directly with SRS Labs for the payment of royalties and to ensure proper trademark usage. Neither the purchase of the NJM2178, nor the corresponding sale of audio enhancement equipment conveys the right to commercialized recordings made with the Sound Retrieval System.

For further information, please contact:

SRS Labs, Inc. • 2909 Daimler Street • Santa Ana, CA 92705 USA
Tel 714-442-1070 Fax 714-852-1099 <http://www.srslabs.com>