



**NEC's DIRECTLY MODULATED  
InGaAsP MQW-DFB  
LASER DIODE MODULE  
FOR 2.5 GB/s, 110 KM AND 240 KM REACH  
DWDM METRO AND CATV APPLICATIONS**

**NX8563LA  
Series**

**FEATURES**

- **PEAK OUTPUT POWER**  
P<sub>f</sub> = 10 mW MIN.
- **INTERNAL THERMO-ELECTRIC COOLER AND ISOLATOR**
- **HERMETICALLY SEALED 14-PIN BUTTERFLY PACKAGE**
- **SINGLE MODE FIBER PIGTAIL**
- **WIDE OPERATION TEMPERATURE RANGE**
- **AVAILABLE FOR DWDM WAVELENGTHS BASED ON ITU-T RECOMMENDATIONS**

**DESCRIPTION**

NEC's NX8563LA Series is a 1 550 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode module with Single Mode Fiber.

It is designed as directly modulation light source and ideal for optical transmission systems. The device is available for Dense Wavelength Division Multiplexing (DWDM) wavelengths based on ITU-T recommendations, enabling a wide range of applications.

**ELECTRO-OPTICAL CHARACTERISTICS** (T<sub>LD</sub> = T<sub>SET</sub>, T<sub>C</sub> = -20 + 85°C)

SYMBOL	PARAMETER AND CONDITIONS	UNIT	MIN	TYP	MAX
T <sub>set</sub>	Laser Set Temperature	°C	30		45
V <sub>F</sub>	Forward Voltage, P <sub>f</sub> = 10 mW	V	0.9		2.0
I <sub>th</sub>	Threshold Current	mA		20	40
P <sub>f</sub>	Optical Output Power from Fiber, I <sub>F</sub> = I <sub>op</sub> , T <sub>LD</sub> = T <sub>set</sub>	mW	10		
I <sub>op</sub>	Operation Current	mA			125
P <sub>th</sub>	Threshold Output Power, I <sub>F</sub> = I <sub>th</sub>	μW			100
η	Quantum Efficiency, CW	W/A	0.142	0.17	
λ <sub>p</sub>	Peak Emission Wavelength, P <sub>f</sub> = 10 mW, CW, T <sub>LD</sub> = T <sub>set</sub>	nm	1 530	ITU-T*1	1 562
Δv	Spectral Line Width, P <sub>f</sub> = 10 mW, CW, 3 dB down	MHz		1	5
SMSR	Side Mode Suppression Ratio, P <sub>f</sub> = 10 mW, under modulation	dB	30	35	
ZIN	Input Impedance	Ω		25	
RIN	Relative Intensity Noise, P <sub>f</sub> = 10 mW, 20 MHz to 3 GHz	dB/Hz			-140
t <sub>r</sub> /t <sub>f</sub>	Rise and Fall Time, 20-80%/80-20%, T <sub>c</sub> = 25°C	ps			120
S <sub>11</sub>	Input Return Loss, f = 50 MHz to 3 GHz f = 3 GHz to 6 GHz	dB	6 3		
BW	Band Width, -3 dB, P <sub>f</sub> = 10 mW	GHz	2.5		
DP	Dispersion Penalty, T <sub>c</sub> = 25°C <sup>2</sup>	dB			2.0

Notes:

\*1 Available for DWDM wavelengths based on ITU-T recommendation. Please refer to the **ORDERING INFORMATION**.


\*2 2.48832 Gb/s, PRBS 2<sup>23</sup>-1, duty cycle, Extinction Ratio ≥ 8.5 dB, BER = 10<sup>-10</sup>, NX8563LAS: 1 800 ps/nm(100 km),  
NX8563LA: 4 320 ps/nm(240 km)

**ELECTRO-OPTICAL CHARACTERISTICS** (Applicable to Monitor PD: T<sub>LD</sub> = T<sub>SET</sub>, T<sub>C</sub> = -20 to +85°C)

SYMBOL	PARAMETER AND CONDITIONS	UNIT	MIN	TYP	MAX
I <sub>m</sub>	Monitor Current, P <sub>f</sub> = 10 mW, V <sub>R</sub> = 5 V	μA	100		2 000
I <sub>D</sub>	Dark Current, V <sub>R</sub> = 5 V	nA			10
γ <sup>*1</sup>	Tracking Error, I <sub>m</sub> = const.	dB			0.6

Note:

$$*1 \gamma = \left| 10 \log \frac{P_f}{10 \text{ mW}} \right|$$

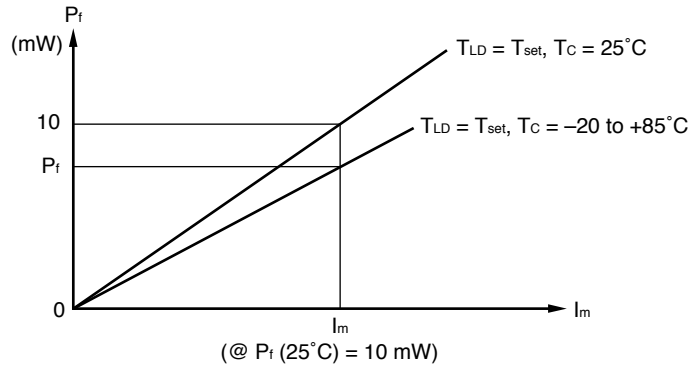

**ELECTRO-OPTICAL CHARACTERISTICS** (Applicable to Thermistor and TEC: T<sub>LD</sub> = T<sub>SET</sub>, T<sub>C</sub> = -20 to +85°C)

SYMBOL	PARAMETER AND CONDITIONS	UNIT	MIN.	TYP.	MAX.
R	Thermistor Resistance, T <sub>LD</sub> = 25°C	kΩ	9.5	10.0	10.5
B	B Constant	K	3 350	3 450	3 550
I <sub>C</sub>	Cooler Current, ΔT = 85 - T <sub>set</sub> , P <sub>f</sub> = 10 mW	A			1.2
V <sub>C</sub>	Cooler Voltage, ΔT = 85 - T <sub>set</sub> , P <sub>f</sub> = 10 mW	V			2.4

**ABSOLUTE MAXIMUM RATINGS<sup>1</sup>**

(T<sub>C</sub> = 25°C, unless otherwise specified)


SYMBOL	PARAMETER	UNIT	RATINGS
I <sub>F</sub>	Forward Current of LD	mA	300
V <sub>R</sub>	Reverse Voltage of LD	V	2.0
I <sub>F</sub>	Forward Current of PD	mA	10
V <sub>R</sub>	Reverse Voltage of PD	V	20
T <sub>C</sub>	Operating Case Temperature	°C	-20 to +85
T <sub>stg</sub>	Storage Temperature	°C	-40 to +85
T <sub>slid</sub>	Lead Soldering Temperature	°C	260 (10 sec.)

Note:

1. Operation in excess of any one of these parameters may result in permanent damage.

**ORDERING INFORMATION**

PART NUMBER	PACKAGE
NX8563LA-AZ*	Hermetically sealed 14-pin butterfly package

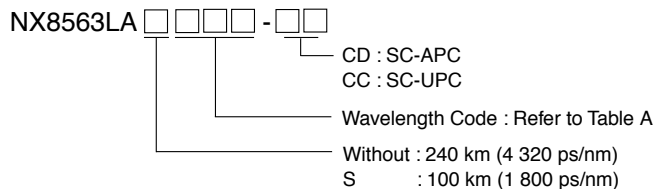

**\*NOTE:**

Please refer to the last page of this data sheet, “Compliance with EU Directives” for Pb-Free RoHS Compliance Information.



**Table A: DWDM wavelength base on ITU-T recommendations (@ T<sub>LD</sub> = T<sub>set</sub>)**

Wavelength Code	ITU-T Wavelength <sup>*1</sup> (nm)	Frequency (THz)	Wavelength Code	ITU-T Wavelength <sup>*1</sup> (nm)	Frequency (THz)
303	1530.33	195.90	509	1550.91	193.30
311	1531.11	195.80	517	1551.72	193.20
318	1531.89	195.70	525	1552.52	193.10
326	1532.68	195.60	533	1553.32	193.00
334	1533.46	195.50	541	1554.13	192.90
342	1534.25	195.40	549	1554.94	192.80
350	1535.03	195.30	557	1555.74	192.70
358	1535.82	195.20	565	1556.55	192.60
366	1536.60	195.10	573	1557.36	192.50
373	1537.39	195.00	581	1558.17	192.40
381	1538.18	194.90	589	1558.98	192.30
389	1538.97	194.80	597	1559.79	192.20
397	1539.76	194.70	606	1560.60	192.10
405	1540.55	194.60	614	1561.41	192.00
413	1541.34	194.50			
421	1542.14	194.40			
429	1542.93	194.30			
437	1543.73	194.20			
445	1544.52	194.10			
453	1545.32	194.00			
461	1546.11	193.90			
469	1546.91	193.80			
477	1547.71	193.70			
485	1548.51	193.60			
493	1549.31	193.50			
501	1550.11	193.40			

Note:

\*1 The value which omitted and computed the 3rd place below the decimal point

**PACKAGE DIMENSIONS** (Units in mm)

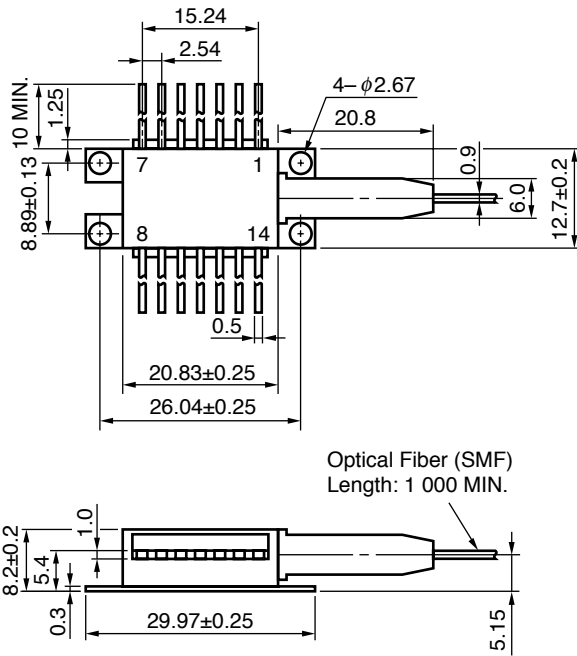


**PIN CONNECTIONS**

Pin No.	Function	Pin No.	Function
1	Thermistor	8	GND
2	Thermistor	9	GND
3	Bias	10	GND
4	PD Anode	11	GND, LD Anode
5	PD Cathode	12	Signal Input
6	Cooler Anode	13	GND
7	Cooler Cathode	14	GND

**OPTICAL FIBER DIMENSIONS** (UNIT: mm)

PARAMETER	UNIT	SPECIFICATION
Outer Diameter	mm	0.9±0.1
Minimum Fiber Bending Radius	mm	30
Fiber Length	mm	1 000 MIN.

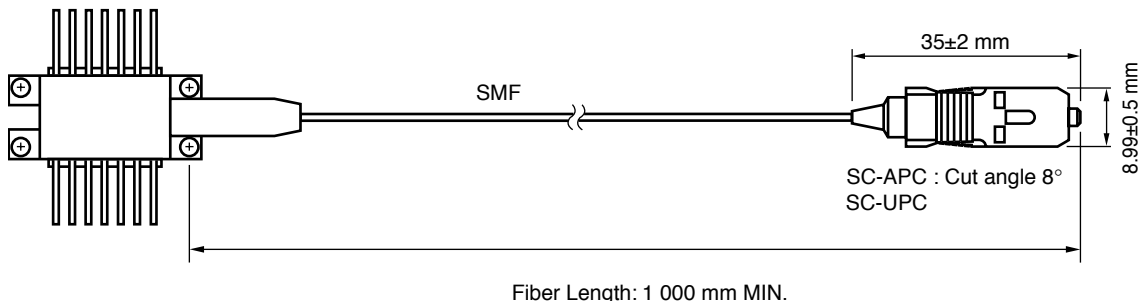

**Life Support Applications**

These NEC products are not intended for use in life support devices, appliances, or systems where the malfunction of these products can reasonably be expected to result in personal injury. The customers of CEL using or selling these products for use in such applications do so at their own risk and agree to fully indemnify CEL for all damages resulting from such improper use or sale.

**CEL** California Eastern Laboratories, Your source for NEC RF, Microwave, Optoelectronic, and Fiber Optic Semiconductor Devices.

4590 Patrick Henry Drive • Santa Clara, CA 95054-1817 • (408) 988-3500 • FAX (408) 988-0279 • [www.cel.com](http://www.cel.com)

DATA SUBJECT TO CHANGE WITHOUT NOTICE

12/15/2003

Subject: Compliance with EU Directives

CEL certifies, to its knowledge, that semiconductor and laser products detailed below are compliant with the requirements of European Union (EU) Directive 2002/95/EC Restriction on Use of Hazardous Substances in electrical and electronic equipment (RoHS) and the requirements of EU Directive 2003/11/EC Restriction on Penta and Octa BDE.

CEL Pb-free products have the same base part number with a suffix added. The suffix –A indicates that the device is Pb-free. The –AZ suffix is used to designate devices containing Pb which are exempted from the requirement of RoHS directive (\*). In all cases the devices have Pb-free terminals. All devices with these suffixes meet the requirements of the RoHS directive.

This status is based on CEL’s understanding of the EU Directives and knowledge of the materials that go into its products as of the date of disclosure of this information.

Restricted Substance per RoHS	Concentration Limit per RoHS (values are not yet fixed)	Concentration contained in CEL devices	
		-A	-AZ
Lead (Pb)	< 1000 PPM	Not Detected	(*)
Mercury	< 1000 PPM	Not Detected	
Cadmium	< 100 PPM	Not Detected	
Hexavalent Chromium	< 1000 PPM	Not Detected	
PBB	< 1000 PPM	Not Detected	
PBDE	< 1000 PPM	Not Detected	

If you should have any additional questions regarding our devices and compliance to environmental standards, please do not hesitate to contact your local representative.

**Important Information and Disclaimer:** Information provided by CEL on its website or in other communications concerning the substance content of its products represents knowledge and belief as of the date that it is provided. CEL bases its knowledge and belief on information provided by third parties and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. CEL has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. CEL and CEL suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall CEL’s liability arising out of such information exceed the total purchase price of the CEL part(s) at issue sold by CEL to customer on an annual basis.

See CEL Terms and Conditions for additional clarification of warranties and liability.