


SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

- Meet or Exceed the Requirements of TIA/EIA-422-B, TIA/EIA-485-A[†] and ITU Recommendations V.11 and X.27
- Operate at Data Rates up to 35 Mbaud
- Four Skew Limits Available:
SN65ALS176 . . . 15 ns
SN75ALS176 . . . 10 ns
SN75ALS176A . . . 7.5 ns
SN75ALS176B . . . 5 ns
- Designed for Multipoint Transmission on Long Bus Lines in Noisy Environments
- Low Supply-Current Requirements
. . . 30 mA Max
- Wide Positive and Negative Input/Output Bus-Voltage Ranges
- Thermal Shutdown Protection
- Driver Positive and Negative Current Limiting
- Receiver Input Hysteresis
- Glitch-Free Power-Up and Power-Down Protection
- Receiver Open-Circuit Fail-Safe Design

D OR P PACKAGE
(TOP VIEW)



description

The SN65ALS176 and SN75ALS176 series differential bus transceivers are designed for bidirectional data communication on multipoint bus transmission lines. They are designed for balanced transmission lines and meet TIA/EIA-422-B, TIA/EIA-485-A, and ITU Recommendations V.11 and X.27.

The SN65ALS176 and SN75ALS176 series combine a 3-state, differential line driver and a differential input line receiver, both of which operate from a single 5-V power supply. The driver and receiver have active-high and active-low enables, respectively, that can be connected together externally to function as a direction control. The driver differential outputs and the receiver differential inputs are connected internally to form a differential input/output (I/O) bus port that is designed to offer minimum loading to the bus when the driver is disabled or $V_{CC} = 0$. This port features wide positive and negative common-mode voltage ranges, making the device suitable for party-line applications.

The SN65ALS176 is characterized for operation from -40°C to 85°C . The SN75ALS176 series is characterized for operation from 0°C to 70°C .



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

[†] These devices meet or exceed the requirements of TIA/EIA-485-A, except for the Generator Contention Test (para. 3.4.2) and the Generator Current Limit (para. 3.4.3). The applied test voltage ranges are -6 V to 8 V for the SN75ALS176, SN75ALS176A, and SN75ALS176B and -4 V to 8 V for the SN65ALS180.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2000, Texas Instruments Incorporated

SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B

DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

AVAILABLE OPTIONS

T _A	t _{sk(lim)} [†]	PACKAGED DEVICES	
		SMALL OUTLINE (D) [‡]	PLASTIC DIP (P)
0°C to 70°C	10 7.5 5	SN75ALS176D SN75ALS176AD SN75ALS176BD	SN75ALS176P SN75ALS176AP SN75ALS176BP
–40°C to 85°C	15	SN65ALS176D	SN65ALS176P

[†] This is the maximum range that the driver or receiver delay times vary over temperature, V_{CC}, and process (device to device).

[‡] The D package is available taped and reeled. Add the suffix R to the device type (e.g., SN75ALS176DR).

Function Tables

DRIVER

INPUT D	ENABLE DE	OUTPUTS	
		A	B
H	H	H	L
L	H	L	H
X	L	Z	Z


H = high level, L = low level, X = irrelevant,
Z = high impedance

RECEIVER


DIFFERENTIAL INPUTS A–B	ENABLE $\overline{\text{RE}}$	OUTPUT R
V _{ID} ≥ 0.2 V	L	H
–0.2 V < V _{ID} < 0.2 V	L	?
V _{ID} ≤ –0.2 V	L	L
X	H	Z
Inputs open	L	H

H = high level, L = low level, X = irrelevant,
Z = high impedance

logic symbol[§]

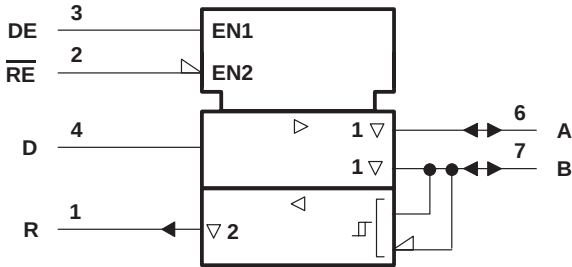


logic diagram (positive logic)

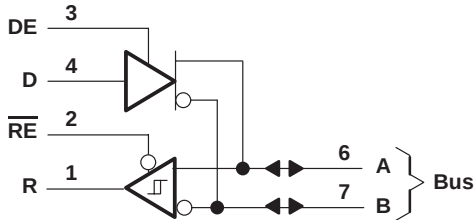

[§] This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

schematics of inputs and outputs

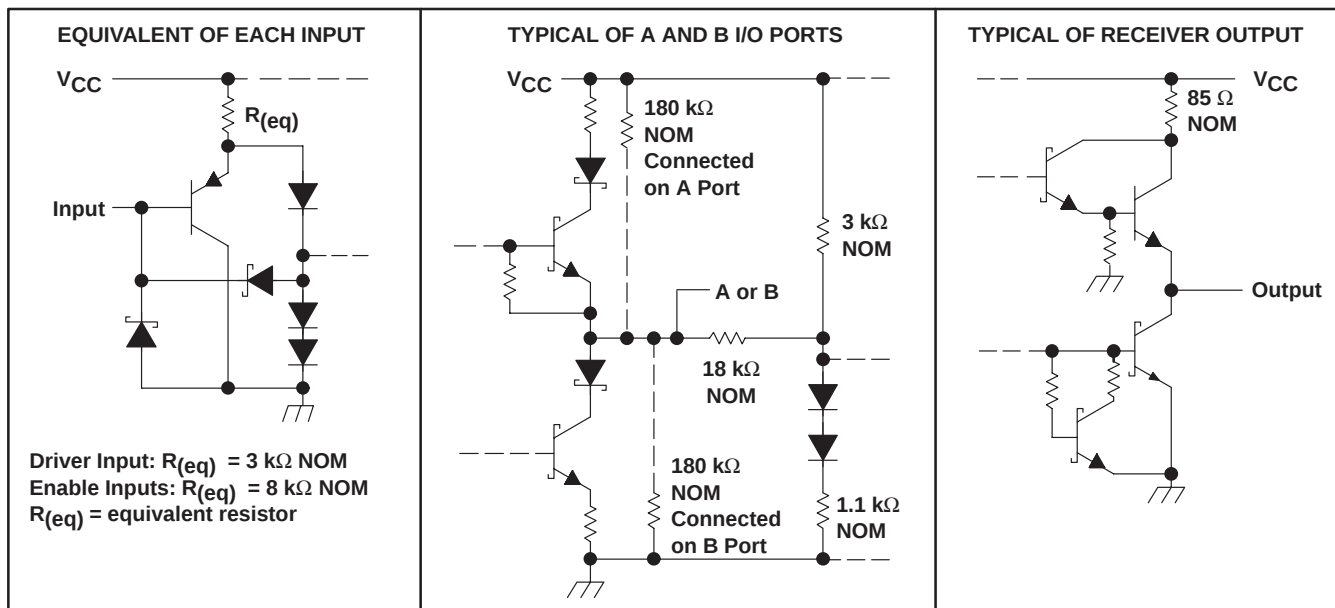

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage, V_{CC} (see Note 1)	7 V
Voltage range at any bus terminal	–7 V to 12 V
Enable input voltage, V_I	5.5 V
Package thermal impedance, θ_{JA} (see Note 2): D package	97°C/W
P package	85°C/W
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C
Storage temperature range, T_{Stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential I/O bus voltage, are with respect to network ground terminal.
 2. The package thermal impedance is calculated in accordance with JESD 51.

SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B

DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

recommended operating conditions (unless otherwise noted)

		MIN	NOM	MAX	UNIT
Supply voltage, V _{CC}		4.75	5	5.25	V
Input voltage at any bus terminal (separately or common mode), V _I or V _{IC}		12			V
		−7			
High-level input voltage, V _{IH}	D, DE, and $\overline{RE}$	2			V
Low-level input voltage, V _{IL}	D, DE, and $\overline{RE}$	0.8			V
Differential input voltage, V _{ID} (see Note 3)		±12			V
High-level output current, I _{OH}	Driver	−60			mA
	Receiver	−400			μA
Low-level output current, I _{OL}	Driver	60			mA
	Receiver	8			
Operating free-air temperature, T _A	SN65ALS176	−40		85	°C
	SN75ALS176 series	0		70	

NOTE 3: Differential input/output bus voltage is measured at the noninverting terminal A with respect to the inverting terminal B.



SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

DRIVER SECTION

electrical characteristics over recommended ranges of supply voltage and operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]		MIN	TYP [‡]	MAX	UNIT
V _{IK} Input clamp voltage	I _I = –18 mA				–1.5	V
V _O Output voltage	I _O = 0		0		6	V
V _{OD1} Differential output voltage	I _O = 0		1.5		6	V
V _{OD2} Differential output voltage	R _L = 100 Ω, See Figure 1		1/2V _{OD1} or 2 [§]			V
	R _L = 54 Ω, See Figure 1		1.5	2.5	5	V
V _{OD3} Differential output voltage	V _{test} = –7 V to 12 V, See Figure 2		1.5		5	V
Δ V _{OD} Change in magnitude of differential output voltage [¶]	R _L = 54 Ω or 100 Ω, See Figure 1				±0.2	V
V _{OC} Common-mode output voltage	R _L = 54 Ω or 100 Ω, See Figure 1				3 –1	V
Δ V _{OC} Change in magnitude of common-mode output voltage [¶]	R _L = 54 Ω or 100 Ω, See Figure 1				±0.2	V
I _O Output current	Outputs disabled (see Note 4)	V _O = 12 V			1	mA
		V _O = –7 V			–0.8	
I _{IH} High-level input current	V _I = 2.4 V				20	μA
I _{IL} Low-level input current	V _I = 0.4 V				–400	μA
I _{OS} Short-circuit output current [#]	V _O = –4 V	SN65ALS176			–250	mA
	V _O = –6 V	SN75ALS176			–250	
	V _O = 0				–150	
	V _O = V _{CC}				250	
	V _O = 8 V				250	
I _{CC} Supply current	No load	Outputs enabled		23	30	mA
		Outputs disabled		19	26	

[†] The power-off measurement in TIA/EIA-422-B applies to disabled outputs only and is not applied to combined inputs and outputs.

[‡] All typical values are at V_{CC} = 5 V and T_A = 25°C.

[§] The minimum V_{OD2} with a 100-Ω load is either 1/2 V_{OD1} or 2 V, whichever is greater.

[¶] Δ|V_{OD}| and Δ|V_{OC}| are the changes in magnitude of V_{OD} and V_{OC}, respectively, that occur when the input is changed from one logic state to the other.

[#] Duration of the short circuit should not exceed one second for this test.

NOTE 4: This applies for power on and power off. Refer to TIA/EIA-485-A for exact conditions. The TIA/EIA-422-B limit does not apply for a combined driver and receiver terminal.



SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B

DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

switching characteristics over recommended ranges of supply voltage and operating free-air temperature range (unless otherwise noted)

SN65ALS176

PARAMETER	TEST CONDITIONS	MIN	TYP [†]	MAX	UNIT
t _d (OD) Differential output delay time	R _L = 54 Ω, C _L = 50 pF, See Figure 3			15	ns
t _{sk} (p) Pulse skew [‡]	R _L = 54 Ω, C _L = 50 pF, See Figure 3		0	2	ns
t _{sk} (lim) Pulse skew [§]	R _L = 54 Ω, C _L = 50 pF, See Figure 3			15	ns
t _t (OD) Differential output transition time	R _L = 54 Ω, C _L = 50 pF, See Figure 3		8		ns
t _{PZH} Output enable time to high level	R _L = 110 Ω, C _L = 50 pF, See Figure 4			80	ns
t _{PZL} Output enable time to low level	R _L = 110 Ω, C _L = 50 pF, See Figure 5			30	ns
t _{PHZ} Output disable time from high level	R _L = 110 Ω, C _L = 50 pF, See Figure 4			50	ns
t _{PLZ} Output disable time from low level	R _L = 110 Ω, C _L = 50 pF, See Figure 5			30	ns

[†] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[‡] Pulse skew is defined as the |t_{pLH} – t_{pHL}| of each channel of the same device.

[§] Skew limit is the maximum difference in propagation delay times between any two channels of any two devices.

SN75ALS176, SN75ALS176A, SN75ALS176B

PARAMETER	TEST CONDITIONS	MIN	TYP [†]	MAX	UNIT
t _d (OD) Differential output delay time	R _L = 54 Ω, C _L = 50 pF, See Figure 3	3	8	13	ns
		4	7	11.5	
		5	8	10	
t _{sk} (p) Pulse skew [‡]	R _L = 54 Ω, C _L = 50 pF, See Figure 3		0	2	ns
t _{sk} (lim) Pulse skew [§]	R _L = 54 Ω, C _L = 50 pF, See Figure 3			10	ns
				7.5	
				5	
t _t (OD) Differential output transition time	R _L = 54 Ω, C _L = 50 pF, See Figure 3		8		ns
t _{PZH} Output enable time to high level	R _L = 110 Ω, C _L = 50 pF, See Figure 4		23	50	ns
t _{PZL} Output enable time to low level	R _L = 110 Ω, C _L = 50 pF, See Figure 5		14	20	ns
t _{PHZ} Output disable time from high level	R _L = 110 Ω, C _L = 50 pF, See Figure 4		20	35	ns
t _{PLZ} Output disable time from low level	R _L = 110 Ω, C _L = 50 pF, See Figure 5		8	17	ns

[†] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[‡] Pulse skew is defined as the |t_{pLH} – t_{pHL}| of each channel of the same device.

[§] Skew limit is the maximum difference in propagation delay times between any two channels of any two devices.

SYMBOL EQUIVALENTS

DATA-SHEET PARAMETER	TIA/EIA-422-B	TIA/EIA-485-A
V _O	V _{0a} , V _{0b}	V _{0a} , V _{0b}
V _{OD1}	V ₀	V ₀
V _{OD2}	V _t (R _L = 100 Ω)	V _t (R _L = 54 Ω)
V _{OD3}	None	V _t (test termination measurement 2)
Δ V _{OD}	V _t – V _{tl}	V _t – V _{tl}
V _{OC}	V _{os}	V _{os}
Δ V _{OC}	V _{os} – V _{os}	V _{os} – V _{os}
I _{OS}	I _{sa} , I _{sb}	None
I _O	I _{xa} , I _{xb}	I _{ia} , I _{ib}



SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

RECEIVER SECTION

electrical characteristics over recommended ranges of common-mode input voltage, supply voltage, and operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP [†]	MAX	UNIT
V_{IT+} Positive-going input threshold voltage	$V_O = 2.7\text{ V}$,	$I_O = -0.4\text{ mA}$			0.2	V
V_{IT-} Negative-going input threshold voltage	$V_O = 0.5\text{ V}$,	$I_O = 8\text{ mA}$	-0.2 [‡]			V
V_{hys} Hysteresis voltage ($V_{IT+} - V_{IT-}$)				60		mV
V_{IK} Enable-input clamp voltage	$I_I = -18\text{ mA}$			-1.5		V
V_{OH} High-level output voltage	$V_{ID} = 200\text{ mV}$, See Figure 6	$I_{OH} = -400\text{ }\mu\text{A}$,	2.7			V
V_{OL} Low-level output voltage	$V_{ID} = -200\text{ mV}$, See Figure 6	$I_{OL} = 8\text{ mA}$,			0.45	V
I_{OZ} High-impedance-state output current	$V_O = 0.4\text{ V to }2.4\text{ V}$				± 20	μA
V_I Line input current	Other input = 0 V (see Note 5)	$V_I = 12\text{ V}$			1	mA
		$V_I = -7\text{ V}$			-0.8	
I_{IH} High-level-enable input current	$V_{IH} = 2.7\text{ V}$				20	μA
I_{IL} Low-level-enable input current	$V_{IL} = 0.4\text{ V}$				-100	μA
r_I Input resistance			12	20		$\text{k}\Omega$
I_{OS} Short-circuit output current	$V_{ID} = 200\text{ mV}$,	$V_O = 0$	-15		-85	mA
I_{CC} Supply current	No load	Outputs enabled		23	30	mA
		Outputs disabled		19	26	

[†] All typical values are at $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$.

[‡] The algebraic convention, in which the less positive (more negative) limit is designated minimum, is used in this data sheet for common-mode input voltage and threshold voltage levels only.

NOTE 5: This applies for power on and power off. Refer to TIA/EIA-485-A for exact conditions.

SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

switching characteristics over recommended ranges of supply voltage and operating free-air temperature range (unless otherwise noted)

SN65ALS176

PARAMETER		TEST CONDITIONS		MIN	TYP [†]	MAX	UNIT
t _{pd}	Propagation time	V _{ID} = –1.5 V to 1.5 V, See Figure 7	C _L = 15 pF,			25	ns
t _{sk(p)}	Pulse skew [§]	V _{ID} = –1.5 V to 1.5 V, See Figure 7	C _L = 15 pF,		0	2	ns
t _{sk(lim)}	Pulse skew [¶]	R _L = 54 Ω, See Figure 3	C _L = 50 pF,			15	ns
t _{PZH}	Output enable time to high level	C _L = 15 pF,	See Figure 8		11	18	ns
t _{PZL}	Output enable time to low level	C _L = 15 pF,	See Figure 8		11	18	ns
t _{PHZ}	Output disable time from high level	C _L = 15 pF,	See Figure 8			50	ns
t _{PLZ}	Output disable time from low level	C _L = 15 pF,	See Figure 8			30	ns

[†] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[§] Pulse skew is defined as the |t_{PLH} – t_{PHL}| of each channel of the same device.

[¶] Skew limit is the maximum difference in propagation delay times between any two channels of any two devices.

SN75ALS176, SN75ALS176A, SN75ALS176B

PARAMETER		TEST CONDITIONS		MIN	TYP [†]	MAX	UNIT
t _{pd}	Propagation time	V _{ID} = –1.5 V to 1.5 V, See Figure 7	C _L = 15 pF,	9	14	19	ns
				10.5	14	18	
				11.5	13	16.5	
t _{sk(p)}	Pulse skew [‡]	V _{ID} = –1.5 V to 1.5 V, See Figure 7	C _L = 15 pF,		0	2	ns
t _{sk(lim)}	Pulse skew [§]	R _L = 54 Ω, See Figure 3	C _L = 50 pF,			10	ns
						7.5	
						5	
t _{PZH}	Output enable time to high level	C _L = 15 pF,	See Figure 8		7	14	ns
t _{PZL}	Output enable time to low level	C _L = 15 pF,	See Figure 8		20	35	ns
t _{PHZ}	Output disable time from high level	C _L = 15 pF,	See Figure 8		20	35	ns
t _{PLZ}	Output disable time from low level	C _L = 15 pF,	See Figure 8		8	17	ns

[†] All typical values are at V_{CC} = 5 V, T_A = 25°C.

[‡] Pulse skew is defined as the |t_{PLH} – t_{PHL}| of each channel of the same device.

[§] Skew limit is the maximum difference in propagation delay times between any two channels of any two devices.

PARAMETER MEASUREMENT INFORMATION

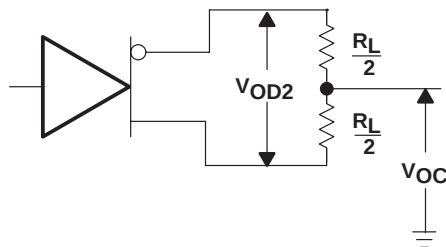


Figure 1. Driver V_{OD2} and V_{OC}

PARAMETER MEASUREMENT INFORMATION



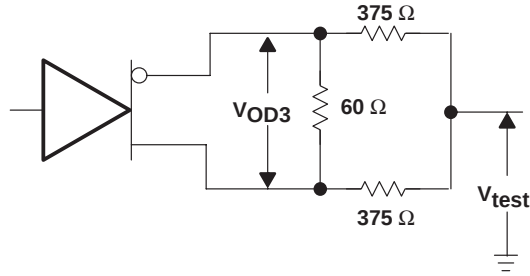


Figure 2. Driver V_{OD3}

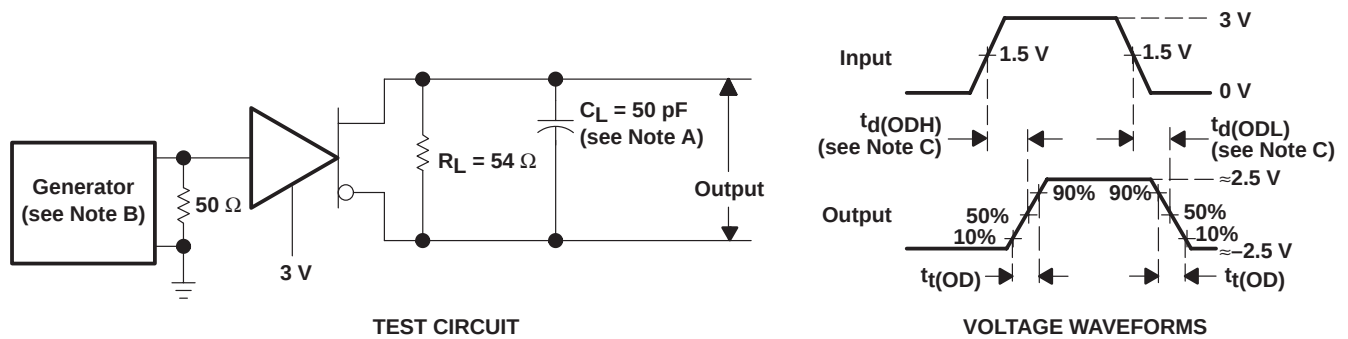

- NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 1 MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.
C. $t_d(OD) = t_d(ODH)$ or $t_d(ODL)$

Figure 3. Driver Test Circuit and Voltage Waveforms

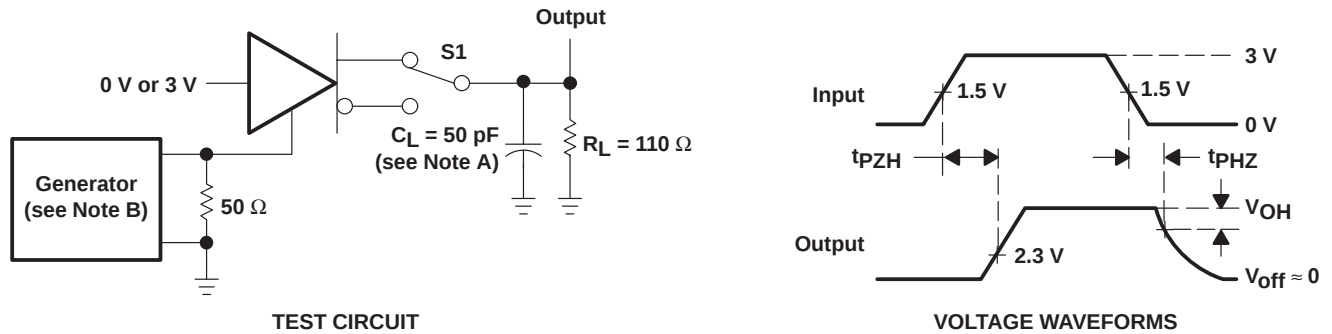


- NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 1 MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 4. Driver Test Circuit and Voltage Waveforms

SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

PARAMETER MEASUREMENT INFORMATION

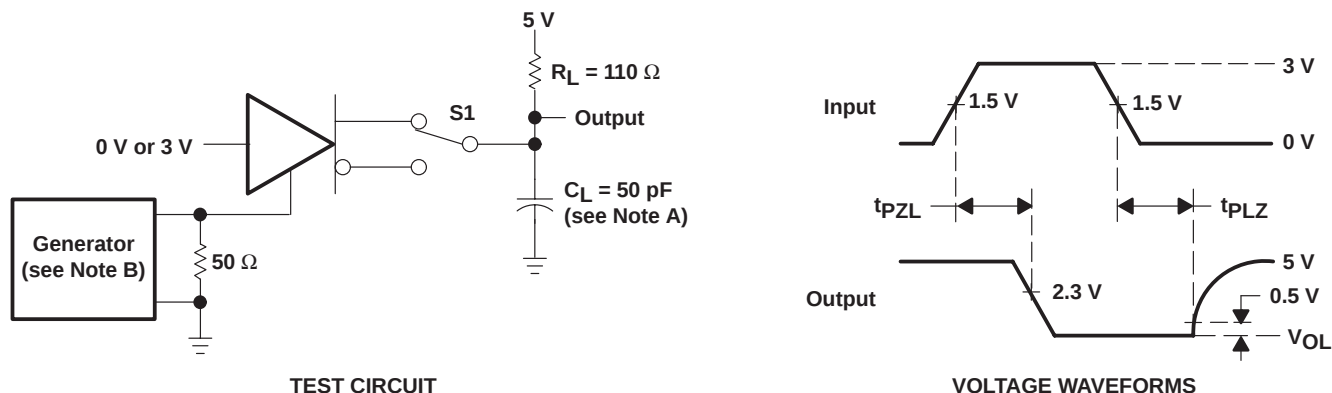

- NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_0 = 50$ Ω.
C. $t_{pd} = t_{PLH}$ or t_{PHL}

Figure 5. Driver Test Circuit and Voltage Waveforms


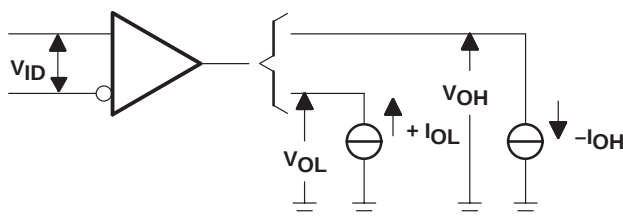



Figure 6. Receiver V_{OH} and V_{OL} Test Circuit

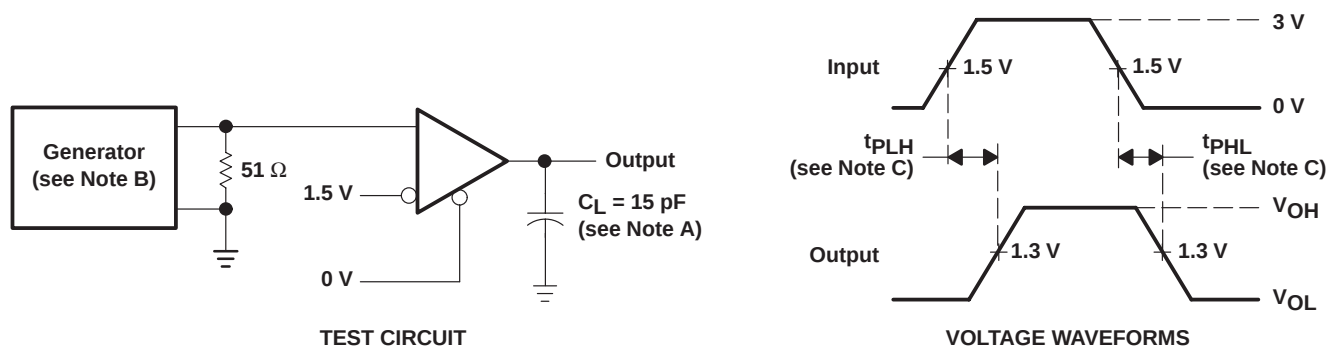

- NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: $PRR \leq 1$ MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_0 = 50$ Ω.
C. $t_{pd} = t_{PLH}$ or t_{PHL}

Figure 7. Receiver Test Circuit and Voltage Waveforms

PARAMETER MEASUREMENT INFORMATION

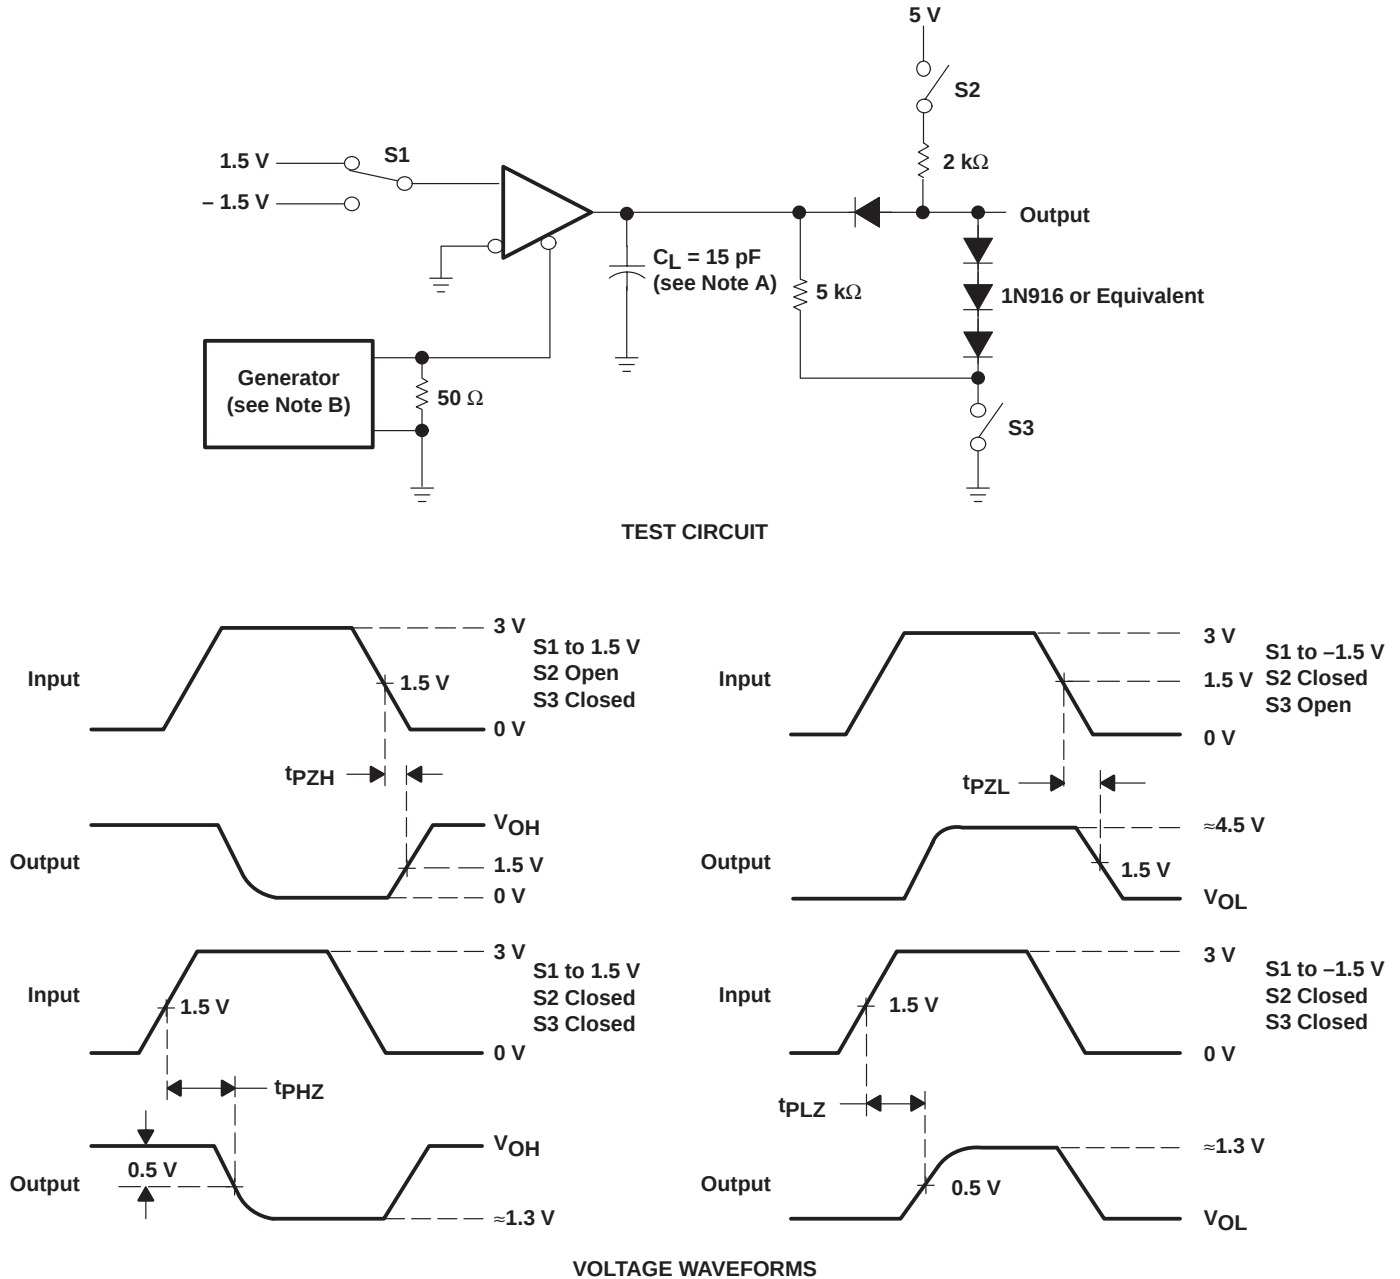

- NOTES: A. C_L includes probe and jig capacitance.
B. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 1 MHz, 50% duty cycle, $t_r \leq 6$ ns, $t_f \leq 6$ ns, $Z_O = 50 \Omega$.

Figure 8. Receiver Test Circuit and Voltage Waveforms

SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B
DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

TYPICAL CHARACTERISTICS†

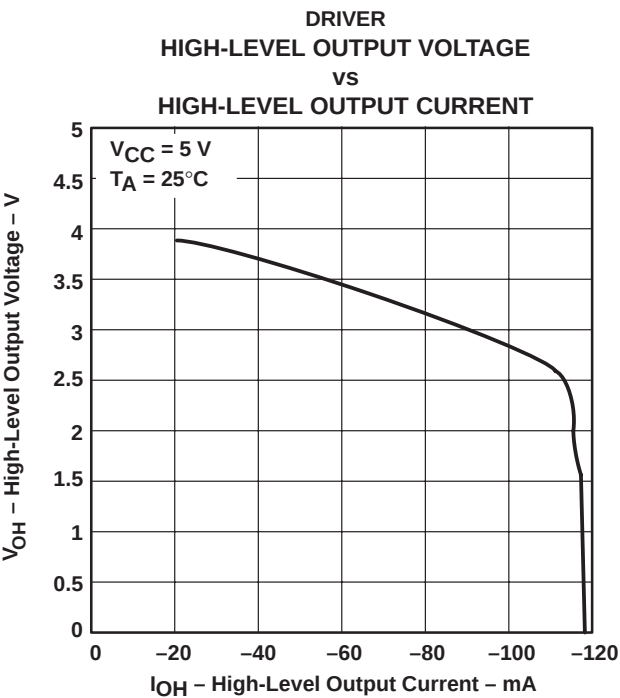


Figure 9

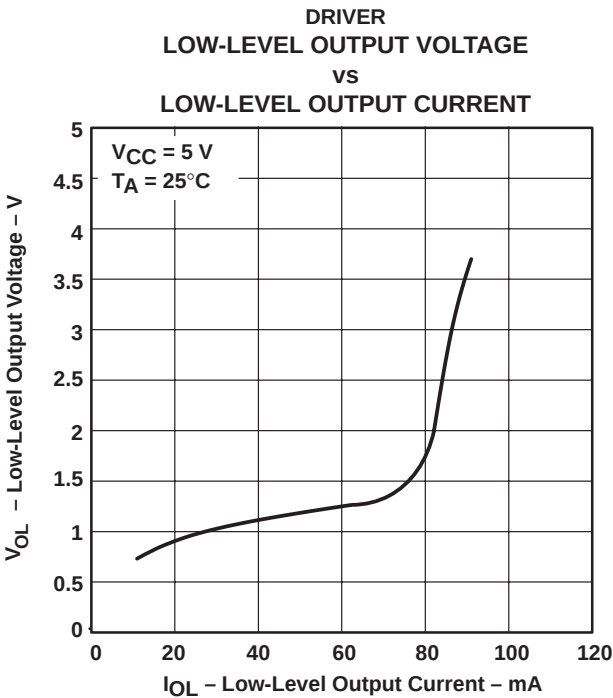


Figure 10

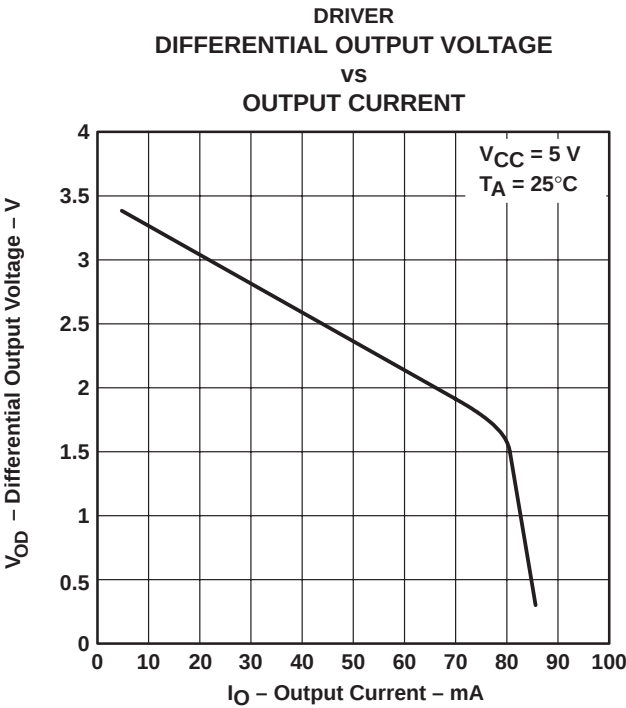


Figure 11

† Operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied.

RECEIVER TYPICAL CHARACTERISTICS†

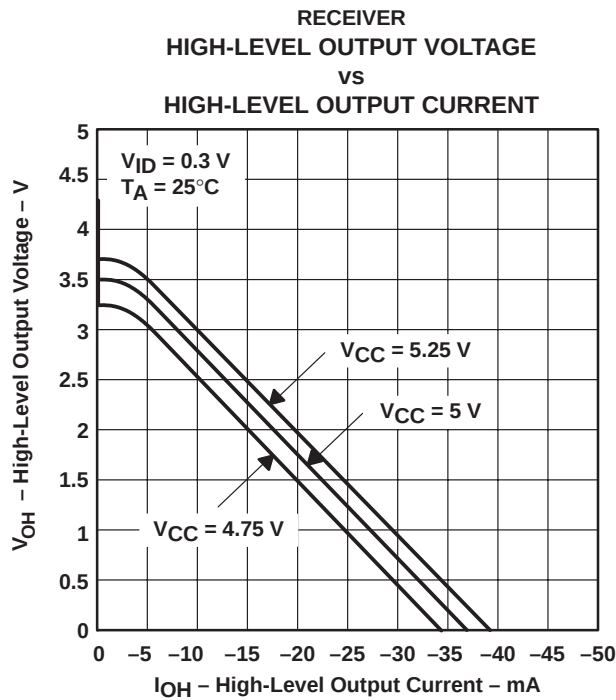


Figure 12

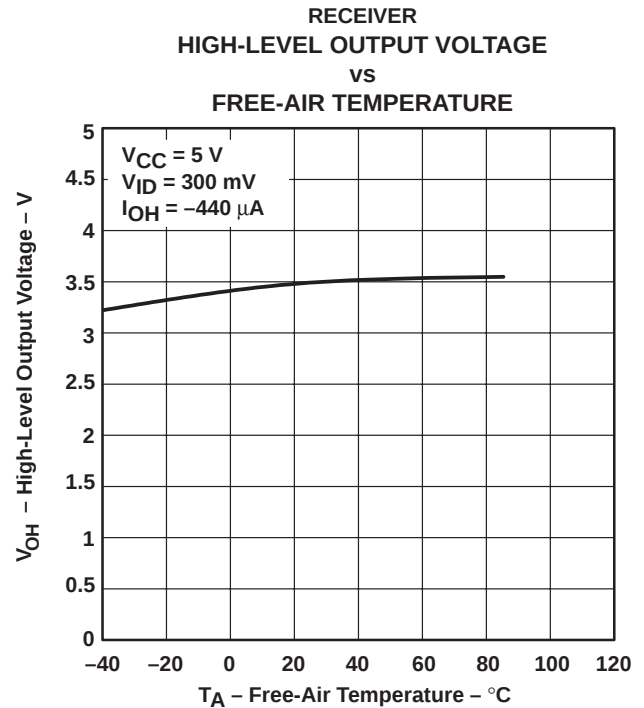


Figure 13

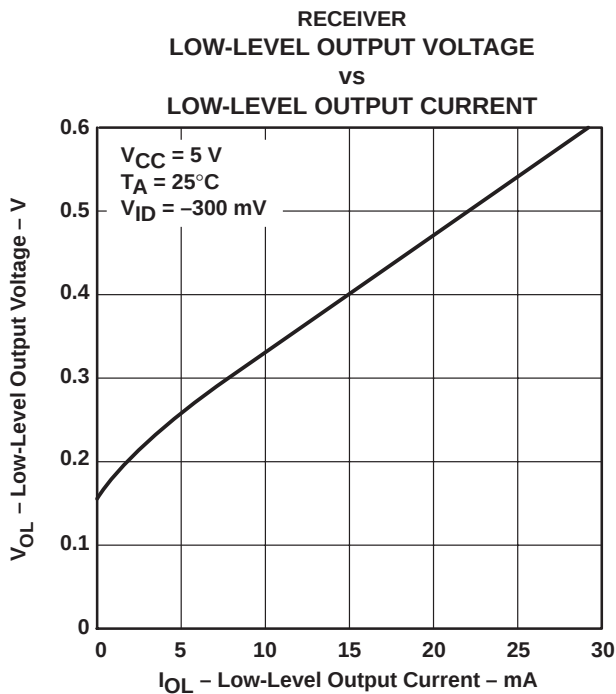


Figure 14

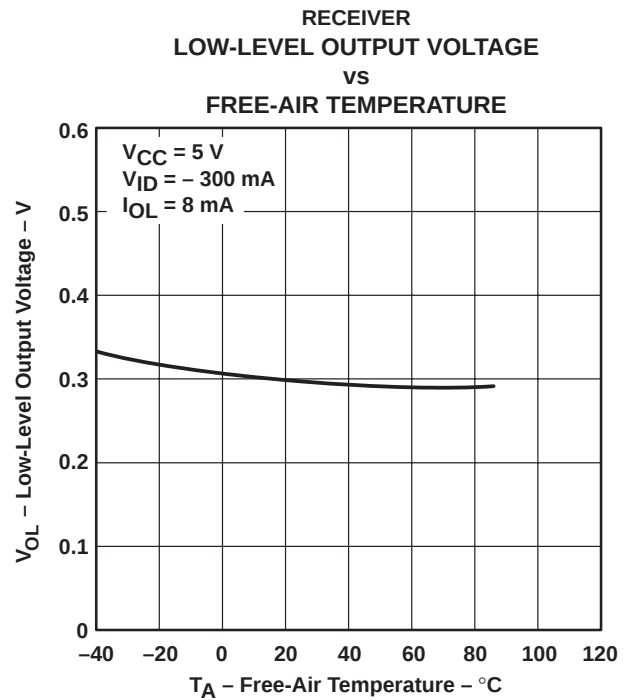


Figure 15

† Operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied.

SN65ALS176, SN75ALS176, SN75ALS176A, SN75ALS176B
DIFFERENTIAL BUS TRANSCEIVERS

SLLS040H – AUGUST 1987 – REVISED JUNE 2000

TYPICAL CHARACTERISTICS†

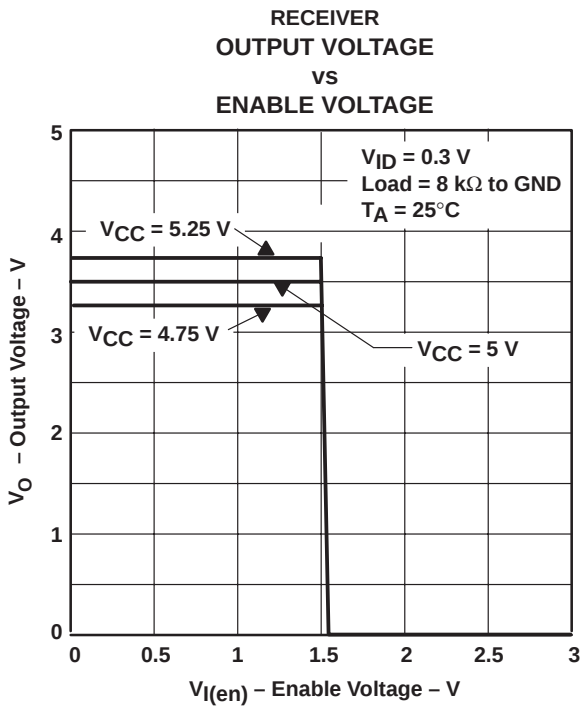


Figure 16


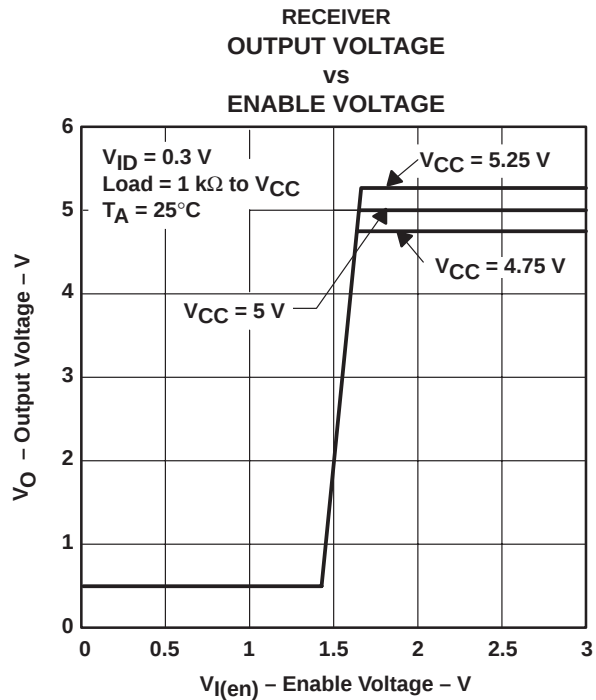


Figure 17

† Operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied.

APPLICATION INFORMATION

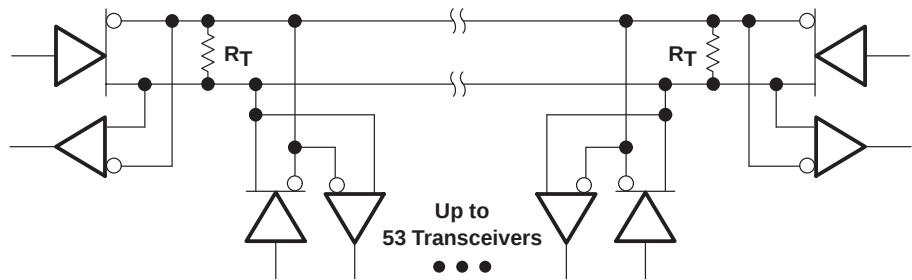

NOTE A: The line should terminate at both ends in its characteristic impedance ($R_T = Z_0$). Stub lengths off the main line should be kept as short as possible.

Figure 18. Typical Application Circuit

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.