

ISDN MAGNETICS

U Interface Through Hole Transformers

TM00204

- Designed to interface with Motorola MC145572 transceiver IC


ELECTRICAL SPECIFICATIONS at 25° C

Part Number	Turns Ratio ± 3%	Primary Inductance* mH min	Leakage Inductance μH max	DCR Ω max		Interwinding Capacitance pF max	Interwinding Breakdown Voltage Vrms min
				Pri	Sec		
0559-6204-08	1.25 : 1 CT	26.5	95	6	9	80	1500

* Measured at 10 kHz, 0.1 Vac


SCHEMATIC

0559-6204-08

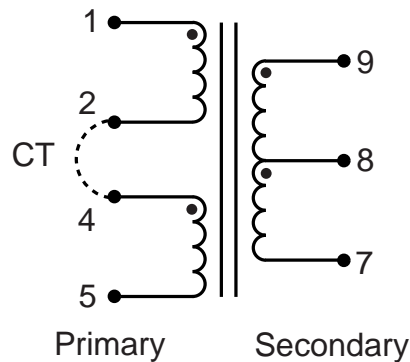

MECHANICAL

0559-6204-08

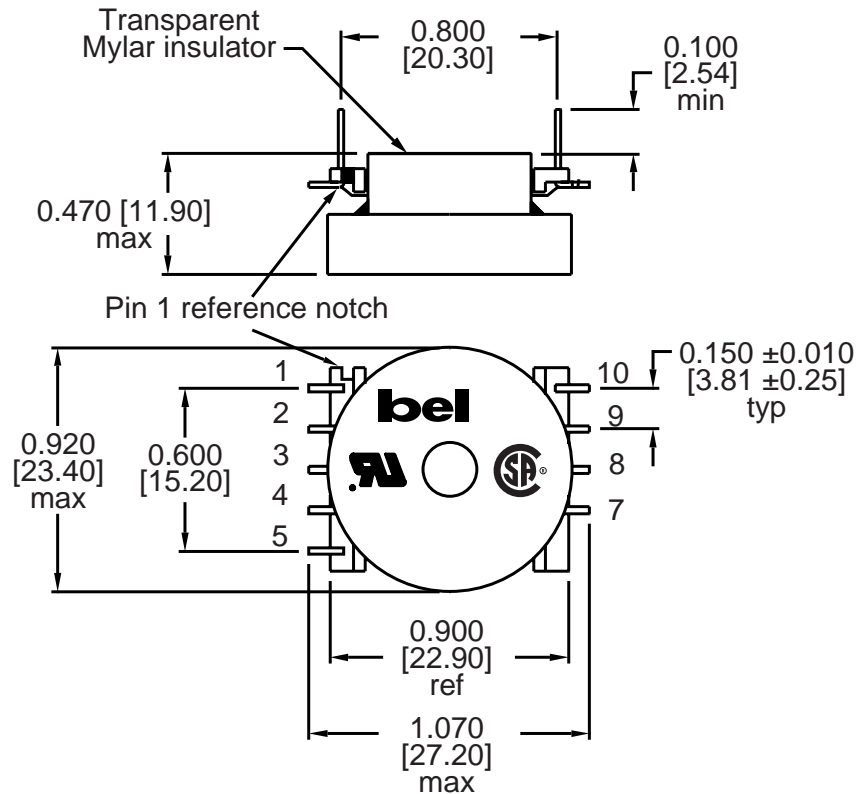

Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

CORPORATE

Bel Fuse Inc.
 198 Van Vorst Street
 Jersey City, NJ 07302
 Tel 201-432-0463
 Fax 201-432-9542
 www.belfuse.com

FAR EAST

Bel Fuse Ltd.
 8F / 8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel 852-2328-5515
 Fax 852-2352-3706
 www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Suite G7, Preston
 Lancashire, PR1 8UD, U.K.
 Tel 44-1772-556601
 Fax 44-1772-888366
 www.belfuse.com