

## TO-92 Plastic-Encapsulate Transistors

### AV4401 TRANSISTOR (NPN )

#### FEATURES

Power dissipation

$$P_{CM} : 0.625 \text{ W (Tamb=25 )}$$

Collector current


$$I_{CM} : 0.6 \text{ A}$$

Collector-base voltage

$$V_{(BR)CBO} : 60 \text{ V}$$

Operating and storage junction temperature range


$$T_J, T_{stg} : -55 \text{ to } +150$$

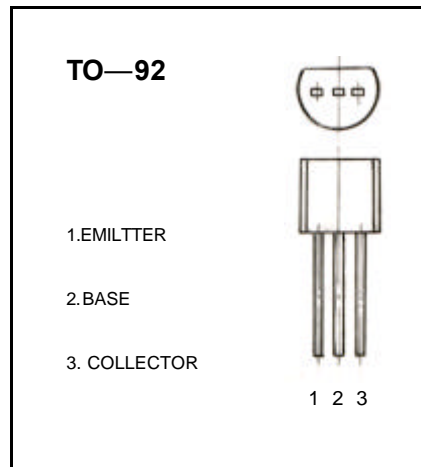


#### ELECTRICAL CHARACTERISTICS (Tamb=25 unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100 \mu A, I_E=0$	60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1 \text{ mA}, I_B=0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100 \mu A, I_C=0$	6		V
Collector cut-off current	$I_{CBO}$	$V_{CB}=50 \text{ V}, I_E=0$		0.1	$\mu A$
Collector cut-off current	$I_{CEO}$	$V_{CE}=35 \text{ V}, I_B=0$		0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5 \text{ V}, I_C=0$		0.1	$\mu A$
DC current gain	$h_{FE(1)}$	$V_{CE}=1 \text{ V}, I_C=150 \text{ mA}$	100	300	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=150 \text{ mA}, I_B=15 \text{ mA}$		0.4	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=150 \text{ mA}, I_B=15 \text{ mA}$		0.95	V
Transition frequency	$f_T$	$V_{CE}=10 \text{ V}, I_C=20 \text{ mA}$ $f = 100 \text{ MHz}$	250		MHz


### Typical Characteristics

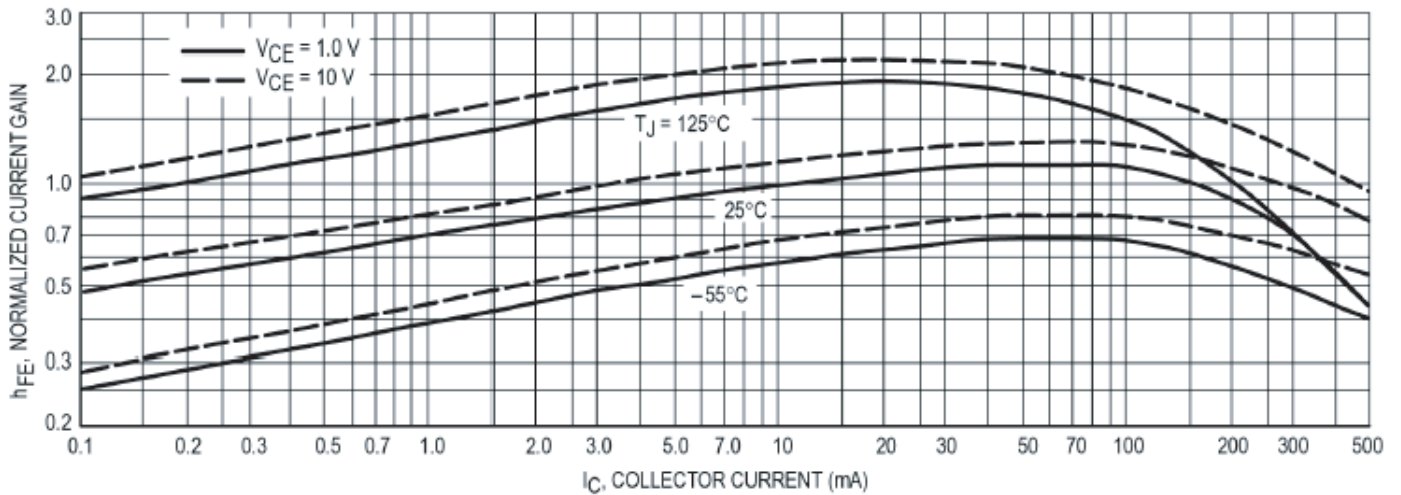


DC Current Gain

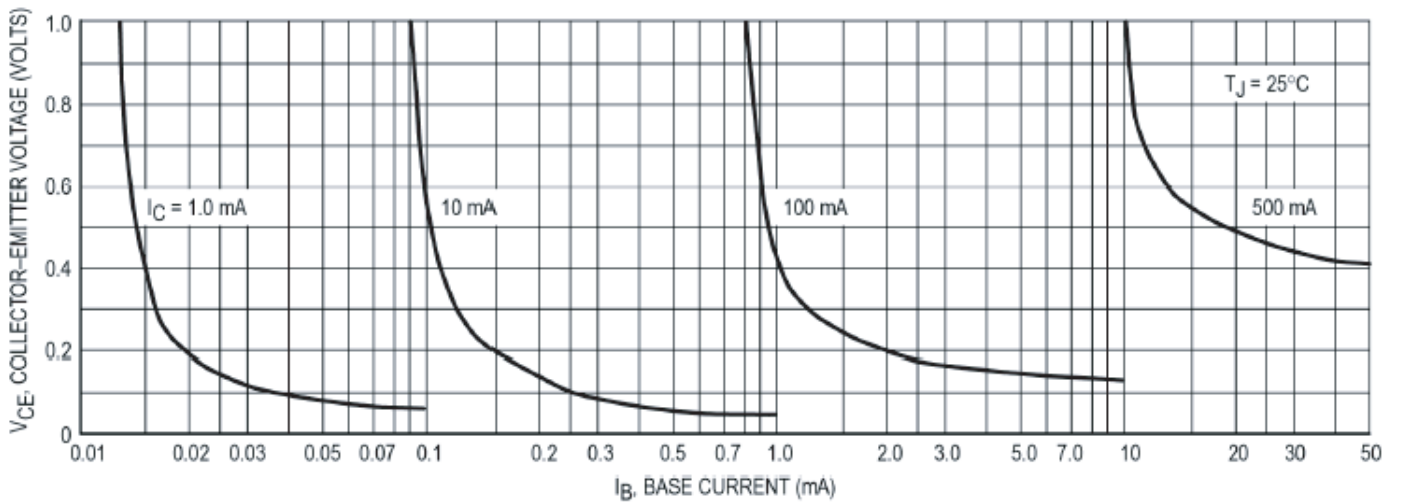

Collector Saturation Region

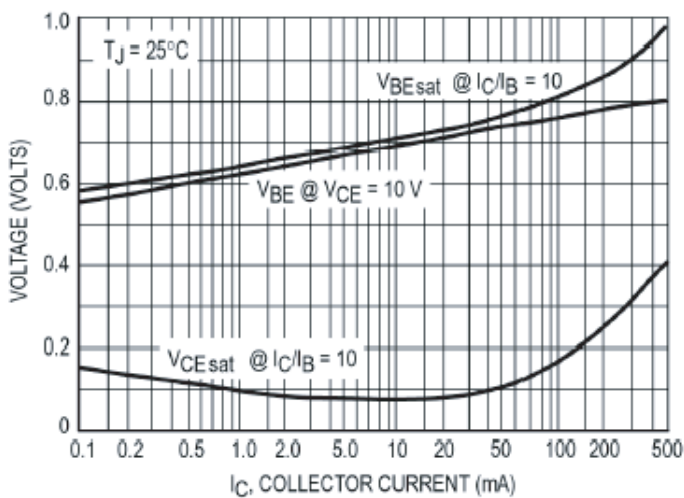


"On" Voltages

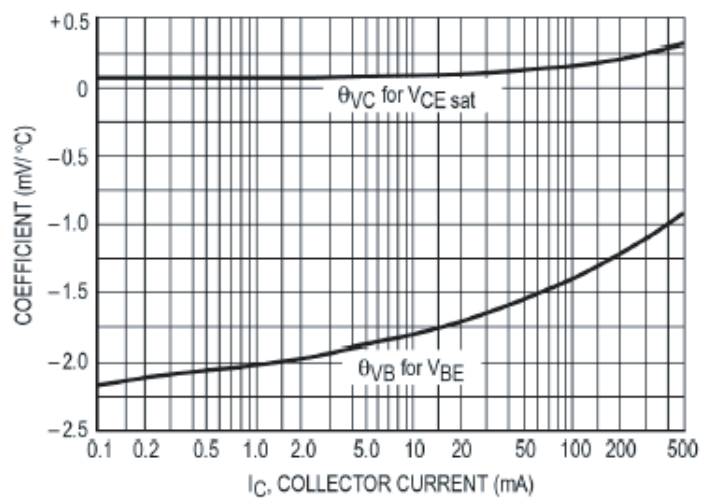

Temperature Coefficients

TO-92 PACKAGE OUTLINE DIMENSIONS

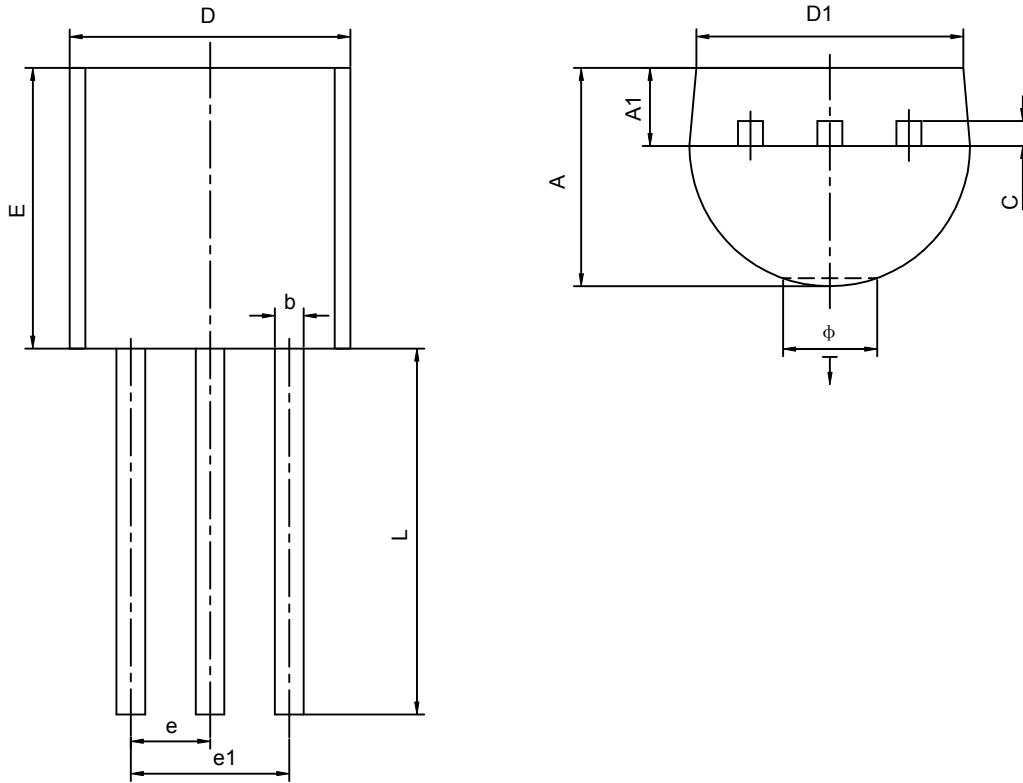

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.400	4.700	0.173	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270TYP		0.050TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Ö		1.600		0.063
↓	0.000	0.380	0.000	0.015