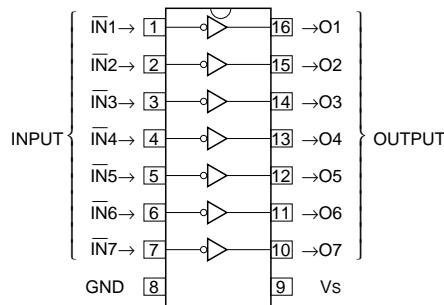


DESCRIPTION

M54580P and M54580FP are seven-circuit output-sourcing Darlington transistor arrays. The circuits are made of PNP and NPN transistors. Both the semiconductor integrated circuits perform high-current driving with extremely low input-current supply.

FEATURES

- High breakdown voltage ($BV_{CEO} \geq 50V$)
- High-current driving ($I_o(\max) = -150mA$)
- Active L-level input
- With input diodes
- Wide operating temperature range ($T_a = -20$ to $+75^{\circ}C$)

PIN CONFIGURATION

16P4(P)
Package type 16P2N-A(FP)


APPLICATION

Drives of relays, printers and indication elements such as LEDs, fluorescent display tubes and lamps, and interfaces between MOS-bipolar logic systems and relays, solenoids, or small motors

FUNCTION

The M54580P and M54580FP each have seven circuits, which are made of output current-sourcing Darlington transistors consisting of PNP and NPN transistors. Each PNP transistor has a diode and resistance of $7k\Omega$ between the base and input pin. Its emitter and NPN transistor collectors are connected to the Vs pin (pin 9). Resistance of $50k\Omega$ is connected between each output pin and GND pin (pin 8). Output current is 150mA maximum. Supply voltage Vs is 50V maximum.

The M54580FP is enclosed in a molded small flat package, enabling space-saving design.

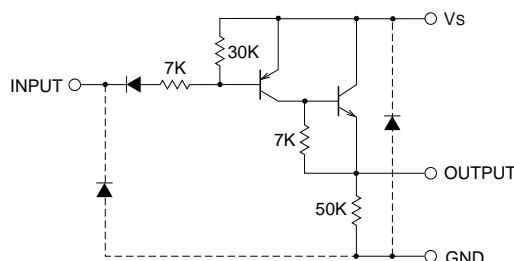CIRCUIT DIAGRAM

The seven circuits share the Vs and GND.

The diode, indicated with the dotted line, is parasitic, and cannot be used.

Unit : Ω

ABSOLUTE MAXIMUM RATINGS (Unless otherwise noted, $T_a = -20$ ~ $+75^{\circ}C$)

Symbol	Parameter	Conditions	Ratings	Unit
V _{CEO}	Collector-emitter voltage	Output, L	-0.5 ~ +50	V
V _s	Supply voltage		50	V
V _i	Input voltage		-0.5 ~ V _s	V
I _o	Output current	Current per circuit output, H	-150	mA
P _d	Power dissipation	T _a = 25°C, when mounted on board	1.47(P)/1.00(FP)	W
T _{opr}	Operating temperature		-20 ~ +75	°C
T _{stg}	Storage temperature		-55 ~ +125	°C

7-UNIT 150mA SOURCE TYPE DARLINGTON TRANSISTOR ARRAY

RECOMMENDED OPERATING CONDITIONS (unless otherwise noted, $T_a = -20 \sim +75^\circ C$)

Symbol	Parameter	Limits			Unit	
		min	typ	max		
V _s	Supply voltage	4	—	50	V	
I _o	Output current (Current per 1 circuit when 7 circuits are coming on simultaneously)	Duty Cycle P : no more than 85% FP : no more than 50%	0	—	-100	mA
		Duty Cycle P : no more than 100% FP : no more than 100%	0	—	-50	
V _{ih}	"H" input voltage	V _s -0.4	—	V _s	V	
V _{il}	"L" input voltage	0	—	V _s -3.2	V	

ELECTRICAL CHARACTERISTICS (Unless otherwise noted, $T_a = -20 \sim +75^\circ C$)


Symbol	Parameter	Test conditions	Limits			Unit
			min	typ*	max	
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _{CEO} = 100μA	50	—	—	V
V _{ce(sat)}	Collector-emitter saturation voltage	VI = V _s -3.2V, I _o = -100mA	—	0.9	1.5	V
		VI = V _s -3.2V, I _o = -50mA	—	0.8	1.2	
I _i	Input current	VI = V _s -3.5V	—	-0.3	-0.6	mA
		VI = V _s -6V	—	-0.65	-0.95	
I _r	Clamping diode reverse current	VI = 40V	—	—	100	μA
h _{FE}	DC amplification factor	V _{ce} = 4V, V _s = 10V, I _c = -100mA, T _a = 25°C	800	3000	—	—

* : The typical values are those measured under ambient temperature (T_a) of 25°C. There is no guarantee that these values are obtained under any conditions.

SWITCHING CHARACTERISTICS (Unless otherwise noted, $T_a = 25^\circ C$)


Symbol	Parameter	Test conditions	Limits			Unit
			min	typ	max	
t _{on}	Turn-on time	CL = 15pF (note 1)	—	200	—	ns
t _{off}	Turn-off time		—	7500	—	ns

NOTE 1 TEST CIRCUIT

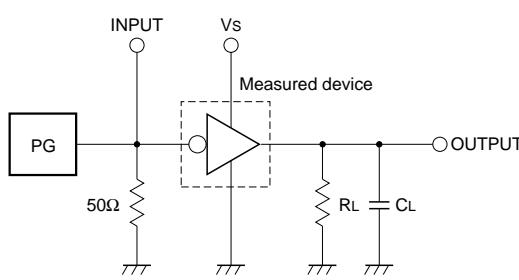







- (1) Pulse generator (PG) characteristics : PRR = 1kHz,
tw = 10μs, tr = 6ns, tf = 6ns, Zo = 50Ω
VI = 0.8 to 4V
- (2) Input-output conditions : RL = 40Ω, Vs = 4V
- (3) Electrostatic capacity CL includes floating capacitance at connections and input capacitance at probes

TIMING DIAGRAM

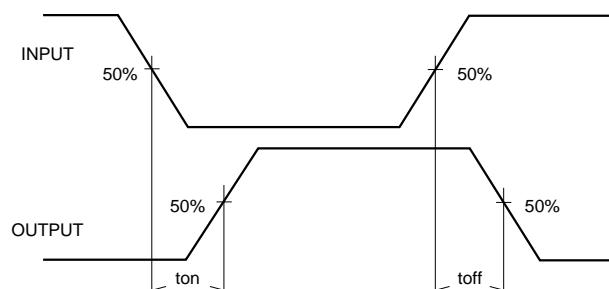

7-UNIT 150mA SOURCE TYPE DARLINGTON TRANSISTOR ARRAY

TYPICAL CHARACTERISTICS

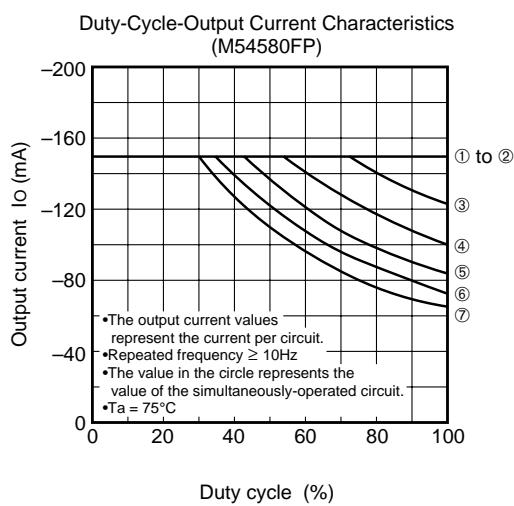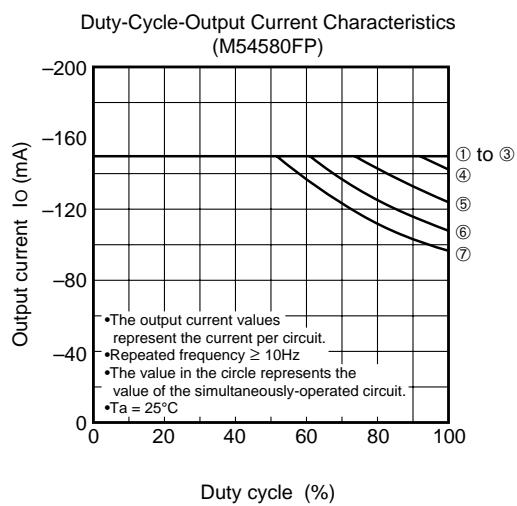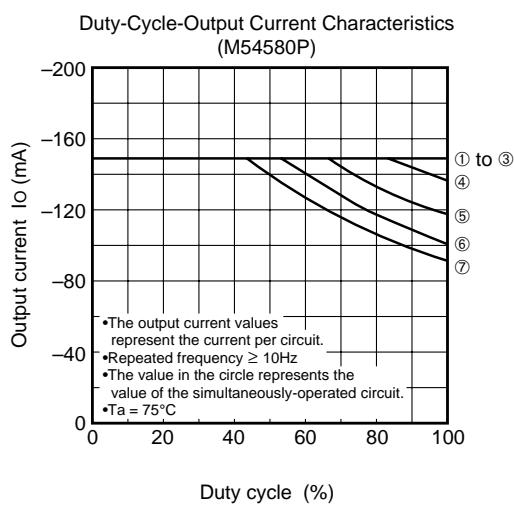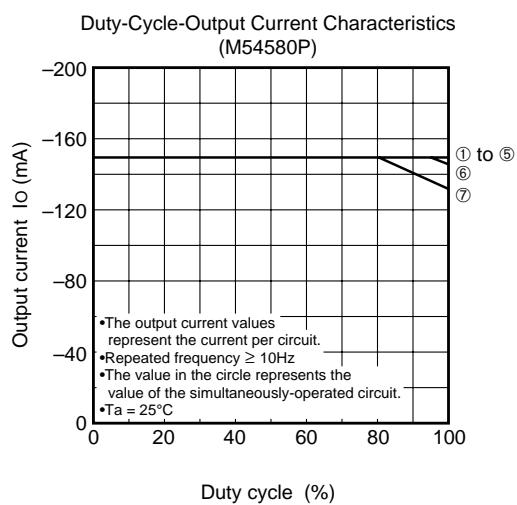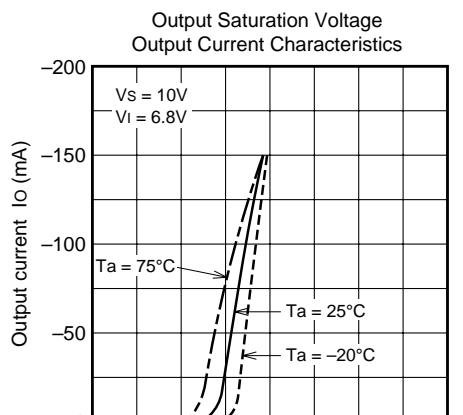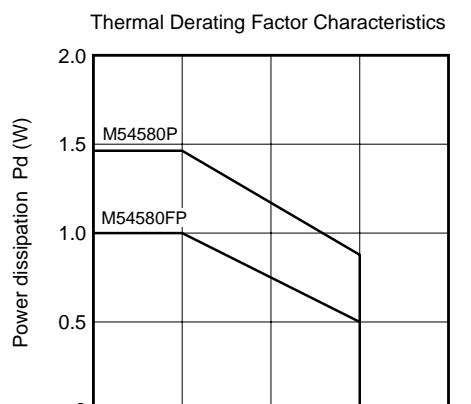

7-UNIT 150mA SOURCE TYPE DARLINGTON TRANSISTOR ARRAY

