

A and F SERIES

Single and dual output

Recommended for new design-ins



[2 YEAR WARRANTY]

- Low noise
- Linear regulation
- Six sided shield
- Pi input filter
- Short circuit protected
- High Isolation
- Meets EN55022 and VDE0871 level B conducted noise

The A and F Series offer high input/output isolation of 500VDC with only 1mV rms (40mV pk-pk) output ripple and noise. Other premium performance features include line and load regulation of less than $\pm 0.1\%$ and efficiencies of up to 69%. The converters are encapsulated in a 2 x 2 inch industry standard package with a 0.38 inch profile. The six sided copper case allows optimum thermal conductivity and provides shielding for EMI/RFI suppression. A Pi input filter reduces reflected ripple. Reliable operation is assured through the use of efficient, design-derated components and by heatsinking all dissipating elements directly to the metal case. This permits operation from -25°C to $+71^{\circ}\text{C}$ with no derating or additional heatsinking required. A and F Series DC/DC converter are suitable for a wide range of general industrial applications, especially where low noise levels are required.

SPECIFICATION All specifications are typical at nominal input, full load at 25°C unless otherwise stated

| OUTPUT SPECIFICATIONS | | |
|--------------------------|--|---|
| Line regulation | HL to LL, A series FL to NL, F series | $\pm 0.07\%$, max. $\pm 0.1\%$, max |
| Load regulation | A series, FL-NL, all outputs F series, FL-NL, dual output | $\pm 0.07\%$ $\pm 0.1\%$ |
| Cross regulation | Voltage balance, duals | $\pm 1.0\%$, max |
| Ripple and noise | 5Hz to 20MHz | 40mV pk-pk, max. 1mV rms, max. |
| Transient response | A series: FL to NL | $\pm 0.1\%$ max. dev., 50 μs recovery |
| | F series: FL to NL | $\pm 0.5\%$ max. dev., 75 μs recovery |
| | F series: | $\pm 0.5\%$ max. dev., |
| | FL to 50% FL | 25 μs recovery |
| Temperature coefficient | | $\pm 0.01\%/^{\circ}\text{C}$, max. |
| Overvoltage protection | F series, 5 Volt output models only | 6.8VDC |
| Short circuit protection | A series, output to common F series, output to common | 150% Iout 160% Iout |
| INPUT SPECIFICATIONS | | |
| Input voltage range | See table on facing page | |
| Input filter | See Note 5 | Pi network |

| ELECTROMAGNETIC COMPATIBILITY SPECIFICATIONS | | |
|--|---|--|
| Conducted noise | EN55022, EN55011, FCC | Class B |
| GENERAL SPECIFICATIONS | | |
| Efficiency | | 63% min. |
| Isolation Voltage | Input/Output | 500VDC |
| Switching frequency | Fixed | 20kHz |
| Case Material | Black coated copper with non-conductive base | |
| Weight | 50g (1.77oz) | |
| MTBF | MIL-HDBK-217E | 680,000 hours |
| ENVIRONMENTAL SPECIFICATIONS | | |
| Temperature | Operating ambient | -25°C to $+71^{\circ}\text{C}$ |
| | Non-operating | -55°C to $+85^{\circ}\text{C}$ |
| | Case | $+95^{\circ}\text{C}$, max. |
| | Derating | None required |
| Cooling | Free-air convection | |
| Relative humidity | Non-condensing | 5% to 95% RH |
| Altitude | Operating | 10,000 feet max. |
| | Non-operating | 40,000 feet max. |

| INPUT VOLTAGE RANGES ⁽⁶⁾ | | |
|-------------------------------------|---------------|--------------|
| NOMINAL INPUT | A SERIES | F SERIES |
| 5VDC | 4.75 to 5.25V | 4.75 to 5.5V |
| 48VDC | 42.0 to 56.0V | |

5 Watt Nominal input DC/DC converters


| INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | INPUT CURRENT | | REGULATION (1) | | EFFICIENCY | MODEL NUMBER |
|---------------|----------------|----------------|---------------|-----------|-----------------|-----------------|------------|--------------|
| | | | NO LOAD | FULL LOAD | LINE (MAX.) (2) | LOAD (MAX.) (3) | | |
| 5VDC | ±12VDC | ±150mA | 150mA | 1150mA | ±0.07% | ±0.07% | 63% | A05D12/150Z |
| 48VDC | ±15VDC | ±150mA | 20mA | 135mA | ±0.07% | ±0.07% | 69% | A48D15/150Z |
| 5VDC | 5VDC | 1000mA | 130mA | 1500mA | ±0.1% | ±0.1% | 67% | F05S05/1000Z |

Notes

- 1 Maximum.
- 2 Measured from high line to low line.
- 3 Measured from full load to no load.
- 4 The A series case is connected to output common for all input voltages except 48V when it is connected to + input.
- 5 Fixed frequency design provides for easier input filtering and better noise performance.
- 6 The input voltage range can be increased to 10% under reduced loads. Please contact the factory for details.

| PIN CONNECTIONS | | |
|-----------------|--------------|----------|
| PIN | A SERIES (4) | F SERIES |
| 1 | + Input | + Input |
| 2 | - Input | - Input |
| 3 | + Output | + Output |
| 4 | Common | No Pin |
| 5 | - Output | - Output |

CASE

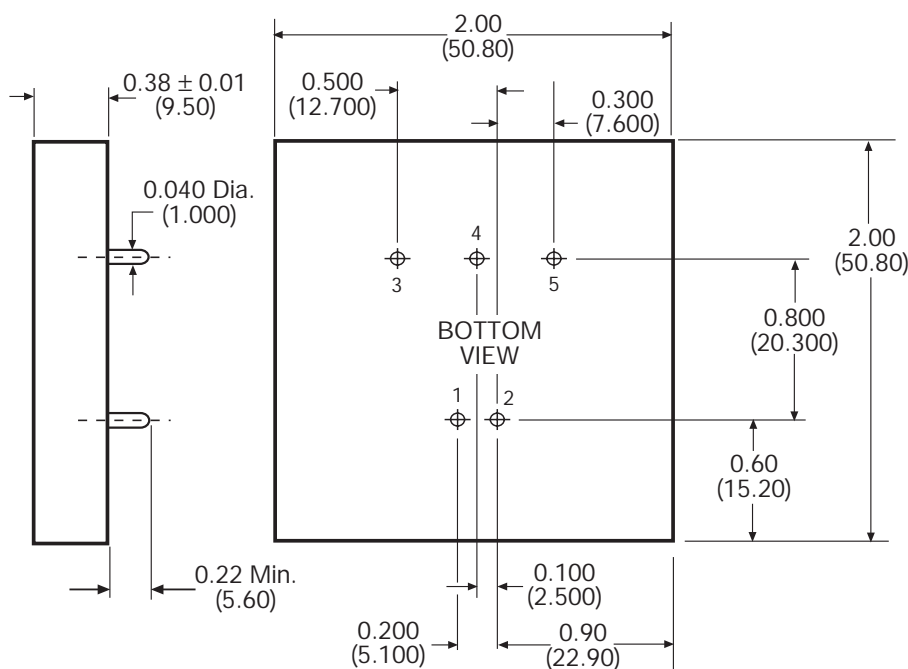

Tolerance .xx = ±0.04
.xxx = ±0.005