

# 2SK1301


## Silicon N-Channel MOS FET

### Application

High speed power switching

### Features

- Low on-resistance
- High speed switching
- Low drive current
- 4 V gate drive device
  - Can be driven from 5 V source
- Suitable for motor drive, DC-DC converter, power switch and solenoid drive

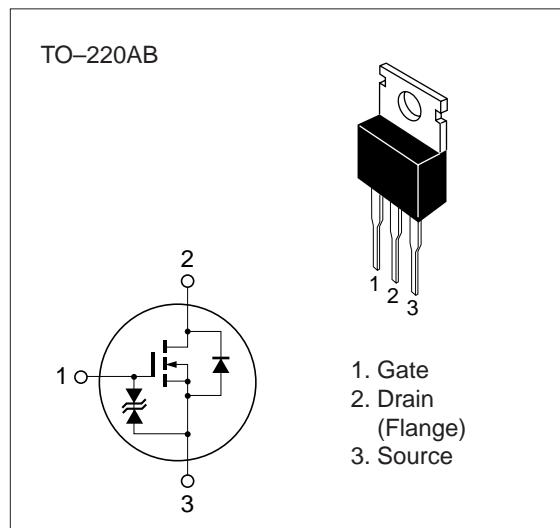

**Table 1 Absolute Maximum Ratings (Ta = 25°C)**

Item	Symbol	Ratings	Unit
Drain to source voltage	V <sub>DSS</sub>	100	V
Gate to source voltage	V <sub>GSS</sub>	±20	V
Drain current	I <sub>D</sub>	15	A
Drain peak current	I <sub>D(pulse)</sub> *	60	A
Body to drain diode reverse drain current	I <sub>DR</sub>	15	A
Channel dissipation	P <sub>ch</sub> **	50	W
Channel temperature	T <sub>ch</sub>	150	°C
Storage temperature	T <sub>stg</sub>	–55 to +150	°C

\* PW ≤ 10 µs, duty cycle ≤ 1 %

\*\* Value at T<sub>C</sub> = 25 °C

**Table 2 Electrical Characteristics (Ta = 25°C)**

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Drain to source breakdown voltage	V <sub>(BR)DSS</sub>	100	—	—	V	I <sub>D</sub> = 10 mA, V <sub>GS</sub> = 0
Gate to source breakdown voltage	V <sub>(BR)GSS</sub>	±20	—	—	V	I <sub>G</sub> = ±100 µA, V <sub>DS</sub> = 0
Gate to source leak current	I <sub>GSS</sub>	—	—	±10	µA	V <sub>GS</sub> = ±16 V, V <sub>DS</sub> = 0
Zero gate voltage drain current	I <sub>DSS</sub>	—	—	250	µA	V <sub>DS</sub> = 80 V, V <sub>GS</sub> = 0
Gate to source cutoff voltage	V <sub>GS(off)</sub>	1.0	—	2.0	V	I <sub>D</sub> = 1 mA, V <sub>DS</sub> = 10 V
Static drain to source on state resistance	R <sub>DS(on)</sub>	—	0.10	0.13	Ω	I <sub>D</sub> = 8 A, V <sub>GS</sub> = 10 V *
		—	0.13	0.18		I <sub>D</sub> = 8 A, V <sub>GS</sub> = 4 V *
Forward transfer admittance	y <sub>fs</sub>	7	11	—	S	I <sub>D</sub> = 8 A, V <sub>DS</sub> = 10 V *
Input capacitance	C <sub>iss</sub>	—	860	—	pF	V <sub>DS</sub> = 10 V, V <sub>GS</sub> = 0,
Output capacitance	C <sub>oss</sub>	—	340	—	pF	f = 1 MHz
Reverse transfer capacitance	C <sub>rss</sub>	—	100	—	pF	
Turn-on delay time	t <sub>d(on)</sub>	—	10	—	ns	I <sub>D</sub> = 8 A, V <sub>GS</sub> = 10 V,
Rise time	t <sub>r</sub>	—	70	—	ns	R <sub>L</sub> = 3.75 Ω
Turn-off delay time	t <sub>d(off)</sub>	—	180	—	ns	
Fall time	t <sub>f</sub>	—	100	—	ns	
Body to drain diode forward voltage	V <sub>DF</sub>	—	1.3	—	V	I <sub>F</sub> = 15 A, V <sub>GS</sub> = 0
Body to drain diode reverse recovery time	t <sub>rr</sub>	—	250	—	ns	I <sub>F</sub> = 15 A, V <sub>GS</sub> = 0, di <sub>F</sub> /dt = 50 A/µs

\* Pulse Test

