

- Ideal Front-End Filter for European Wireless Receivers
- Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Surface-Mount Ceramic Case with 52 mm² Footprint
- Complies with Directive 2002/95/EC (RoHS)

The RF1172B is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 433.92 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching (not included). Our new patent pending solder seal process utilizes a Faraday shield lid, which improves out of band rejection.

RF1172B

433.92 MHz SAW Filter



Electrical Characteristics

С	haracteristic	Sym	Notes	Minimum	Typical Maximum		Units
Center Frequency at 25°C	Absolute Frequency	f _c	1, 2		433.92		MHz
	Tolerance from 433.92 MHz	Δf_{C}	1, 2			±80	kHz
Insertion Loss		IL	1		3.0	5.0	dB
3 dB Bandwidth		BW ₃	1, 2	500	600	800	kHz
Rejection	at f _c - 21.4 MHz (Image)			40	50		
	at f _c - 10.7 MHz (LO)		1	15	30		dB
	Ultimate				80		
Temperature	Operating Case Temp.	T _C	3, 4	-40		+85	°C
	Turnover Temperature	T _O		15	25	35	°C
	Turnover Frequency	f _O			f _c		MHz
	Freq. Temp. Coefficient	FTC			0.032		ppm/°C ²
Frequency Aging	Absolute Value during the First Year	fA	5		≤10		ppm/yr
External Impedance	Series Inductance	L	1		47		nH
	Shunt Capacitance	С			11		pF
Lid Symbolization (in addition to Lot and/or Date Codes)		RFM RF1172B					



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

Notes:

- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c. Note that insertion loss and bandwidth are dependent on the impedance matching component values and quality.
- 2. The frequency f_c is defined as the midpoint between the 3dB frequencies.
- 3. Where noted, specifications apply over the entire specified operating temperature range.
- 4. The turnover temperature, T_O , is the temperature of maximum (or turnover) frequency, f_O . The nominal frequency at any case temperature, T_C , may be calculated from: $f = f_O [1 FTC (T_O T_C)^2]$.
- 5. Frequency aging is the change in fc with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
- 6. The design, manufacturing process, and specifications of this device are subject to change without notice.
- 7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
- 8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.


SAW Filter


Absolute Maximum Ratings

	Value	Units	
Incident RF Power	+13	dBm	
DC Voltage between any 2 pins (Observe ESD Precautions)		±30	VDC
Case Temperature ⁵		-40 to +85	°C
Soldering Temperature	(10 seconds / 5 cycles max.)	260	°C

Typical Filter Response

Typical filter responses are shown below. The actual response is dependent on external impedance matching and circuit layout. Illustrated frequencies and minimum rejection for LO and IMAGE are shown only for superhet receivers with 10.7 MHz IF







Electrical Connections

Pin	Connection		
1	Input		
2	Ground		
3	Output Return		
4	Case Ground		
5	Output		
6	Ground		
7	Input Return		
8	Case Ground		



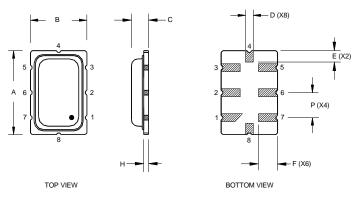

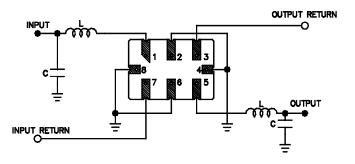

Case Dimensions

Dimension	mm			Inches			
	Min	Nom	Max	Min	Nom	Max	
Α	8.26	8.51	8.76	0.325	0.335	0.345	
В	5.59	5.84	6.10	0.220	0.230	0.240	
С		1.70	2.00		0.067	0.079	
D		0.79			0.031		
E		1.14			0.045		
F		1.98			0.078		
Н		0.51			0.020		
Р		2.54			0.100		