


TYPICAL PERFORMANCE

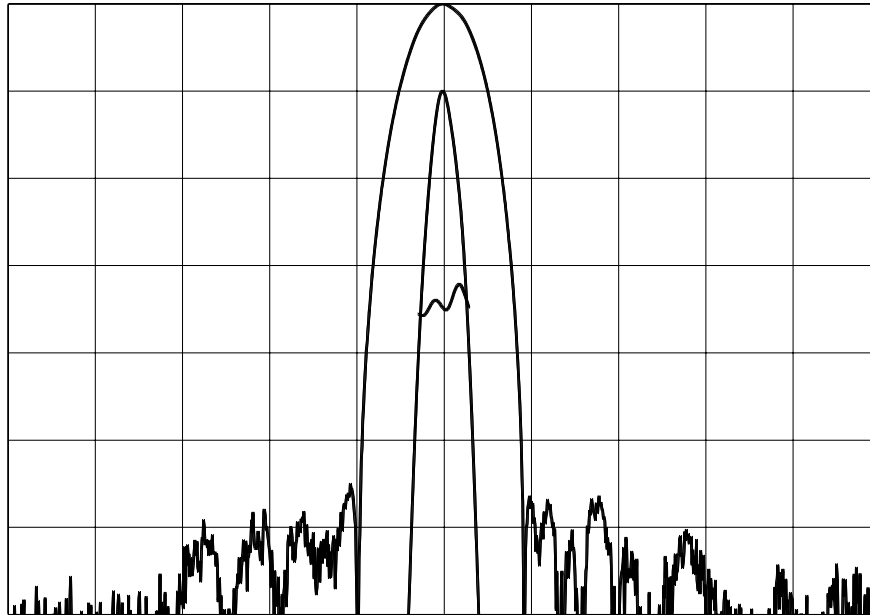




Horizontal: 0.5 MHz/div Vertical (from top):
 Magnitude 10 dB/div
 Magnitude 1 dB/div
 Phase 5 deg/div

SPECIFICATION

Parameter	Min.	Typ.	Max.	Units.
Center Frequency (Fc) ¹	69.96	70.00	70.04	MHz
Insertion Loss at Fc		16	18	dB
1 dB Bandwidth	0.16	0.18		MHz
3 dB Bandwidth	0.25	0.3		MHz
40 dB Bandwidth		0.89	1	MHz
Passband Ripple		0.02	0.1	dB
Phase Ripple		1.4	3	deg p-p
Group Delay Ripple		200	300	ns p-p
Absolute Delay		3.4		us
Ultimate Rejection	50	60		dB
Substrate Material	Quartz			
Ambient Temperature		25		° C

Notes:
 1: Mean Value of 3 dB points

PACKAGE OUTLINE

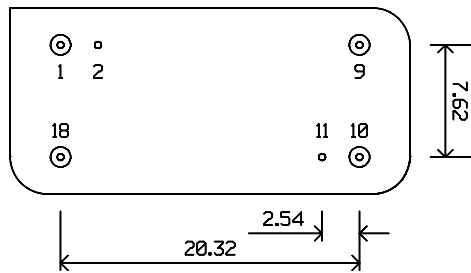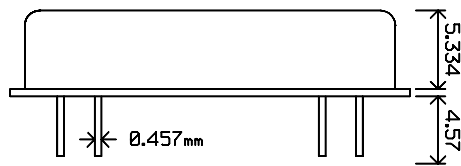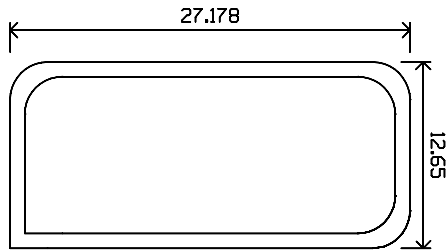


Units: mm

Pin Configuration:

Input: 18
Input Return: 1
Output: 10
Output Return: 9
Ground: 2, 11

MATCHING CIRCUIT

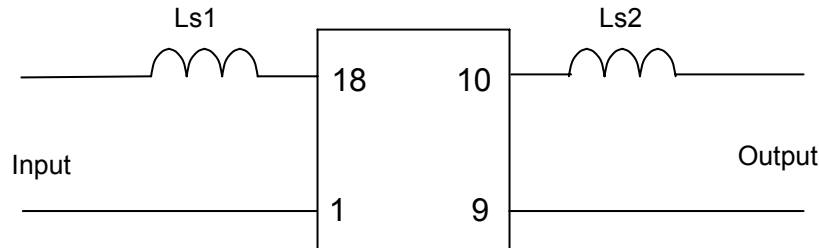

Component values:

Ls1 = 68 nH
Ls2 = 68 nH

(Minimum Q = 45)

Notes

- 1: Recommend use of 2% tolerance components.
- 2: Optimum Values depend on board layout. Values intended as guide only.

