

THREE-TERMINAL POSITIVE VOLTAGE REGULATORS

These voltage regulators are monolithic integrated circuits designed as fixed-voltage regulators for a wide variety of applications including local, on-card regulation. These regulators employ internal current limiting, thermal shutdown, and safe-area


compensation. With adequate heatsinking they can deliver output currents in excess of 1.5 ampere.

Although designed primarily as a fixed voltage regulator, these devices can be used with external components to obtain adjustable voltages and currents.


FEATURES

- Output Current in Excess of 1.5 Ampere
- No External Components Required
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation
- Output Voltage Offered in 2% Tolerance


PIN ARRANGEMENT

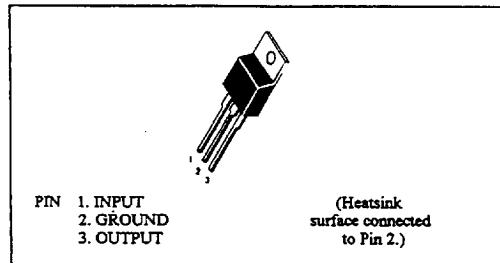

CIRCUIT SCHEMATIC

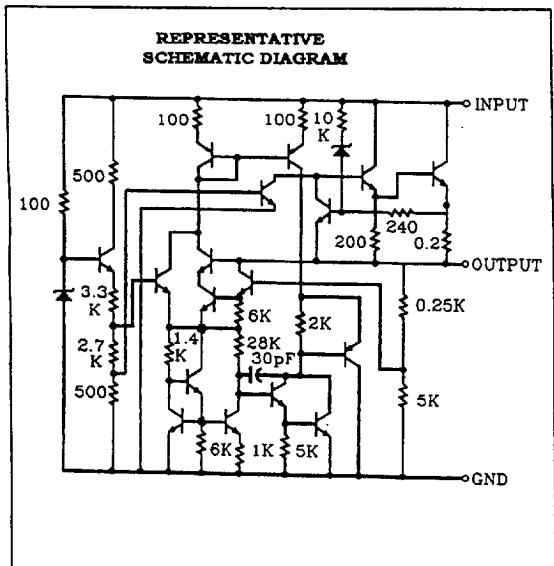

TYPICAL CONNECTING CIRCUIT

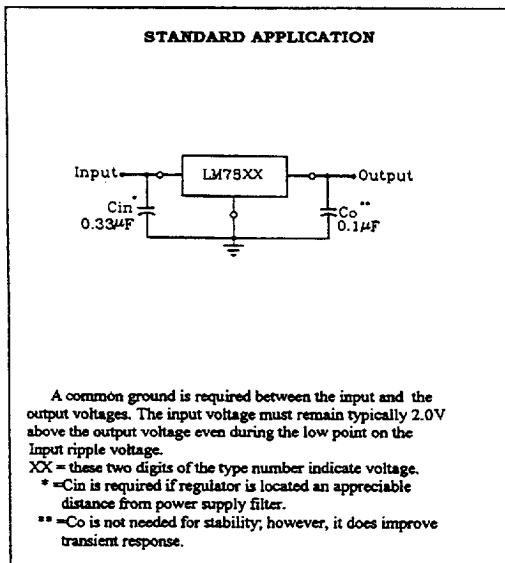

■ 3719482 0001172 T91 ■

• ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Item	Symbol	LM7800 Series	Unit
Input Voltage	Vin *	30	V
Input Voltage	Vin **	40	V
Power Dissipation	Pd ***	15	W
Operating Ambient Temperature	Topr	-20 to +75	°C
Operating Junction Temperature	Tj	-20 to +125	°C
Storage Temperature	Tstg	-55 to +125	°C

Note: *LM7805 to LM7818

** LM7824

***Follow the derating curve

• LM7805 ELECTRICAL CHARACTERISTICS

(Vin=10V, Iout=500mA, 0°C ≤ Tj ≤ 125°C, Cin=0.33µF, Cout=0.1µF; unless otherwise specified.)

Item	Symbol	Test Conditions		min.	typ.	max.	unit
Output Voltage	Vout	Tj=25°C		4.90	5.0	5.10	V
		7V ≤ Vin ≤ 20V, 5mA ≤ Iout ≤ 1.0A, Pd ≤ 15W		4.85	--	5.15	V
Line Regulation	REGline	Tj=25°C	7V ≤ Vin ≤ 25V	--	3	100	mV
			8V ≤ Vin ≤ 12V	--	1	50	mV
Load Regulation	REGload	Tj=25°C	5mA ≤ Iout ≤ 1.5A	--	15	100	mV
Quiescent Current	Iq	Tj=25°C, Iout=0		--	4.2	8.0	mA
Quiescent Current Change	Δ Iq	Tj=25°C	7V ≤ Vin ≤ 25V	--	--	1.3	mA
Output Noise Voltage	Vn	Ta=25°C, 10Hz ≤ f ≤ 100KHz		--	40	--	µV
Ripple Rejection Ratio	RR	f=120Hz		62	78	--	dB
Voltage Drop	Vdrop	Iout=1.0A, Tj=25°C		--	2.0	--	V
Output Resistance	Rout	f=1KHz		--	17	--	mΩ
Output Short Circuit Current	Ios	Tj=25°C		--	750	--	mA
Peak Output Current	Io peak	Tj=25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	Δ Vout/Δ Tj	Iout=5mA, 0°C ≤ Tj ≤ 125°C		--	-1.1	--	mV/°C

■ 3719482 0001173 928 ■

• LM7806 ELECTRICAL CHARACTERISTICS

($V_{in}=11V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions		min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C		5.88	6.0	6.12	V
		8V≤V _{in} ≤21V, 5mA≤I _{out} ≤1.0A, P _D ≤15W		5.83	--	6.17	V
Line Regulation	Δ REGline	T _j =25°C	8V≤V _{in} ≤25V	--	5	120	mV
			9V≤V _{in} ≤13V	--	1.5	60	mV
Load Regulation	Δ REGload	T _j =25°C	5mA≤I _{out} ≤1.5A	--	14	120	mV
			250mA≤I _{out} ≤750mA	--	4.0	60	mV
Quiescent Current	I _q	T _j =25°C, I _{out} =0		--	4.3	8.0	mA
Quiescent Current Change	Δ I _q	8V≤V _{in} ≤25V		--	--	1.3	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz		--	45	--	μV
Ripple Rejection Ratio	RR	f=120Hz		59	75	--	dB
Voltage Drop	V _{drop}	I _{out} =1.0A, T _j =25°C		--	2.0	--	V
Output Resistance	R _{out}	f=1KHz		--	19	--	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C		--	550	--	mA
Peak Output Current	I _{o peak}	T _j =25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C ≤ T _j ≤ 125°C		--	-0.8	--	mV/°C

• LM7808 ELECTRICAL CHARACTERISTICS

($V_{in}=14V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions		min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C		7.84	8.0	8.16	V
		10.5V≤V _{in} ≤23V, 5mA≤I _{out} ≤1.0A, P _D ≤15W		7.74	--	8.26	V
Line Regulation	Δ REGline	T _j =25°C	10.5V≤V _{in} ≤25V	--	6	160	mV
			11V≤V _{in} ≤17V	--	2.0	80	mV
Load Regulation	Δ REGload	T _j =25°C	5mA≤I _{out} ≤1.5A	--	12	160	mV
			250mA≤I _{out} ≤750mA	--	4	80	mV
Quiescent Current	I _q	T _j =25°C, I _{out} =0		--	4.3	8.0	mA
Quiescent Current Change	Δ I _q	10.5V≤V _{in} ≤25V		--	--	1.0	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz		--	52	--	μV
Ripple Rejection Ratio	RR	f=120Hz		56	72	--	dB
Voltage Drop	V _{drop}	I _{out} =1.0A, T _j =25°C		--	2.0	--	V
Output Resistance	R _{out}	f=1KHz		--	16	--	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C		--	450	--	mA
Peak Output Current	I _{o peak}	T _j =25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C ≤ T _j ≤ 125°C		--	-1.8	--	mV/°C

■ 3719482 0001174 864 ■

• LM7809 ELECTRICAL CHARACTERISTICS

($V_{in}=15V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions	min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C	8.82	9	9.18	V
		10.5V≤V _{in} ≤27V, 5mA≤I _{out} ≤1.0A, P _D ≤15W	8.77	--	9.23	V
Line Regulation	Δ REGline	T _j =25°C	11.5V≤V _{in} ≤30V	--	6	mV
			12V≤V _{in} ≤18V	--	2.0	mV
Load Regulation	Δ REGload	T _j =25°C	5mA≤I _{out} ≤1.5A	--	12	mV
			250mA≤I _{out} ≤750mA	--	4	mV
Quiescent Current	I _Q	T _j =25°C, I _{out} =0	--	4.3	1.0	mA
Quiescent Current Change	Δ I _Q	14.5V≤V _{in} ≤30V	--	--	0.5	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz	--	52	--	μV
Ripple Rejection Ratio	RR	f=120Hz	55	72	--	dB
Voltage Drop	V _d	I _{out} =1.0A, T _j =25°C	--	2.0	--	V
Output Resistance	R _{out}	f=1KHz	--	16	--	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C	--	450	--	mA
Peak Output Current	I _{o peak}	T _j =25°C	--	2.2	--	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C≤T _j ≤125°C	--	-1.8	--	mV/°C

• LM7810 ELECTRICAL CHARACTERISTICS

($V_{in}=16V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions	min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C	9.8	10	10.2	V
		17.5V≤V _{in} ≤30V, 5mA≤I _{out} ≤1.0A, P _D ≤15W	9.75	-	12.25	V
Line Regulation	Δ REGline	T _j =25°C	10.5V≤V _{in} ≤30V	--	10	mV
			13V≤V _{in} ≤9V	--	3.0	mV
Load Regulation	Δ REGload	T _j =25°C	5mA≤I _{out} ≤1.5A	--	12	mV
			250mA≤I _{out} ≤750mA	--	4.0	mV
Quiescent Current	I _Q	T _j =25°C, I _{out} =0	--	4.3	8.0	mA
Quiescent Current Change	Δ I _Q	14.5V≤V _{in} ≤30V	--	--	1.0	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz	--	52	--	μV
Ripple Rejection Ratio	RR	f=120Hz	54	72	--	dB
Voltage Drop	V _d	I _{out} =1.0A, T _j =25°C	--	2.0	--	V
Output Resistance	R _{out}	f=1KHz	--	16	--	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C	--	450	--	mA
Peak Output Current	I _{o peak}	T _j =25°C	--	2.2	--	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C≤T _j ≤125°C	--	-1.8	--	mV/°C

■ 3719482 0001175 7TO ■

• LM7812 ELECTRICAL CHARACTERISTICS

($V_{in}=19V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions		min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C		11.76	12.0	12.24	V
		14.5V≤V _{in} ≤27V, 5mA≤I _{out} ≤1.0A, P _D ≤15W		11.66	--	12.34	V
Line Regulation	Δ REGline	T _j =25°C	14.5V≤V _{in} ≤30V	--	10	240	mV
			16V≤V _{in} ≤22V	--	3.0	120	mV
Load Regulation	Δ REGload	T _j =25°C	5mA≤I _{out} ≤1.5A	--	12	240	mV
			250mA≤I _{out} ≤750mA	--	4.0	120	mV
Quiescent Current	I _Q	T _j =25°C, I _{out} =0		--	4.3	8.0	mA
Quiescent Current Change	Δ I _Q	T _j =25°C	14.5V≤V _{in} ≤30V	--	--	1.0	mA
			5mA≤I _{out} ≤1.0A	--	--	0.5	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz		--	75	--	μV
Ripple Rejection Ratio	RR	f=120Hz		55	71	--	dB
Voltage Drop	V _{drop}	I _{out} =1.0A, T _j =25°C		--	2.0	--	V
Output Resistance	R _{out}	f=1KHz		--	18	--	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C		--	350	--	mA
Peak Output Current	I _{o peak}	T _j =25°C		--	2.2	--	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C≤T _j ≤125°C		--	-1.0	--	mV/°C

• LM7815 ELECTRICAL CHARACTERISTICS

($V_{in}=23V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions		min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C		14.7	15.0	15.3	V
		17.5V≤V _{in} ≤30V, 5mA≤I _{out} ≤1.0A, P _D ≤15W		14.55	--	15.45	V
Line Regulation	Δ REGline	T _j =25°C	17.5V≤V _{in} ≤30V	--	11	300	mV
			20V≤V _{in} ≤26V	--	3.0	150	mV
Load Regulation	Δ REGload	T _j =25°C	5mA≤I _{out} ≤1.5A	--	12	300	mV
			250mA≤I _{out} ≤750mA	--	4	150	mV
Quiescent Current	I _Q	T _j =25°C, I _{out} =0		--	4.4	8.0	mA
Quiescent Current Change	Δ I _Q	T _j =25°C	17.5V≤V _{in} ≤30V	--	--	1.0	mA
			5mA≤I _{out} ≤1.0A	--	--	0.5	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz		--	90	--	μV
Ripple Rejection Ratio	RR	f=120Hz		54	70	--	dB
Voltage Drop	V _{drop}	I _{out} =1.0A, T _j =25°C		--	2.0	--	V
Output Resistance	R _{out}	f=1KHz		--	19	--	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C		--	230	--	mA
Peak Output Current	I _{o peak}	T _j =25°C		--	2.1	--	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C≤T _j ≤125°C		--	-1.0	--	mV/°C

■ 3719482 0001176 637 ■

• LM7818 ELECTRICAL CHARACTERISTICS

($V_{in}=27V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions	min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C	17.64	18.0	18.36	V
		21.0V≤V _{in} ≤33V, 5mA≤I _{out} ≤1.0A, P _D ≤15W	17.44	—	18.56	V
Line Regulation	Δ V _o line	T _j =25°C	21.0V≤V _{in} ≤33V	—	15	mV
			24V≤V _{in} ≤30V	—	5.0	mV
Load Regulation	Δ REG _{load}	T _j =25°C	5mA≤I _{out} ≤1.5A	—	12	mV
			250mA≤I _{out} ≤750mA	—	4.0	mV
Quiescent Current	I _q	T _j =25°C, I _{out} =0	—	4.5	8.0	mA
Quiescent Current Change	Δ I _q	21.0V≤V _{in} ≤33V	—	—	1.0	mA
		5mA≤I _{out} ≤1.0A	—	—	0.5	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz	—	110	—	μV
Ripple Rejection Ratio	RR	f=120Hz	53	69	—	dB
Voltage Drop	V _{drop}	I _{out} =1.0A, T _j =25°C	—	2.0	—	V
Output Resistance	R _{out}	f=1KHz	—	22	—	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C	—	200	—	mA
Peak Output Current	I _{o peak}	T _j =25°C	—	2.1	—	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C≤T _j ≤125°C	—	-1.0	—	mV/°C

• LM7824 ELECTRICAL CHARACTERISTICS

($V_{in}=33V$, $I_{out}=500mA$, $0^\circ C \leq T_j \leq 125^\circ C$, $C_{in}=0.33\mu F$, $C_{out}=0.1\mu F$; unless otherwise specified.)

Item	Symbol	Test Conditions	min.	typ.	max.	unit
Output Voltage	V _{out}	T _j =25°C	23.52	24.0	24.48	V
		27.0V≤V _{in} ≤38V, 5mA≤I _{out} ≤1.0A, P _D ≤15W	23.32	—	24.68	V
Line Regulation	Δ V _o line	T _j =25°C	27.0V≤V _{in} ≤38V	—	18	mV
			30V≤V _{in} ≤36V	—	6.0	mV
Load Regulation	Δ V _o load	T _j =25°C	5mA≤I _{out} ≤1.5A	—	12	mV
			250mA≤I _{out} ≤750mA	—	4.0	mV
Quiescent Current	I _q	T _j =25°C, I _{out} =0	—	4.6	8.0	mA
Quiescent Current Change	Δ I _q	27.0V≤V _{in} ≤38V	—	—	1.0	mA
		5mA≤I _{out} ≤1.0A	—	—	0.5	mA
Output Noise Voltage	V _n	T _a =25°C, 10Hz≤f≤100KHz	—	170	—	μV
Ripple Rejection Ratio	RR	f=120Hz	50	66	—	dB
Voltage Drop	V _{drop}	I _{out} =1.0A, T _j =25°C	—	2.0	—	V
Output Resistance	R _{out}	f=1KHz	—	28	—	mΩ
Output Short Circuit Current	I _{os}	T _j =25°C	—	150	—	mA
Peak Output Current	I _{o peak}	T _j =25°C	—	2.1	—	A
Temperature Coefficient of Output Voltage	Δ V _{out} /Δ T _j	I _{out} =5mA, 0°C≤T _j ≤125°C	—	-1.5	—	mV/°C

■ 3719482 0001177 573 ■

FIGURE 1 - WORST CASE POWER DISSIPATION versus AMBIENT TEMPERATURE (Case 221A)

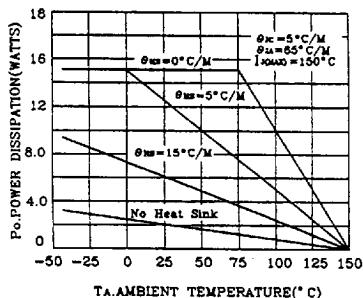


FIGURE 2 - WORST CASE POWER DISSIPATION versus AMBIENT TEMPERATURE (Case 1)

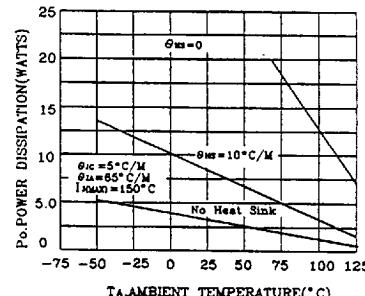


FIGURE 3 - INPUT OUTPUT DIFFERENTIAL AS A FUNCTION OF JUNCTION TEMPERATURE

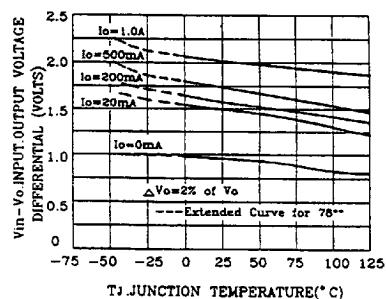


FIGURE 4 - INPUT OUTPUT DIFFERENTIAL AS A FUNCTION OF JUNCTION TEMPERATURE

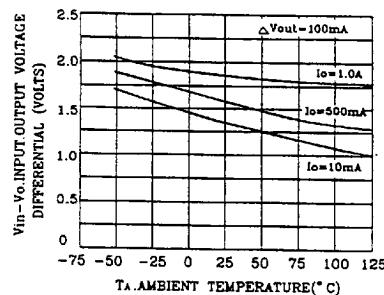


FIGURE 5 - PEAK OUTPUT CURRENT AS A FUNCTION OF INPUT-OUTPUT DIFFERENTIAL VOLTAGE


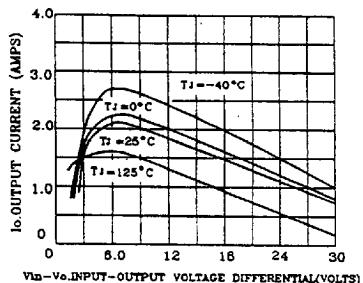


FIGURE 6 - PEAK OUTPUT CURRENT AS A FUNCTION OF INPUT-OUTPUT DIFFERENTIAL VOLTAGE

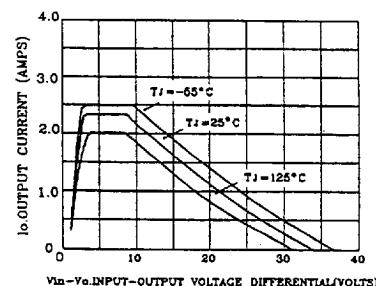

3719482 0001178 40T

FIGURE 7 - RIPPLE REJECTION AS A FUNCTION OF OUTPUT VOLTAGE

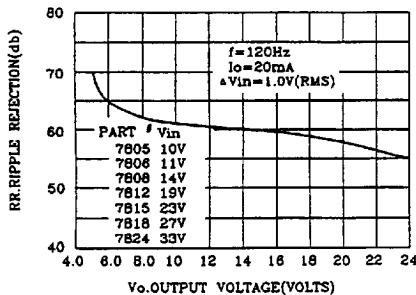


FIGURE 8 - RIPPLE REJECTION AS A FUNCTION OF FREQUENCY

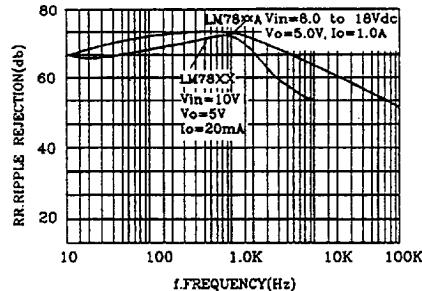


FIGURE 9 - OUTPUT VOLTAGE AS A FUNCTION OF JUNCTION TEMPERATURE

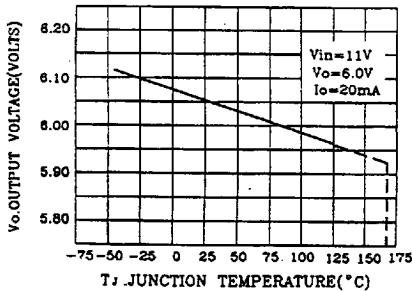


FIGURE 10 - OUTPUT IMPEDANCE AS A FUNCTION OF OUTPUT VOLTAGE

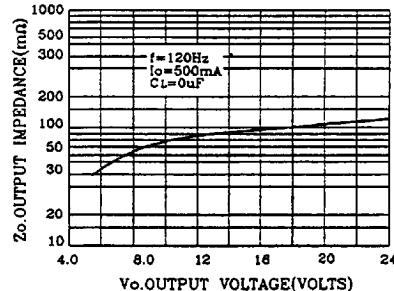


FIGURE 11 - QUIESCENT CURRENT AS A FUNCTION OF TEMPERATURE


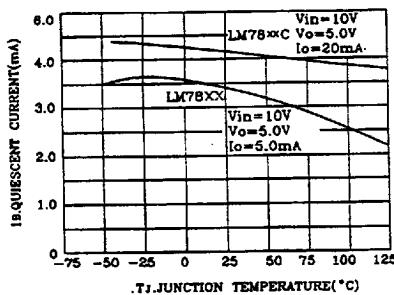


FIGURE 12 -DROPOUT CHARACTERISTICS

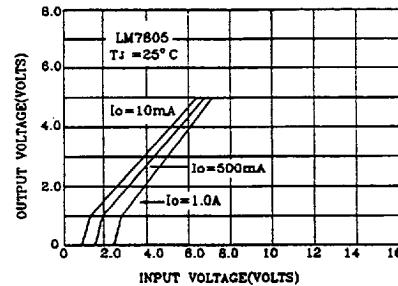

■ 3719482 0001179 346 ■