

Description

The SM6201 series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provide large currents with a significantly small dropout voltage. The SM6201 consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error amplifier. Output voltage is selectable in 0.1V steps between 1.3~6.0V.



Features

- * Max. Operating Voltage: 10V
- * Highly Accurate: Output Voltage $\pm 2\%$
- * Low Power Consumption: Typ. 2uA
- * Output Voltage Range: 1.3V~6V (selectable in 0.1V steps)
- * Dropout Voltage: 0.16V@ $I_{out}=100mA$
- * Output Voltage Temperature Characteristics: Typ. $\pm 100ppm/\text{C}$
- * Max. Output Current: 250mA (Typ.)
- * Capacitors Can Be Tantalum Or Ceramic

Applications


- * Reference Voltage
- * Portable Games And AV Equipment
- * Battery Powered Equipment
- * Cameras, Video Recorders
- * Mobile Phones And Cordless Phones

Typical Application Circuit

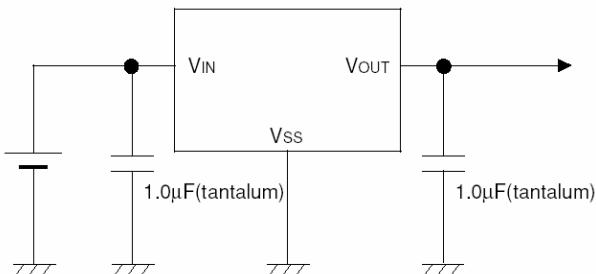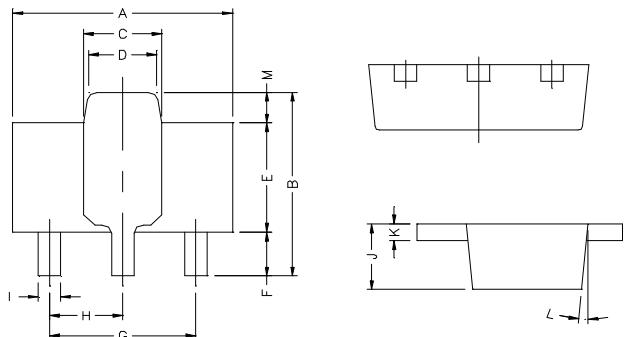

SOT-89


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.4	4.6	G	3.00	REF.
B	4.05	4.25	H	1.50	REF.
C	1.50	1.70	I	0.40	0.52
D	1.30	1.50	J	1.40	1.60
E	2.40	2.60	K	0.35	0.41
F	0.89	1.20	L	5° TYP.	
			M	0.70 REF.	

Marking :

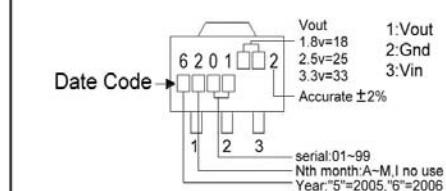

Block Diagram

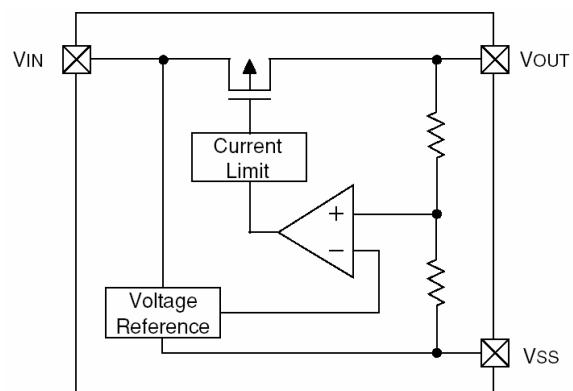

Absolute Maximum Ratings Ta=25°C

Parameter	Symbol	Ratings	Unit
Input Voltage	V _{IN}	12	V
Output Current	I _{OUT}	500	mA
Output Voltage	V _{OUT}	V _{SS} -0.3~V _{IN} +0.3	V
Operating Ambient Temperature	T _{OPR}	-40~+85	°C
Storage Temperature	T _{STG}	-55~+125	°C
Continuous Total Power Dissipation	P _D	500	mW

Electrical Characteristics Ta=25°C
SM6201-50 V_{OUT}(T) =5.0V (Note1)

Parameter	Symbol	Condition	Min	TYP	Max	Unit
Output Voltage	V _{OUT(E)} (Note2)	V _{IN} =6.0V, I _{OUT} =40mA	4.900	5.000	5.100	V
Max. Output Current	I _{OUT} max	V _{IN} =6V, V _{OUT(E)} ≥4.5V	200	-	-	mA
Load Regulation	△V _{OUT}	V _{IN} =6V, I _{OUT} =1mA to 100mA	-	30	70	mV
Dropout Voltage (Note3)	V _{dif1}	I _{OUT} =100mA	-	160	340	mV
	V _{dif2}	I _{OUT} =200mA	-	400	600	
Supply Current	I _{SS}	V _{IN} =6V	-	2.0	6.0	μA
Input Regulation	△V _{OUT} △V _{IN} ·V _{OUT}	I _{OUT} =40mA V _{IN} =6V to 10V	-	0.2	0.3	%/V
Input Voltage	V _{IN}		1.8	-	10	V
Output Voltage Temperature Characteristics	△V _{OUT} △T _{OPR} ·V _{OUT}	I _{OUT} =40mA -40°C≤ T _{OPR} ≤ 85°C	-	±100	-	ppm/°C

Note 1: V_{OUT(T)} =Specified Output Voltage.

2: V_{OUT(E)} =Effective Output Voltage (i.e. the output voltage when "V_{OUT(T)} +1.0V" is provided while maintaining a certain I_{OUT} value).

3: V_{dif} ={V_{IN1}^(Note5)-V_{OUT1}^(Note4)}

4: V_{OUT1} =A voltage equal to 98% of the output voltage when a stabilized (V_{OUT(T)} + 1.0V) is output.

5: V_{IN1} =The input voltage at the time V_{OUT1} is output (input voltage has been gradually reduced).

SM6201-33 V_{OUT}(T) =3.3V (Note1)

Parameter	Symbol	Condition	Min	TYP	Max	Unit
Output Voltage	V _{OUT(E)} (Note2)	V _{IN} =4.3V, I _{OUT} =40mA	3.234	3.300	3.366	V
Max. Output Current	I _{OUT} max	V _{IN} =4.3V, V _{OUT(E)} ≥2.97V	150	-	-	mA
Load Regulation	△V _{OUT}	V _{IN} =4.3V, I _{OUT} =1mA to 80mA	-	20	50	mV
Dropout Voltage (Note3)	V _{dif1}	I _{OUT} =80mA	-	200	360	mV
	V _{dif2}	I _{OUT} =160mA	-	450	700	
Supply Current	I _{SS}	V _{IN} =4.3V	-	2.0	5.0	μA
Input Regulation	△V _{OUT} △V _{IN} ·V _{OUT}	I _{OUT} =40mA V _{IN} =4.3V to 10V	-	0.2	0.3	%/V
Input Voltage	V _{IN}		1.8	-	10	V
Output Voltage Temperature Characteristics	△V _{OUT} △T _{OPR} ·V _{OUT}	I _{OUT} =40mA -40°C≤ T _{OPR} ≤ 85°C	-	±100	-	ppm/°C

SM6201-27 Vout (T) =2.7V (Note1)



Parameter	Symbol	Condition	Min	TYP	Max	Unit
Output Voltage	VOUT(E)(Note2)	VIN=3.7V, IOUT=40mA	2.646	2.700	2.754	V
Max. Output Current	IOUT max	VIN=3.7V, VOUT(E)≥2.43V	100	-	-	mA
Load Regulation	△VOUT	VIN=3.7V, IOUT=1mA to 60mA	-	15	40	mV
Dropout Voltage (Note3)	Vdif1	IOUT=60mA	-	200	370	mV
	Vdif2	IOUT=120mA	-	450	710	
Supply Current	I _{SS}	VIN=3.7V	-	2.0	5.0	μA
Input Regulation	△VOUT △VIN·VOUT	IOUT=40mA VIN=3.7V to 10V	-	0.2	0.3	%/V
Input Voltage	VIN		1.8	-	10	V
Output Voltage Temperature Characteristics	△VOUT △Topr·VOUT	IOUT=40mA -40°C ≤ Topr ≤ 85°C	-	±100	-	ppm/°C

SM6201-18 Vout (T) =1.8V (Note1)

Parameter	Symbol	Condition	Min	TYP	Max	Unit
Output Voltage	VOUT(E)(Note2)	VIN=2.8V, IOUT=40mA	1.764	1.800	1.836	V
Max. Output Current	IOUT max	VIN=2.8V, VOUT(E)≥1.62V	80	-	-	mA
Load Regulation	△VOUT	VIN=2.8V, IOUT=1mA to 60mA	-	10	30	mV
Dropout Voltage (Note3)	Vdif1	IOUT=40mA	-	200	370	mV
	Vdif2	IOUT=80mA	-	450	710	
Supply Current	I _{SS}	VIN=2.8V	-	3.0	5.0	μA
Input Regulation	△VOUT △VIN·VOUT	IOUT=40mA VIN=2.8V to 10V	-	0.2	0.3	%/V
Input Voltage	VIN		1.8	-	10	V
Output Voltage Temperature Characteristics	△VOUT △Topr·VOUT	IOUT=40mA -40°C ≤ Topr ≤ 85°C	-	±100	-	ppm/°C






SM6201-13 Vout (T) =1.3V (Note1)

Parameter	Symbol	Condition	Min	TYP	Max	Unit
Output Voltage	VOUT(E)(Note2)	VIN=2.3V, IOUT=40mA	1.274	1.300	1.326	V
Max. Output Current	IOUT max	VIN=2.3V, VOUT(E)≥1.17V	60	-	-	mA
Load Regulation	△VOUT	VIN=2.3V, IOUT=1mA to 30mA	-	10	30	mV
Dropout Voltage (Note3)	Vdif1	IOUT=30mA	-	200	600	mV
	Vdif2	IOUT=60mA	-	500	810	
Supply Current	I _{SS}	VIN=2.3V	-	3.0	5.0	μA
Input Regulation	△VOUT △VIN·VOUT	IOUT=40mA VIN=2.3V to 10V	-	0.2	0.3	%/V
Input Voltage	VIN		1.8	-	10	V
Output Voltage Temperature Characteristics	△VOUT △Topr·VOUT	IOUT=40mA -40°C ≤ Topr ≤ 85°C	-	±100	-	ppm/°C

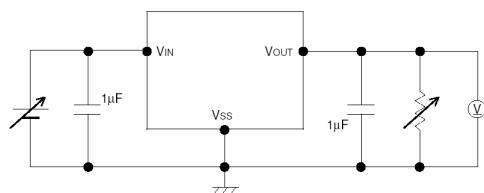
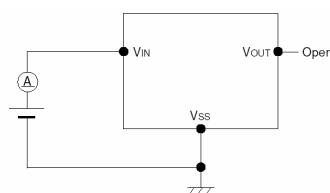
Test Circuit
Circuit1

Circuit2


Characteristics Curve

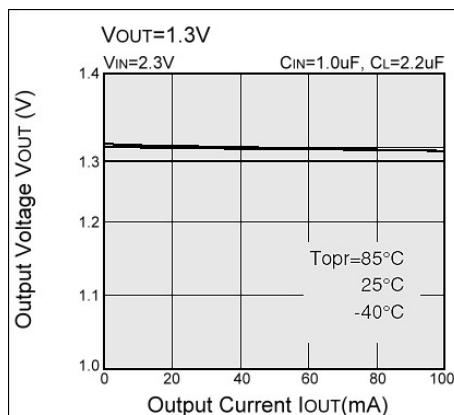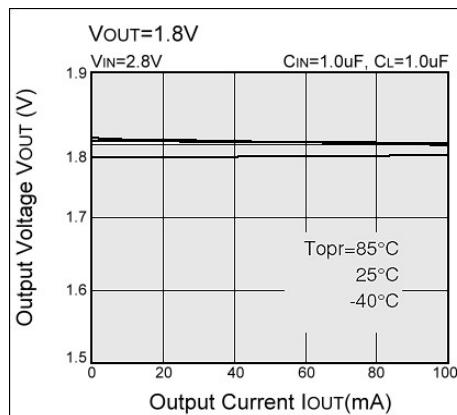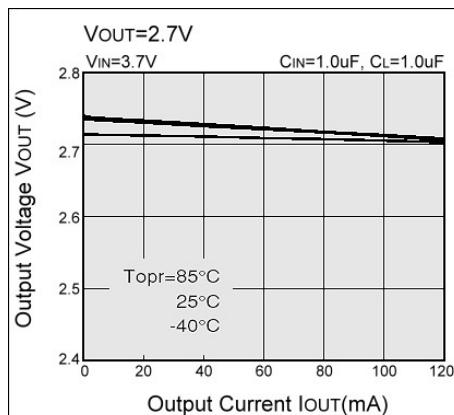
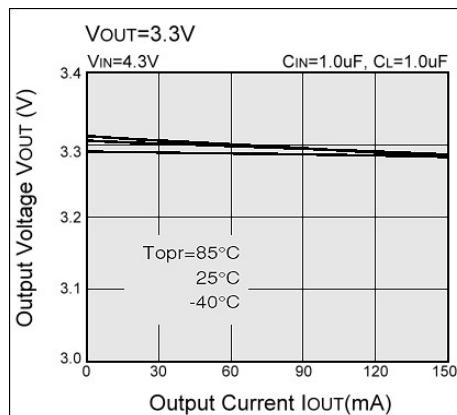
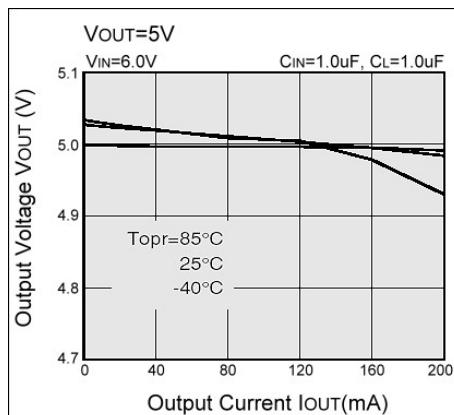
(1) Output Voltage vs. Output Current

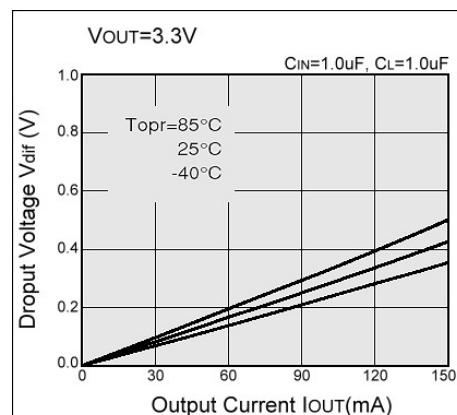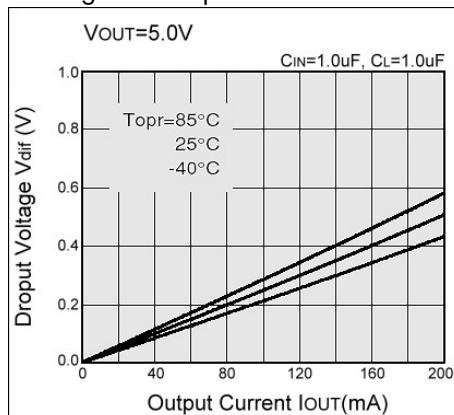





(2) Dropout Voltage vs. Output Current









(2) Dropout Voltage vs. Output Current

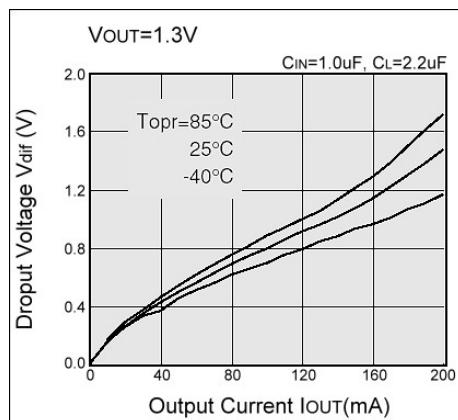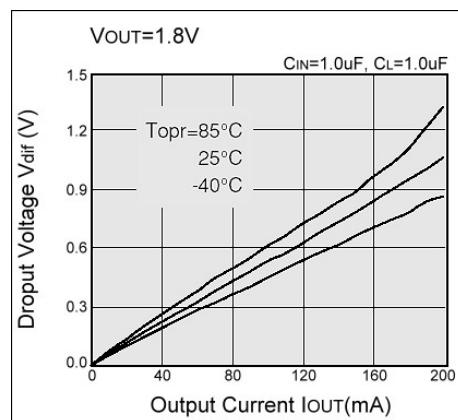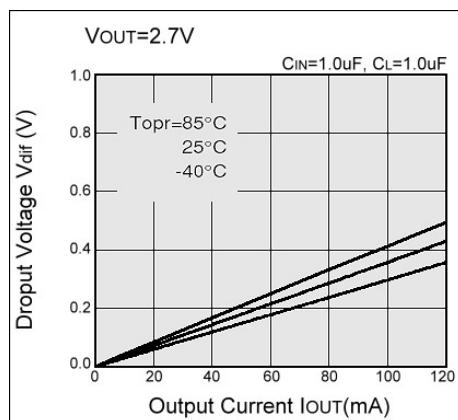






(3) Output Voltage vs. Input Voltage

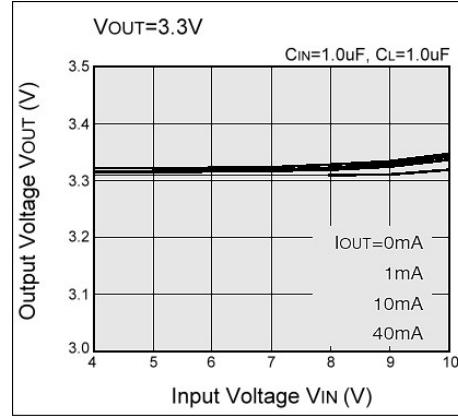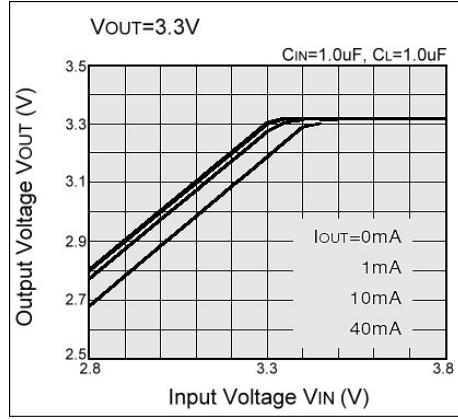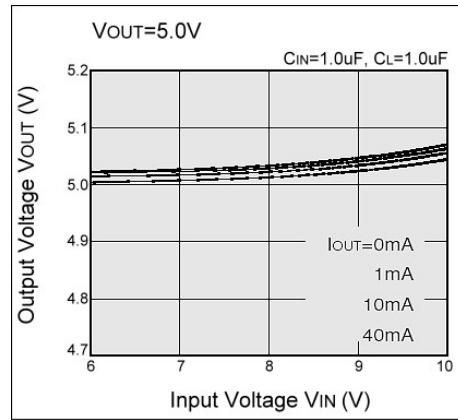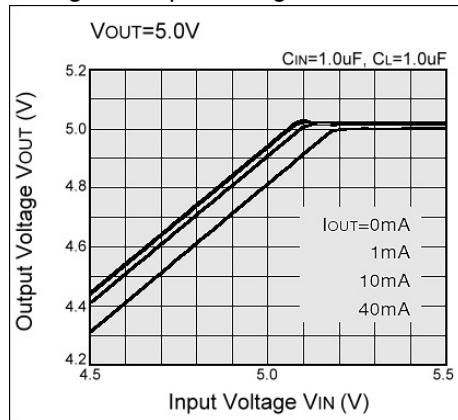

(3) Output Voltage vs. Input Voltage

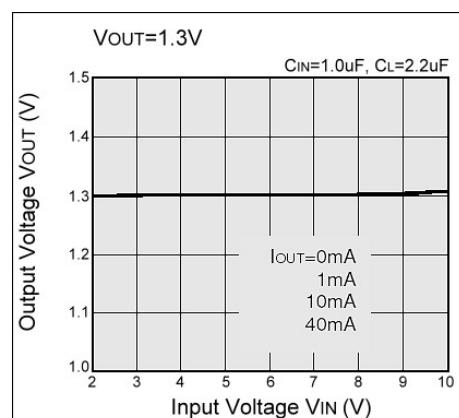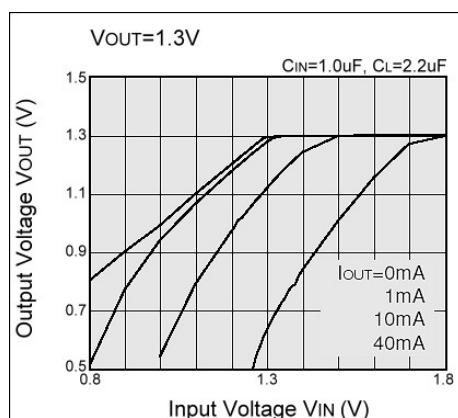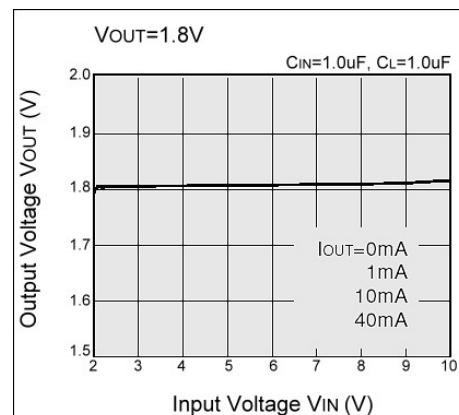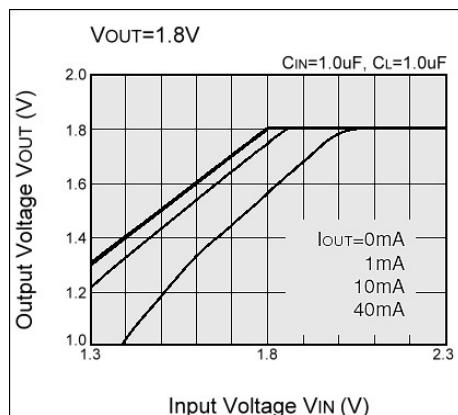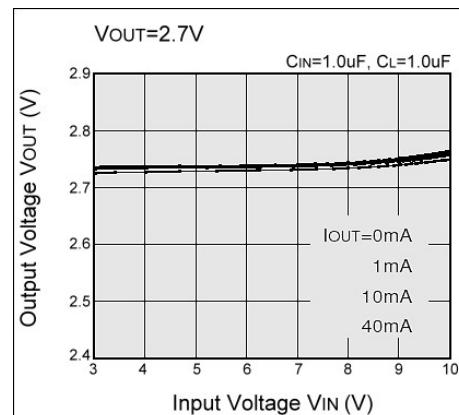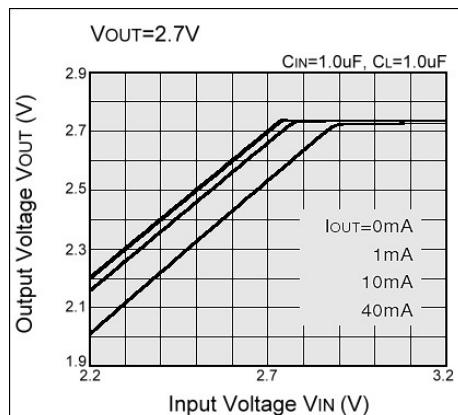

(4) Supply Current vs. Input Voltage

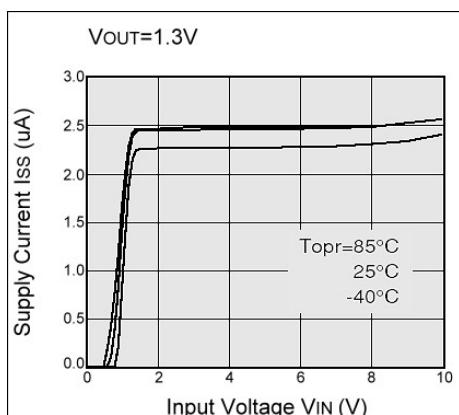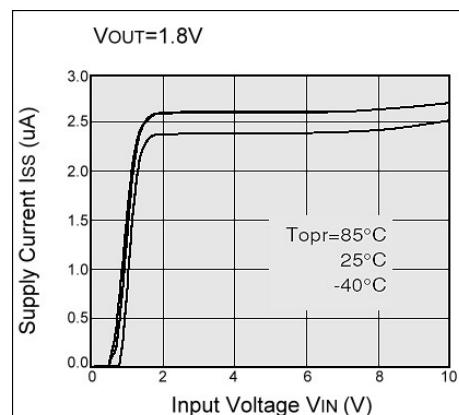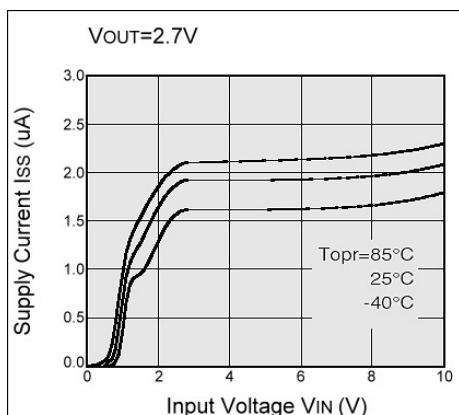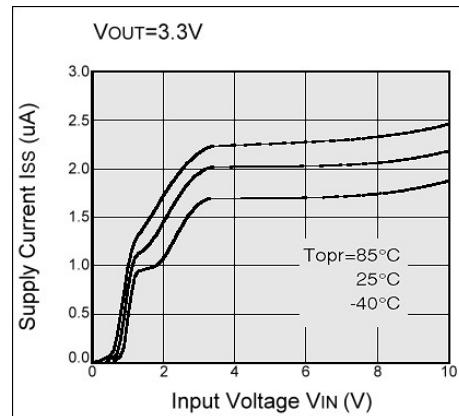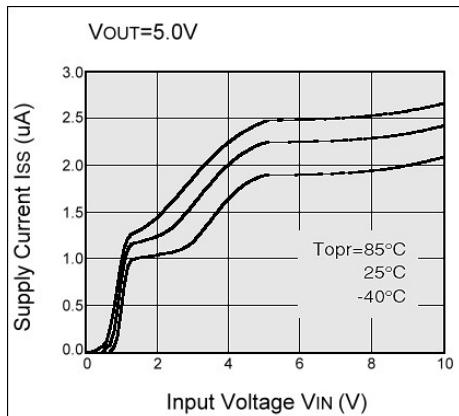

(5) Output Voltage vs. Ambient Temperature

