


# Lowpass Filter

KR Model 2306


**Passband Amplitude**

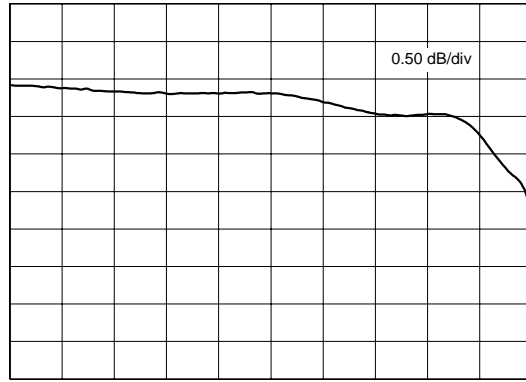

100 KHz

6 MHz

**Overall Amplitude**

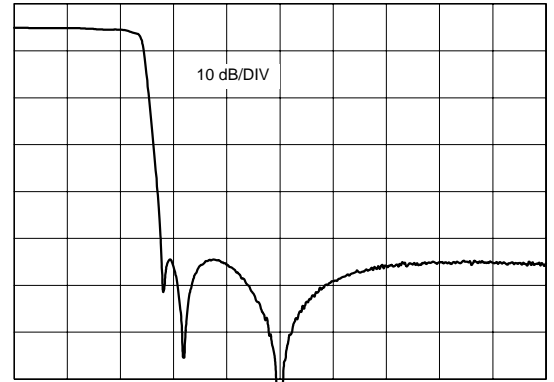



100 KHz

25 MHz

## Specifications

<b>KR Part Number</b>	<b>2306</b>
<b>Filter Type</b>	Lowpass
<b>Insertion Loss</b>	< 1 dB
<b>Attenuation at 6 MHz</b>	< 3 db
<b>Start of Stopband</b>	7 MHz
<b>Stopband Attenuation</b>	> 40 dB
<b>Source and Load Impedance</b>	75 $\Omega$

## Outline Drawing

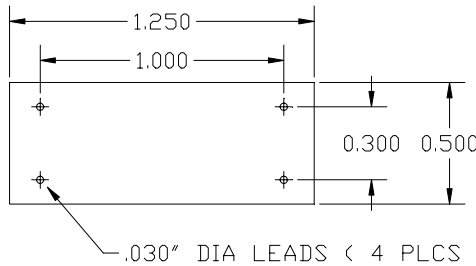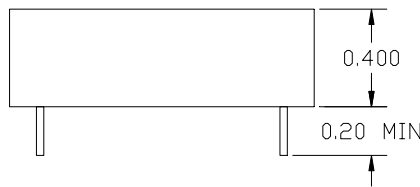

Epoxy Case  
Pins are 0.030 Diameter

All Dimensions Shown in inches

**KR Electronics**  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900