



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

SWITCHING DIODE

VOLTAGE 350 Volts CURRENT 225 mAmpere

Lead free devices

CHBD3004BRMPT

APPLICATION

- * Ultra high speed switching

FEATURE

- * Small surface mounting type. (SC-74/SOT-457)
- * High speed. ($T_{RR}=50\text{ nSec Typ.}$)
- * Suitable for high packing density.
- * Maximum total power dissipation is 350mW.
- * Peak forward current is 625mA.
- * High voltage capability.


CONSTRUCTION

- * Silicon epitaxial planar



MARKING

- * D6P

CIRCUIT



SC-74/SOT-457

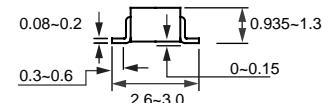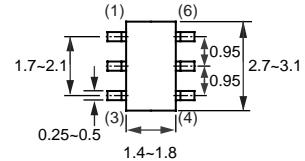

Dimensions in millimeters

SC-74/SOT-457

MAXIMUM RATINGS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	CHBD3004BRMPT	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	350	Volts
Maximum RMS Voltage	V_{RMS}	300	Volts
Maximum DC Blocking Voltage	V_{DC}	212	Volts
Maximum Average Forward Rectified Current	I_o	225	mAmps
Peak Forward Surge Current	I_{FSM}	4.0	Amps
@ $T_P = 1\mu\text{Sec}$		1.0	
Typical Junction Capacitance between Terminal (Note 1)	C_J	5.0	pF
Maximum Reverse Recovery Time (Note 2)	T_{RR}	50	nSec
Typical Thermal Resistance	$R_{\theta JA}$	357	°C/W
Operation and Storage Temperature Range	$T_{J,TSTG}$	-65 to +150	°C

ELECTRICAL CHARACTERISTICS (At $T_A = 25^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	CHBD3004BRMPT	UNITS
Reverse Breakdown Voltage at $I_R = 150\mu\text{A}$	BV_R	350 Min.	Volts
Maximum Instantaneous Forward Voltage at $I_F = 100\text{mA}$	V_F	1.0	Volts
Maximum Average Reverse Current at $V_R = 240\text{V}$	I_R	100	nAmps
		100	uAmps

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 0 volts.

2. Measured at applied forward current of 30mA ,reverse current of 30mA , $R_L=100\Omega$ and recovery to $I_{RR}=3\text{mA}$.

3. ESD sensitive product handling required.

2004-09

RATING CHARACTERISTIC CURVES (CHBD3004BRMPT)

Typical Electrical Characteristics

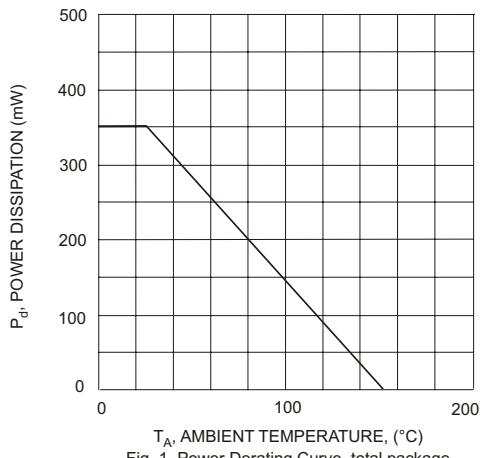


Fig. 1 Power Derating Curve, total package

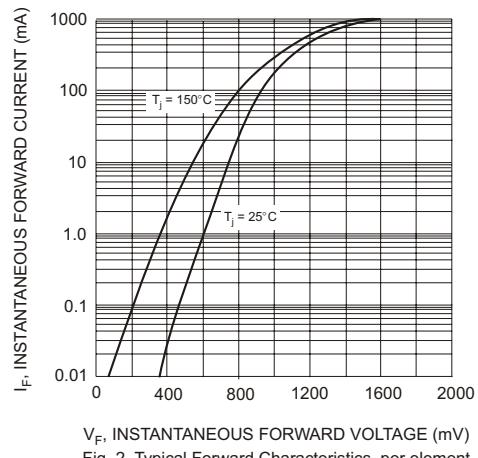


Fig. 2 Typical Forward Characteristics, per element

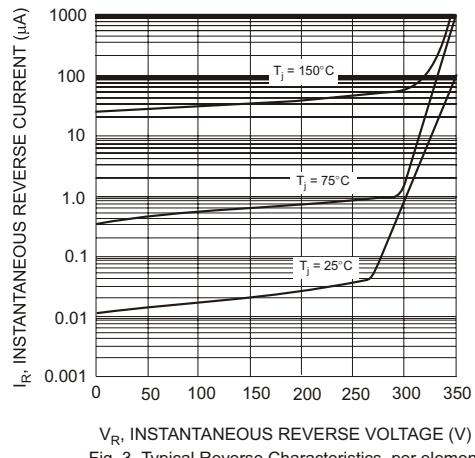


Fig. 3 Typical Reverse Characteristics, per element

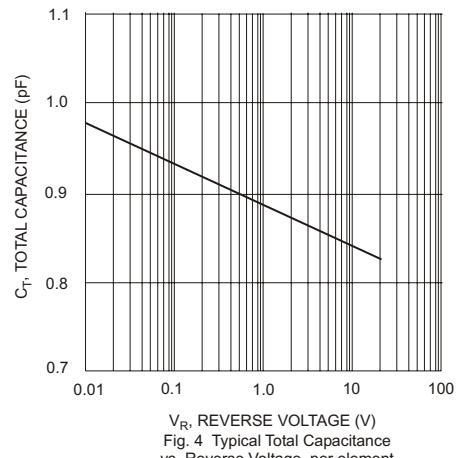


Fig. 4 Typical Total Capacitance vs. Reverse Voltage, per element