

# DATA SHEET

## BZX55-C SERIES

### AXIAL LEAD ZENER DIODES

VOLTAGE

2.4 to 47 Volts

POWER


500 mWatts

DO-35

Unit: inch (mm)

#### FEATURES

- Planar Die construction
- 500mW Power Dissipation
- Ideally Suited for Automated Assembly Processes
- Both normal and Pb free product are available :
  - Normal : 80~95% Sn, 5~20% Pb
  - Pb free: 98.5% Sn above

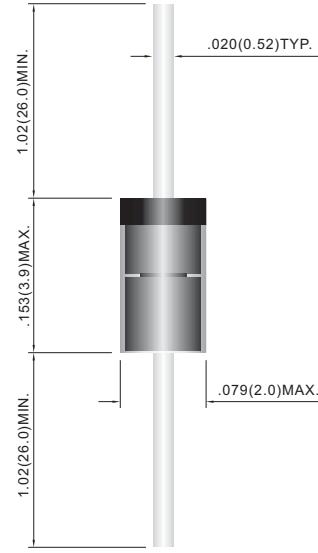

#### MECHANICAL DATA

- Case: Molded glass DO-35
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram Below
- Approx. Weight: 0.13 grams
- Mounting Position: Any
- Ordering information: Suffix :" -35" to order DO-35 Package
- Packing information

B - 2K per Bulk box  
 T/R - 10K per 13" plastic Reel  
 T/B - 5K per horiz. tape & Ammo box

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T<sub>J</sub>=25°C unless otherwise noted)

| Parameter   | Symbol           | Value       | Units |
|---|------------------|-------------|-------|
| Power Dissipation at Tamb = 25 °C   | P <sub>TOT</sub> | 500         | mW    |
| Junction Temperature  | T <sub>J</sub>   | 175         | °C    |
| Storage Temperature Range   | T <sub>S</sub>   | -65 to +175 | °C    |
| Valid provided that leads at a distance of 8mm from case are kept at ambient temperature. |                  |             |       |

| Parameter   | Symbol           | Min. | Typ. | Max. | Units |
|---|------------------|------|------|------|-------|
| Thermal Resistance Junction to Ambient Air  | R <sub>thA</sub> | --   | --   | 0.3  | K/mW  |
| Forward Voltage at IF = 100mA   | V <sub>F</sub>   | --   | --   | 1    | V     |
| Valid provided that leads at a distance of 10 mm from case are kept at ambient temperature. |                  |      |      |      |       |

| Part Number | Nominal Zener Voltage |        |        | Max. Zener Impedance |     |           |     | Max Reverse Leakage Current |      | marking code |  |
|-------------|-----------------------|--------|--------|----------------------|-----|-----------|-----|-----------------------------|------|--------------|--|
|             | Vz @ IzT              |        |        | ZzT @ IzT            |     | Zzk @ Izk |     | IR @ VR                     |      |              |  |
|             | Nom. V                | Min. V | Max. V | Ω                    | mA  | Ω         | mA  | uA                          | V    |              |  |
| BZX55-C2V4  | 2.4                   | 2.28   | 2.56   | 85                   | 5.0 | 600       | 1.0 | 50                          | 1.0  | 55C2V4       |  |
| BZX55-C2V7  | 2.7                   | 2.50   | 2.90   | 85                   | 5.0 | 600       | 1.0 | 10                          | 1.0  | 55C2V7       |  |
| BZX55-C3V0  | 3.0                   | 2.80   | 3.20   | 85                   | 5.0 | 600       | 1.0 | 4.0                         | 1.0  | 55C3V0       |  |
| BZX55-C3V3  | 3.3                   | 3.10   | 3.50   | 85                   | 5.0 | 600       | 1.0 | 2.0                         | 1.0  | 55C3V3       |  |
| BZX55-C3V6  | 3.6                   | 3.40   | 3.80   | 85                   | 5.0 | 600       | 1.0 | 2.0                         | 1.0  | 55C3V6       |  |
| BZX55-C3V9  | 3.9                   | 3.70   | 4.10   | 85                   | 5.0 | 600       | 1.0 | 2.0                         | 1.0  | 55C3V9       |  |
| BZX55-C4V3  | 4.3                   | 4.00   | 4.60   | 75                   | 5.0 | 600       | 1.0 | 1.0                         | 1.0  | 55C4V3       |  |
| BZX55-C4V7  | 4.7                   | 4.40   | 5.00   | 60                   | 5.0 | 600       | 1.0 | 0.5                         | 1.0  | 55C4V7       |  |
| BZX55-C5V1  | 5.1                   | 4.80   | 5.40   | 35                   | 5.0 | 550       | 1.0 | 0.1                         | 1.0  | 55C5V1       |  |
| BZX55-C5V6  | 5.6                   | 5.20   | 6.00   | 25                   | 5.0 | 450       | 1.0 | 0.1                         | 1.0  | 55C5V6       |  |
| BZX55-C6V2  | 6.2                   | 5.80   | 6.60   | 10                   | 5.0 | 200       | 1.0 | 0.1                         | 2.0  | 55C6V2       |  |
| BZX55-C6V8  | 6.8                   | 6.40   | 7.20   | 8                    | 5.0 | 150       | 1.0 | 0.1                         | 3.0  | 55C6V8       |  |
| BZX55-C7V5  | 7.5                   | 7.00   | 7.90   | 7                    | 5.0 | 50        | 1.0 | 0.1                         | 5.0  | 55C7V5       |  |
| BZX55-C8V2  | 8.2                   | 7.70   | 8.70   | 7                    | 5.0 | 50        | 1.0 | 0.1                         | 6.0  | 55C8V2       |  |
| BZX55-C9V1  | 9.1                   | 8.50   | 9.60   | 10                   | 5.0 | 50        | 1.0 | 0.1                         | 7.0  | 55C9V1       |  |
| BZX55-C10   | 10.0                  | 9.40   | 10.60  | 15                   | 5.0 | 70        | 1.0 | 0.1                         | 7.5  | 55C10V       |  |
| BZX55-C11   | 11.0                  | 10.40  | 11.60  | 20                   | 5.0 | 70        | 1.0 | 0.1                         | 8.5  | 55C11V       |  |
| BZX55-C12   | 12.0                  | 11.40  | 12.70  | 20                   | 5.0 | 90        | 1.0 | 0.1                         | 9.0  | 55C12V       |  |
| BZX55-C13   | 13.0                  | 12.40  | 14.10  | 26                   | 5.0 | 110       | 1.0 | 0.1                         | 10.0 | 55C13V       |  |
| BZX55-C15   | 15.0                  | 13.80  | 15.60  | 30                   | 5.0 | 110       | 1.0 | 0.1                         | 11.0 | 55C15V       |  |
| BZX55-C16   | 16.0                  | 15.30  | 17.10  | 40                   | 5.0 | 170       | 1.0 | 0.1                         | 12.0 | 55C16V       |  |
| BZX55-C18   | 18.0                  | 16.80  | 19.10  | 50                   | 5.0 | 170       | 1.0 | 0.1                         | 14.0 | 55C18V       |  |
| BZX55-C20   | 20.0                  | 18.80  | 21.20  | 55                   | 5.0 | 220       | 1.0 | 0.1                         | 15.0 | 55C20V       |  |
| BZX55-C22   | 22.0                  | 20.80  | 23.30  | 55                   | 5.0 | 220       | 1.0 | 0.1                         | 17.0 | 55C22V       |  |
| BZX55-C24   | 24.0                  | 22.80  | 25.60  | 80                   | 5.0 | 220       | 1.0 | 0.1                         | 18.0 | 55C24V       |  |
| BZX55-C27   | 27.0                  | 25.10  | 28.90  | 80                   | 5.0 | 220       | 1.0 | 0.1                         | 20.0 | 55C27V       |  |
| BZX55-C30   | 30.0                  | 28.00  | 32.00  | 80                   | 5.0 | 220       | 1.0 | 0.1                         | 22.0 | 55C30V       |  |
| BZX55-C33   | 33.0                  | 31.00  | 35.00  | 80                   | 5.0 | 220       | 1.0 | 0.1                         | 24.0 | 55C33V       |  |
| BZX55-C36   | 36.0                  | 34.00  | 38.00  | 80                   | 5.0 | 220       | 1.0 | 0.1                         | 27.0 | 55C36V       |  |
| BZX55-C39   | 39.0                  | 37.00  | 41.00  | 90                   | 2.5 | 500       | 1.0 | 0.1                         | 30.0 | 55C39V       |  |
| BZX55-C43   | 43.0                  | 40.00  | 46.00  | 90                   | 2.5 | 600       | 1.0 | 0.1                         | 33.0 | 55C43V       |  |
| BZX55-C47   | 47.0                  | 44.00  | 50.00  | 110                  | 2.5 | 700       | 1.0 | 0.1                         | 36.0 | 55C47V       |  |

### Typical Characteristics ( $T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

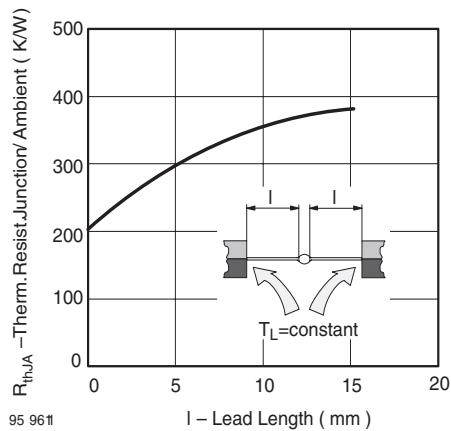


Fig. 1 Thermal Resistance vs. Lead Length

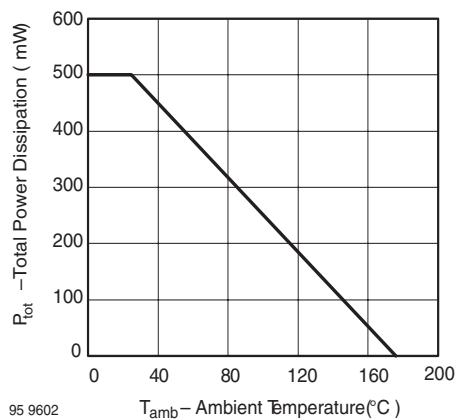


Fig. 2 Total Power Dissipation vs. Ambient Temperature

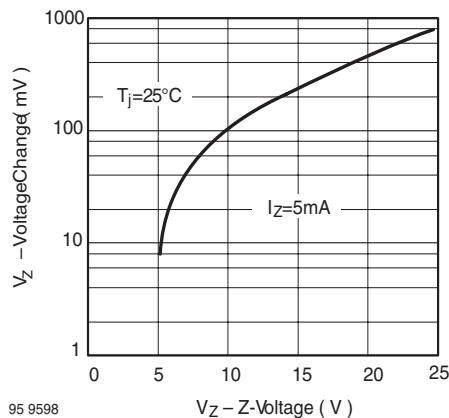


Fig. 3 Typical Change of Working Voltage under Operating Conditions at  $T_{amb}=25^{\circ}\text{C}$

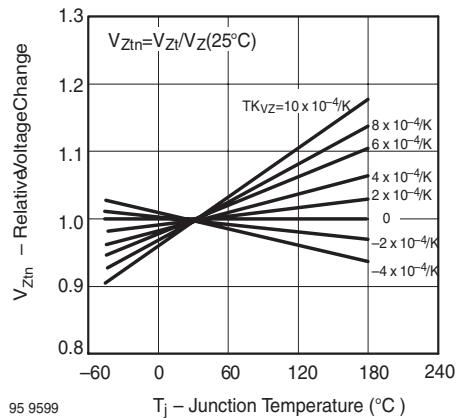


Fig. 4 Typical Change of Working Voltage vs. Junction Temperature

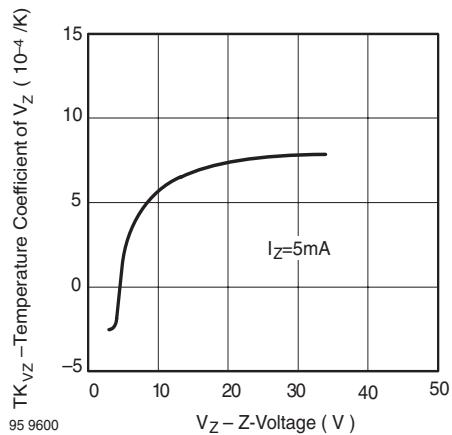


Fig. 5 Temperature Coefficient of  $V_z$  vs. Z-Voltage

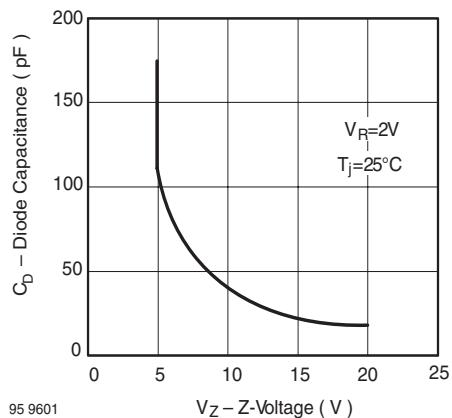


Fig. 6 Diode Capacitance vs. Z-Voltage

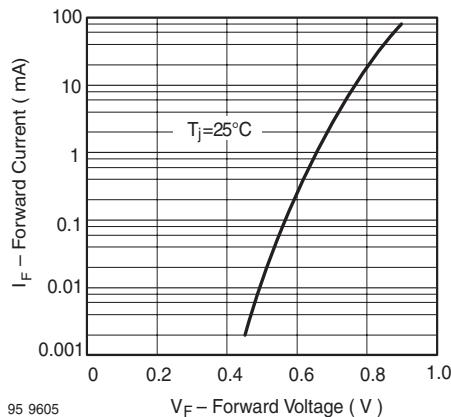


Fig. 7 Forward Current vs. Forward Voltage

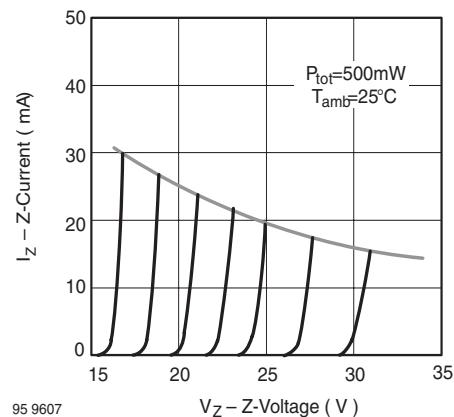


Fig. 9 Z-Current vs. Z-Voltage

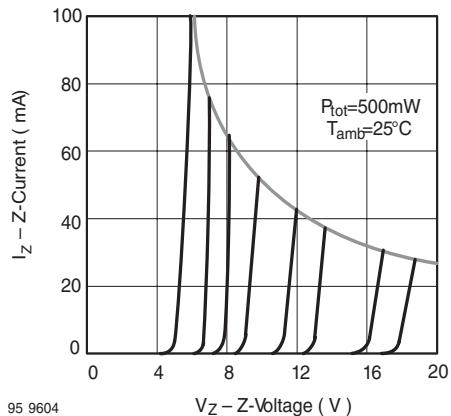


Fig. 8 Z-Current vs. Z-Voltage

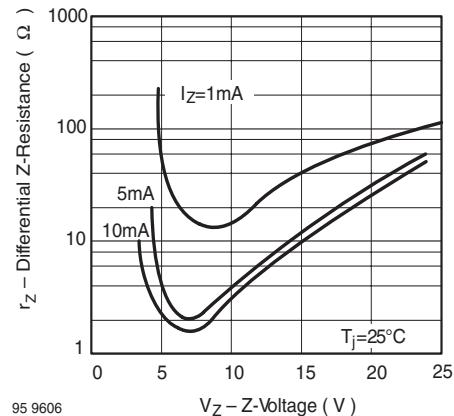


Fig. 10 Differential Z-Resistance vs. Z-Voltage

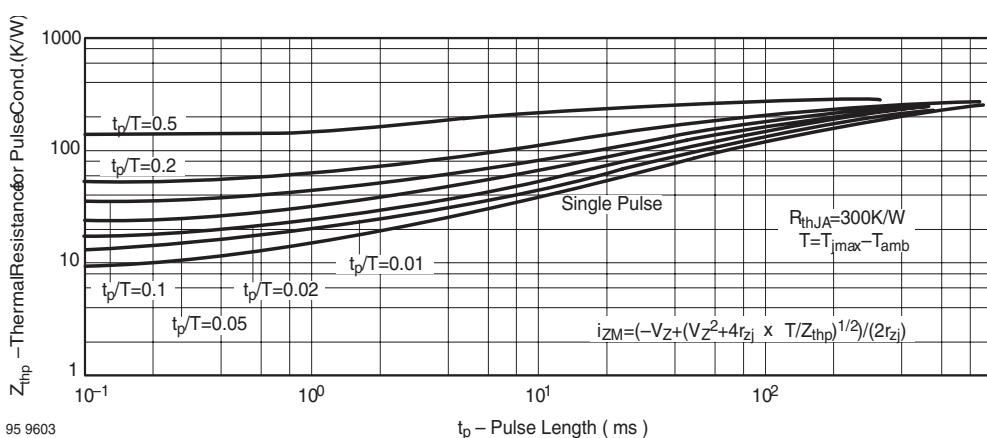


Fig. 11 Thermal Response