

**Silicon PNP Power Transistors**

**2SA1294**

**DESCRIPTION**

- With TO-3PN package
- Complement to type 2SC3263

**APPLICATIONS**

- Audio and general purpose

**PINNING**

PIN	DESCRIPTION
1	Base
2	Collector;connected to mounting base
3	Emitter

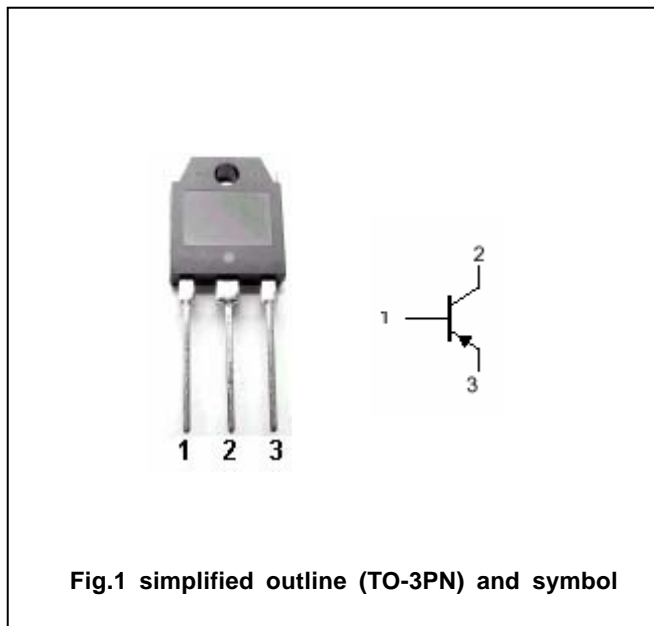


Fig.1 simplified outline (TO-3PN) and symbol

**Absolute maximum ratings(Ta= )**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	-230	V
$V_{CEO}$	Collector-emitter voltage	Open base	-230	V
$V_{EBO}$	Emitter-base voltage	Open collector	-5	V
$I_C$	Collector current		-15	A
$I_B$	Base current		-4	A
$P_C$	Collector power dissipation	$T_C=25$	130	W
$T_j$	Junction temperature		150	
$T_{stg}$	Storage temperature		-55~150	

## Silicon PNP Power Transistors

## 2SA1294

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =-25mA ; I <sub>B</sub> =0	-230			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-5A; I <sub>B</sub> =-0.5A			-2.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =-230V; I <sub>E</sub> =0			-100	μ A
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-5V; I <sub>C</sub> =0			-100	μ A
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =-5A ; V <sub>CE</sub> =4V	50		140	
C <sub>ob</sub>	Output capacitance	I <sub>E</sub> =0 ; V <sub>CB</sub> =-10V; f=1MHz		500		pF
f <sub>T</sub>	Transition frequency	I <sub>E</sub> =2A ; V <sub>CE</sub> =-12V		35		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =-5A; R <sub>L</sub> =12 I <sub>B1</sub> =-I <sub>B2</sub> =-0.5A V <sub>CC</sub> =-60V		0.35		μ s
t <sub>s</sub>	Storage time			1.5		μ s
t <sub>f</sub>	Fall time			0.3		μ s

◆ h<sub>FE</sub> Classifications

O	Y
50-100	70-140

Silicon PNP Power Transistors

2SA1294

PACKAGE OUTLINE

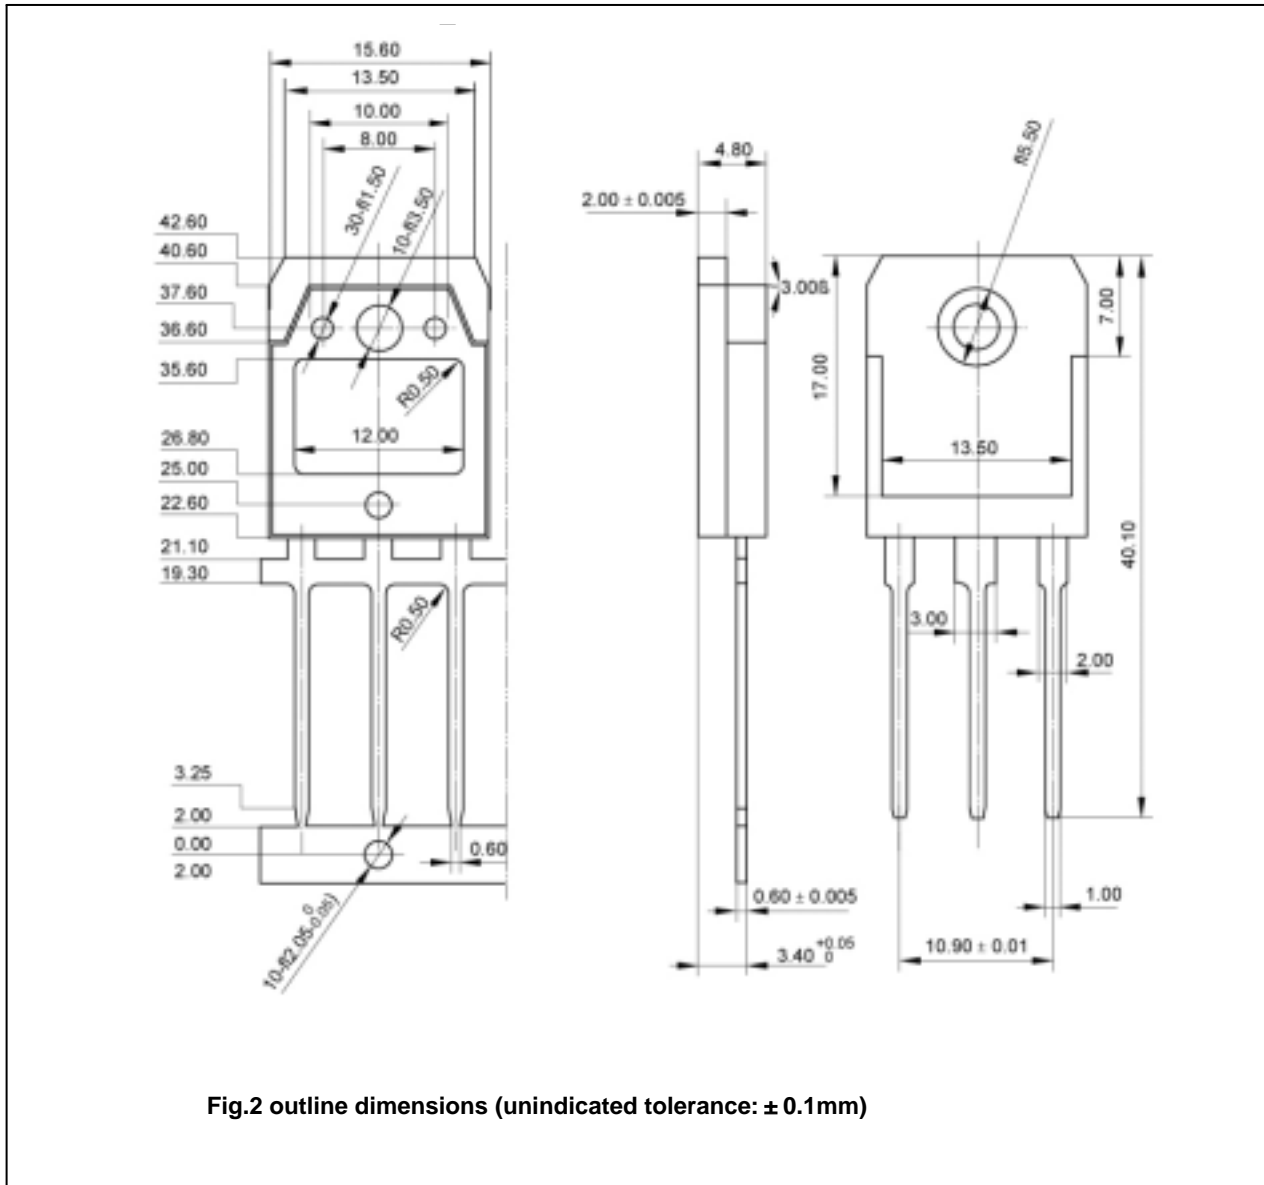


Fig.2 outline dimensions (unindicated tolerance: ± 0.1mm)

Silicon PNP Power Transistors

2SA1294

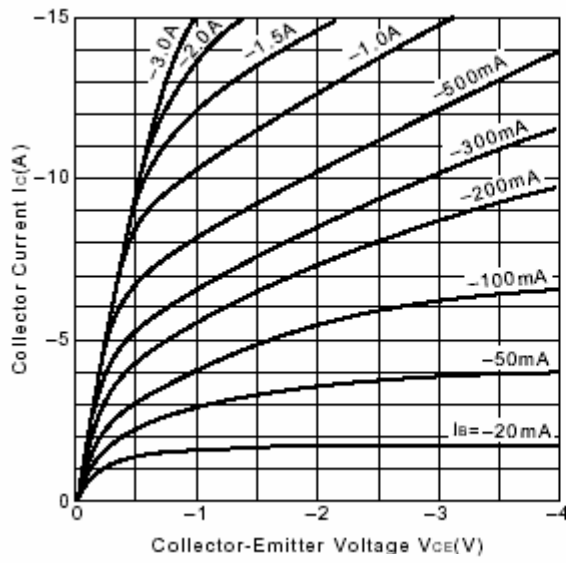


Fig.3 Static Characteristic

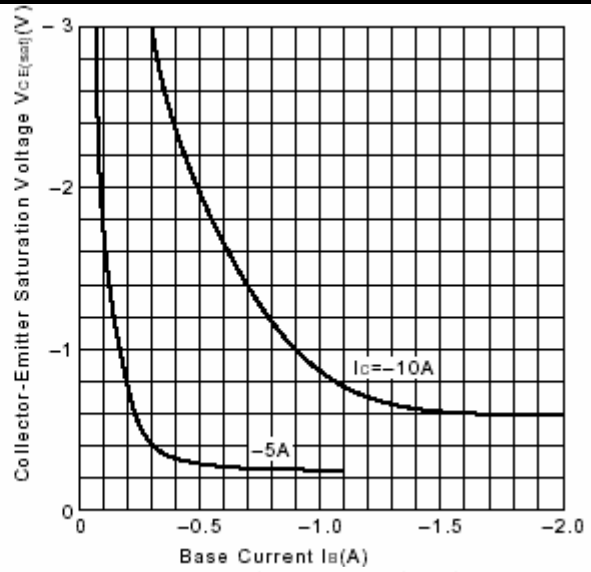


Fig.4  $V_{ce(sat)}-I_b$  Characteristics

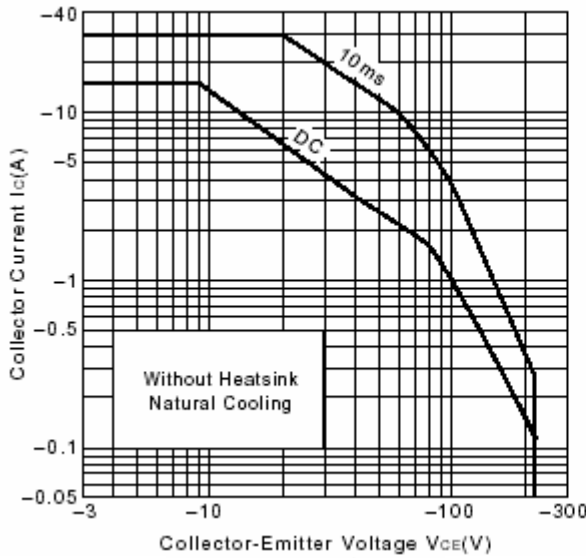


Fig.5 Safe Operating Area

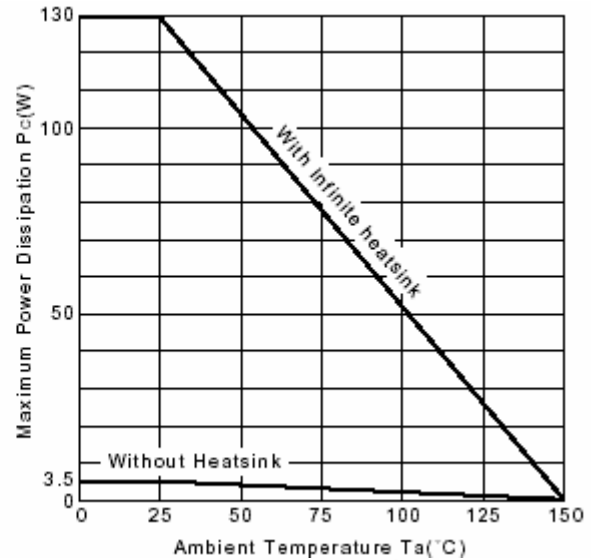


Fig.6  $P_c-T_a$  Derating

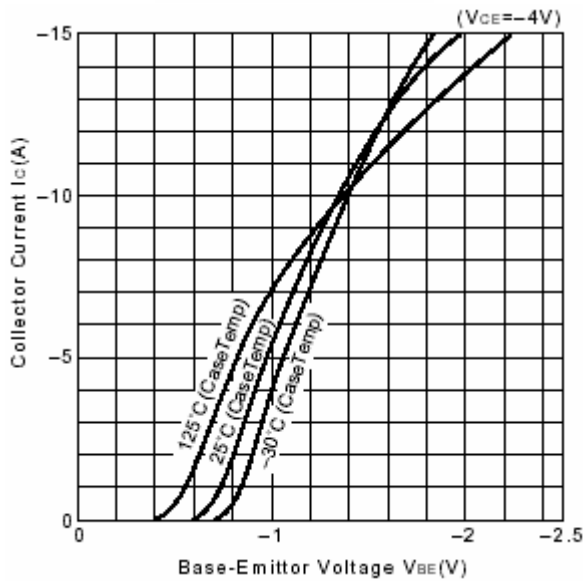


Fig.7  $I_c-V_{BE}$

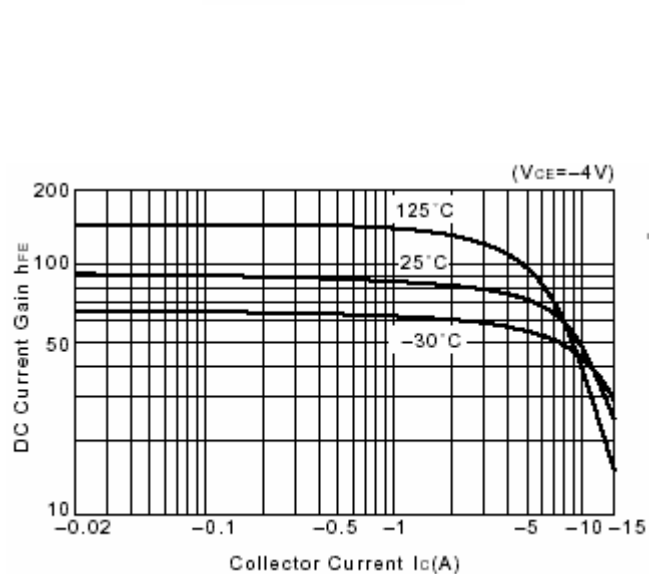


Fig.8 DC current Gain